

MYBT-AS Series




MYBT-AS



MYBT-ASP

Torque Range Reference Chart

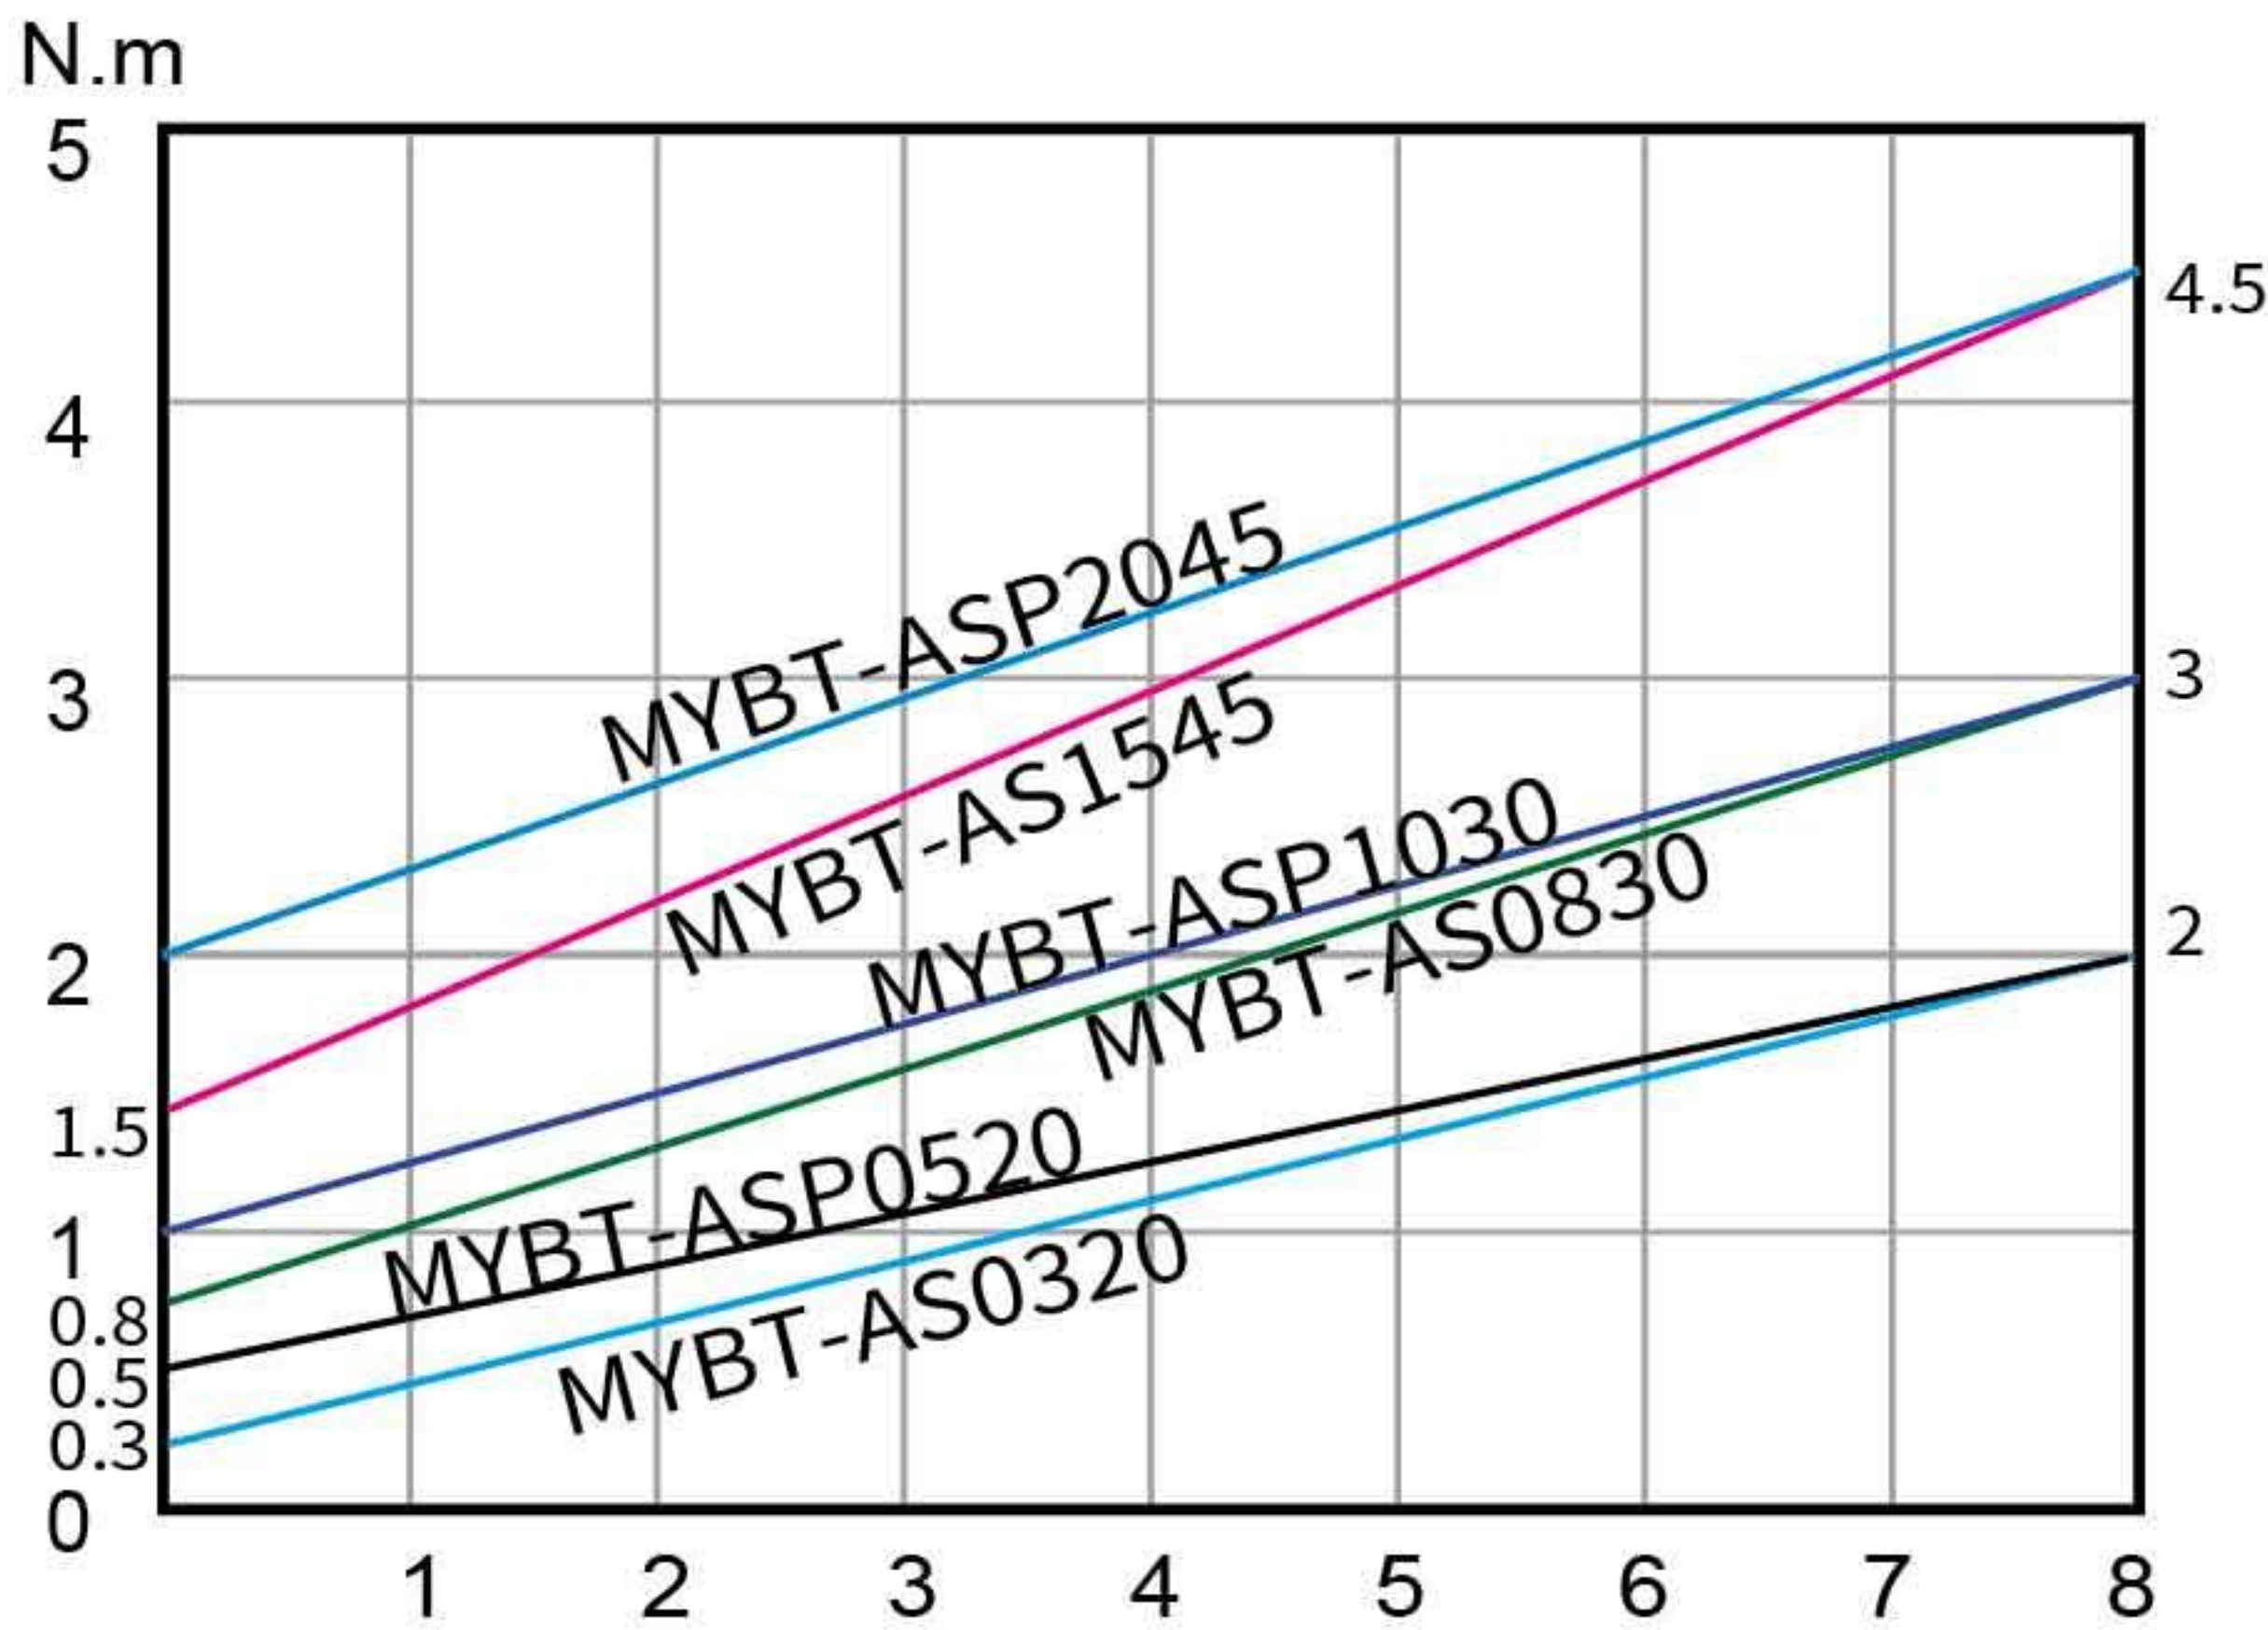

Features


- Unique compact inline design
- LED illumination to light up dark areas
- Status LED to indicate users tightening results
- 10x lifespan long-lasting contactless micro switch trigger
- The durable auto shut off clutch guarantee 2 million tightening
- Unique compact straight design makes it the perfect tool for standalone station
- The sophisticated auto shut off clutch provides outstanding $\pm 3\%$ torque accuracy
- Adopted maintenance-free brushless motor for clean, quiet, and accurate operation
- A fully charged 10.8V lithium-ion battery can tighten up to 4,000 screws
- Auto cut off when low battery to avoid insufficient torque applied to screws
- 40 minutes quick charge

Accessories


90 Degree Attachment
KL-1S
(Applicable to MYBT-AS series)



External Dimension

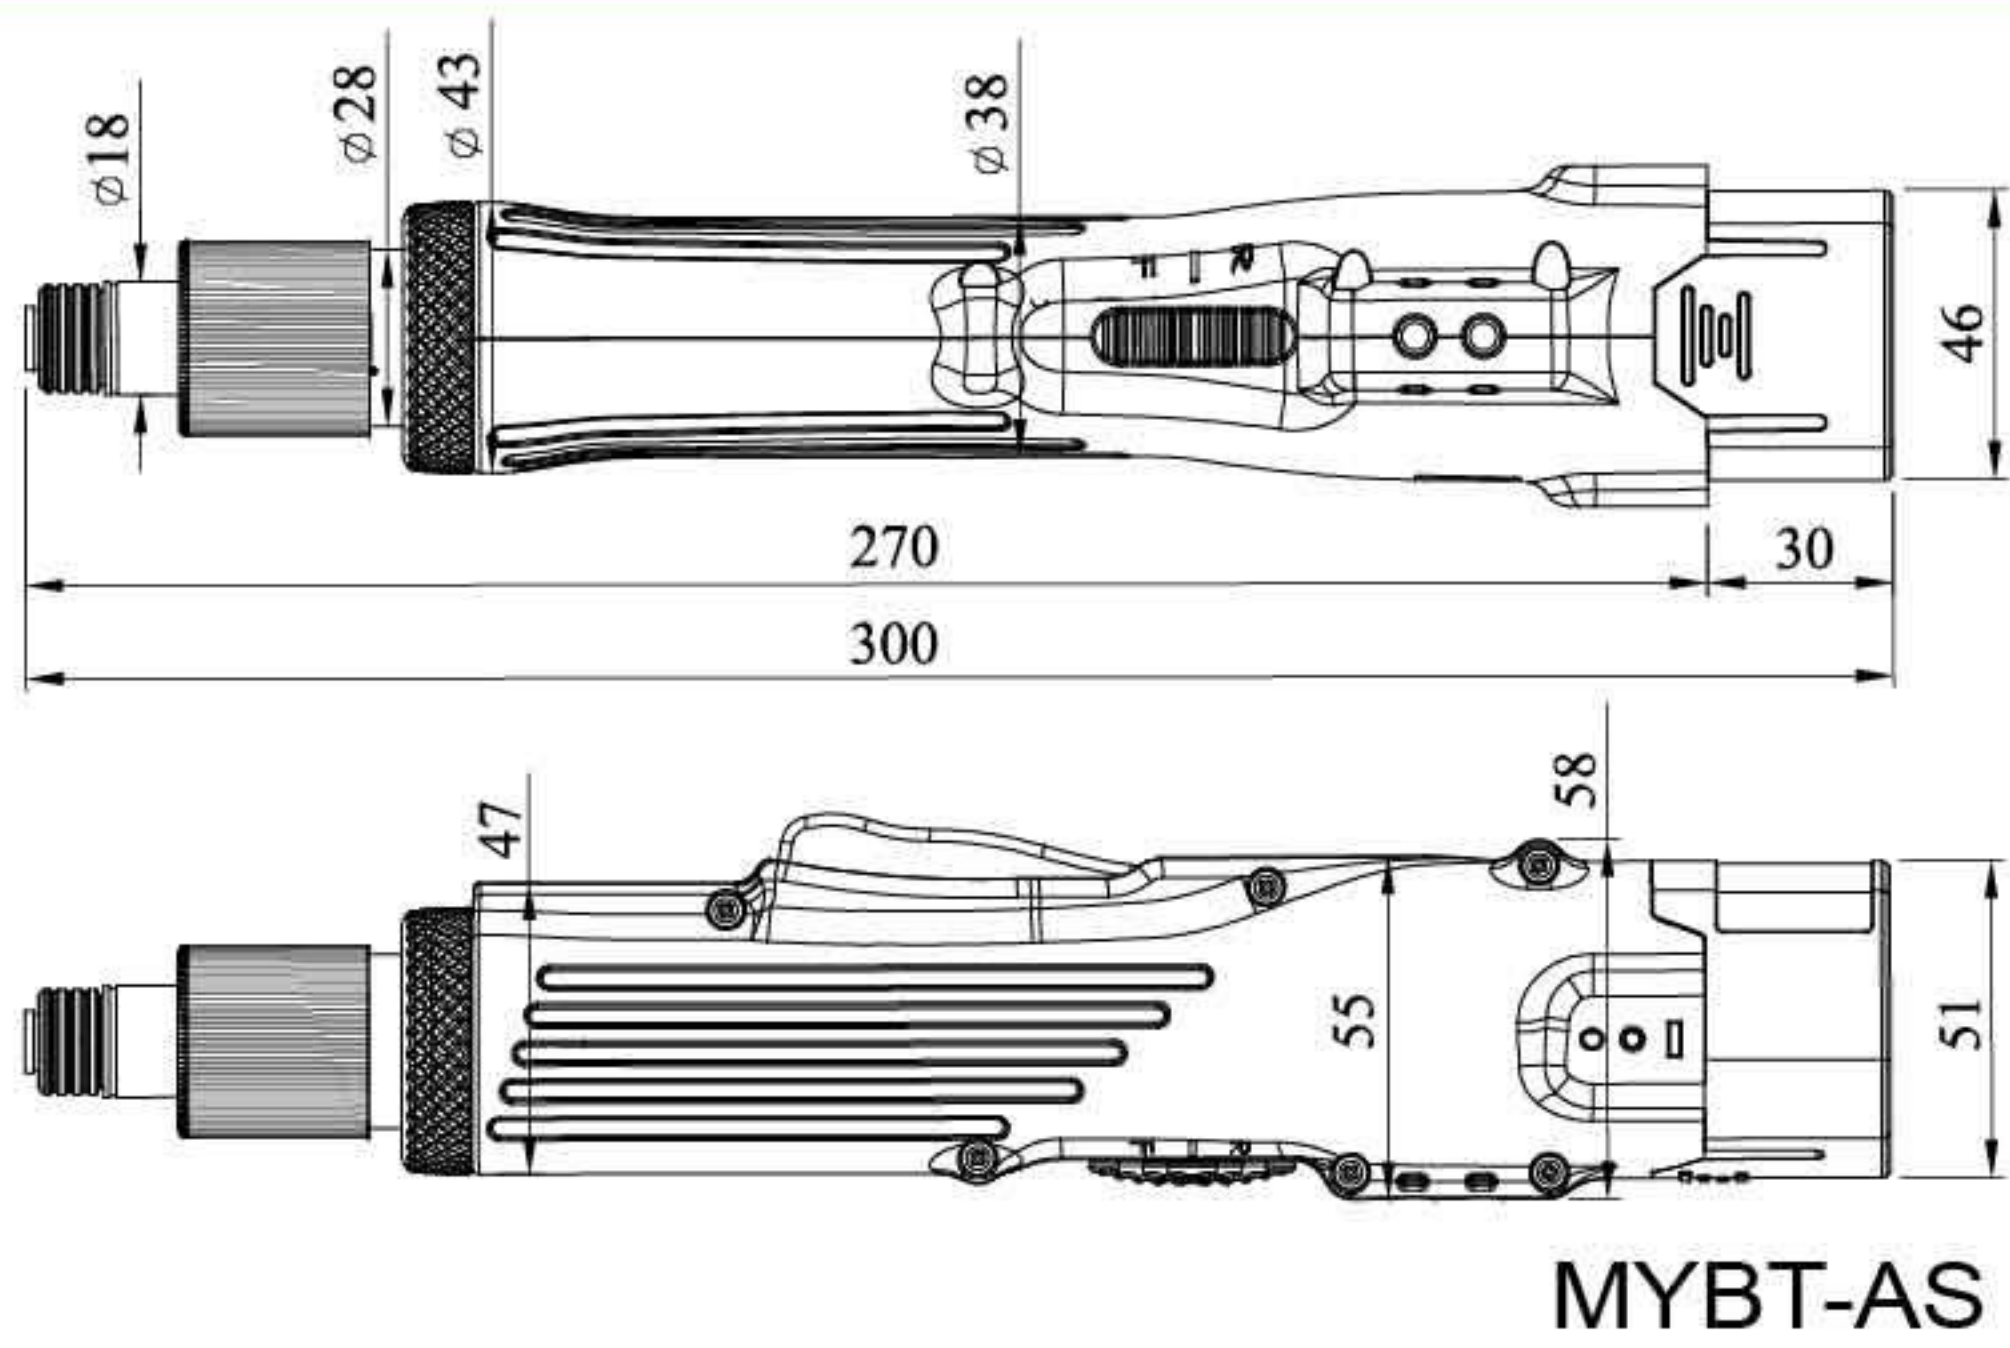


MYBT-AS

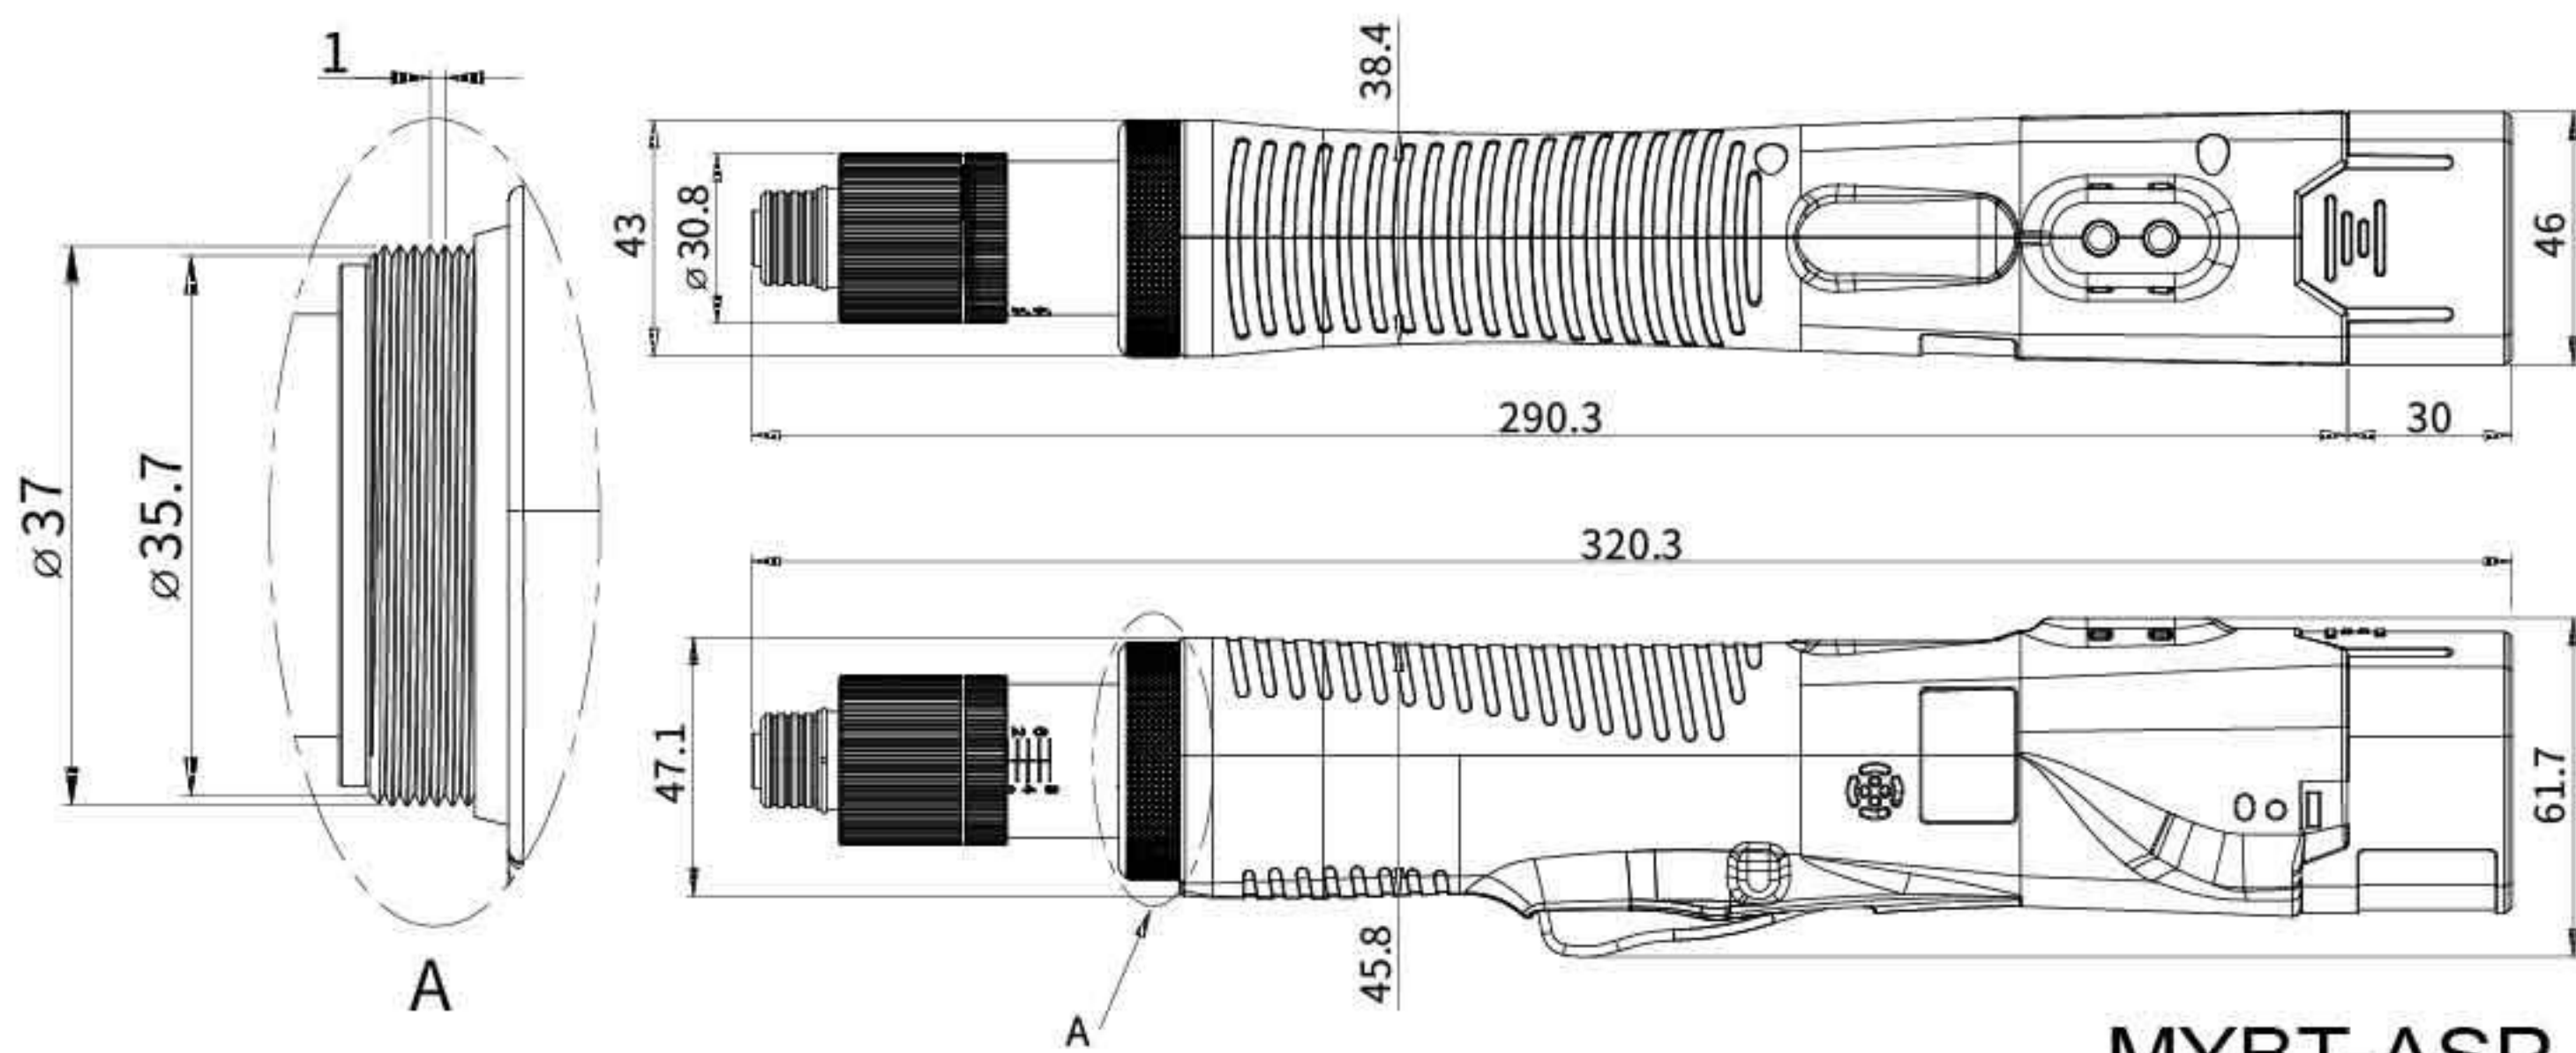

MYBT-ASP
Unit: mm

Specifications

Model	Input Voltage	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Weight (kg)	Size (mm)	Applicable Battery	Applicable Charger	Applicable Torque Meter	Bit Type
		Hard Joint	Soft Joint		HI	LO						
MYBT-AS0320	10.8V	0.3~2.0	0.3~1.6	$\pm 3\%$	1200	850	0.7	270X60	SKC-LB1030S	MYCS-ID50	KTM-150	A B9.5
MYBT-AS0830	10.8V	0.8~3.0	0.8~2.4	$\pm 3\%$	1200	850	0.7	270X60	SKC-LB1030S	MYCS-ID50	KTM-150	A B9.5
MYBT-AS1545	10.8V	1.5~4.5	1.5~3.6	$\pm 3\%$	700	500	0.7	270X60	SKC-LB1030S	MYCS-ID50	KTM-150	A B9.5
MYBT-ASP0520	10.8V	0.5-2	0.5-1.6	$\pm 3\%$	1200	—	0.72	290X62	SKC-LB1030S	MYCS-ID50	KTM-150	B9.5
MYBT-ASP1030	10.8V	1-3	1-2.4	$\pm 3\%$	1200	—	0.72	290X62	SKC-LB1030S	MYCS-ID50	KTM-150	B9.5
MYBT-ASP2045	10.8V	2-4.5	2-3.6	$\pm 3\%$	700	—	0.72	290X62	SKC-LB1030S	MYCS-ID50	KTM-150	B9.5

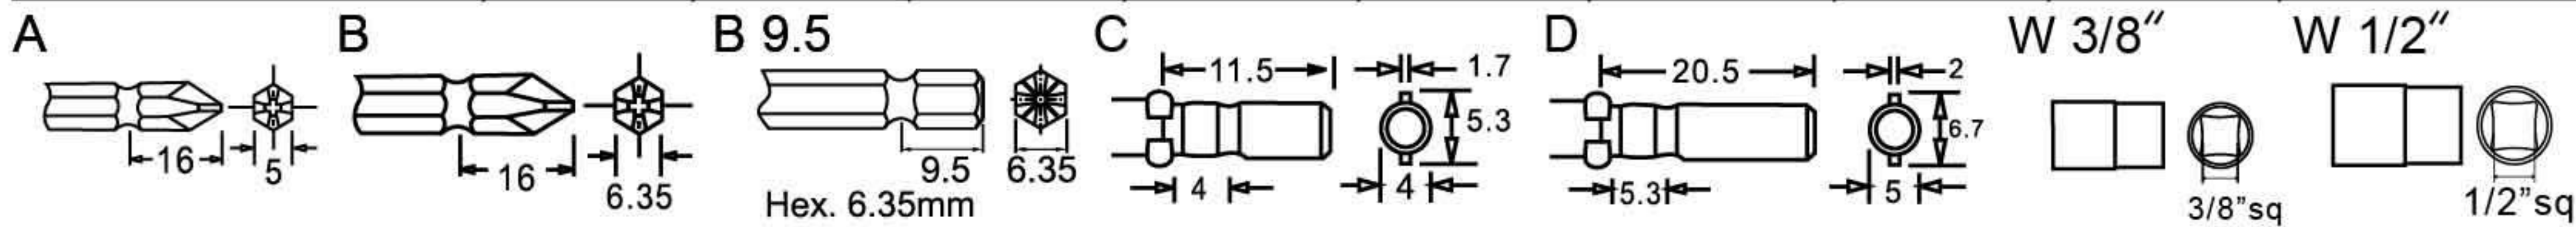

※ Tool Weight & Size indications without battery.