

# SMART PROGRAMMABLE **IMPACT WRENCH** + REMOTE CONTROL

**MYTORQ**  
ANLIDAR INDUSTRIAL CO.,LTD.

## MYBT-IM+ Series




MYBT-IM 50 / 70 / 100 +




MYBT-IM 200 +

### External Dimension

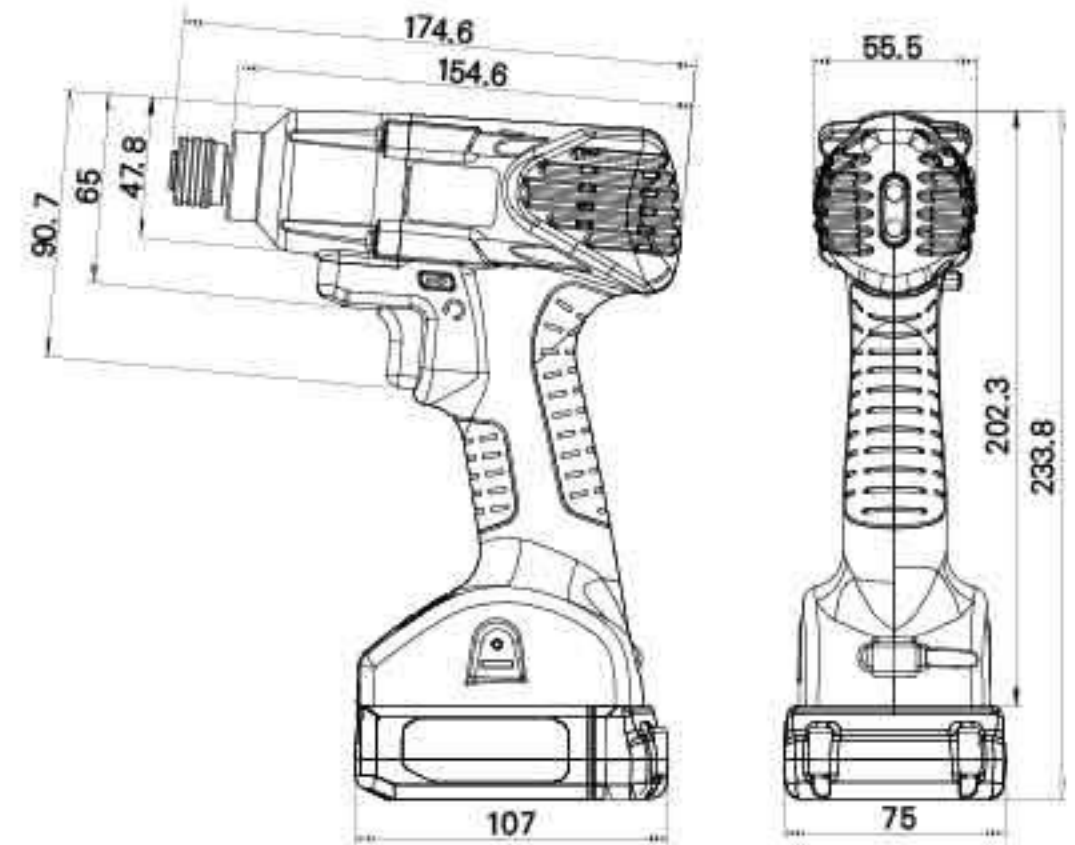

MYBT-IM 50 / 70 / 100 +

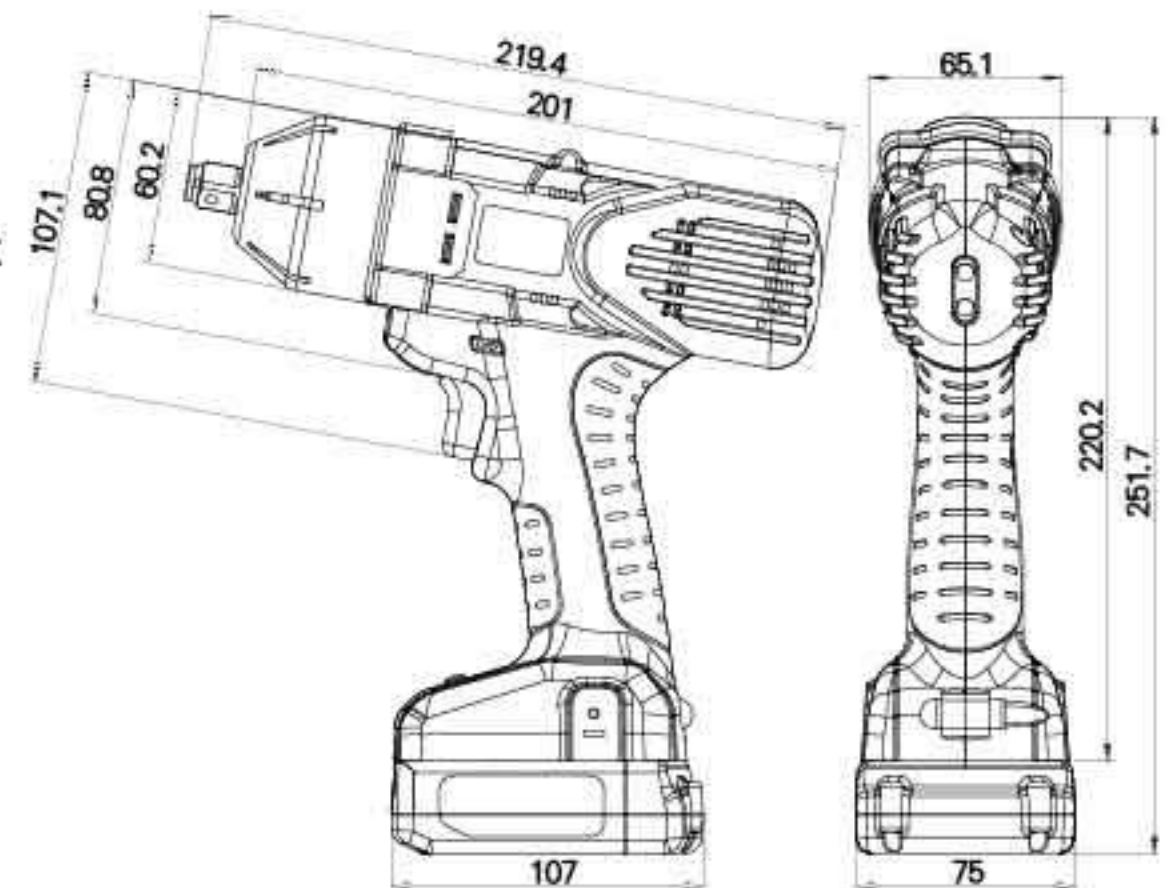

MYBT-IM 200 +  
Unit: mm

### Features

- OK & NG indicator - Prevent cross head and stripped screw to secure fastening quality.
- Program - Max. 5 programs to use in a sequence.
- Counter - Counter reminds user for no. of remaining untighten screw.
- Low battery alert - To judge best timing to change battery.
- Prohibit setting configuration - When activated, user cannot change settings without remote control. This is to avoid any user to change tool settings intentionally.
- Low voltage compensation, stable power output to ensure torque output stability.


| Model No.   | Output | Bolt Size | Socket Size |
|-------------|--------|-----------|-------------|
| MYBT-IM50+  | 80%    | M12       | 19mm        |
| MYBT-IM70+  | 80%    | M14       | 22mm        |
| MYBT-IM100+ | 80%    | M16       | 24mm        |
| MYBT-IM200+ | 80%    | M20       | 30mm        |

※ Examined by KTM-IWT400, MYBT-IM+ series torque accuracy is  $\pm 8 \sim 10\%$

※ Socket weight, driver handling, bolt property class, bolt size may all affect torque output.

### Specifications

| Model       | Input Voltage | Free Speed (r.p.m) | B.P.M    | Torque (N.m)          | Bolt Size (Class 12.9) & Torque                                                      | Tool Weight (kg) | Applicable Battery | Applicable Charge Station | Torque Tester           | Bit Type                  |
|-------------|---------------|--------------------|----------|-----------------------|--------------------------------------------------------------------------------------|------------------|--------------------|---------------------------|-------------------------|---------------------------|
| MYBT-IM50+  | 14.4V         | 0~1900             | 0 ~ 2500 | 8 ~ 50                | (M6) 3 - 20 N.m<br>(M8) 3 - 20 N.m<br>(M10) 5 - 30 N.m<br>(M12) 12 - 50 N.m          | 1                | SKC-LB1430         | MYCS-ID70+                | KTM-IWT50<br>KTM-IWT400 | B 9.5<br>W 3/8"           |
| MYBT-IM70+  | 14.4V         | 0~2600             | 0 ~ 3400 | 20 ~ 70               | (M8) 8 - 30 N.m<br>(M10) 8 - 40 N.m<br>(M12) 20 - 60 N.m<br>(M14) 25 - 70 N.m        | 1                | SKC-LB1430         | MYCS-ID70+                | KTM-IWT400              | B 9.5<br>W 3/8"           |
| MYBT-IM100+ | 14.4V         | 0~2000             | 0 ~ 2600 | 20 ~ 100              | (M10) 8 - 40 N.m<br>(M12) 20 - 70 N.m<br>(M14) 20 - 90 N.m<br>(M16) 25 - 100 N.m     | 1                | SKC-LB1430         | MYCS-ID70+                | KTM-IWT400              | B 9.5<br>W 3/8"<br>W 1/2" |
| MYBT-IM200+ | 14.4V         | 0~1700             | 0 ~ 2100 | 25 ~ 180<br>(Max 200) | (M12) 15 - 110 N.m<br>(M14) 22 - 120 N.m<br>(M16) 22 - 140 N.m<br>(M20) 23 - 200 N.m | 1.5              | SKC-LB1430         | MYCS-ID70+                | KTM-IWT400              | W 1/2"                    |

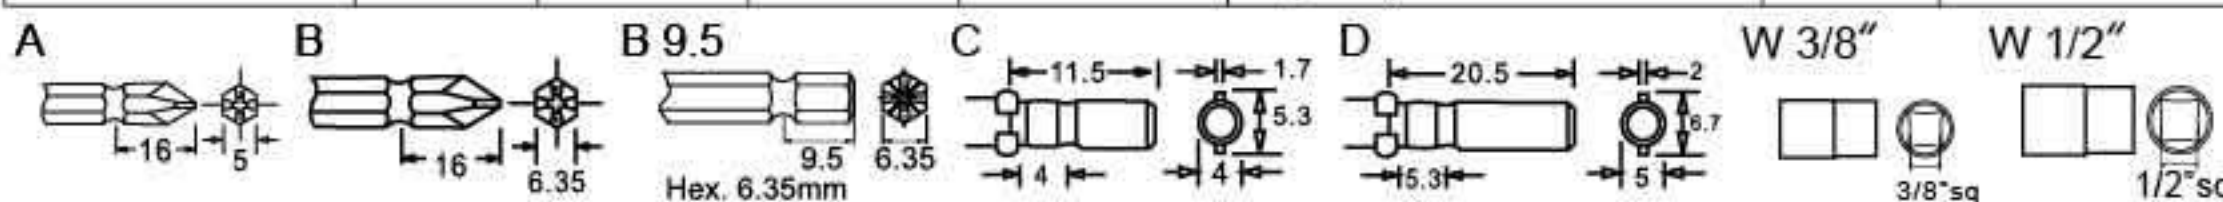

※ Tool Weight & Size indications without battery.