

SMART PROGRAMMABLE **IMPACT WRENCH** + REMOTE CONTROL

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.

MYBT-IM+ Series




MYBT-IM 50 / 70 / 100 +




MYBT-IM 200 +

External Dimension

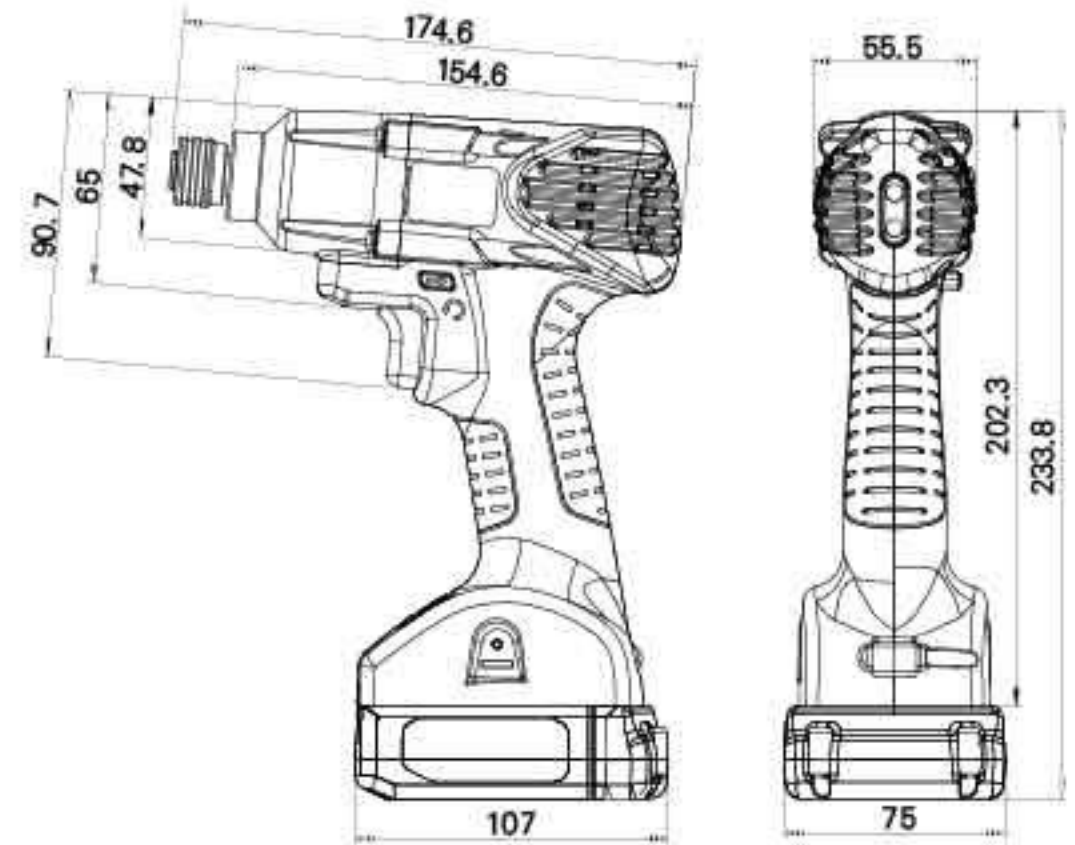

MYBT-IM 50 / 70 / 100 +

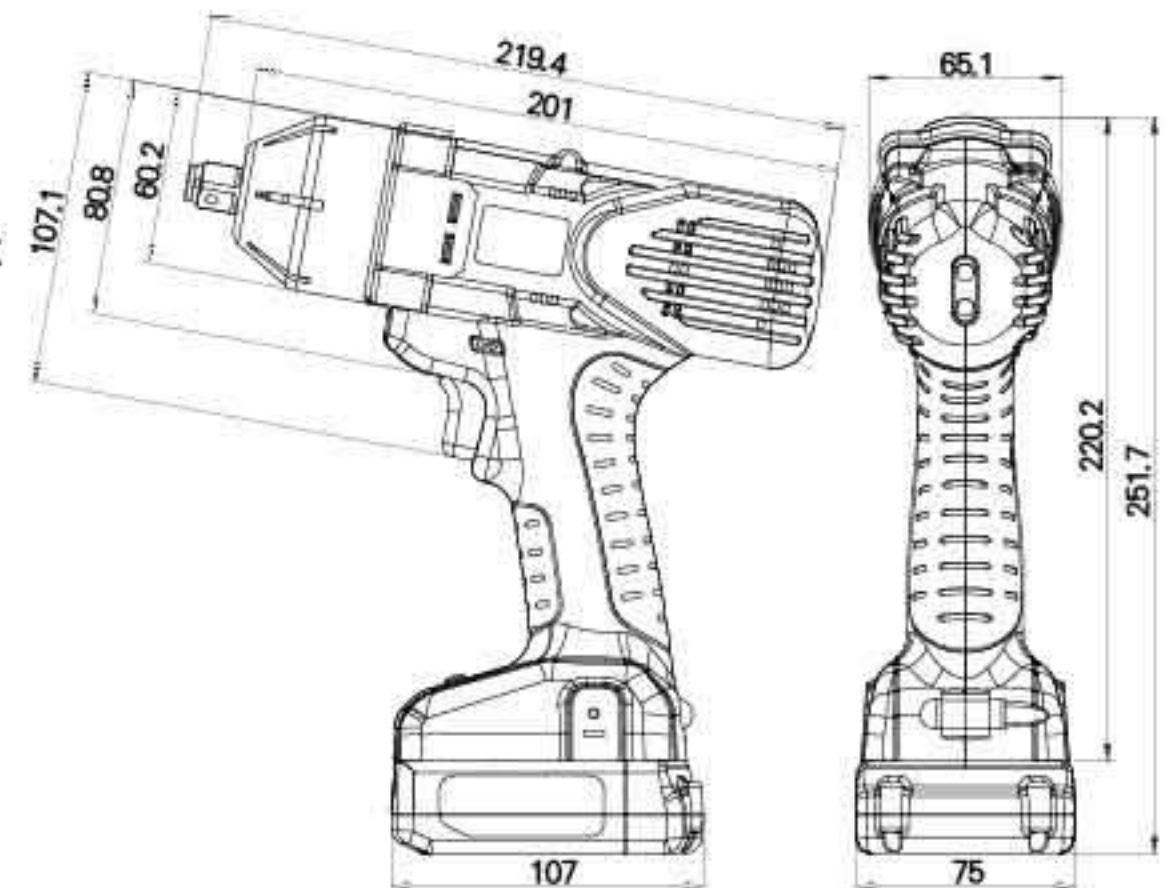

MYBT-IM 200 +
Unit: mm

Features

- OK & NG indicator - Prevent cross head and stripped screw to secure fastening quality.
- Program - Max. 5 programs to use in a sequence.
- Counter - Counter reminds user for no. of remaining untighten screw.
- Low battery alert - To judge best timing to change battery.
- Prohibit setting configuration - When activated, user cannot change settings without remote control. This is to avoid any user to change tool settings intentionally.
- Low voltage compensation, stable power output to ensure torque output stability.


Model No.	Output	Bolt Size	Socket Size
MYBT-IM50+	80%	M12	19mm
MYBT-IM70+	80%	M14	22mm
MYBT-IM100+	80%	M16	24mm
MYBT-IM200+	80%	M20	30mm

※ Examined by KTM-IWT400, MYBT-IM+ series torque accuracy is $\pm 8 \sim 10\%$

※ Socket weight, driver handling, bolt property class, bolt size may all affect torque output.

Specifications

Model	Input Voltage	Free Speed (r.p.m)	B.P.M	Torque (N.m)	Bolt Size (Class 12.9) & Torque	Tool Weight (kg)	Applicable Battery	Applicable Charge Station	Torque Tester	Bit Type
MYBT-IM50+	14.4V	0~1900	0 ~ 2500	8 ~ 50	(M6) 3 - 20 N.m (M8) 3 - 20 N.m (M10) 5 - 30 N.m (M12) 12 - 50 N.m	1	SKC-LB1430	MYCS-ID70+	KTM-IWT50 KTM-IWT400	B 9.5 W 3/8"
MYBT-IM70+	14.4V	0~2600	0 ~ 3400	20 ~ 70	(M8) 8 - 30 N.m (M10) 8 - 40 N.m (M12) 20 - 60 N.m (M14) 25 - 70 N.m	1	SKC-LB1430	MYCS-ID70+	KTM-IWT400	B 9.5 W 3/8"
MYBT-IM100+	14.4V	0~2000	0 ~ 2600	20 ~ 100	(M10) 8 - 40 N.m (M12) 20 - 70 N.m (M14) 20 - 90 N.m (M16) 25 - 100 N.m	1	SKC-LB1430	MYCS-ID70+	KTM-IWT400	B 9.5 W 3/8" W 1/2"
MYBT-IM200+	14.4V	0~1700	0 ~ 2100	25 ~ 180 (Max 200)	(M12) 15 - 110 N.m (M14) 22 - 120 N.m (M16) 22 - 140 N.m (M20) 23 - 200 N.m	1.5	SKC-LB1430	MYCS-ID70+	KTM-IWT400	W 1/2"

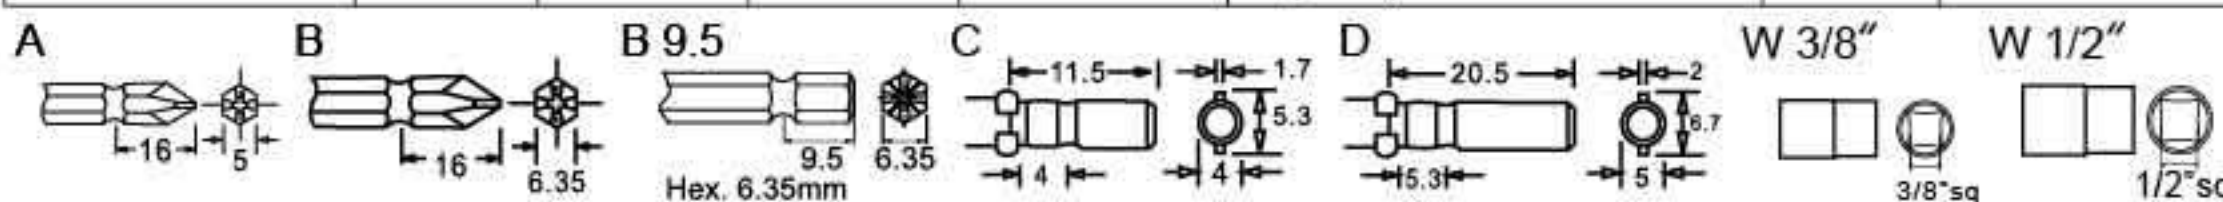

※ Tool Weight & Size indications without battery.