

AUTO SHUT OFF SCREWDRIVER TORQUE ADJUSTMENT INTERNAL

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.

MYBT-AI Series



MYBT-AI0512



MYBT-AI0822

Features


MYBT-AI0408 / MYBT-AI0512

- Maintenance free brushless motor with 2 years warranty
- Long lasting contactless micro switch trigger
- Precision auto shut off clutch
- Durable mechanical clutch allows 2 million tightening
- OK/NG status LED indicator
- Compact & ergonomic design
- High / Low speed selections
- LED illuminate tightening area

MYBT-AI0615 / MYBT-AI0822

- LED illumination to light up dark areas
- Status LED to indicate users tightening results
- 10x lifespan long-lasting contactless micro switch trigger
- The durable auto shut off clutch guarantee 2 million tightening
- The sophisticated auto shut off clutch provides outstanding $\pm 3\%$ torque accuracy
- Adopted maintenance-free brushless motor for clean, quiet, and accurate operation
- A fully charged 18V lithium-ion battery can tighten up to 2,400 screws
- Auto cut off when low battery to avoid insufficient torque applied to screws
- 40 minutes quick charge

External Dimension

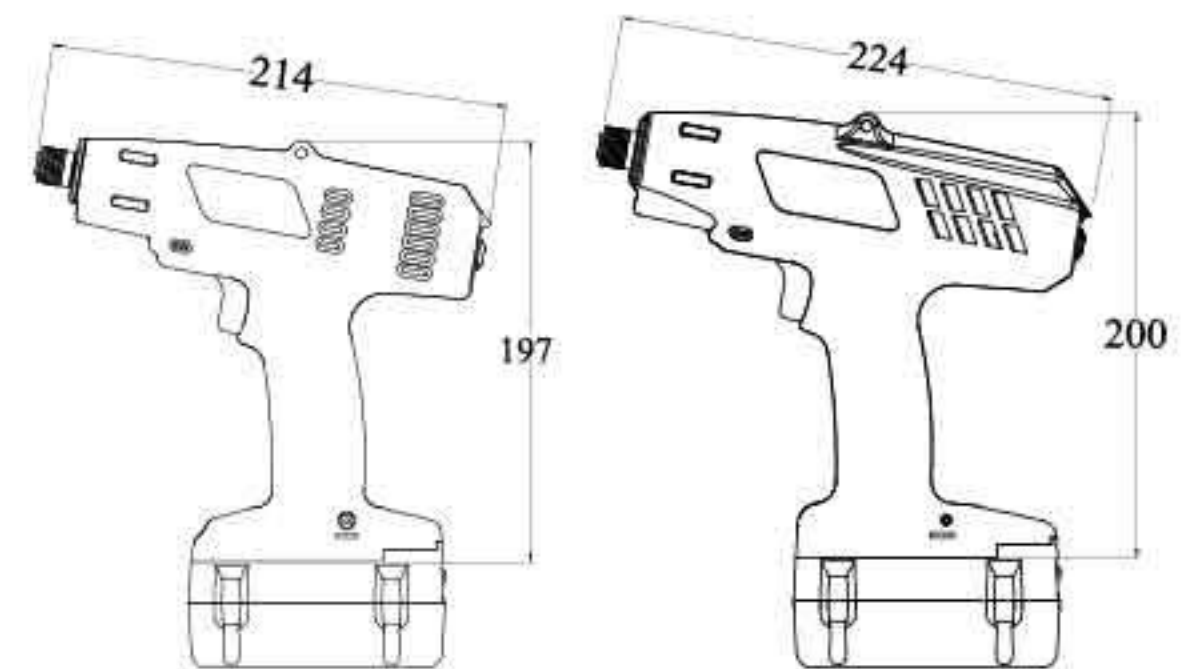

MYBT-AI0512

MYBT-AI0822


Unit: mm

Torque Identification Ring



Specifications

Model	Input Voltage	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Weight (kg)	Size (mm)	Applicable Battery	Applicable Charger	Applicable Torque Meter	Bit Type
		Hard Joint	Soft Joint		HI	LO						
MYBT-AI0408	18V	4~8	4~6.4	$\pm 3\%$	1200	780	1.0	214X197	SKC-LB1820 SKC-LB1840	MYCS-ID120 MYCS-ID80 MYCS-80	KTM-150	B、B9.5
MYBT-AI0512	18V	5~12	5~9.6	$\pm 3\%$	720	450	1.0	214X197	SKC-LB1820 SKC-LB1840	MYCS-ID120 MYCS-ID80 MYCS-80	KTM-150	B、B9.5
MYBT-AI0615	18V	6~15	6~12	$\pm 3\%$	600	380	1.2	224X200	SKC-LB1840	MYCS-ID120 MYCS-ID80 MYCS-80	KTM-250	B、B9.5 W 3/8"
MYBT-AI0822	18V	8~22	8~17.6	$\pm 3\%$	350	200	1.2	224X200	SKC-LB1840	MYCS-ID120 MYCS-ID80 MYCS-80	KTM-250	B、B9.5 W 3/8"

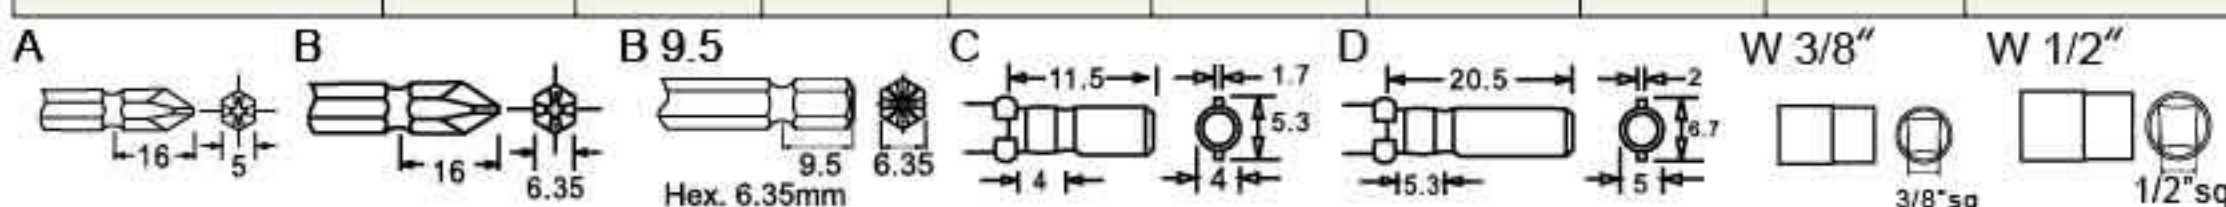

*Free load speed will be fixed when battery volume is more than 17V (17~21V)

*Tool Weight & Size indications without battery.