

MY-SAVER Screwdriver Series







M 34*P1.0
LH (Reverse Thread)



MY-SAVER 3 / 5 / 7

MY-SAVER 3 / 5 / 7 + KS-TM

External Dimension

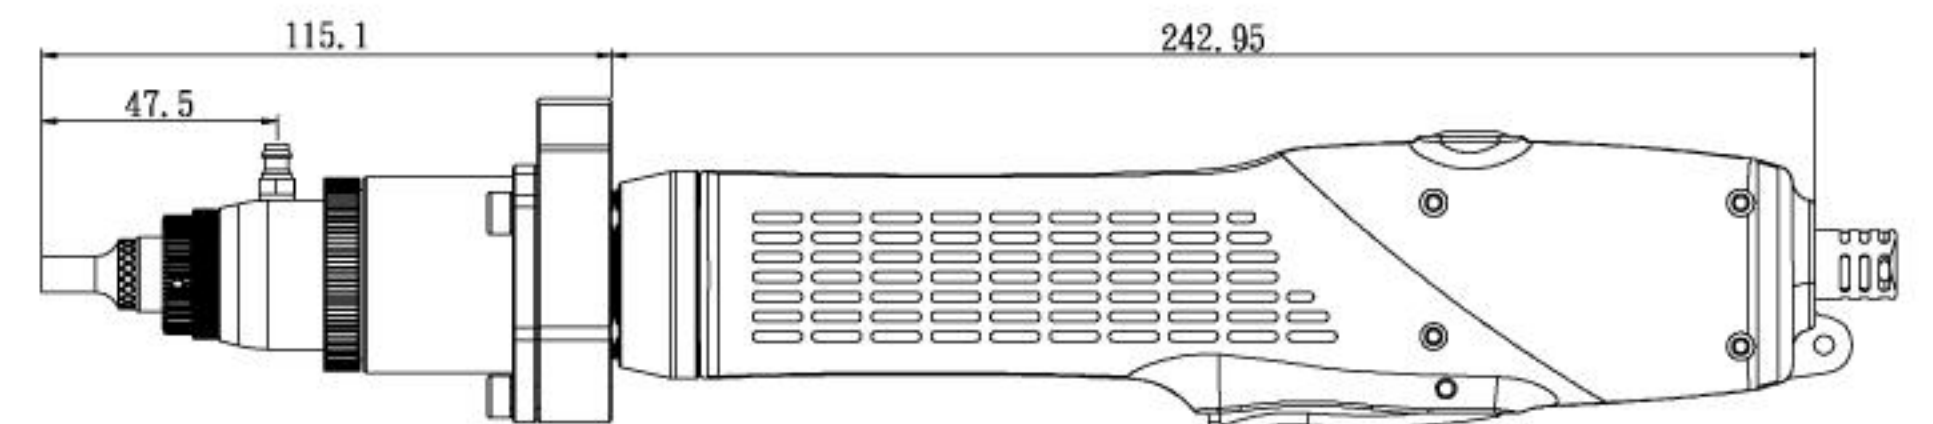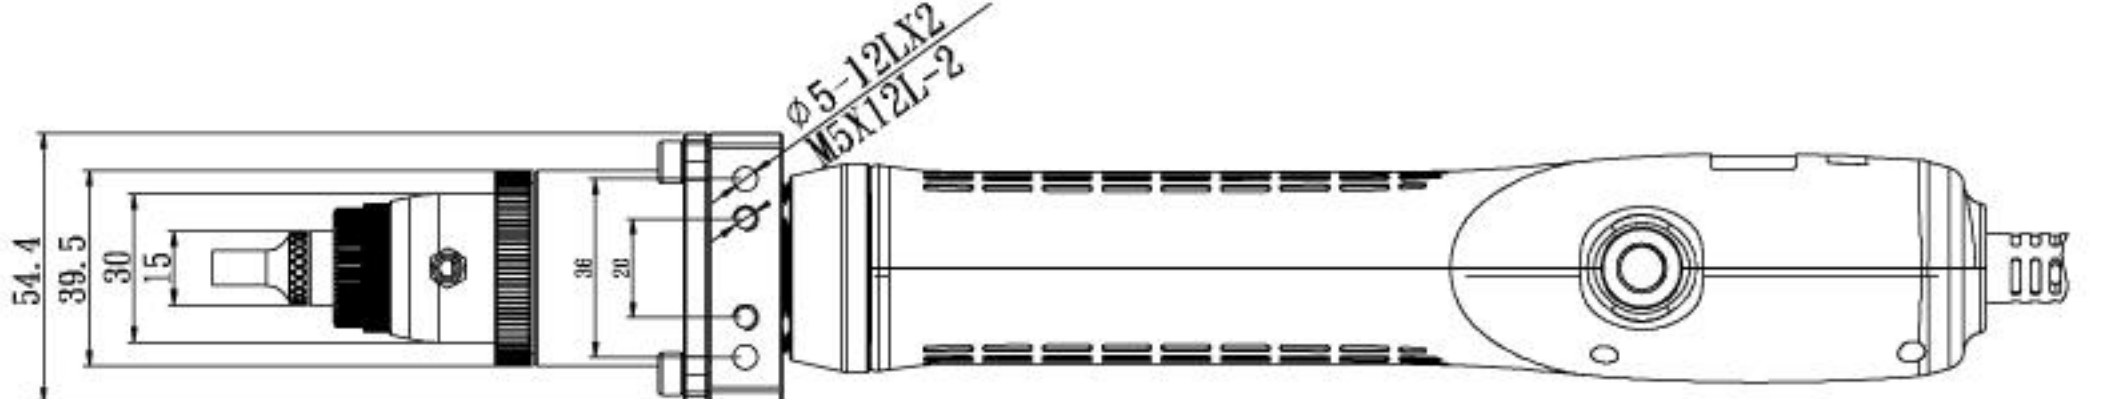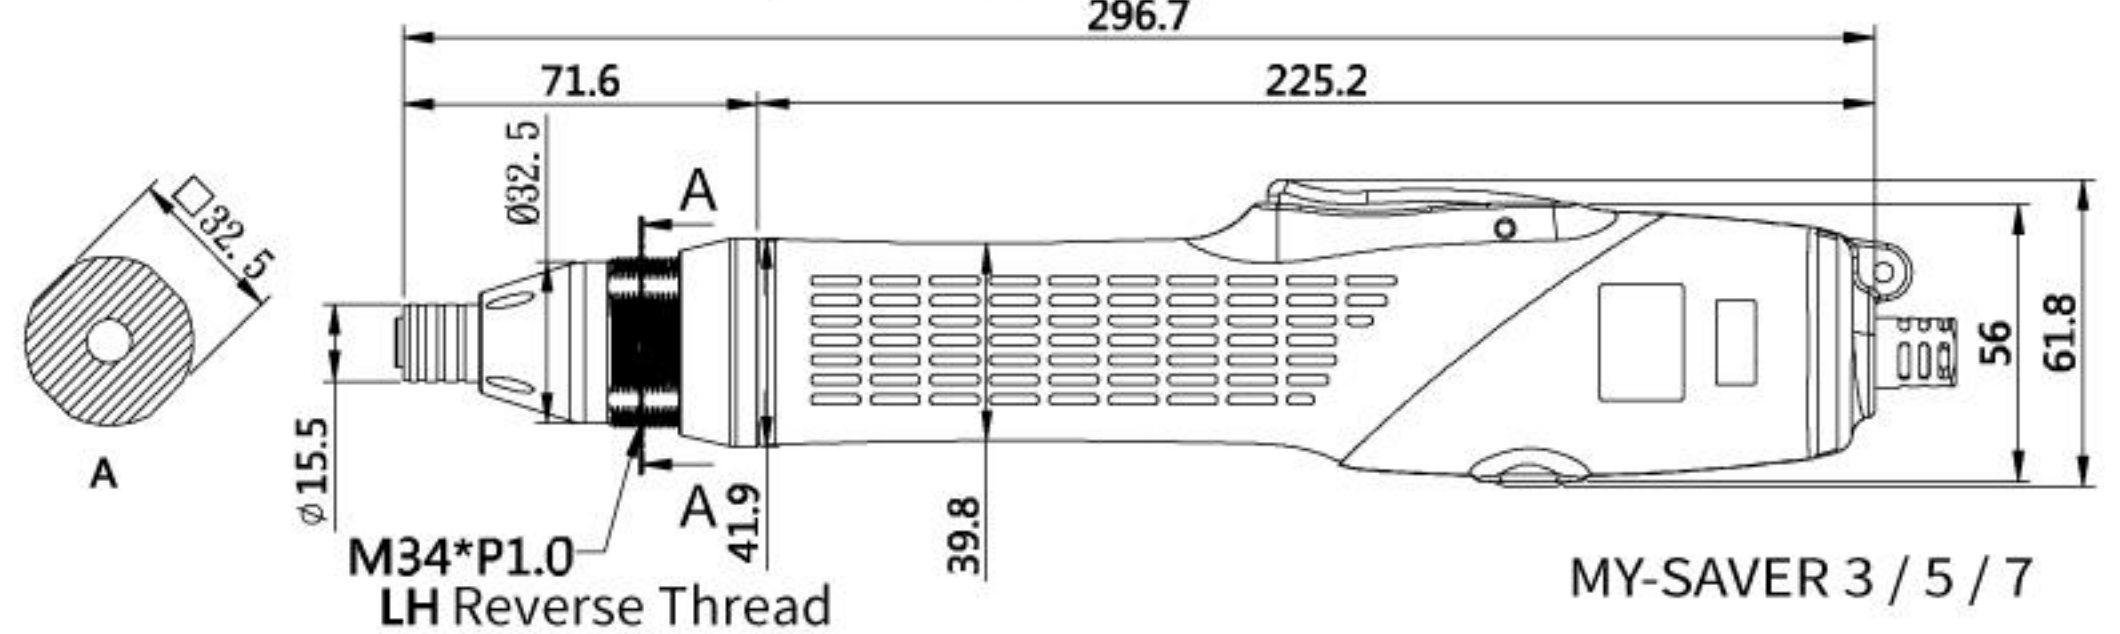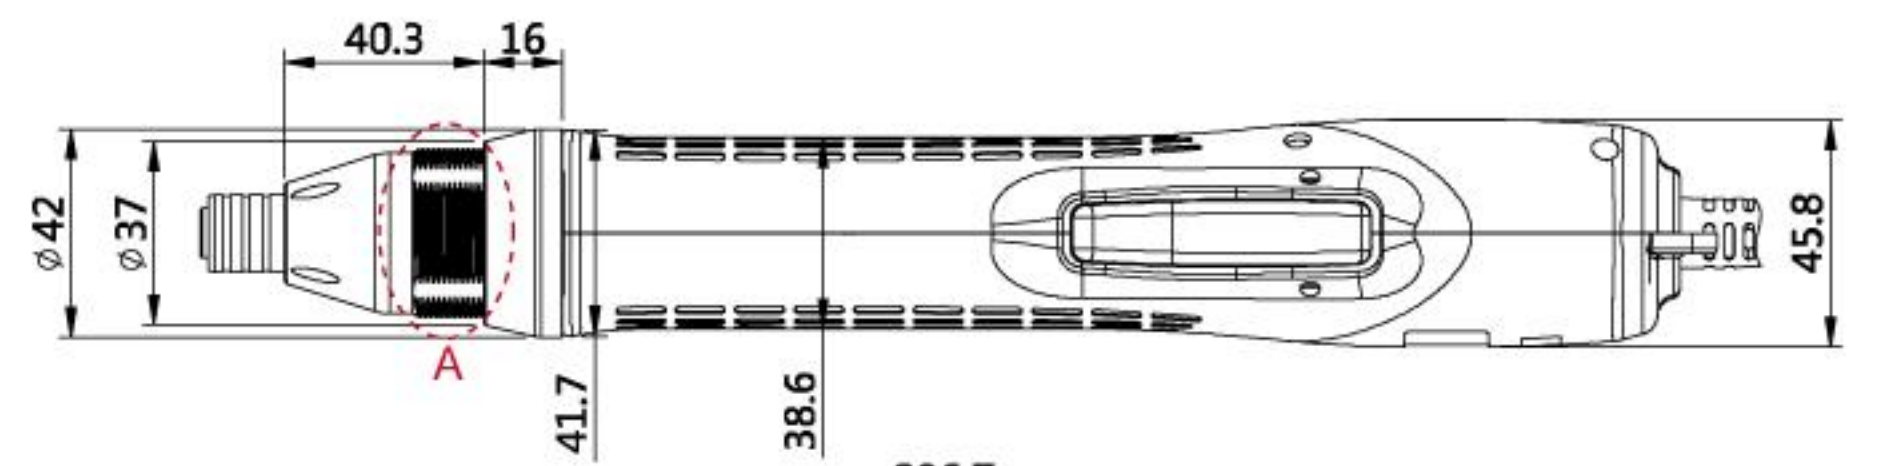

MY-SAVER 3 / 5 / 7 + KS-TM

Bit nozzle specification

PART NO	d1	d2	D	H
P11032-15	3.5	5.5	6.5	2
P11032-17	4.5	6.5	7.5	2
P11032-18	5.5	7.5	8.5	2

※d1<Screw Head Dia<d2

Accessories

Screwdriver Holder
KH-2L





Screwdriver Holder
KH-6



Pistol Grip
LG-15S



Screw Head Dia

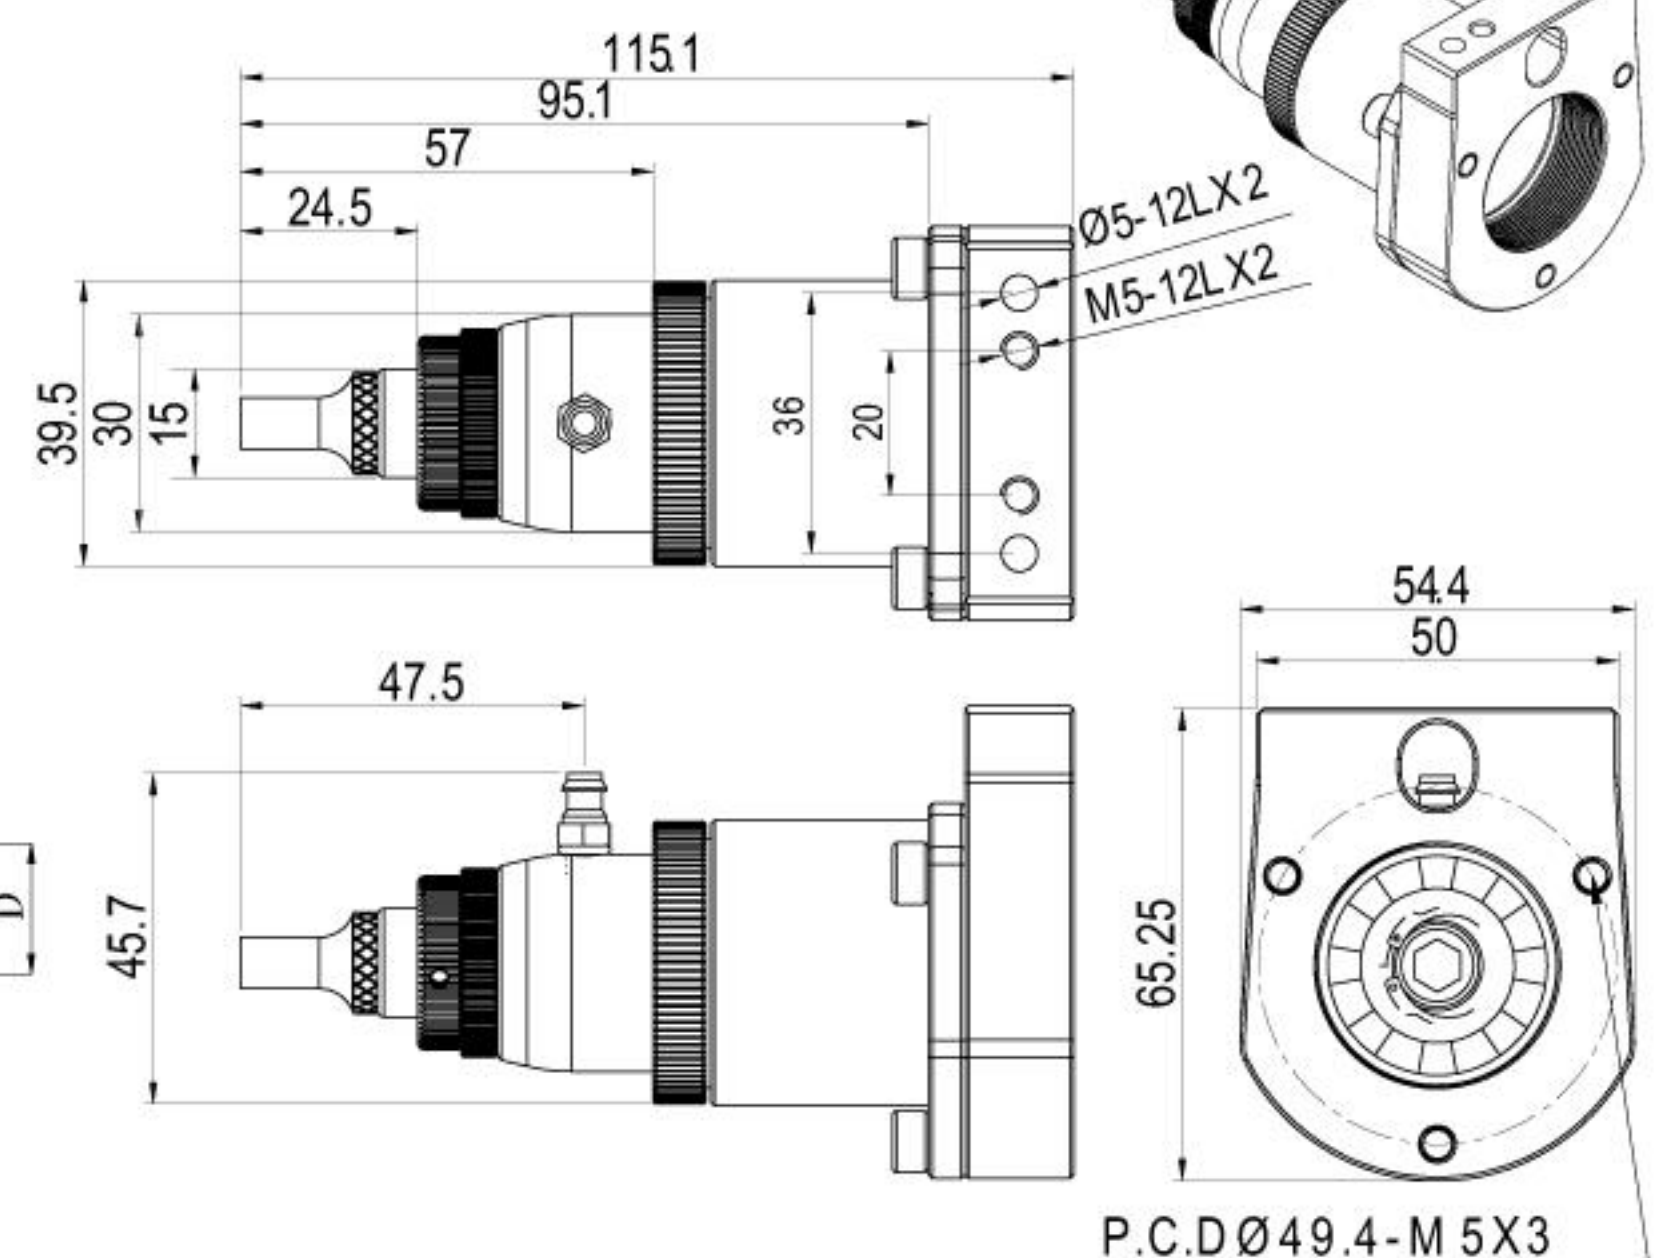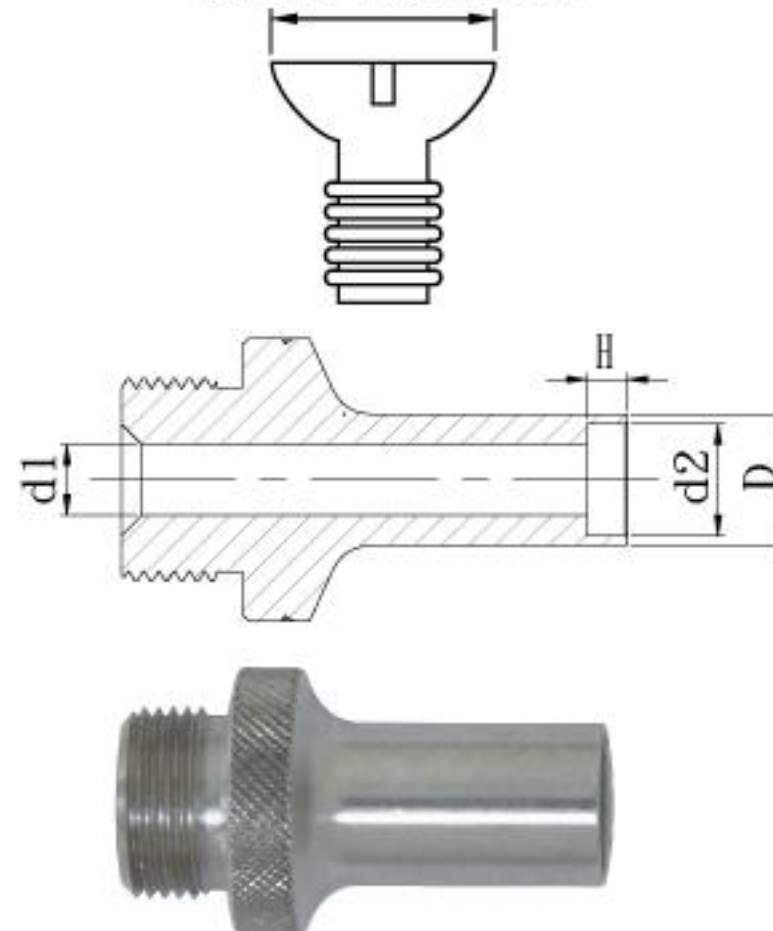

P.C.D Ø49.4-M 5X3

Unit: mm

Specifications

Model	Input voltage	Torque			Free Speed (r.p.m)	Power Consumption	Weight (g)	Length (mm)	Power Controller	Bit Type
		(N.m)	(kgf.cm)	(Lbf.in)						
MY-SAVER 3	DC40	0.6~3	6.11~30.59	5.31~26.55	1600~160	90W	830	297	MY-SAVER	A、B 9.5、D
MY-SAVER 5	DC40	1~5	10.2~51.00	8.85~44.25	1100~110	90W	830	297	MY-SAVER	A、B 9.5
MY-SAVER 7	DC40	1.4~7	14.27~71.39	12.39~61.96	660~70	90W	830	297	MY-SAVER	B 9.5

※CE、RoHS

