

MY-Sirius Screwdriver Series



(Optional)

M 40 * P1.5
LH (Reverse Thread)



A


MY-Sirius 12 / 18

MY-Sirius 25

M 45 * P1.5
LH (Reverse Thread)




A

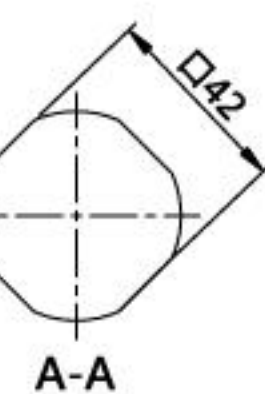


A-A

External Dimension

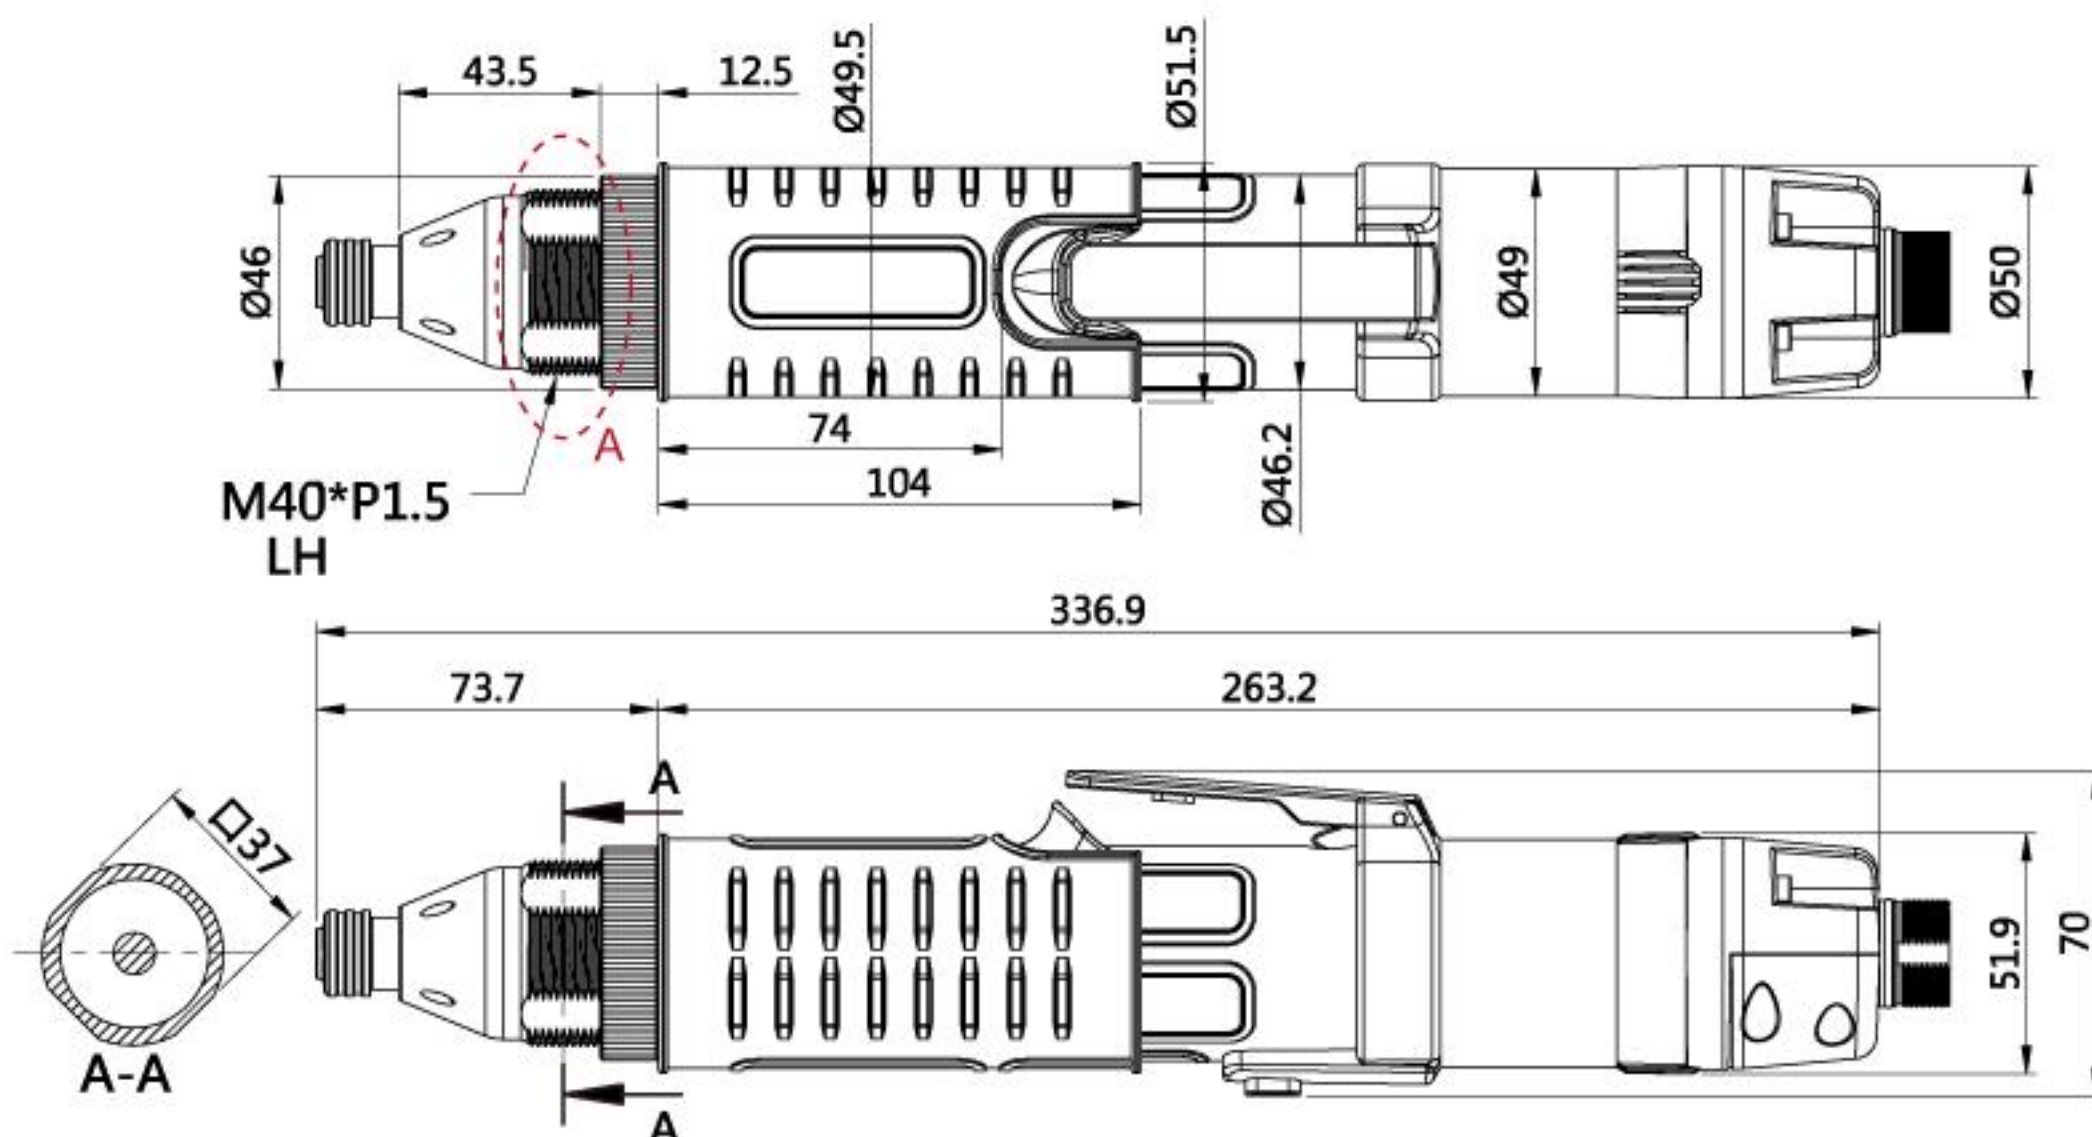

MY-Sirius 12 / 18

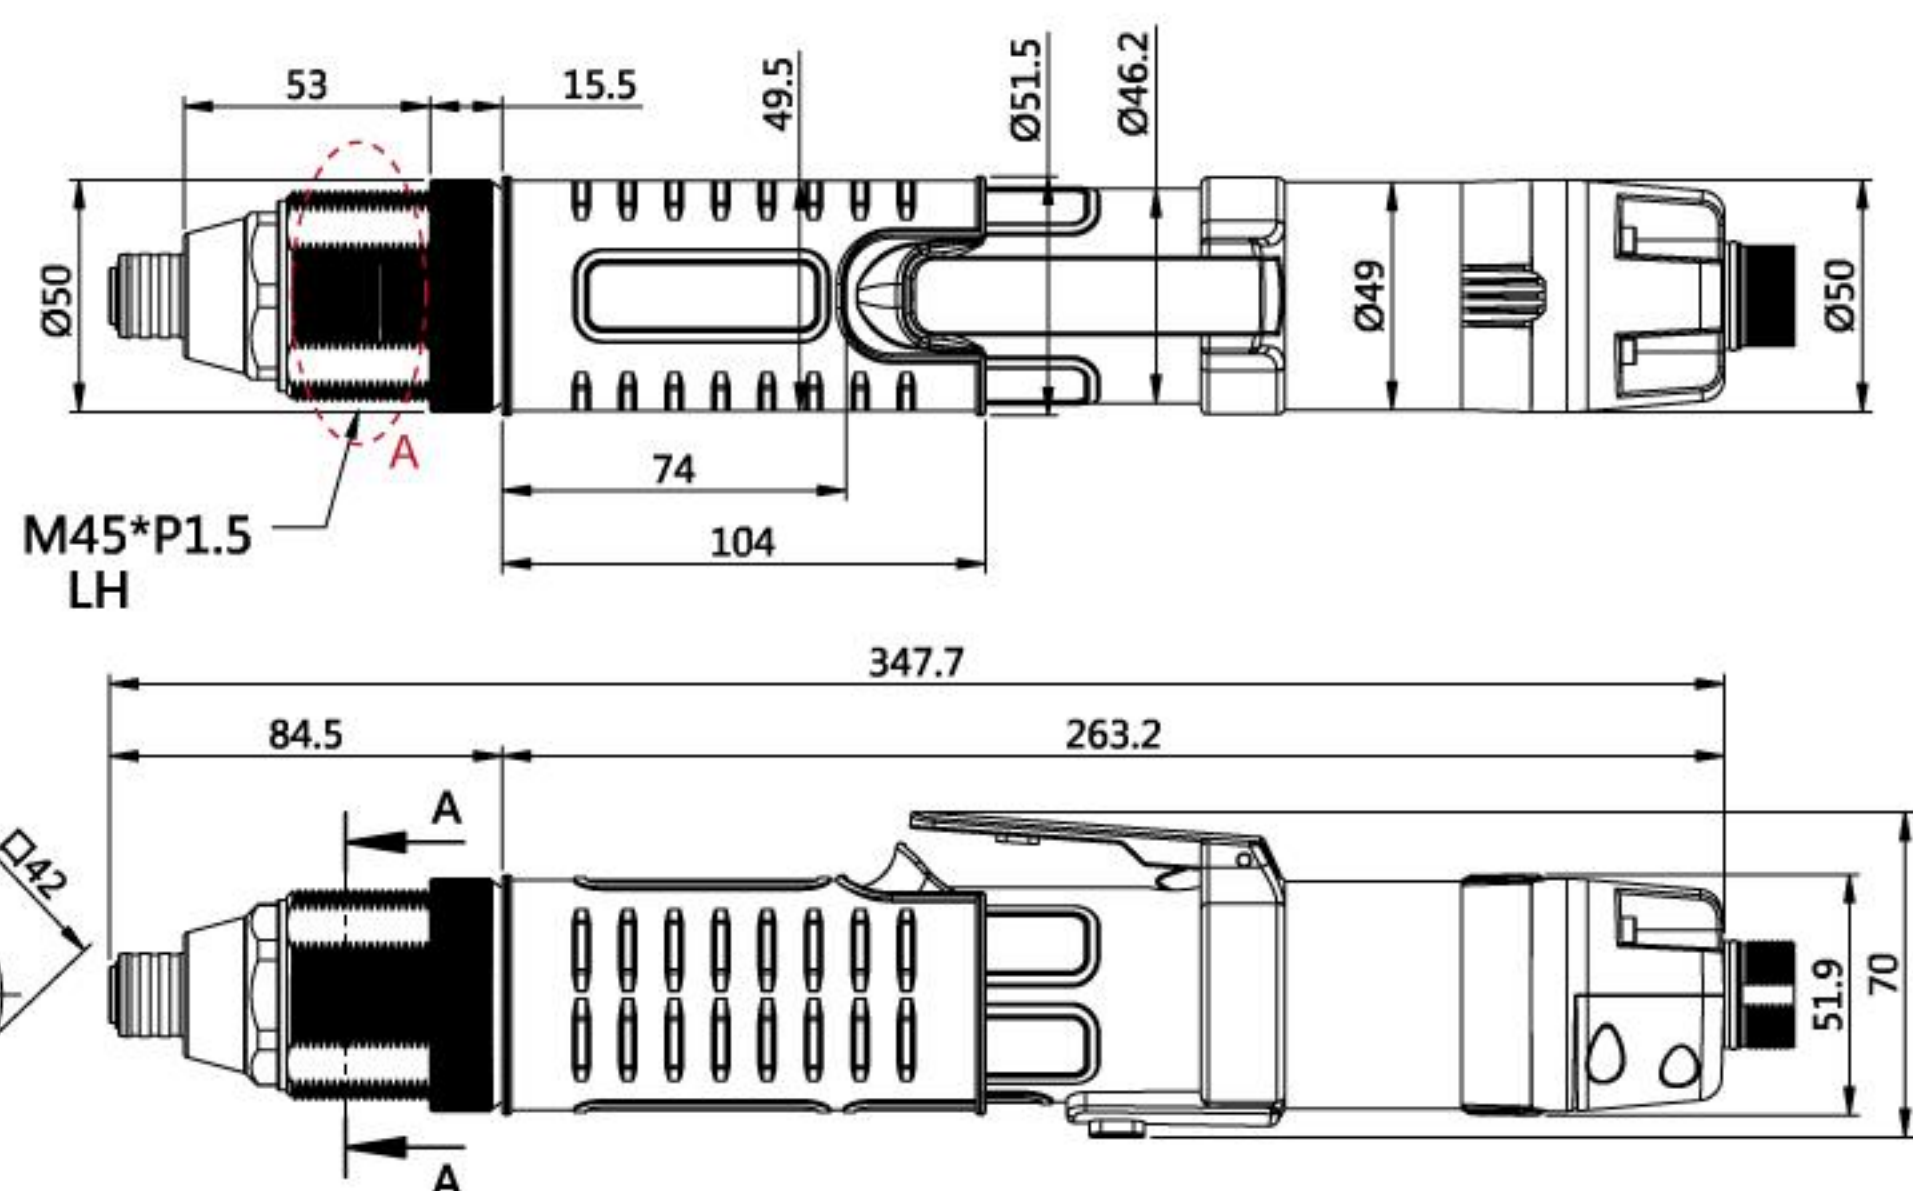

MY-Sirius 25

Unit: mm

Specifications

Model	Input voltage	Torque			Free Speed (r.p.m)	Power Consumption	Weight (g)	Length (mm)	Applicable controller	Bit Type
		(N.m)	(kgf.cm)	(Lbf.in)						
MY-Sirius 12	DC40	1.5~ 12	15.30 ~ 122.40	13.28~ 106.21	800~40	90W	1460	337	MY-Sirius	B 9.5 、W3/8"
MY-Sirius 18	DC40	2.25 ~ 18	22.95 ~ 183.6	19.91~ 159.3	550~30	90W	1475	337	MY-Sirius	B 9.5 、W3/8"
MY-Sirius 25	DC40	3.13~ 25	31.93 ~255	27.70 ~ 221.28	350~20	90W	1910	348	MY-Sirius	B 9.5 、W3/8"

※CE、RoHS

