

MY-TR




Features

In the era of industry 4.0, assembly data collection and integration is becoming a must. In order to meet market demands, Anlidar’s latest invention MY-TR is able to display tightening torque, output tightening torque, output tightening status, storage tightening torque and together with error proof functions.

MY-TR is also able to prevent errors from tightening torque, tightening number of threads, and tightening time. With various I/O, MY-TR can be connected to your PLC and integrated with your automation equipment and output assembly status instantly to your sever or private could by ethernet or WIFI for traceability.

External Dimension

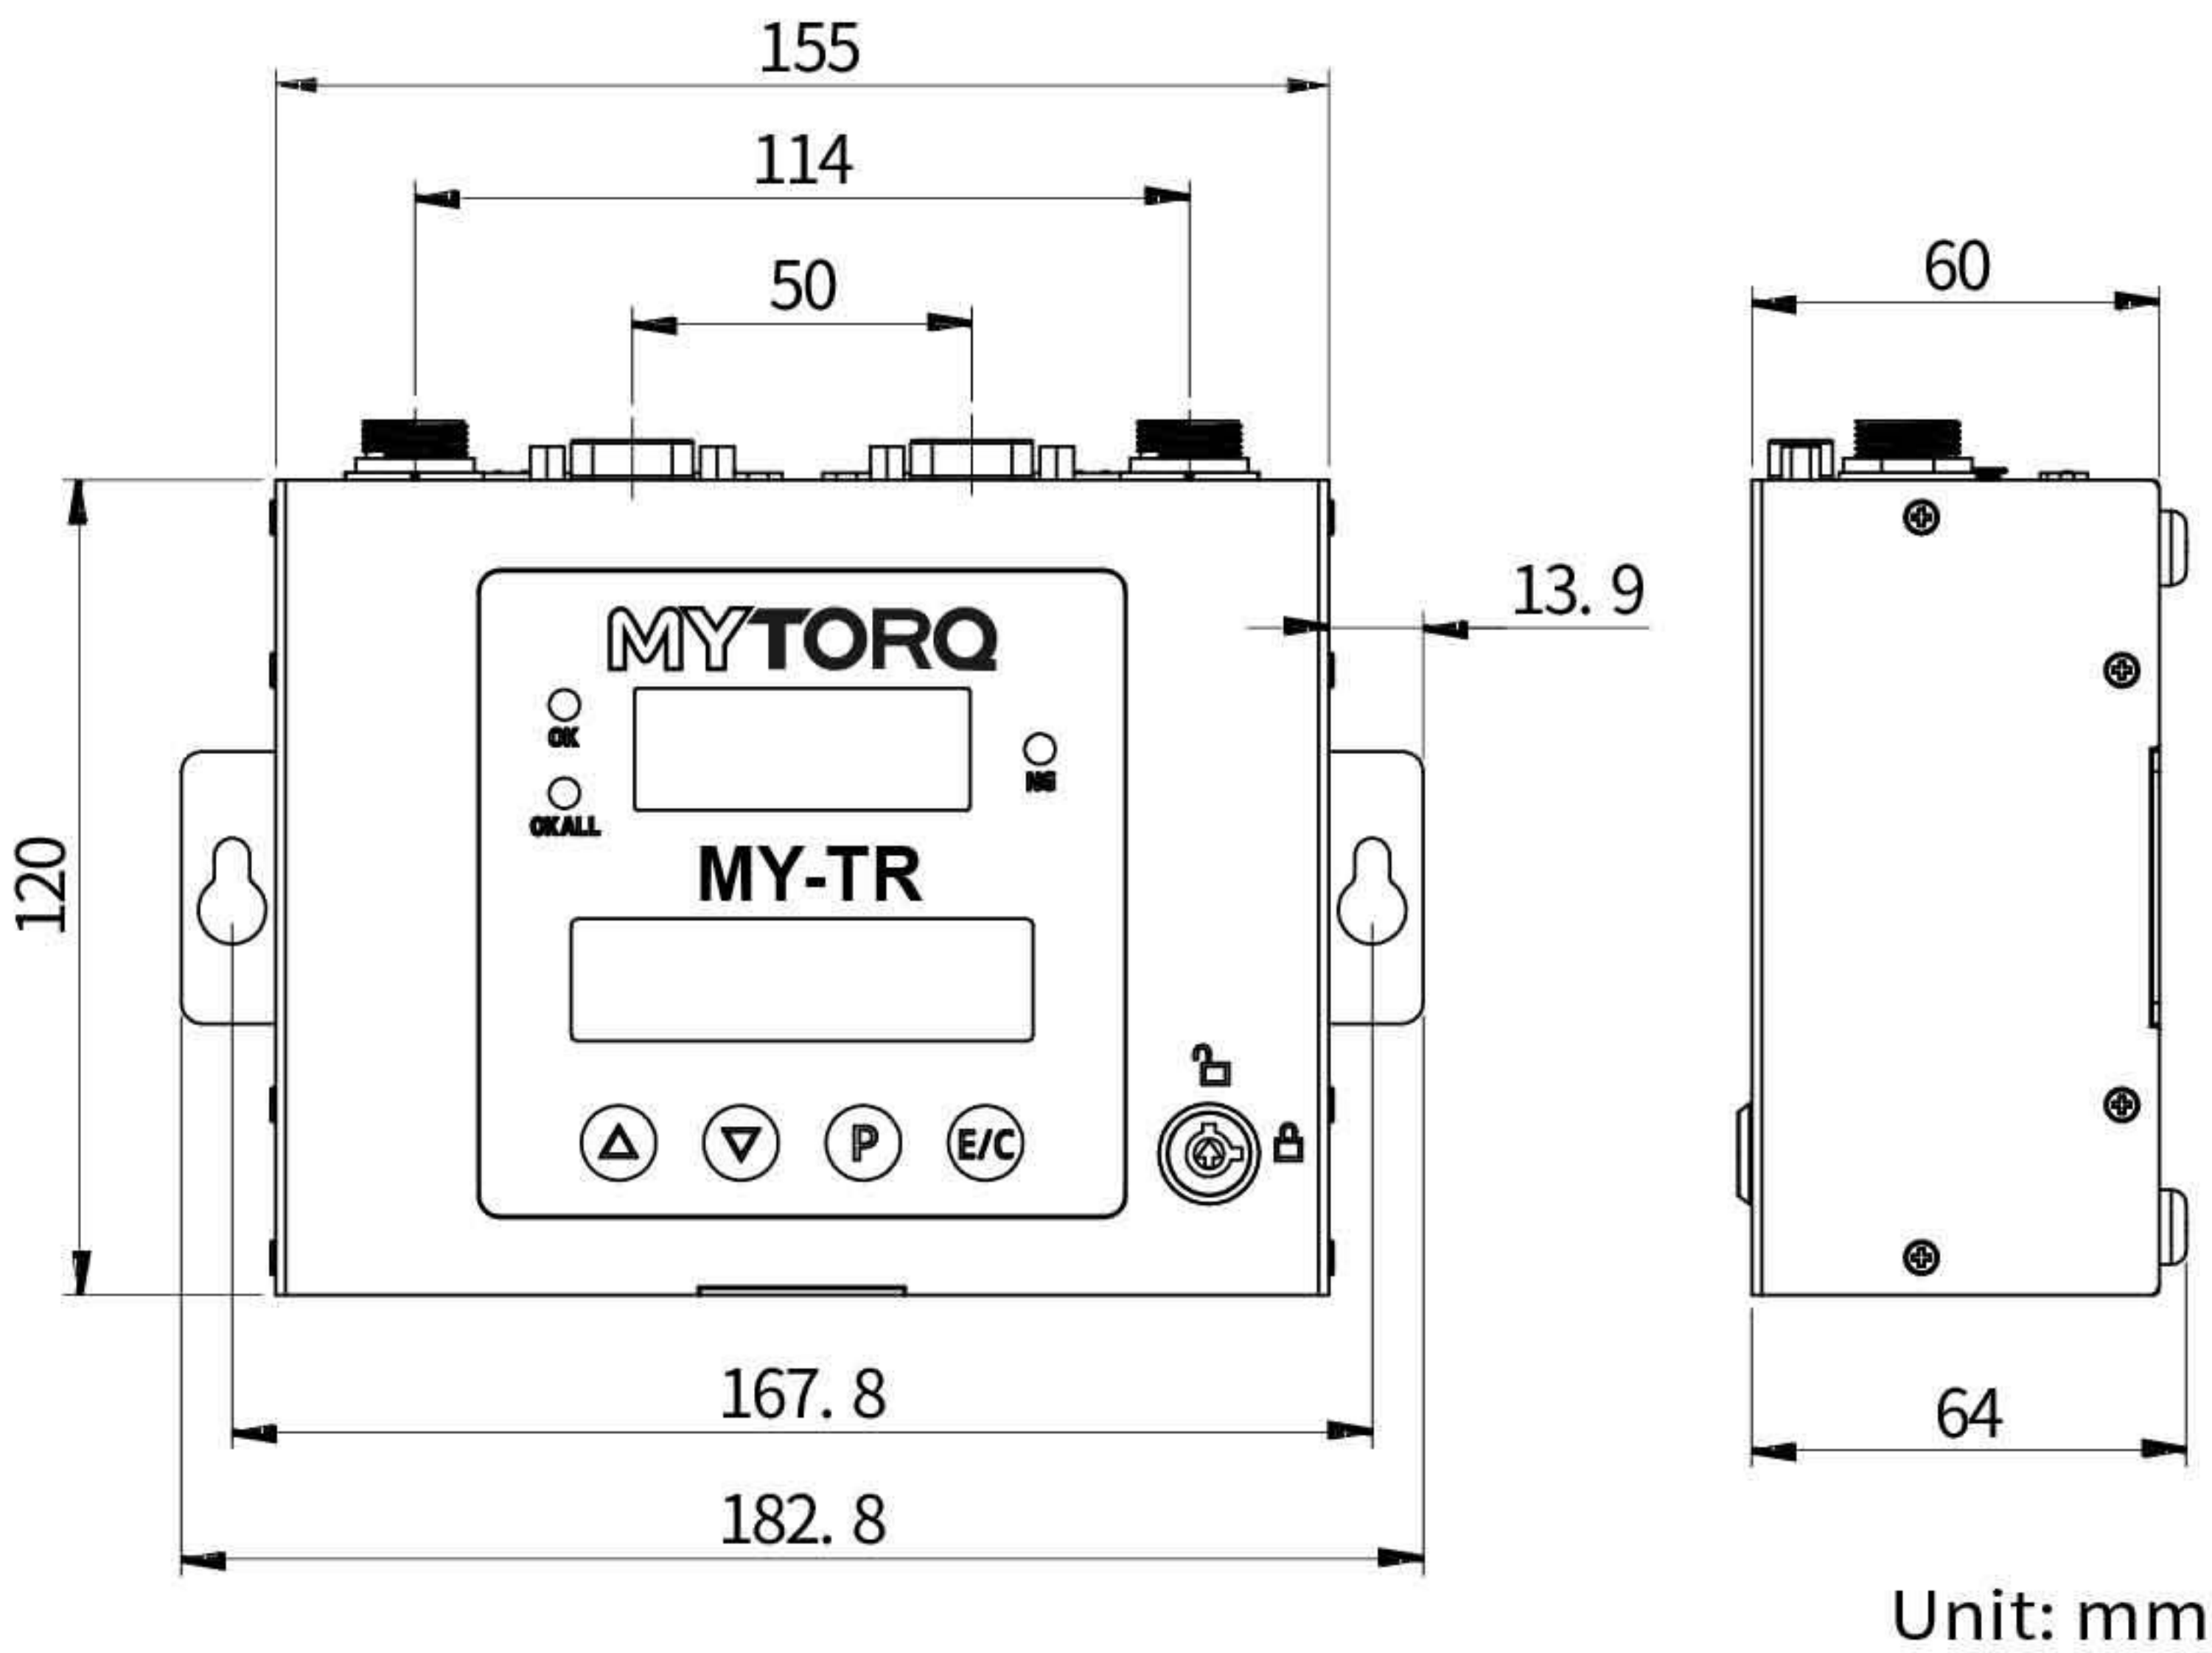

Specifications

Model	MY-TR
Input Voltage	DC 32V/ 40V
I/O Output Voltage	DC 24V 50mA/12V 100mA
Batch Count	1-250
Count method	Count-up / Count-down
Continued induction switch(sensor)	ON/OFF
Sensor switch mode	ON(2 Sensors) / OFF(1 Sensor)
Slow start time setting	0~9.9 seconds
Slow start speed setting	L0:100%,10%~90% L1~L9 Rated speed
Stop time detection	0.00~9.99 seconds
Torque value detection	0.0~550.00kgf.cm
Screw thread detection	0.0~999.9
External signal input	Start / Reverse / Disable / Confirm / Cleared / Gate / Sequence cleared
External signal output	OK / NG / OK ALL / STOP
Serial interface	RS-232X2
Assembly management	MY-DAS / MY-AMS
external dimensions	155X120X60(mm)
Weight(g)	630g
Accessories	Power cableX1 KeyX2
Applicable Models	MY2-TR MYT-TR MY5-TR MY7-TR MY8-TR MY9-TR MYR-TR MYLR-TR