



BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER AND PUSH START CLUTCH TYPE SERIES

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.

MYLR Series

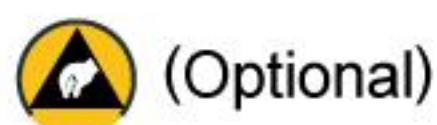


External Dimension

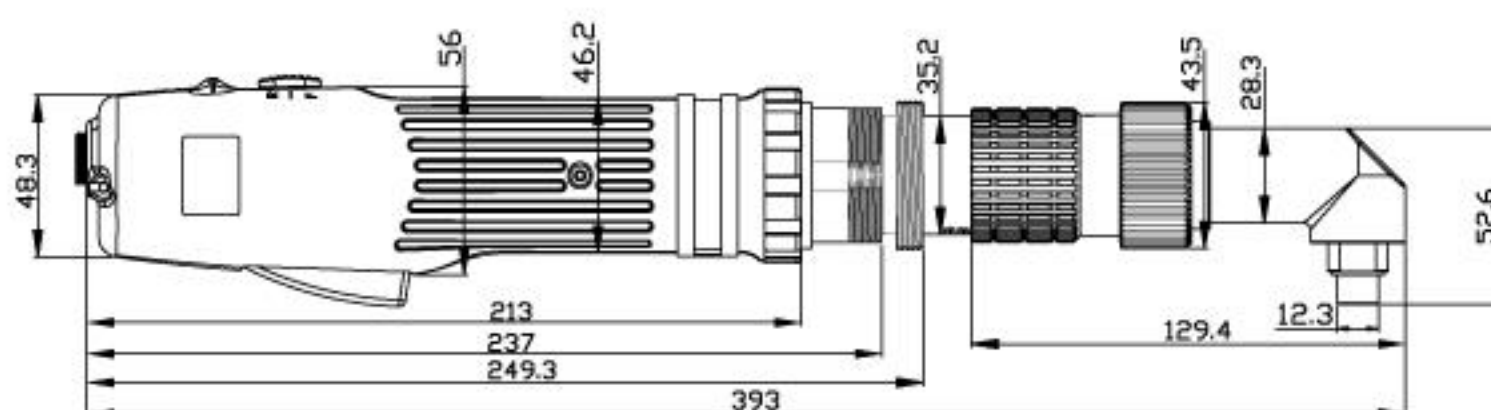

Unit: mm

Torque Range Reference Chart

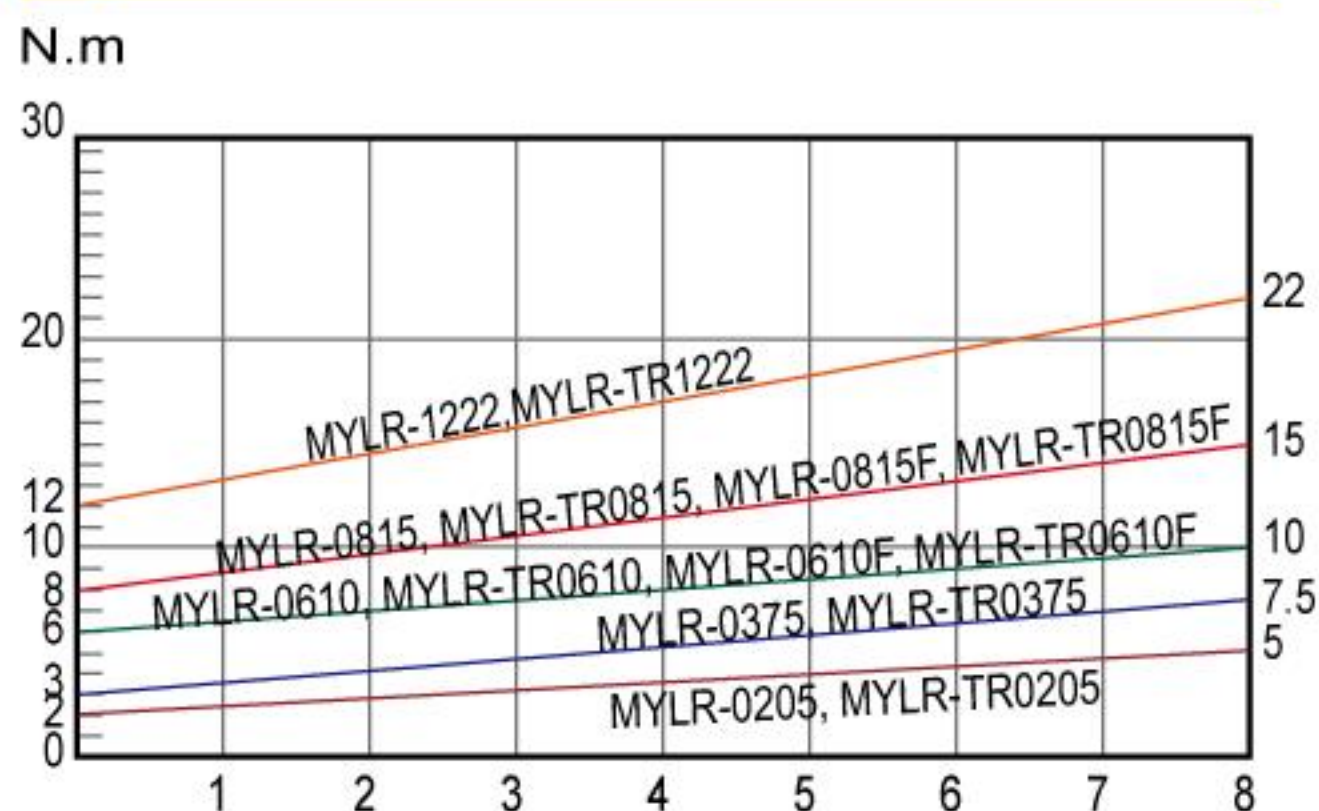

Accessories

Power Controller
MYP40-1500



Spring Balancer
KL-2000



Spiral Cable



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (kg)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MYLR-0205	2~5	2~4	±5%	1200	-	≤5	≤4	2.5	393	MYP40-1500	B 9.5 、 W 3/8"
MYLR-0375	3~7.5	3~6	±5%	900	-	≤6	≤4.5	2.5	393	MYP40-1500	B 9.5 、 W 3/8"
MYLR-0610	6~10	6~8	±5%	600	-	≤8	≤6	2.5	393	MYP40-1500	B 9.5 、 W 3/8"
MYLR-0610F	6~10	6~8	±5%	880	-	≤8	≤6	2.5	393	MYP40-1500	B 9.5 、 W 3/8"
MYLR-0815F	8~15	8~12	±5%	600	-	≤10	≤8	2.5	393	MYP40-1500	B 9.5 、 W 3/8"
MYLR-0815	8~15	8~12	±5%	370	-	≤10	≤8	2.5	393	MYP40-1500	B 9.5 、 W 3/8"
MYLR-1222	12~22	12~17.6	±5%	370	-	≤10	≤8	2.5	393	MYP40-1500	B 9.5 、 W 3/8"

※CE、RoHS

