



BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER CLUTCH TYPE SERIES

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.

MYT Series

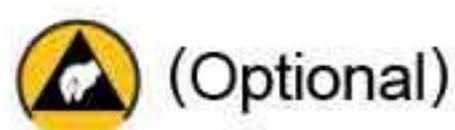


External Dimension

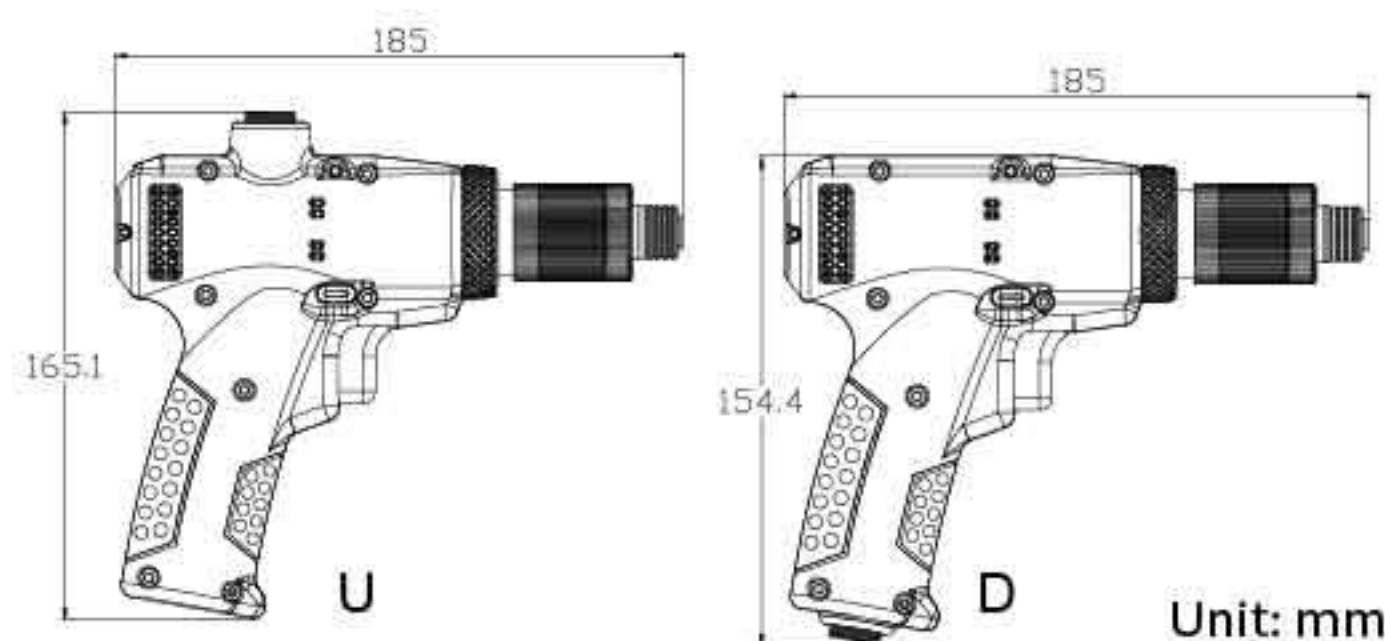

Unit: mm

Torque Range Reference Chart

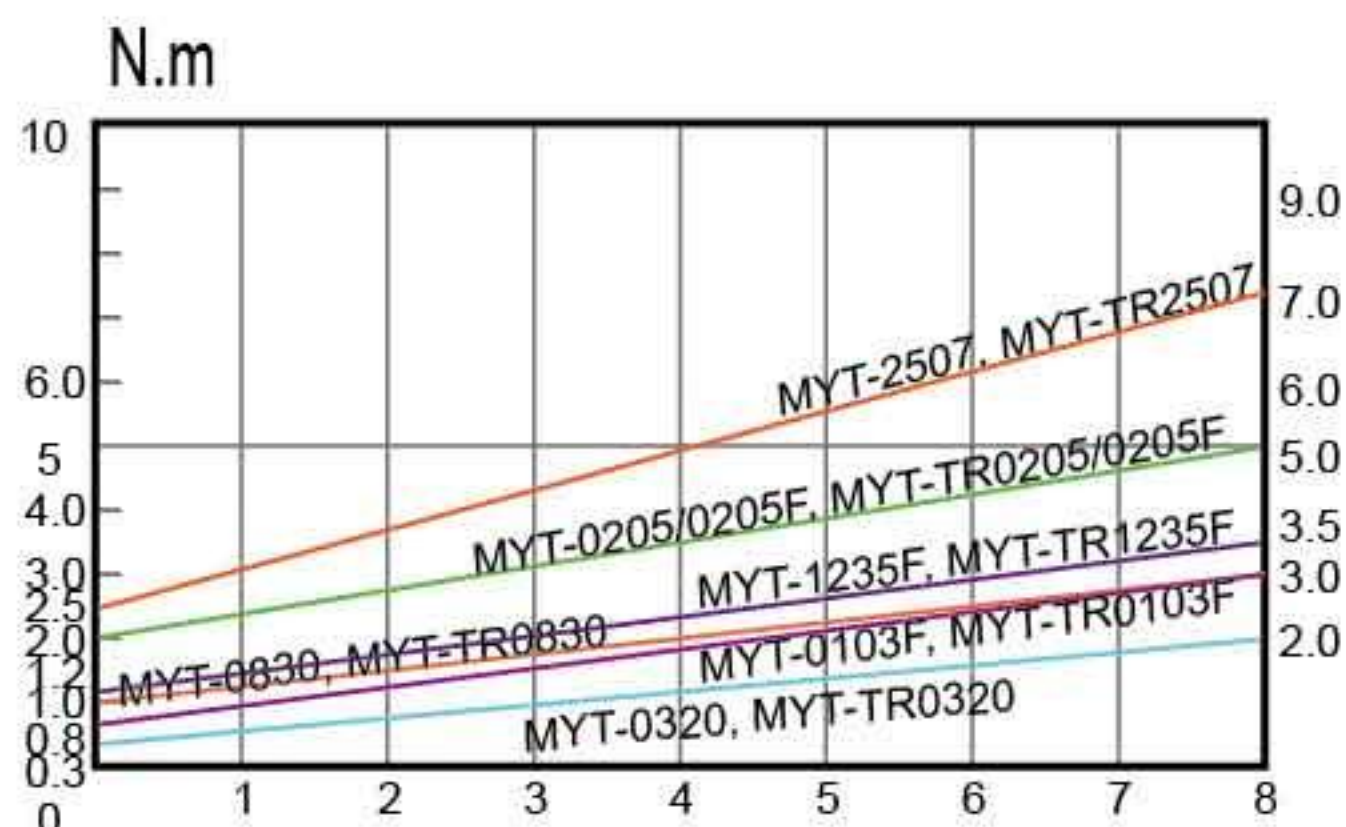

Accessories

Torque Locker
KC-28A



Screwdriver Holder
KH-2



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (kg)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MYT-0320	0.3~2.0	0.3~1.6	±5%	1200	-	2.3~3.5	2.3~3.0	0.7	185X150	MYP40-500	A、B 9.5
MYT-0830	0.8~3.0	0.8~2.4	±5%	1200	-	2.6~4.0	2.6~3.5	0.7	185X150	MYP40-500	A、B 9.5
MYT-0205	2~5	2~4	±5%	700	-	4.0~5.0	≤4	0.7	185X150	MYP40-500	A、B 9.5
MYT-0103F	1~3	1~2.4	±5%	3300	-	2.0~4.0	2.0~3.5	0.7	185X150	MYP40-1500	A、B 9.5
MYT-1235F	1.2~3.5	1.2~2.8	±5%	1700	-	2.6~4.0	2.6~3.5	0.7	185X150	MYP40-1500	A、B 9.5
MYT-0205F	2~5	2~4	±5%	1000	-	4.0~5.0	≤4	0.7	185X150	MYP40-1500	B 9.5
MYT-2507	2.5~7	2.5~5.6	±5%	850	-	5.0~6.0	≤5	0.7	185X150	MYP40-1500	B 9.5

※CE、RoHS

