

PSxxTSL Series

Straddle leg Electric Pedestrian Stacker with capacities of 1200/1600/1800kg



INTRODUCTION

- Safe, Compact and Ergonomic Long Tiller Design
- Precise Lifting and Lowering with Fully Proportional Hydraulic System
- Powerful, Maintenance Free German AC Power Train
- Core Components from Top Quality Brands
- 3 Wheel Structure for Stability

ADVANTAGES:

- The PSxxL series is tailored to most pedestrian controlled stacking operations with capacities from 2600 lbs to 4000lbs.
- Ergonomic tiller allows for efficient and safe operation.
- Proportional lifting allows for efficient and safe lifting of any product at any lift speed.
- By using high quality, state of the art components, this stacker will out perform and last longer than comparable stackers on the market today.

 Long-tiller Design	 Capacity 1200-1800kg	 Easy Maintenance	 High Performance
 Powerful Battery	 Robust Design	 Full Proportional Lift	CAN-BUS Technology



Straddle leg

Adjustable straddle leg design, suitable for diverse pallet sizes and more stability.



Easy Assembly

Multi position straddle allows for easy assembly, multiple pallet widths and excellent stability.

CAN-BUS

CANBUS technology

CANBUS technology allows for fewer wires and increased dependability. CANBUS technology slows for easier adjustments and troubleshooting reducing downtime. New digital display outperforms analog.



ZAPI controller

ZAPI controller and Battery Indicator with hour meter as well as fault code display for easy maintenance.



For every application the right battery capacity

With the PSxxTSL series for every truck the right battery:
PS12TSL 24 volt 180 Ah battery;
PS16/18TSL 24 volt 270Ah battery standard.



Built in USB connector

USB connector for charging of additional devices during warehouse operations.



Maintenance friendly

The truck design and component placement allow for easy service and maintenance. Two screws are used to hold cover in place allowing fast and easy access to all components. Drive wheel and caster can be removed and replaced without use of additional lifting devices.



Electronic proportional lifting and lowering

The electronically controlled proportional lifting system ensures accurate positioning and stacking operations at every lifting height. Proportional lifting increases productivity especially at higher lift heights.

Long tiller design for ergonomics and safety

Through the long tiller design the operator can always keep a safe distance to the truck during proceeding the work very ergonomically.

The long tiller allows the operator to keep a safe distance while providing precision operations.

Reduced force to the operator allows for easy and ergonomic control of the operation of the truck.

Handle operating heights are varied allowing for comfortable and efficient use of multiple operators.

Parameter

Manufacturer's type designation		PS12TSL	PS16TSL	PS18TSL
Load Capacity / rated load	t	1.2	1.6	1.8
Service weight	kg	1190	1480	1560
Lift height	mm	3510	4510	4510
Aisle width for pallets 1000X1200 crossways	mm	2396	2437	2446
Travel speed, laden/ unladen	Km/h	5.4/6.0	5.4/6.0	5.4/6.0
Max. gradeability, laden/ unladen	%	45/55	45/55	45/53
Battery voltage, nominal capacity K5	V/Ah	24/180	24/270	24/270

Smart and Ergnomic Tillers

Standard For PSE12B and PSE12N

Turtle Speed Button

Smart Pin Code Access

Battery discharge indicator

Operating hour counter

On-board diagnostics via error codes

BACK

FRONT

Emergency-reverse &Horn Buttons

Dual butterfly-style thumb driving controls

Electric lifting and lowering

RFID Card Access is optional for PSE12B and standard for PSE12N

RFID card provides faster access to equipment and ideal for applications when one truck needs to be used by different operators

*PSE12BSL/NSL, PSE12BM/NM and PSE12B/N have the same tiller as standard, PSE12N, PSE12ND, PSE12NS, PSENM have the RFID card as standard.

RFID card Access



Vertical Driving in Confined Space



The function of driving with tiller in the **vertical position** helps with work in confined area without sacrificing of safety.

The tiller bar is supported by the air spring which helps to return the tiller to its vertical position without strike in the end point.

For increase of operation comfort and safety the trucks are equipped with speed reduction function in turns.



Gradeability Performance

Model	PSE12B/N/BD/ND/BM/NM	PSE12BSL/NSL
Max.grade ability laden	5%	4%
Max.grade ability unladen	10%	10%



Robustness




Steel cover

The main cover is made out of steel with thickness 2.0mm.



Tiller is made out of PA6 30% of glass fiber material, having high strength.




Capacity of 1200kg with high residual value at maximum height (load center distance 600 mm)



Wide mast provides perfect observation of forks, the field of view is clear and not interrupted by mast sections, cylinder or chains.

Real mast profiles are used for long life-time, no cheap bended solutions used. All directed to maintain performance of the truck during its life-cycle.




Welded forks are used to ensure robustness.



The operator can always clearly see the forks which significantly increases safety of operation.

Maintenance Friendly

Convenient and fast access to any component of the truck, no elements are located in areas difficult to reach. No Special tools are required.

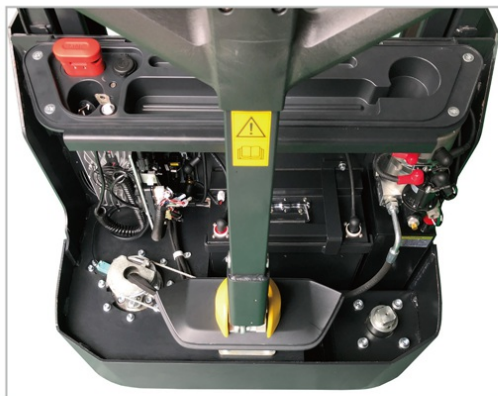

CAN-bus Battery Management System

The BMS of battery controls charging and discharging parameters, working temperature, short circuits, has sleeping mode and is able to turn off the power in case of emergency. Communication with BMS and software adjustment is possible via CAN.

Capacity



Ready

24.50V

0.00A

Min Volt
0mV

Avg Volt
0.0mV

Max Volt
0mV

Communication
Normal

Realtime

Rated Capacity 60.0 Ah Wh(Current) 0.0 Wh

Discharge Cycle Times

Other

Name	Value	Units
Cell Temp1	25.3	°C
Cell Temp1	25.1	°C
SOC	45	1/255
Power Temp	27.1	°C
Envir Temp	32.2	°C
Cell Volt Alarm	none	
Total Volt Alarm	none	
Current Alarm	none	
Temp Alarm	none	
Balance Alarm	none	

Volt

Name	Value	Units
Cell	3507	mV
Total	24.5	V
Current	0.0	A
Run(Wh)	0	Wh

The software diagnostic tool for lithium batteries can provide full information about battery's condition and its current status.
(The above values are for reference only.)



The electric system is using CAN communication protocol increasing reliability of the system.



PSE12B/BD/BSL/BM

2x12 85Ah (5Hr) AGM maintenance free batteries are used.
Optionally available 2x12 106Ah (5Hr).



For PSE12B the charger with current 12A is used.
The standard charging time is 7 hours.



PSE12N/ND/NSL/NM

24V 60Ah Lithium LiFePO4 battery with BMS. Lithium battery has connection terminals with screws and located inside the steel case.



For PSE12N the charger with current 25A is used.
The standard charging time is 2.5 hours.
Opportunity charging is supported.

The **PSE12N/ND/NSL/NM** stacker is equipped with maintenance-free 24V/60Ah LiFePO4 type Li-ion battery with fast charging and ultra-high number of charging /discharging cycles during life time; opportunity charging feature basically does not limit your operation time. The integrated BMS provides the same features as the BMS for the batteries of pallet trucks(refer to pallet truck section) .
The on-board charger with 25A current can provide full charge for less than 2.5 hours with great efficiency.

The **PSE12B/BD/BSL/BM** stacker is equipped with 2x12V 85Ah VRLA-AGM maintenance free batteries. Optionally available 2x12V 105Ah batteries for longer operation.
The stacker is equipped with 12A on-board charger. The charging time is 7-8 hours, opportunity charging is not available.



Parameter

Manufacturer's type designation		PSE12NMSL	PSE12BSL	PSE12NSL
Load Capacity / rated load	kg	1200		
Service weight	kg	720	860	825
Lift height	mm	2000	3600	
Aisle width for pallets 1000X1200 crossways	mm	2228		
Travel speed, laden/ unladen	Km/h	4.2 / 4.5		

Max. gradeability, laden/unladen	%	4 / 10		
Battery voltage, nominal capacity K5	V/Ah	24 / 60	2x12 / 85	24 / 60

Smart and Ergnomic Tillers

Standard For PSE12B and PSE12N

Turtle Speed Button

Smart Pin Code Access

Battery discharge indicator

Operating hour counter

On-board diagnostics via error codes

BACK

Emergency-reverse &Horn Buttons

Dual butterfly-style thumb driving controls

Electric lifting and lowering

FRONT

RFID Card Access is optional for PSE12B and standard for PSE12N

RFID card provides faster access to equipment and ideal for applications when one truck needs to be used by different operators

*PSE12BSL/NSL, PSE12BM/NM and PSE12B/N have the same tiller as standard, PSE12N, PSE12ND, PSE12NS, PSENM have the RFID card as standard.

RFID card Access



Vertical Driving in Confined Space



The function of driving with tiller in the **vertical position** helps with work in confined area without sacrificing of safety.

The tiller bar is supported by the air spring which helps to return the tiller to its vertical position without strike in the end point.

For increase of operation comfort and safety the trucks are equipped with speed reduction function in turns.



Gradeability Performance

Model	PSE12B/N/BD/ND/BM/NM	PSE12BSL/NSL
Max.grade ability laden	5%	4%
Max.grade ability unladen	10%	10%



Robustness



Steel cover

The main cover is made out of steel with thickness 2.0mm.



Tiller is made out of PA6 30% of glass fiber material, having high strength.




Capacity of 1200kg with high residual value at maximum height (load center distance 600 mm)



Wide mast provides perfect observation of forks, the field of view is clear and not interrupted by mast sections, cylinder or chains.

Real mast profiles are used for long life-time, no cheap bended solutions used. All directed to maintain performance of the truck during its life-cycle.



Welded forks are used to ensure robustness.



The operator can always clearly see the forks which significantly increases safety of operation.

Maintenance Friendly

Convenient and fast access to any component of the truck, no elements are located in areas difficult to reach. No Special tools are required.



CAN-bus Battery Management System

The BMS of battery controls charging and discharging parameters, working temperature, short circuits, has sleeping mode and is able to turn off the power in case of emergency. Communication with BMS and software adjustment is possible via CAN.

Capacity



Ready

Min Volt

Max Volt

24.50V

0mV

0mV

Avg Volt

Communication

0.00A

0.0mV

Normal

Realtime

Rated Capacity 60.0 AH Wh(Current) 0.0 Wh

Discharge Cycle Times

Discharge Cycle Times

Other

Name	Value	Units
Cell Temp1	25.3	°C
Cell Temp1	25.1	°C
SOC	45	1/255
Power Temp	27.1	°C
Envir Temp	32.2	°C
Cell Volt Alarm	none	
Total Volt Alarm	none	
Current Alarm	none	
Temp Alarm	none	
Balance Alarm	none	

Volt

Name	Value	Units
Cell	3507	mV
Total	24.5	V
Current	0.0	A
Run(Wh)	0	Wh

The software diagnostic tool for lithium batteries can provide full information about battery's condition and its current status.
(The above values are for reference only.)



The electric system is using CAN communication protocol increasing reliability of the system.



PSE12B/BD/BSL/BM

2x12 85Ah (5Hr) AGM maintenance free batteries are used.
Optionally available 2x12 106Ah (5Hr).



For PSE12B the charger with current 12A is used
The standard charging time is 7 hours.



PSE12N/ND/NSL/NM

24V 60Ah Lithium LiFePO4 battery with BMS. Lithium battery has connection terminals with screws and located inside the steel case.



For PSE12N the charger with current 25A is used
The standard charging time is 2.5 hours
Opportunity charging is supported

The **PSE12N/ND/NSL/NM** stacker is equipped with maintenance-free 24V/60Ah LiFePO4 type Li-ion battery with fast charging and ultra-high number of charging /discharging cycles during life time; opportunity charging feature basically does not limit your operation time. The integrated BMS provides the same features as the BMS for the batteries of pallet trucks(refer to pallet truck section) .
The on-board charger with 25A current can provide full charge for less than 2.5 hours with great efficiency.

The **PSE12B/BD/BSL/BM** stacker is equipped with 2x12V 85Ah VRLA-AGM maintenance free batteries. Optionally available 2x12V 105Ah batteries for longer operation.
The stacker is equipped with 12A on-board charger. The charging time is 7-8 hours, opportunity charging is not available.



Parameter

Manufacturer's type designation		PSE12B	PSE12N	PSE12BD	PSE12ND
Load Capacity /rated load	kg	1200			
Service weight	kg	650	620	740	710
Lift height	mm	3600			
Aisle width for pallets 1000X1200 crossways	mm	2167		2241/2192	
Travel speed, laden/ unladen	Km/h	4.2/4.5			

Max. gradeability, laden/ unladen	%	5/10			
Battery voltage, nominal capacity K5	V/Ah	2x12/85	24/60	2x12/85	24/60

Smart and Ergnomic Tillers

Standard For PSE12B and PSE12N

Turtle Speed Button

Smart Pin Code Access

Battery discharge indicator
Operating hour counter
On-board diagnostics via error codes

BACK

FRONT

Emergency-reverse &Horn Buttons

Dual butterfly-style thumb driving controls

Electric lifting and lowering

RFID Card Access is optional for PSE12B and standard for PSE12N

RFID card provides faster access to equipment and ideal for applications when one truck needs to be used by different operators

*PSE12BSL/NSL, PSE12BM/NM and PSE12B/N have the same tiller as standard, PSE12N, PSE12ND, PSE12NS, PSENM have the RFID card as standard.

RFID card Access

Vertical Driving in Confined Space

The function of driving with tiller in the **vertical position** helps with work in confined area without sacrificing of safety.

The tiller bar is supported by the air spring which helps to return the tiller to its vertical position without strike in the end point.

For increase of operation comfort and safety the trucks are equipped with speed reduction function in turns.

Gradeability Performance

Model	PSE12B/N/BD/ND/BM/NM	PSE12BSL/NSL
Max.grade ability laden	5%	4%
Max.grade ability unladen	10%	10%



Robustness



Steel cover

The main cover is made out of steel with thickness 2.0mm.



Tiller is made out of PA6 30% of glass fiber material, having high strength.




Capacity of 1200kg with high residual value at maximum height (load center distance 600 mm)



Wide mast provides perfect observation of forks, the field of view is clear and not interrupted by mast sections, cylinder or chains.

Real mast profiles are used for long life-time, no cheap bended solutions used. All directed to maintain performance of the truck during its life-cycle.




Welded forks are used to ensure robustness.



The operator can always clearly see the forks which significantly increases safety of operation.

Maintenance Friendly

Convenient and fast access to any component of the truck, no elements are located in areas difficult to reach. No Special tools are required.

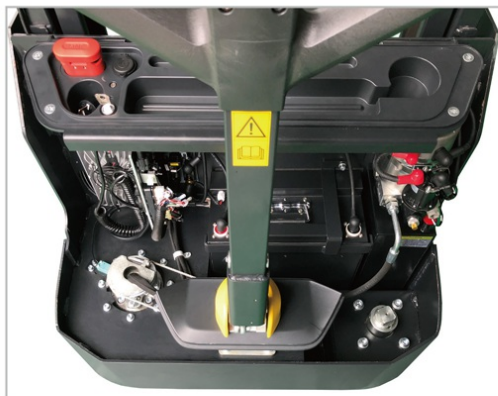

CAN-bus Battery Management System

The BMS of battery controls charging and discharging parameters, working temperature, short circuits, has sleeping mode and is able to turn off the power in case of emergency. Communication with BMS and software adjustment is possible via CAN.

Capacity			
Ready	Min Volt	Max Volt	
24.50V	0mV	0mV	
0.00A	Avg Volt	Communication	
	0.0mV	Normal	
Realtime			
Rated Capacity	60.0 Ah	Wh(Current)	0.0 Wh
Discharge Cycle Times	...	Discharge Cycle Times	...
Other			
Name	Value	Units	
Cell Temp1	25.3	°C	
Cell Temp1	25.1	°C	
SOC	45	1/255	
Power Temp	27.1	°C	
Envir Temp	32.2	°C	
Cell Volt Alarm	none		
Total Volt Alarm	none		
Current Alarm	none		
Temp Alarm	none		
Balance Alarm	none		
Volt			
Name	Value	Units	
Cell	3507	mV	
Total	24.5	V	
Current	0.0	A	
Run(Wh)	0	Wh	

The software diagnostic tool for lithium batteries can provide full information about battery's condition and its current status. (The above values are for reference only.)



The electric system is using CAN communication protocol increasing reliability of the system.



PSE12B/BD/BSL/BM

2x12 85Ah (5Hr) AGM maintenance free batteries are used. Optionally available 2x12 106Ah (5Hr).



For PSE12B the charger with current 12A is used. The standard charging time is 7 hours.



PSE12N/ND/NSL/NM

24V 60Ah Lithium LiFePO4 battery with BMS. Lithium battery has connection terminals with screws and located inside the steel case.



For PSE12N the charger with current 25A is used. The standard charging time is 2.5 hours. Opportunity charging is supported.

The **PSE12N/ND/NSL/NM** stacker is equipped with maintenance-free 24V/60Ah LiFePO4 type Li-ion battery with fast charging and ultra-high number of charging /discharging cycles during life time; opportunity charging feature basically does not limit your operation time. The integrated BMS provides the same features as the BMS for the batteries of pallet trucks(refer to pallet truck section) . The on-board charger with 25A current can provide full charge for less than 2.5 hours with great efficiency.

The **PSE12B/BD/BSL/BM** stacker is equipped with 2x12V 85Ah VRLA-AGM maintenance free batteries. Optionally available 2x12V 105Ah batteries for longer operation. The stacker is equipped with 12A on-board charger. The charging time is 7-8 hours, opportunity charging is not available.



Parameter

Manufacturer's type designation		PSE12BM	PSE12NM	PSE12BMD	PSE12NMD
Load Capacity/ rated load	kg	1200			
Service weight	kg	530	500	645	610
Lift height	mm	2000			
Aisle width for pallets 1000X1200 crossways	mm	2197		2245	2195
Travel speed, laden/ unladen	Km/h	4.2 / 4.5			

Max. gradeability, laden/ unladen	%	5 / 10			
Battery voltage, nominal capacity K5	V/Ah	2x12 / 85	24 / 60	2x12 / 85	24 / 60

SWB-130/130S/130D

Walkie Electric Stacker



Capacity
1300kg


Full Free Lift Mast

Li
Smart Lithium
Battery

Intelligent Design

Noblelift Walkie Electric Stacker

With a full free lifting mast, this stacker offers an ideal solution for material handling in confined spaces like supermarkets and internal workshops. Standard with a lithium battery, it ensures quick replacement and charging flexibility.

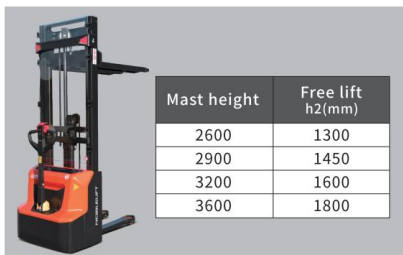


Full Free Mast Structure



Soft start for lifting



24V100Ah LFP battery with built-in BMS

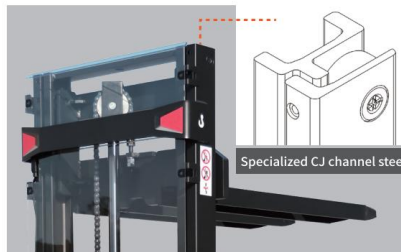


Load capacity upgrade


- Load capacity is upgraded to 1.3t, meeting the needs of customers better.
- The full free lifting mast is an ideal choice for working in limited height spaces.
- Soft start enables more stable and controllable lifting operations.
- Stability and performance of the truck is enhanced greatly via specialized CJ channel steel.
- Vertical drive function enables easy steering in narrow spaces such as lorries and elevators safely.

SWB-130/130S/130D

- External programming port, diagnosing faults without removing the cover. Convenient and fast maintenance.
- Patented chain turning structure with high strength.
- Standard speed reduction at turns ensures stability and safety during large angle turns.
- Makes it convenient to adjust the pressure on top of supporting wheels without lifting up the machine.

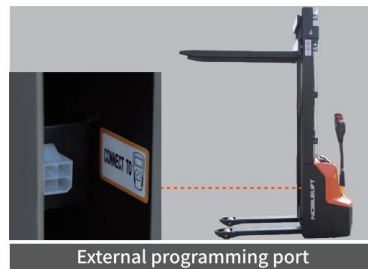

Smart Lithium Battery

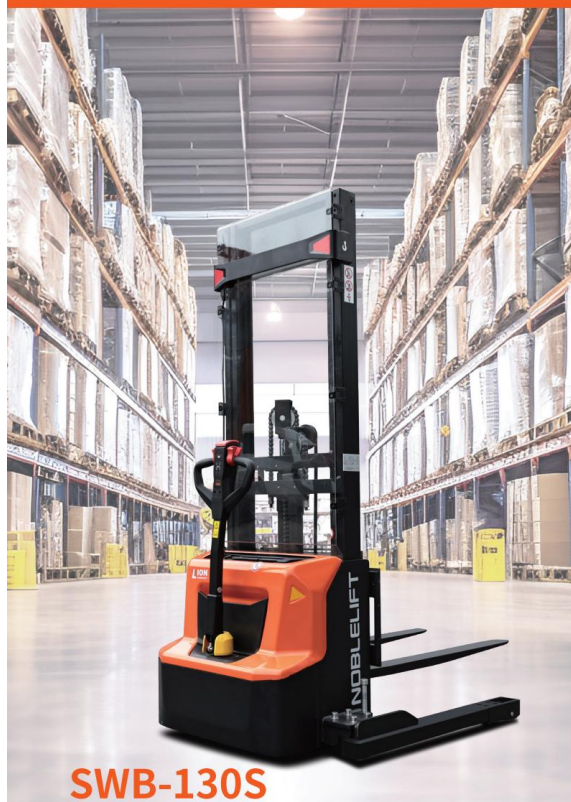

SWB-130S



All Li-ion batteries are equipped with built-in Battery Management System(BMS), which provides mandatory control of all important parameters of the battery during charging and operation. With this control, the safety of Li-ion battery during the whole life-cycle is guaranteed. The Li-ion batteries are certified according to international safety transportation (by sea and by air) and operation standards. The BMS communicates with control system of the truck via CAN-BUS, uploading key status data and can make its diagnosis and repair with special software.

SWB-130/130S/130D

The machine can ensure high efficiency even in multiple shifts.

Lithium batteries have functions such as fast charging, maintenance free, environmentally friendly, and intelligent display, while also easy to maintain, cost-effective, and improving work efficiency greatly.


Ergonomic & smart tiller

The tiller of the truck with ergonomic design has comfortable soft grips for comfort daily operation. All buttons are big and can be easily reached by operators even in case of working in gloves.

Integrated PIN code panel with LCD display for smart control and operation.



Working Together For A Shared Future

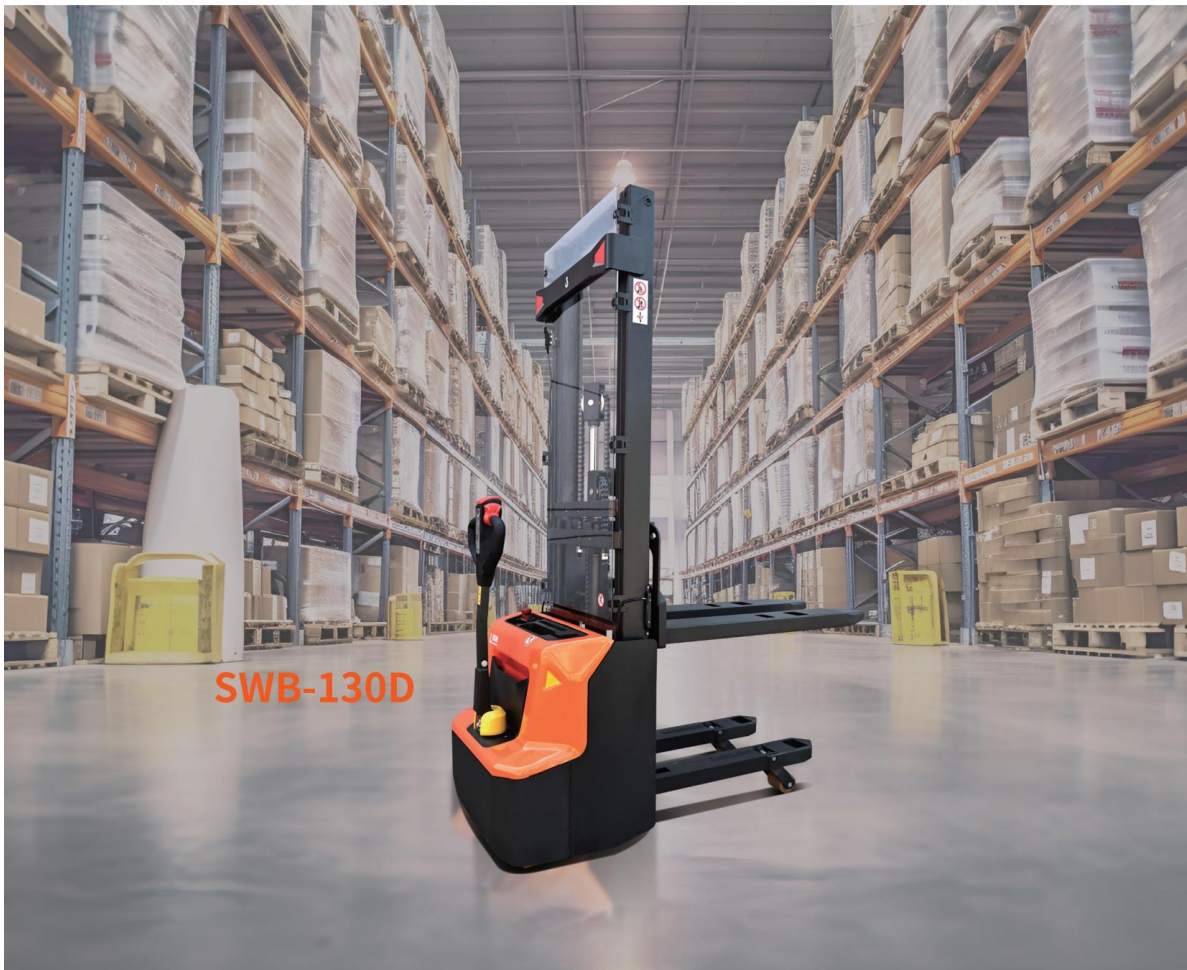

Parameter

Manufacturer's type designation		SWB130	SWB-130S	SWB-130D
Load Capacity / rated load	t	1.3	1.27	1.3
Service weight	kg	670	835	745
Lift height	mm	3510	3510	3510
Aisle width for pallets 1000X1200 crossways	mm	2167	2228	2244 / 2196
Travel speed, laden/ unladen	Km/h	4.2 / 4.5	4.2 / 4.5	4.2 / 4.5
Max. gradeability, laden/ unladen	%	4/10	4/10	4/10
Battery voltage, nominal capacity K2	V/Ah	24/100	24/100	24/100

ECL15B/N

Powered Stackers

INTRODUCTION

ECL 15B/N series is an economical long-tiller pallet stacker, with the rated load capacity of 1500KG and lift height from 1600 to 3600mm, it meets customers' demands for increasing economic performance, handling efficiency and safety.

High maneuverable, economical and practical design, it can fully meets customers' demands. With compact design, its turning radius is smaller than conventional stackers, which is more suitable for small stacking warehouse operation.



- | | | | |
|--|--|--|---|
| 
Long-tiller
Design | 
Capacity
1500Kg | 
Easy
Maintenance | 
CURTIS
Technology |
| 
Powerful
Battery | 
Robust
Design | 
High
Maneuverability | 
Best Cost-Performance
Ratio |

Highlights Presentation

General Design



- Electrical box cover is based on long-tiller series design
- Mast is based on the existing structure design
- Hydraulic system is based on EDGE PSE12N stacker design
- Tiller is based on ECL10 tiller structure design



Long-tiller design meets the requirements of ergonomics and safety

- Long-tiller design ensure the operators high efficiency and safe distance from stacker-body.
- Long-tiller stacker uses less operating force, compared with the short-tiller stacker.
- Height is adjustable according to operators operating habits and height preference.
- 4-wheel design with sideways long-tiller gives operators a better view to the pallet.
- The safety distance and good view makes stacking operation more efficient and faster.



Economic but durable tiller with internal structure design and plastic coating, ensures reliable and comfortable operation. CAN-BUS technology reduces the connection number and improves system reliability. CAN-BUS technology is convenient to check and shoot trouble, it also reduces maintenance time. Components use digital signals has longer lifetime than those use analog signals.



CAN communication is used for all functions of the electrical system to improve the stability and consistency of performance. Handheld programmer or computer software can make diagnosis, including troubleshooting, which makes maintenance easier than other controllers used by logistics industry.



Battery deep discharge protection device, voltage discharge indicator with low voltage automatic cutting and lifting function, for higher battery lifetime. Proofed emergency switch and voltage discharge indicator, make it more durable and reliable. Indicator shows faults through CAN-BUS, there is no need to remove the indicator housings.



All parts of the stacker is maintenance-convenient, no need for special tools. Built-in 8A charger. Maintenance-free lead-acid battery, 48Vx60Ah. 48v2.2kw powerful pump system& powerful drive.

Parameter

Manufacturer's type designation		ECL15B/N	
		1600	3600
Load Capacity / rated load	t	1.5	1.5
Service weight	kg	641	782
Lift height	mm	1515	3515
Aisle width for pallets 1000X1200 crossways	mm	2293	2317
Travel speed, laden/ unladen	Km/h	4.4/4.7	

Max. gradeability, laden/ unladen	%	5/10
-----------------------------------	---	------

PS12/16/20N PS16DN

The range of stacker includes the wide list of models with capacity from 1200kg to 2000kg and lifting height up to 5500mm.


INTRODUCTION

The truck designed to be used with high efficiency even during their multi-shift operation. The configuration of the truck allows you to get more powerful and productive units thanks to its increased speed and different options of batteries, including Lithium solutions.

ADVANTAGES:

- The new model range of short-tiller trucks introduced by Nobelift has combined all the experience gained by the manufacturer over past years. By using of the most advanced solutions and top level components, the new range is ready to provide the top level of performance to its users.
- During the design stage, several priorities and various details were considered and verified such as improvement of the service life and performance of our trucks, easy maintenance as well as confirmation of interchangeability of components not only within model range, but also with other ranges of Nobelift products.
- The experience of Nobelift shows that the use of top brand components from well-known suppliers not only helps to improve reliability, but also gain trust from our customers and put the products to a new level. That is why nearly all key components used for the model range are coming from famous brands with rich experience in material handling industry.





Powerful AC-drive unit from the global industry leaders: the AC driving motor designed and produced by Schabmuller comes together with the top quality ZF gearbox and it is equipped with Intorq electromagnetic brake. The drive unit can provide the drive speed up to 8 km/h. The use of top level quality drive wheels from German manufacturers Rader Vogel or Wicke helps to ensure the long life time of PU tires.



Rema tiller delivers high level of ergonomics as well as reliability of control system. In addition, the tiller ensures a long life-time thanks to the contactless rocker switches designed for lifting/lowering function.



The integrated design of operator's platform and protective arms as well as totally new internal structure allows to ensure the smallest body length of the stackers and provide extremely low turning radius among competitors. Together with this, the suspension system for the platform helps to provide the high level of comfort to operators.



The driving controllers and steering controllers are manufactured by Zapi (Italy) - the leading European brand with long history in the industry, which provides extremely reliable and flexible solutions with high performance level of the control system.



The use of apron with 8 mm thickness allows to ensure the robustness of chassis and its strength even in case of collision against objects. The strong battery cover made out of steel helps to provide a high level of strength for this part.



The option of PIN-code panel access, which works not only with PIN-code but also with access cards (RFID), can significantly simplify the procedure of access limitation for the fleet which may be used by more than one operator.



The model range can be equipped with the option of Electric Power Steering (EPS) which delivers precise and fast control for the position of steering wheel and has a high level of reliability as well as safety according to official standards.



PS16DN

Manufacturer's type designation		PS12N	PS16N	PS20N	PS16DN
Load Capacity / rated load	t	1.2	1.6	2	1.6
Service weight	kg	1080	1380	1620	1450
Lift height	mm	3530	5430	4530	4530
Aisle width for pallets 1000X1200 crossways	mm	2285	2325	2455	2586
Travel speed, laden/ unladen	Km/h	7.0/8.0	6.0/7.0	6.0/7.0	6.0/7.0
Max. gradeability, laden/ unladen	%	6/12	6/12	6/10	6/12
Battery voltage, nominal capacity K2	V/Ah	24/160-180	24/210-270	24/270-350	24/120

PS16/20NW

NW Series Electric Pallet Stacker

Suspension system
5-wheel structural design
More adaptable to complex ground

Equipped with driving wheel floating technology, PS XX NW is more adaptable to complex ground and not easy to slip. The fixed balance wheel on both side enhances the stability and passability of the truck.

Driving wheel with pressure adjustable structure, is more practical for different application scenarios and vehicle weights.

Driving wheel floating technology, combined with foldable platform floating structure, makes the truck higher effective in shock absorption and more comfortable in operation.



High-performance lithium battery



Robust Design



High-pass sex



Cost-effective



Capacity 1600/2000Kg




Easy Maintenance



Low noise



LiFeP04 battery

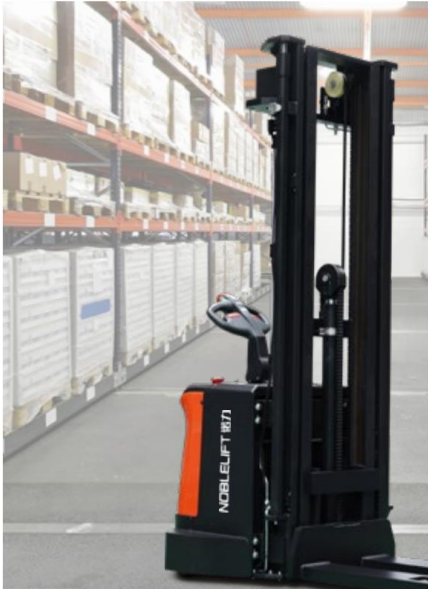



Charger 24V/80Ah

2.5Hr

24V 200Ah

All Li-ion batteries are equipped with on-board Battery Management System (BMS), which provides mandatory control of all important parameters of the battery during charging and operation. With this control, the safety of Li-ion battery during the whole life-cycle is guaranteed. The Li-ion batteries are certified according to international safety transportation (by sea and by air) and operation standards. The BMS communicates with control system of the truck via CAN, the support of the CAN protocols allows to monitor the condition of the battery and make its diagnosis with help of special software which is available for our partners.



High efficiency of the truck can be guaranteed under the condition of multi-shift operations. Lithium battery can be selected. Lithium battery features in fast charging, maintenance-free, environmental protection and intelligent display functions. Besides, the cost is very low from the perspective of long-term ownership and maintenance, and work efficiency is improved.

The multi-function and flexible PS XX NW Series is the ideal choice for stacking operations.

Core parts



▲ German REMA handle with reliable and ergonomic control system. Additionally, the non-contact lifting and lowering rocker switch extends the life of the handle.

▲ Optional electric power steering system adopted in short-tiller stackers can control the steering wheel quickly and accurately, meeting the standards with high reliability and safety.



▲ The Italian Zapi drive controller and steering controller are used to provide customers with reliable and flexible high-performance control system solutions.

▲ The robust chassis with 8mm thick apron protects the truck and the components against mechanical impacts. The steel battery cover ensures the battery well protected.



▲ Integrated functional area, equipped with key switch, emergency switch, battery indicator and USB charging port.



Optional parts



▲ Optional Pin Panel Access, ensuring to manually input password or to swipe to start by RFID cards.

Optional built-in charger, simplifying battery charging work.



▲ Optional French HPI hydraulic system for proportional lift helps to ensure accurate positioning of the fork during lifting and lowering. The acceleration and deceleration of the fork are smoother, so fragile items can be operated.



▲ Optional side battery extraction, through a special trailer, high effective in battery replacement, and convenient for multi-shift operation.

Parameter

Manufacturer's type designation		PS16NW	PS20NW
Load Capacity / rated load	t	1.6	2
Service weight	kg	1365	1630
Lift height	mm	5410	4510
Aisle width for pallets 1000X1200 crossways	mm	2396	2530
Travel speed, laden/ unladen	Km/h	7.0/8.0	6.0/7.0
Max. gradeability, laden/ unladen	%	6/12	6/12



PSE06BCB/NCB Mini counterbalanced stacker

PSE06BCB/NCB can be used in a compact space environment with the compact design and small turning radius. Optimizing self-weight is the initial intention of design so it is ideal for mezzanine application and the truck can easily fit into the cargo lift.

Features:

Versatile application

Compact design: It can work in a confined space with small turning radius and passageway width.

Weight optimization: It is ideal for mezzanine application and the truck can easily fit into the cargo lift.

Ground clearance: It can be used for the rough floor conditions with its increased ground clearance.

Counter-balanced design and double parallel loading wheel arrangement: forks can be adjusted in accordance with the special requirements and can adapt to most of the pallet.

Strong Power

Simple hydraulic piping system with low loss.
Strong grade ability with fast speed.

Easy Operation

Extremely narrow body: Broad vision and clear goods state.

Long tiller design: Safer and lighter steering than the short tiller.

Built-in charger: rechargeable convenient and free for charging.



Features:

Versatile application

Compact design: It can work in a confined space with small turning radius and passageway width.

Weight optimization: It is ideal for mezzanine application and the truck can easily fit into the cargo lift.

Ground clearance: It can be used for the rough floor conditions with its increased ground clearance.

Counter-balanced design and double parallel loading wheel arrangement: forks can be adjusted in accordance with the special requirements and can adapt to most of the pallet.

Strong Power

Simple hydraulic piping system with low loss.
Strong grade ability with fast speed.

Easy Operation

Extremely narrow body: Broad vision and clear goods state.

Long tiller design: Safer and lighter steering than the short tiller.

Built-in charger: rechargeable convenient and free for charging.

Long tiller design meets the requirements of ergonomics and safety

While working in efficiency, long tiller design keeps the operator in a safe distance.

Compared with the short tiller, truck operates more easily with long tiller.

The operator can choose your operating habits and more comfortable operating level.

Safe distance and good vision to make stacking operation be more efficient and rapid.

Multi-function handle

Adopts multi-function handle. Through the CAN-bus technology for lifting operation, the operation is more simple and efficient; CAN-bus technology greatly simplifies the circuit and enhance the truck reliability. With a combination lock function, the handle equipped with power display and working time that makes operation more convenient. And it equipped with an emergency button, turtle speed button and stepless speed control that makes the truck operation more safety.



It is suitable for mezzanine application
with its compact and light design.



Built-in charger

The built-in charger configuration make the truck operation more autonomously and enlarges the work scope.



Parameter

Manufacturer's type designation		PSE06BCB	PSE06NCB
Load Capacity / rated load	t	0.6	0.6
Service weight	kg	1175	1175
Lift height	mm	3200	3200
Aisle width for pallets 1000X1200 crossways	mm	2630	2630
Travel speed, laden/ unladen	Km/h	4.5/4.7	4.5/4.7
Max. gradeability, laden/ unladen	%	5/8	5/8
Battery voltage, nominal capacity K5	V/Ah	2x12/105	2x12/105

PS13/15RM PLUS

The Most Versatile Stacker

INTRODUCTION

Compact structure with excellent forward function, vehicles in a narrow space can be used.

High-performance AC drive system, combined with electric steering unit to enhance whole vehicle's performance and efficiency. With high-quality components, excellent cost performance.

**Faster + High efficiency with German motor!
Upgraded speed of 8km/h for Ride-on Mode**

IT the vehicle is used in warehousing long distance transporting, optionally foldable pedal is the best choice.



ADVANTAGES:

- Straddle leg design
- Forward function
- AC drive system
- Operator' Working will be easier with Electric Steering technology.
- The large battery capacity extends long time operation needs.
- Optional sideshift function.
- Optional side-pull battery.
- Optional pedal, protective arm, ergonomically foldable pedal.



Reach mast

In comparison with common counterbalance heavy stacker, PS13/15RM PLUS not only have same stability, but also have flexible.

Fork tilting

Tilting fork makes the pallet stacking work easier and safer, and separate.



Optional sideshift function

The optional sideshift function allows the forks to move, especially for small space, cargo can be accurately placed on the shelf.

Parameter

Manufacturer's type designation		PS13RM PLUS	PS15RM PLUS
Load Capacity / rated load	t	1.3	1.5
Service weight	kg	1750	1800
Lift height	mm	1600	1600
Aisle width for pallets 1000X1200 crossways	mm	2710	2730
Travel speed, laden/ unladen	Km/h	5.0/5.5	5.0/5.5
Max. gradeability, laden/ unladen	%	5/8	5/8
Battery voltage, nominal capacity K5	V/Ah	24/270	24/270