

NB380 features and advantages:

- ▶ NB380 is a mini-size walk-behind scrubber machine, equipped with brush-less brush motor and vacuum motor, low noise, high efficiency, energy saving, longer life-time, and low maintenance cost.
- ▶ Compact size with washing width 380mm, easy to work in narrow areas.
- ▶ Low energy consumption control system, one full charge can keep machine running 1.5~2 hours with standard 24V32AH lead-acid battery.
- ▶ Intelligent waterproof control panel, one button start, water volume can be adjusted, user-friendly design for easy operation.
- ▶ Products can be used in warehouses, shopping malls, workshops and other places, with a wide range of application scenarios.
- ▶ Aluminum die-casting squeegee frame, good rust prevention and the best water suction performance.
- ▶ Water skirt effectively prevents sewage splashing and controls clean areas.
- ▶ Clean water tank separation, cleaning and maintenance more convenient.
- ▶ Tool-free disassembly design for whole squeegee system, easy for changing the squeegee blade.
- ▶ Foldable handle design for less storage space.



It's never too early for sustainability


The basis for cleanliness

The new NOBLELIFT NB380 combines high performance with ease of use in a compact design. With a working width of 380mm, floors can be cleaned quickly, efficiently and thoroughly with a disc brush or pad. Many well-thought-out details support the user in his daily work. For example, the ergonomically shaped, the good accessibility of all components facilitating daily maintenance or the cover of the solution tank filler neck, which acts as a dosing aid for cleaning chemicals.



Clean water tank separation, cleaning and maintenance more convenient.

The buckle -type brush is replaced with simple and convenient;
the front skirt brush design to prevent the brush of the brushing out of water;
the V -type squeegee design to avoid sewage overflow.

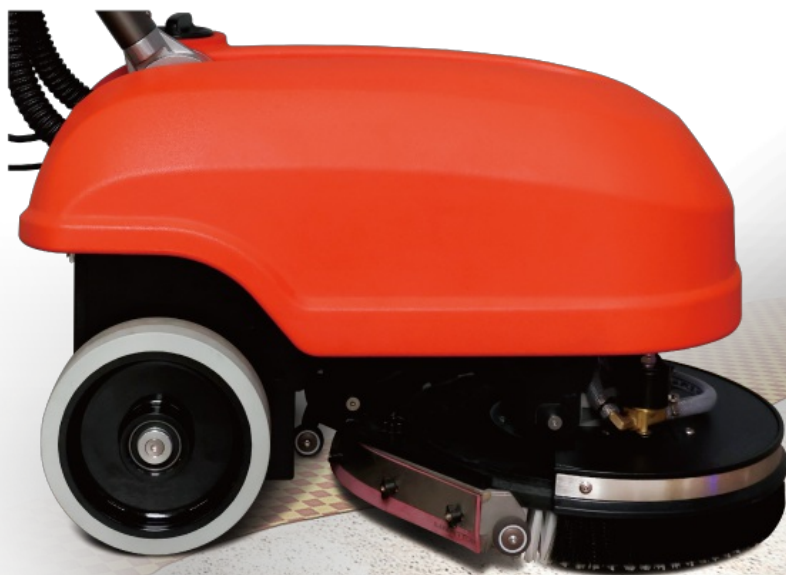

Integrated waterproof touch panel design,easy and fast operation.



Low energy consumption control system, one full charge can keep machine running 1.5~2 hours with standard 24V32AH lead-acid battery.



Foldable handle design for less storage space.

Parameter

Model		NB380
Cleaning Path	mm	380
Solution tank capacity	L	10
Recovery tank capacity	L	10
Clean productivit	m ² /h	1140
Continuous working time	h	1.5~2
Brush motor rated power	W	380
Vacuum motor rated power	W	150
Battery	V	24
Gross weight (with batteries)	kg	58.5
Product dimensions (LxWxH)	mm	700x430x1200


Application

NB530 Walk-behind Scrubber is a brand new self-designed walk-behind scrubber that is suitable for small-and medium-sized places with large flow of people but many small and congested areas, like shopping malls, office buildings, stations, hotels, hospitals, etc. The scrubber delivers superior cleaning results in the compact, flexible and navigating-around-obstacles design.


Features and Advantages

- A large opening on the recovery tank with detachable cap top cover provides perfect and easy access for cleaning and maintenance.
- Reliable and simple Multi-touch control panel with low maintenance cost.
- Big solution tank with filler point located at the front of the scrubber makes the water refilling fast and easy.
- The brush cover and squeegee processed by aluminum die-casting with further spraying are robust, durable and well protected against rust.
- The down pressure from the brush to the ground is designed to be adjustable, which offers versatile and flexible use to cover different floor cleaning requirements and is effective in more applications.
- Efficient mechanical noise reduction system effectively reduces equipment noise during work.
- Efficient and reliable mechanical defoaming and solution tank water-level alarm mechanism greatly improve the service life of the vacuum motor.
- One-button-start design of the motor, digital over-current and under-voltage protection integrated on the controller.
- Patented brush buckle design with longer service life can automatically load and unload the brush.

NB530



Industries

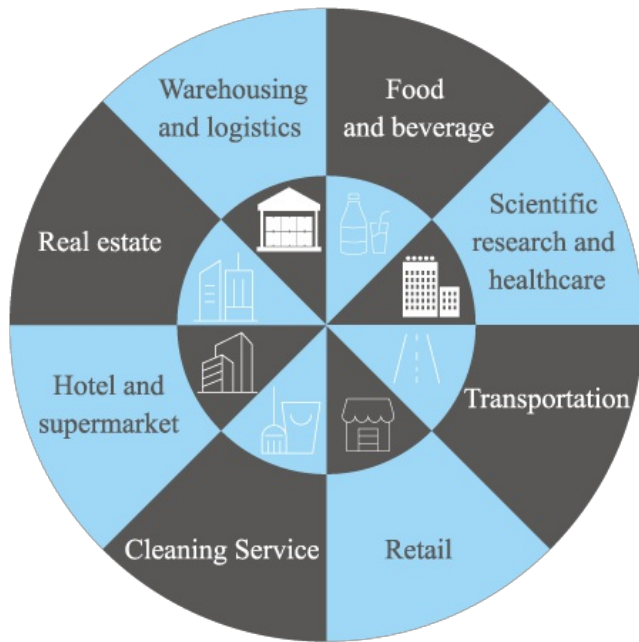

Scenarios



Epoxy Flooring



Tile Flooring



PVC



Small Square Brick Flooring



Wear-Resisting Flooring



Marble Flooring



Terrazzo Flooring



Lime Flooring

Parameter

Model		NB530
Cleaning Path (brush diameter)	mm	530
Squeegee Width	mm	760
Solution tank capacity	L	50
Recovery tank capacity	L	50
Clean productivit	m ² /h	1800
Continuous working time	h	3~4
Brush motor rated power	W	550
Vacuum motor rated power	W	400
Battery		24v (2x12v 100Ah)
Net weight (without batteries)	kg	89
Product dimensions (LxWxH)	mm	1220x540x1050

Application

NR530 Ride-on Scrubber is a brand new self-designed mini ride-on scrubber. The compact size makes it convenient to get in and out of elevators and also ideal for cleaning in confined areas and multi-floor operations.


Features and Advantages

- Adopting front-drive chassis-free, modular patented design to make the scrubber light weight, small turning radius and flexible control;
- Big solution tank with filler point located at the front of the scrubber makes the water refilling fast and easy
- Integrated waterproof touch panel, standard LCD display and visual equipment parameters make it easy to read, simple and convenient to operate, fast and efficient to provide maintenance data;
- Three-speed modes and adjustable water flow;
- Innovative design of linear actuators supports one-button electric lifting/lowering of brush and squeegee-holder, automatic lifting of squeegee-holder for reverse driving, which is safe and efficient;
- Aluminum die-casting brush cover and squeegee, and the brush holder supports one-button automatic loading and unloading;
- A large opening on the recovery tank with detachable cap top cover provides perfect and easy access for cleaning and maintenance;
- The seat is equipped with the safety switch, and the scrubber will automatically stop when the driver leaves the seat.
- Efficient mechanical noise reduction system and ECO mode can effectively reduce equipment noise during work;
- Efficient and reliable mechanical defoaming and solution tank water-level alarm mechanism greatly improve the service life of the vacuum motor;

NR530



Industries

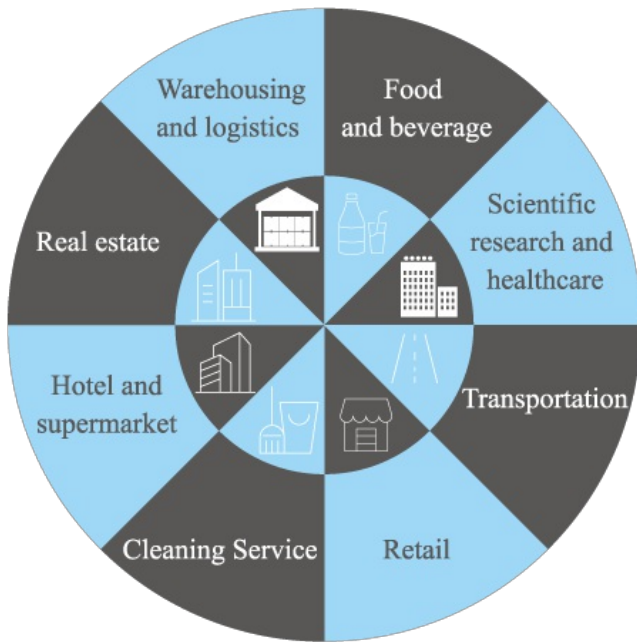

Scenarios



Epoxy Flooring



Tile Flooring




PVC



Small Square Brick Flooring



Wear-Resisting Flooring



Marble Flooring



Terrazzo Flooring



Lime Flooring

Parameter

Model		NR530
Cleaning Path (brush diameter)	mm	530
Squeegee Width	mm	780
Solution tank capacity	L	70
Recovery tank capacity	L	70
Clean productivit	m ² /h	3100
Continuous working time	h	3~4
Brush motor rated power	W	550
Vacuum motor rated power	W	550
Drive motor rated power	W	400
Traveling speed	km/h	0~6
Battery		24v (2x12v 120Ah)
Net weight (without batteries)	kg	120
Product dimensions (LxWxH)	mm	1260x600x1010

NR810

Ride-on Scrubber

Features and Advantages

- The compact size, with low center of gravity, small turning radius and flexible operation.
- Integrated waterproof touch panel design, the LCD can display working parameters and fault code, which is easy to adjust parameters and fault diagnosis.
- Three speed modes and adjustable water flow.
- The independently developed controller has the functions of motor overload and battery low-power protection, effectively extending the life of the motor and battery.
- One touch ECO model to reduce the power and noise level for suction motor, suitable for low noise request place.
- One touch electric lifting/lowering of brush and squeegee-holder, automatic lifting of squeegee-holder for reverse driving, which is safe and efficient.
- Double brush/pad design, innovative brush/pad connection, the brush/pad is easy and convenient to load or unload.
- 120 liter large capacity for solution tank and recovery tank design, effectively reduce the number of adding and releasing water. Automatic alarm for solution tank empty and recovery tank full.
- Large opening of reversible recovery tank, tool-free disassembly design, easy to clean and maintain.
- The seat is equipped with the safety switch, and the scrubber will automatically stop when the driver leaves the seat.





High performance battery
Large capacity maintenance-free lead-acid battery, safe and reliable, long working time.



Control panel
Integrated waterproof touch panel design, easy and fast operation.



Steering wheel
With steering wheel booster ball, comfortable to operate.



Charging port
External charging port, easy to charge.



Hatchback recovery tank
Tool-free disassembly design, easy to clean and maintain.



Water injection port and water level indicator
Display clear water tank water level, large opening water injection port, easy to add clear water.



Hygroscopic strip
Wear-resistant adhesive strip arc suction and scrape-shaped design, easy to absorb water without residue.



High-power non-slip front drive wheel
High-power anti-slip drive front wheel, ramp operation will not slope, more safe.



Industries



Scenarios



Epoxy Flooring



Tile Flooring




PVC



Small Square Brick Flooring



Wear-Resisting Flooring



Marble Flooring



Terrazzo Flooring



Lime Flooring





Product features and advantages:

- NR860P/NR1060 is a middle and large front-wheel drive scrubber with dual brushes.
- The garbage storage box in the recovery tank can effectively filter large garbage to avoid the blockage of the drain pipe.
- The whole vehicle adopts modular and compact design, which brings good maneuverability and flexibility.
- The low center of gravity water tank and battery design ensure the whole vehicle higher driving safety and maintenance convenience.
- Integrated waterproof touch panel design, easy for operations such as driving speed control, water flow adjustment, brush lifting/lowering.
- Large-size color LCD screen to achieve equipment parameters visible, convenient for fault diagnosis and maintenance.
- Standard electronic water level indicator for solution/recovery tanks, making level display intuitive and convenient. The recovery tank will automatically alarm and stop when it is full.
- The whole vehicle is equipped with one-button soft start of motor, over-current and under-voltage protection of controller.
- Patented disk brush adopts buckle design, achieving automatic loading and unloading of disk brush with one key.
- One touch ECO model to reduce the energy consumption and noise level, suitable for low noise request scenarios.
- 36V200Ah maintenance-free lead-acid battery ensures to work continuously for 5-6 hours on one charge.



Long working hours



High reliability



High efficiency



Low security risk

**Save Labor and money,
for users to save a lot of
labor costs.**



Parameter

Cleaning Path (brush diameter) (mm)	NR810
Squeegee Width (mm)	810
Solution tank capacity (L)	120
Recovery tank capacity (L)	120
Clean productivity (m ² /h)	4860
Continuous working time (h)	4~5
Product dimensions (LxWxH) (mm)	1415×600×1010

Product features and advantages:

- NR1060 is a middle and large front-wheel drive scrubber with dual brushes.
- The garbage storage box in the recovery tank can effectively filter large garbage to avoid the blockage of the drain pipe.
- The whole vehicle adopts modular and compact design, which brings good maneuverability and flexibility.
- The low center of gravity water tank and battery design ensure the whole vehicle higher driving safety and maintenance convenience.
- Integrated waterproof touch panel design, easy for operations such as driving speed control, water flow adjustment, brush lifting/lowering.
- Large-size color LCD screen to achieve equipment parameters visible, convenient for fault diagnosis and maintenance.
- Standard electronic water level indicator for solution/recovery tanks, making level display intuitive and convenient. The recovery tank will automatically alarm and stop when it is full.
- The whole vehicle is equipped with one-button soft start of motor, over-current and under-voltage protection of controller.
- Patented disk brush adopts buckle design, achieving automatic loading and unloading of disk brush with one key.
- One touch ECO model to reduce the energy consumption and noise level, suitable for low noise request scenarios.
- 36V200Ah maintenance-free lead-acid battery ensures to work continuously for 5-6 hours on one charge.



Long working hours



High reliability



High efficiency



Low security risk

**Save Labor and money,
for users to save a lot of
labor costs.**



High performance battery



Control panel



Steering wheel



Charging port



Hatchback recovery tank



Hygroscopic steak




Water injection port
and water level indicator



High-power non-slip
front drive wheel

Industries

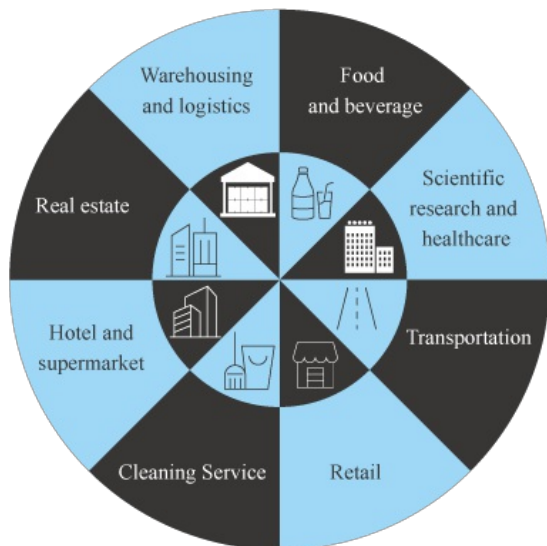


Scenarios




Epoxy Flooring



Wear-Resisting Flooring



Tile Flooring




Marble Flooring



PVC



Terrazzo Flooring



Small Square Brick Flooring



Lime Flooring



Parameter

Model		NR860P	NR1060
Cleaning Path (brush diameter)	mm	860	1060
Brush/pad diameter	mm	2x430	2x530
Solution tank capacity	L	200	
Recovery tank capacity	L	210	
Clean productivit	m ² /h	5590	6890
Continuous working time	h	5~6	
Brush motor rated power	W	2x550	
Vacuum motor rated power	W	600	
Drive motor rated power	W	800	
Traveling speed	km/h	0~6.5	
Battery		36v (6x6V200Ah)	
Net weight (without batteries)	kg	475	477
Product dimensions (LxWxH)	mm	1800x1150x1350	1800x1150x1350



Autonomous Scrubber Dryer ANB450

Clean Like A Pro

Retail

Healthcare

Hospitality

Shopping Mall

Office Building

Compact Yet Productive

The ANB450 is more than just compact; it's a dynamic solution tailored for crowded environments. Featuring advanced edge cleaning technology with a distance from the wall of less than 1.2in/3cm, the ANB450 ensures thorough cleaning in every nook and cranny. With an impressive 43.3in/1100mm turn-around width, it effortlessly navigates tight spaces, ensuring easy passage through crowded aisles. This exceptional adaptability, combined with a 10gal/38L solution tank and a 17.7in/450mm cleaning width, guarantees optimal performance. The ANB450 is the perfect companion for challenging and bustling environments.

10gal/38L

solution tank

17.7in/450mm

cleaning width

1.2in/3cm

distance from the wall

31.9in/810mm

passable width


43.3in/1100mm

turning-around width



Intelligent Cleaning at Your Fingertips

Experience the epitome of effortless intelligent cleaning with the ANB450 Autonomous Scrubber Dryer, empowered by the formidable Nvidia processing chip with 32 TOPS AI performance. With the simple flick of a finger on its user-friendly mobile app and 10.1 inch touch screen, achieve unparalleled adaptability and seamless control. The ANB450's advanced stain and liquid detection capability, driven by its powerful AI features, ensures a thorough and targeted cleaning approach, redefining your cleaning standards with unprecedented intelligence and adaptability. Access the future of cleaning through the ANB450, where smart cleaning is just a fingertip away.

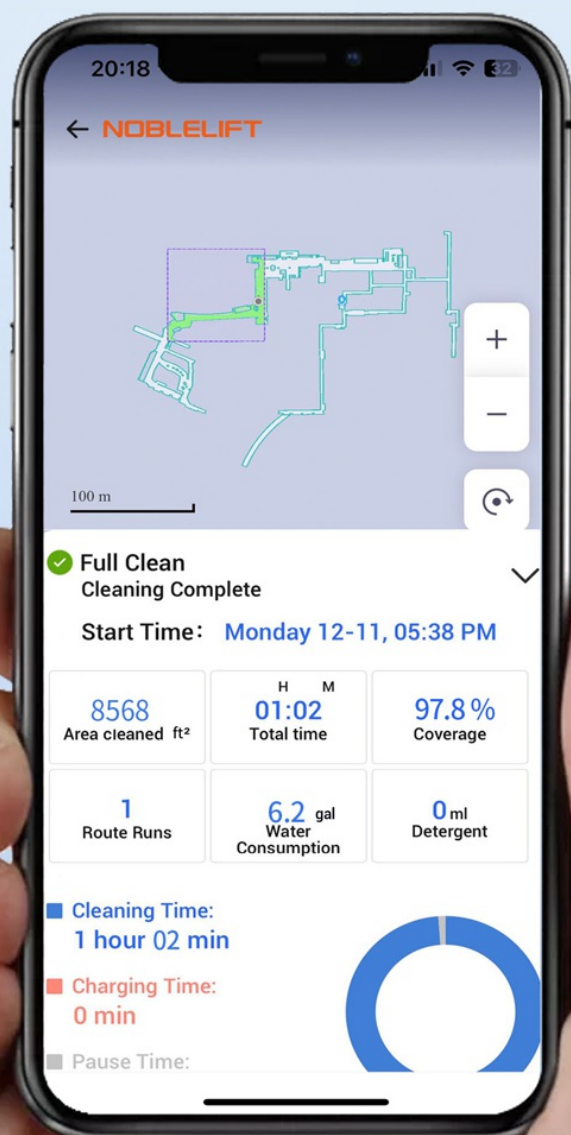

32 TOPS

AI performance
reaching



Mobile App

10.1inch

Touch Screen



Stain perception

Unmatched Safety Assurance

The ANB450 is fortified with a safety shield powered by multiple sensors – 32-beam 3D LiDAR, 3D depth cameras, and a bumper sensor. Combined with NOBLELIFT robust algorithms, these sensors create an impenetrable safety net, ensuring the ANB450 navigates with precision and avoids obstacles seamlessly. Trust in the ANB450 for a cleaning experience that prioritizes safety without compromise.

492ft/150m

32-beam 3D LiDAR
detection range

Protruding

object detection

Low object

$\leq 1.2\text{in}/3\text{cm}$

Cliff

detection



Streamlined Maintenance Excellence

The ANB450 introduces a revolutionary workstation, extending cleaning autonomy 24/7 and significantly reducing maintenance efforts. This intelligent workstation autonomously refills water/detergent and charges the robot, ensuring optimal performance without manual intervention. With features like a magnetic brush, swift 30-second squeegee blade replacements, and a large opening water tank, the ANB450 guarantees a hassle-free and efficient cleaning experience.


- ✔ Workstation
- ✔ Magnetic brush
- ✔ 30s squeegee blades replacement
- ✔ Large opening water tank



Sustainability

The ANB450 pioneers sustainability with an advanced water saving system, reducing water and detergent usage. It can adjust the water flow according to the speed. It's not just cleaning; it's responsible cleaning.

Smart Flow
reduction in water and detergent

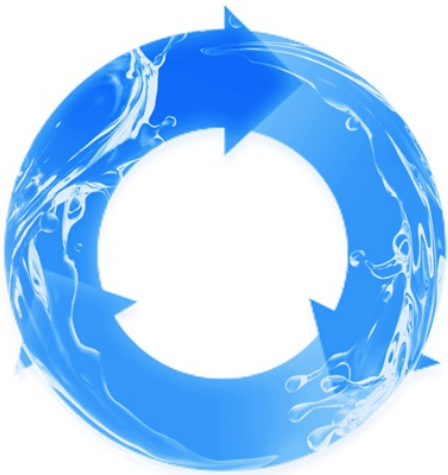

Parameter

Model		ANB450
Length	mm	810
Width	mm	615

Height	mm	1075
Weight	Kg	150
Cleaning Width	mm	450
Squeegee Width	mm	740
Max.Theoretical Productivity	m ² /hr	1944
Brush Pressure	kg	25
Brush Speed	RPM	270
Solution Tank Capacity	L	38
Recovery Tank Capacity	L	36
Max.Speed	m/s	1.2
Min.Distance from Wall	cm	3
Min.Passable Width	mm	810
Min.Turn-around Width	mm	1100
Gradeability		6%
Battery Type		LFP
Battery Capacity	Ah	80
Rated Voltage	DC	24 V
Charging Time	hours	2.7
Max.Runtime	hours	4.5
Sound Pressure Level	dB(A)	At least as 66

AI-Powered Scrubber-dryer Robot

ANB510



Superior cleaning productivity and performance



The CenoBots ANB510 provides exceptional cleaning productivity and performance, making it an excellent cleaning partner. Equipped with a 55 L/14.5 gal water tank and a 120Ah capacity battery, this scrubber can efficiently cover a larger surface area in less time. Its high pad pressure ensures comprehensive and effective cleanliness, making it a reliable cleaning solution for all types of cleaning tasks. With a full coverage productivity of 2570m²/27663ft² per hour, this scrubber is perfect for a wide range of commercial spaces, regardless of their size.



Key Features

- Built to last
- High level of safety
- Easy to maintain
- Hassle-free after sale service
- Human-like intelligent cleaning



Site Survey: Operational Environment Assessment

- The robot passage width should be at least 90cm for optimal operation.
- The maximum climbing angle for the robot design is 8° in non-clean state. To prevent the robot from slipping backward and causing possible risks, it is important to avoid suspending or shutting down the machine during robot uphill.
- Additionally, it is recommended to implement slope areas with appropriate inclines. It is necessary to increase the fence or implement other blocking protection at the edge of the ladder, the entrance of the downhill slope, and other places where there is a risk of the robot falling.



Site Survey: Operational Environment Assessment

Robot Map Boundary
Environment Parameters

Scenarios	Requirement
Aisle Width	90cm
Floor	Indoor flat floor
Max. Gradeability	6°
Overseam Wdth	30mm
Crossing Height	10mm
Operating Temp.	0~45°C

1. Based on the requirements of the table on the left, confirm that the site can meet the basic conditions for robot operation.
2. Determine the location of the docking station based on the customer's needs.
3. Site risk assessment (see subsequent build content for details on how to handle)
 - Cliff aisle (presence of stairs, escalators, elevators, etc.)
 - Open areas, such as water pools
 - Glass, mirrors, etc. (key risk areas)
 - Overhanging obstructions
 - Ground clutter, such as power cords, floor plug boxes, ground escape guide lights, etc.



Site Survey: Operational Environment Assessment

The robot supports the following types of floor cleaning, and other floor materials are evaluated on a case-by-case basis.



Terrazzo



Plastic Floor



Flat Concrete
Floor



Tile



Wooden Floor



Epoxy Floor



Marble



Slate

Manufacturer's type designation		ANB510
Length	mm	1030
Width(w/o squeegee)	mm	580
Height	mm	1045
Weight	Kg	220
Cleaning Width	mm	510
Squeegee Width	mm	740
Max.Theoretical Productivity	m ² /hr	2570
Brush Pressure	Kg	25
Disk Brush Speed	RPM	220
Clean Water Tank Capacity	L	55
Waste Water Tank Capacity	L	55
Max.Speed	m/s	1.4
Min.Distance from Wall	mm	<50
Min.Passable Width	mm	900
Gradeability	°	6
Battery Type		Lithium Iron Phosphate
Battery Capacity	Ah	120
Rated Voltage	VDC	24
Charging Time	hours	4
Max.Runtime	hours	6

The World's First Real Spot-Cleaning Robot



ANS720

Finally a Robot That Cleans like a Professional Cleaning Service

Introducing the world's first Artificial Intelligence enabled autonomous floor-cleaning robot, much more effective and efficient than anything on the market today.

Capable of detecting more than 30 different types of waste and debris with a 99% accuracy, the ANS720 can reliably and intelligently perform auto spot-cleaning thereby greatly increasing cleaning efficiency by as much as a factor of 10. No other autonomous robot can match the ANS720's performance. Worry-free robotic day-time sanitary maintenance is finally possible.



- **Spotless Cleaning Results 100% Guaranteed**
- **Easiest RMA in the Industry**
- **The Highest Level of Safety**

Features



Garbage Detection and Classification

More than 30 different types of waste and debris can be automatically detected and classified, with 99% accuracy.



Innovative Self-adaptive Cleaning Technology

The ANS720 can automatically adjust its area and methods of cleaning according to the amount, size and type of waste and debris it detects, offering the only cleaning robot able to cope with changing real-life scenarios without human intervention.



<5 cm Distance From the Wall

No more human intervention is required after robot cleaning. Even the debris closest to the wall can be removed by ANS720.



Superior Robot Sensing Capability

No need to manually change the internal map in the event of any changes in the environment. The ANS720 can also automatically resume from a lost location, thus assuring a perfect match to very long corridors.




Unbeatable Efficiency Turbo-powers Your ROI

The ANS720 can work on soft/hard floors and carpets, with an unbeatable cleaning efficiency of 2100m²/hr in normal cleaning mode and 20000 m²/hr in patrol cleaning mode.



Site Survey: Operational Environment Assessment

- The robot passage width should be at least 80cm for optimal operation.
- The maximum climbing angle for the robot design is 12° in non-clean state. To prevent the robot from slipping backward and causing possible risks, it is important to avoid suspending or shutting down the machine during robot uphill.
- Additionally, it is recommended to implement slope areas with appropriate inclines. It is necessary to increase the fence or implement other blocking protection at the edge of the ladder, the entrance of the downhill slope, and other places where there is a risk of the robot falling.

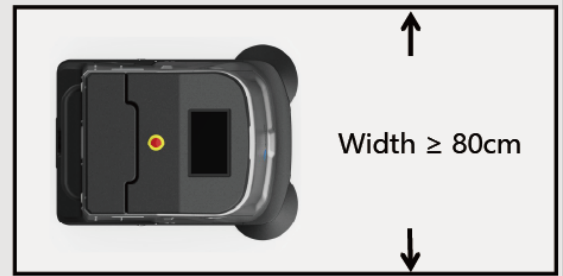


Site Survey: Operational Environment Assessment

Robot Map Boundary
Environment Parameters

Scenarios	Requirement
Aisle Width	80cm
Floor	Indoor flat floor
Max. Gradeability	12°
Overseam Wdth	40mm
Crossing Height	15mm
Operating Temp.	-10~40°C

1. Based on the requirements of the table on the left, confirm that the site can meet the basic conditions for robot operation.
2. Determine the location of the docking station based on the customer's needs.
3. Site risk assessment (see subsequent build content for details on how to handle)
 - Cliff aisle (presence of stairs, escalators, elevators, etc.)
 - Open areas, such as water pools
 - Glass, mirrors, etc. (key risk areas)
 - Overhanging obstructions
 - Ground clutter, such as power cords, floor plug boxes, ground escape guide lights, etc.



Site Survey: Floor Material Assessment

The robot supports the following types of floor cleaning, and other floor materials are evaluated on a case-by-case basis.



Terrazzo



Plastic Floor



Flat Concrete Floor



Tile



Wooden Floor



Epoxy Floor



Marble



Slate

Parameter

Manufacturer's type designation		ANS720
Length	mm	855
Width	mm	600
Height	mm	1050
GVW	Kg	132
Sweeping Width(w/side brushes)	mm	720
Roller Brush Width	mm	460
Max.Theoretical Productivity(spot cleaning)	m ² /hr	19870
Max.Theoretical Productivity(regular cleaning)	m ² /hr	1987
Dust Filter Bag Capacity	L	18
Trash Tray Capacity	L	5
Max.Suction of Vacuum Motor	Kpa	25
Max.Speed	m/s	1.2
Min.Distance from Wall	cm	<5
Min.Passable Width	mm	800
Min.Turn-around Width	mm	1200
Gradeability	°	6
Battery Type		Lithium Iron Phosphate

Battery Capacity	Ah	120
Rated Voltage	VDC	24
Charging Time	hours	4
Max.Runtime(Spot-cleaning)	hours	13
Max.Runtime(Regular-cleaning)	hours	8