



一体式点焊机

Introduction for Portable Spot Welding Machine



360°旋转

机身可360度旋转
Nimble and 360° Rotational Use



产品特点 Features


- ▶ 高效率电阻焊机
 - ▶ 安装容易、操作简便、节约能源
 - ▶ 轻巧、灵活、360° 旋转使用，可以停留在任何位置和角度
 - ▶ 体积小、重量轻、输出大、为同级功率点焊机体积最小者
 - ▶ 电极头及电极臂均有水管冷却，确保焊接品质
 - ▶ 采用特殊铝合金铸造本体，质量轻且韧性大。
 - ▶ 采用合金铜质材料制作电极臂，绕性强度佳，具有高导电性。
 - ▶ 自制率高，零部件供应充足。
-
- ▶ High efficiency resistance welding machine.
 - ▶ Easy to install and operate, saving energy.
 - ▶ Nimble and 360° rotational use. It can be stayed at any position and angle.
 - ▶ Small, light and high output power. It is the smallest welder in the class of same output power.
 - ▶ Electrode and welding arms are all water-cooled so that welding quality can be guaranteed.
 - ▶ The welder body is cast with special aluminum materials, which is light and with high ductility.
 - ▶ The electrode arms are made of copper alloy that has good flexional strength, light conductivity.
 - ▶ High production rate, sufficient supply of spare parts and components.

DN2移动式点焊机 (D系列)

Main Specifications for D Series of DN2



X型焊钳 X Type Gun

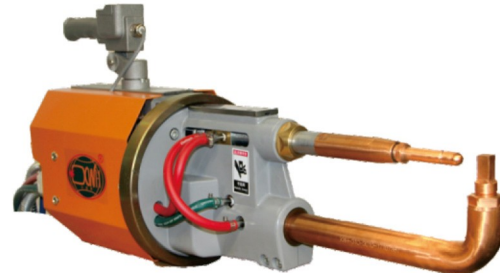

C型焊钳 C Type Gun

Item (项目)	Models (型号)	Unit(单位)	DN2-31X	DN2-31C	DN2-40X	DN2-40C	DN2-63X	DN2-63C
Power at 50% 暂载率为50%的功率		KVA	31	31	40	40	63	63
Transformer turns ratio 变压器匝数比			70	70	56	56	48	48
Maximum short circuit current 最大短路电流		KA	14	14	18	18	20	20
Secondary unload voltage 次级空载电压		V	5.58	5.58	6.8	6.8	7.9	7.9
Voltage at 50Hz/60Hz 50Hz/60Hz电源电压		V	380	380	380	380	380	380
Distance between the arms 电极臂间距		MM	168-288	100	168-328	100	168-428	100
Min. length of arms 最小电极臂长		MM	220	200	300	200	400	200
Max. strength at electrodes 最大电极力		N	3000	3000	3500	3000	3500	3000
Working stroke 电极头焊接行程		MM	15-45	15-25	15-45	15-25	15-45	15-25
Max. stroke of cylinder 最大气缸行程		MM	70	50	100	50	100	50
Max. arm length 最长电极臂		MM	750	350	1000	450	1100	500
Compressed Air supply 气源压力		MPa	0.5	0.5	0.5	0.5	0.5	0.5
Max.thickness of mild steel sheet with min. length s arm 在最短电极臂时焊接碳钢的最大厚度		MM	3+3	3+3	4+4	4+4	5+5	5+5
With 500mm arms 电极臂为500mm时的最大焊接厚度		MM	2+2	2+2	3+3	3+3	3+3	3+3
With maximum length arms 在最长电极臂时的焊接厚度		KVA	1.2+1.2	1.2+1.2	2+2	1.8+1.8	2.0+2.0	2.0+2.0
Cross wire maximum 最大焊接铁线能力		MM	14+14	14+14	16+16	16+16	20+20	20+20
Cooling water pressure 冷却水压力		Mpa	0.2-0.3	0.2-0.3	0.2-0.3	0.2-0.3	0.2-0.3	0.2-0.3
Cooling water flow 冷却水流量		L/min	4	4	4	4	4	4

※注：电极臂间距、角度、长度可根据用户需要来确定
Distance, angle and length of welding arm can be made according to customers' requests.

DN2一体式点焊机参数 (F系列)

Main Specifications for F Series of DN2



X型焊钳 X Type Gun




C型焊钳 C Type Gun

Item (项目)	Models (型号)	Unit(单位)	DN2-35X	DN2-35C	DN2-45X	DN2-45C	DN2-65X	DN2-65C
Power at 50% 暂载率为50%的功率		KVA	35	35	45	45	65	65
Maximum short circuit current 最大短路电流		KVA	15	15	16	16	46	46
Secondary unload voltage 次级空载电压		V	5.7	5.7	6.3	6.3	8	8
Voltage at 50Hz/60Hz 50Hz/60Hz电源电压		V	380	380	380	380	380	380
Distance between the arms 电极臂间距		MM	120-280	100	120-330	100	160-430	100
Max. strength at electrodes 最大电极力		N	3500	3500	3500	3500	3500	3500
Working stroke 电极头焊接行程		MM	15-45	15-25	15-45	15-25	15-45	15-25
Max. stroke 最大行程		MM	50-120	60/100/140	50-120	60/100/140	50-120	60/100/140
Arm length 电极臂		MM	240-600	200-500	300-800	200-500	400-1100	200-500
Compressed Air supply 气源压力		Mpa	0.5	0.5	0.5	0.5	0.5	0.5
Max.thickness of mild steel sheet with min. length s arm 在最短电极臂时焊接碳钢的最大厚度		MM	3+3	3+3	4+4	4+4	5+5	5+5
With 500mm arms 电极臂为500mm时的最大焊接厚度		MM	2+2	2+2	3+3	3+3	3+3	3+3
With maximum length arms 在最长电极臂时的焊接厚度		MM	1.2+1.2	1.2+1.2	2+2	1.8+1.8	2.0+2.0	2.0+2.0
Cross wire maximum 最大焊接铁线能力		MM	14+14	14+14	16+16	16+16	20+20	20+20
Cooling water pressure drop 冷却水压降		Mpa	0.05	0.05	0.05	0.05	0.05	0.05
Cooling water flow 冷却水流量		L/min	12	12	12	12	12	12

※注：电极臂间距、角度、长度可根据用户需要来确定
Distance, angle and length of welding arm can be made according to customers' requests.

DN2一体式点焊机（F系列）结构图

Structure Diagram for F series of DN2

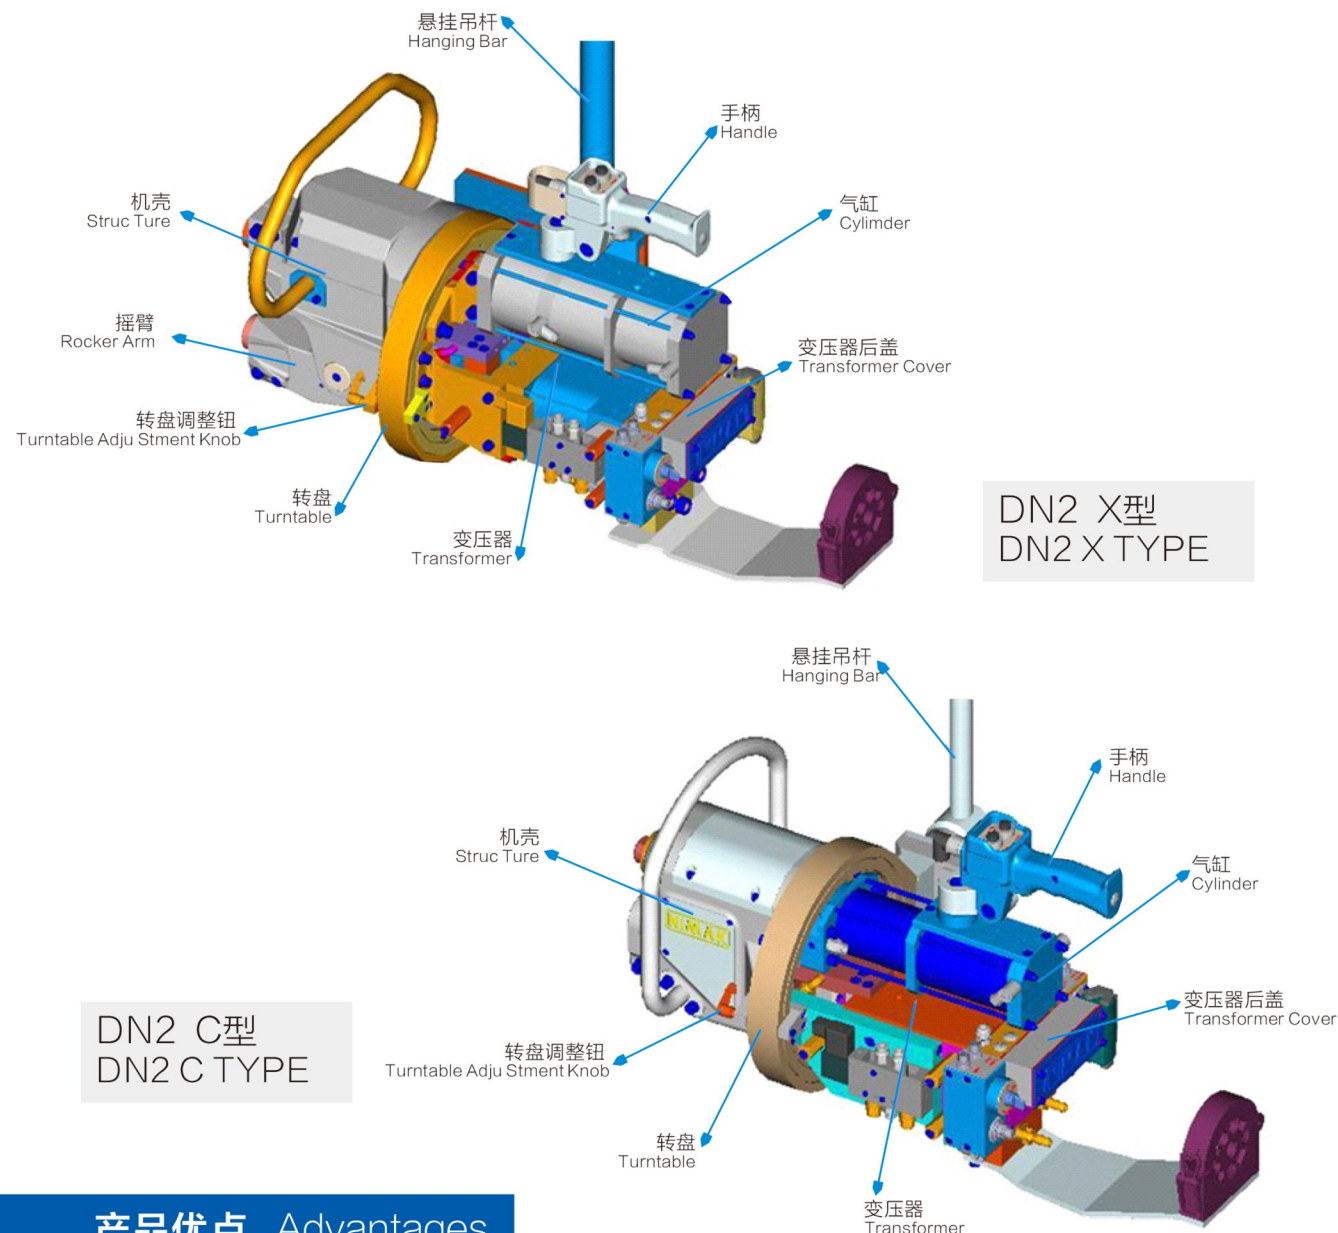


产品优点 Advantages

- ▶ 人性化设计,稳定可靠, 使用寿命长
- ▶ 全封闭外壳 串联增压式气缸 密闭的和保养简单的插接式软管螺丝插头
- ▶ 组件的模块化结构使焊钳能很好地满足各类焊接需要
- ▶ 操控元件设计合理、使用方便
- ▶ 易于维护,变压器可互换
- ▶ Humanized Design, stable And Reliable, Long Lifespan
- ▶ Fully Enclosure Structure, Sealed Cylinder, Easy-maintenance Plug-in Hose
- ▶ Modular Structure Assembly And Multifunctional Using Of Welding Tong
- ▶ Components Greatly Designed, Easy To Operate.
- ▶ Easy Maintenance, Interchangeable Transformer.

移动式点焊机部分图片





Portable Welding Gun

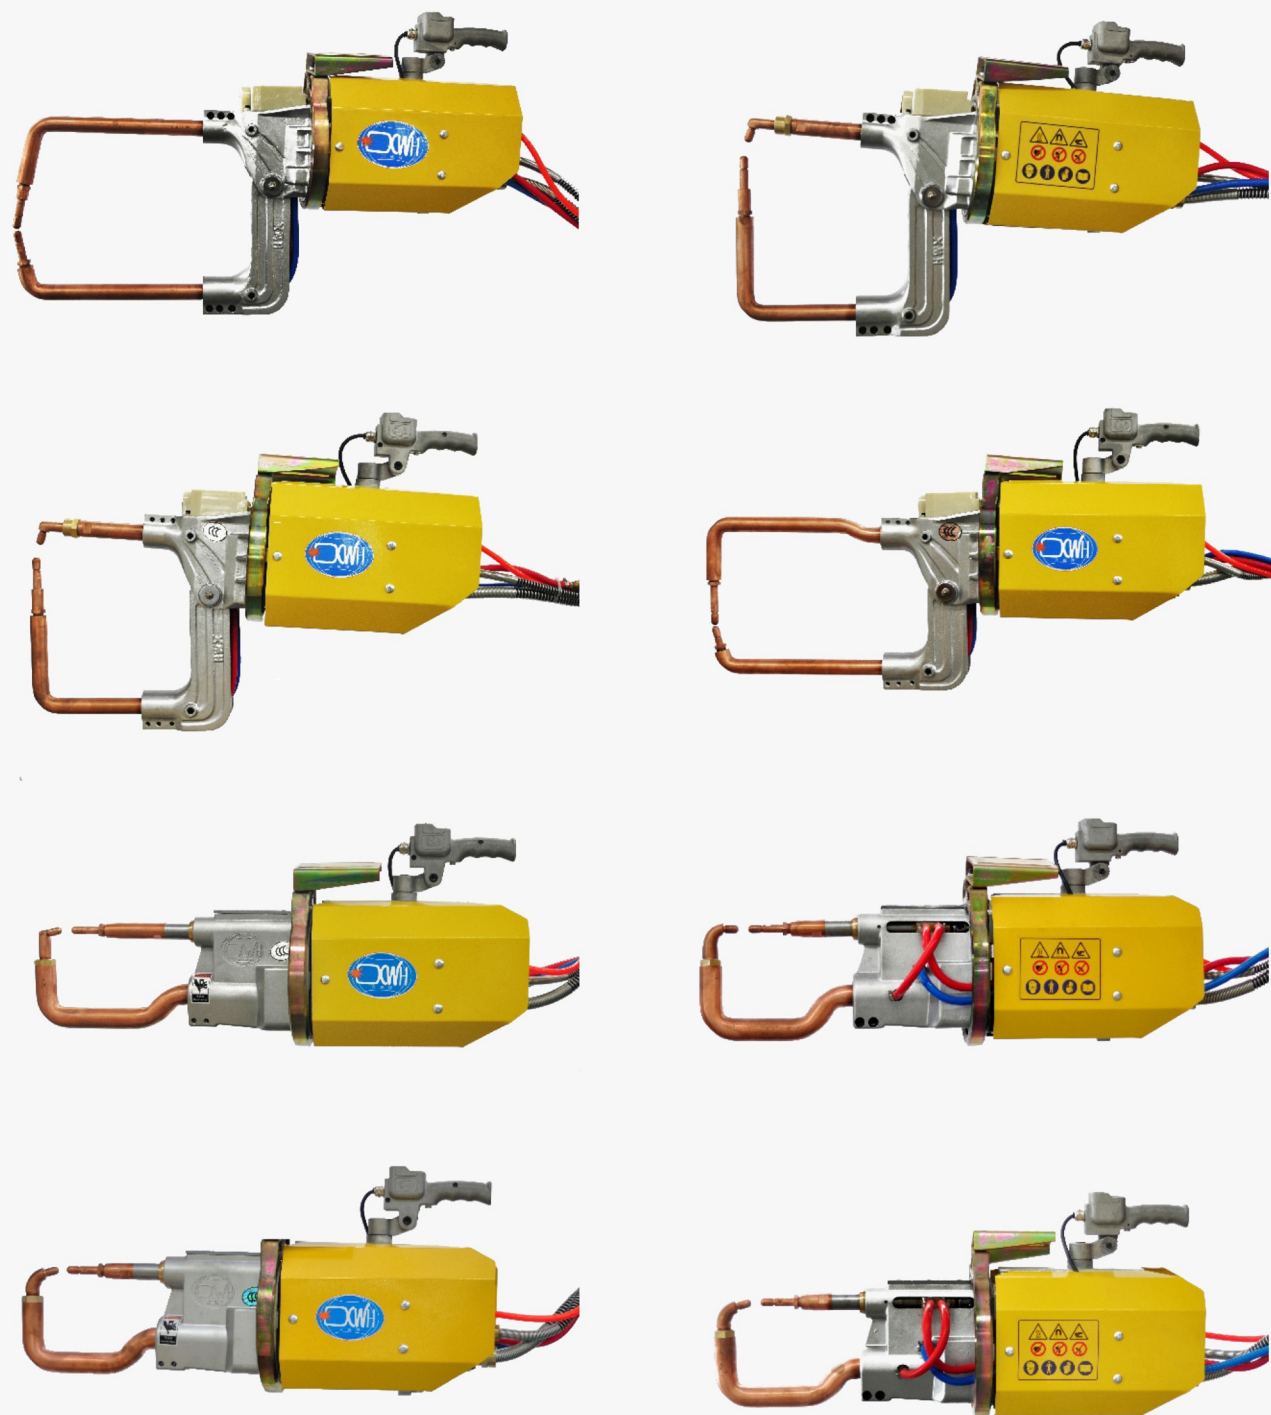



一体式点焊机部分图片

Portable Welding Gun

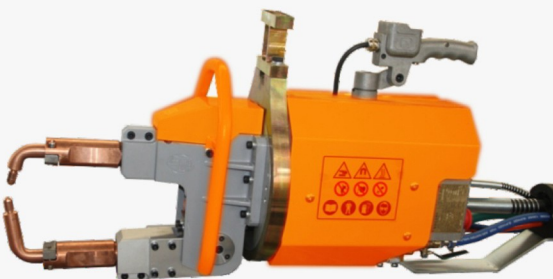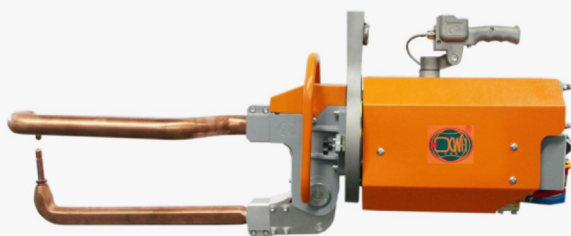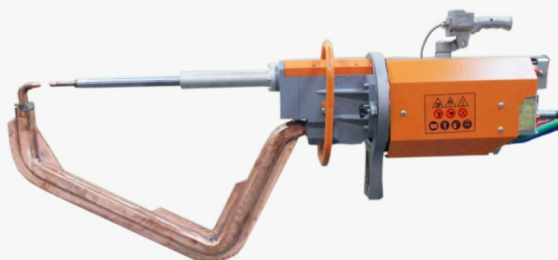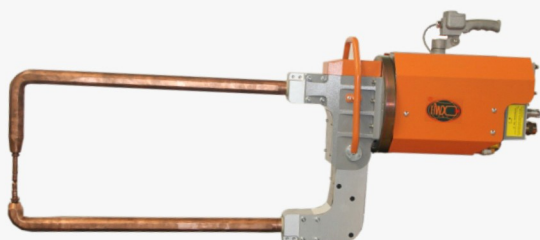

DN(B)2中频移动式点焊机

DN(B)2 Portable MF Spot Welding Machine



X型焊钳 X Type Gun



C型焊钳 C Type Gun

Models (型号)	Unit(单位)	DN(B)2-60X	DN(B)2-60C	DN(B)2-80X	DN(B)2-80C	DN(B)2-100X	DN(B)2-100C
Item (项目)							
Power at 50% 暂载率为50%的功率	KVA	60	60	80	80	100	100
Maximum short circuit current 最大短路电流	KVA	10	10	12	12	14	14
Secondary unload voltage 额定直流空载电压	V	8.9	8.9	8.9	8.9	8.9	8.9
Voltage at 50Hz/60Hz 50Hz/60Hz电源电压	V	3φ380	3φ380	3φ380	3φ380	3φ380	3φ380
Distance between the arms 电极臂间距	MM	120-280	100-300	120-128	100-300	120-280	100-300
Max. strength at electrodes 最大电极力	N	3500	3500	3500	3500	3500	3500
Working stroke 电极头焊接行程	MM	15-45	15-25	15-45	15-25	15-45	15-25
Max. stroke 最大行程	MM	50-120	60/100/140	50-120	60/100/140	50-120	60/100/140
Arm length 电极臂	MM	240-500	200-500	240-600	200-500	240-600	200-500
Compressed Air supply 气源压力	Mpa	0.5	0.5	0.5	0.5	0.5	0.5
Max thickness of mild steel sheet with min. length arm 在最短电极臂时焊接碳钢板的最大厚度	MM	3+3	3+3	4+4	4+4	5+5	5+5
With 500mm arms 电极臂为500mm时的最大焊接厚度	MM	2+2	2+2	3+3	3+3	3+3	3+3
With maximum length arms 在最长电极臂时的焊接厚度	MM	1.2+1.2	1.2+1.2	2+2	1.8+1.8	2.0+2.0	2.0+2.0
Cross wire maximum 最大焊接铁线能力	MM	14+14	14+14	16+16	16+16	20+20	20+20
Cooling water pressure drop 冷却水压降	Mpa	0.05	0.05	0.05	0.05	0.05	0.05
Cooling water flow 冷却水流量	L/min	8	8	8	8	8	8

※注：电极臂间距、角度、长度可根据用户需要来确定

Distance, angle and length of welding arm can be made according to customers' requests.