

# BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER AND PUSH START CLUTCH TYPE SERIES

**MYTORQ**  
ANLIDAR INDUSTRIAL CO.,LTD.


MY8 / MY7 Series



(Optional)




## External Dimension

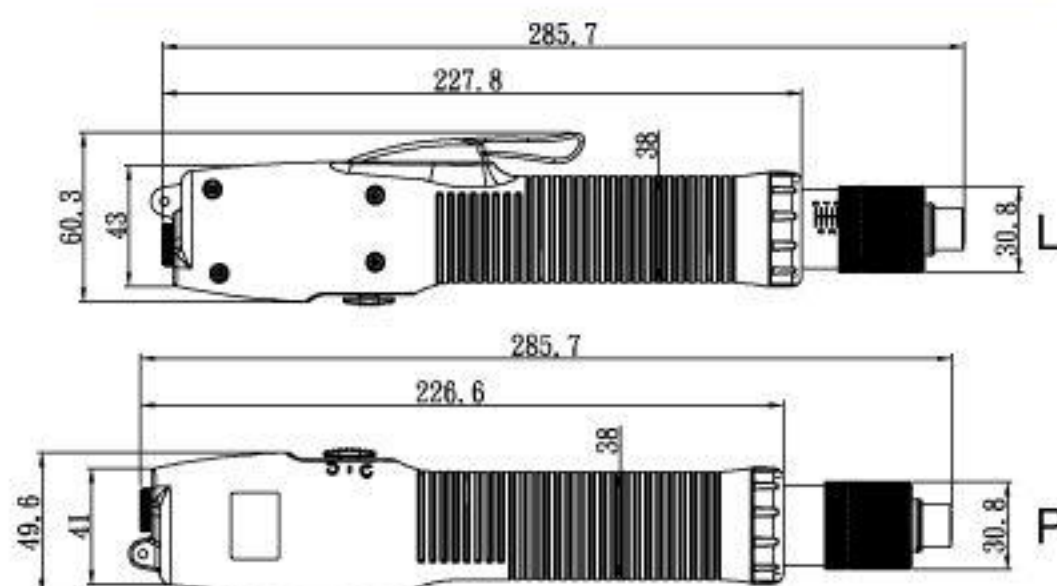

Unit: mm

## Torque Range Reference Chart

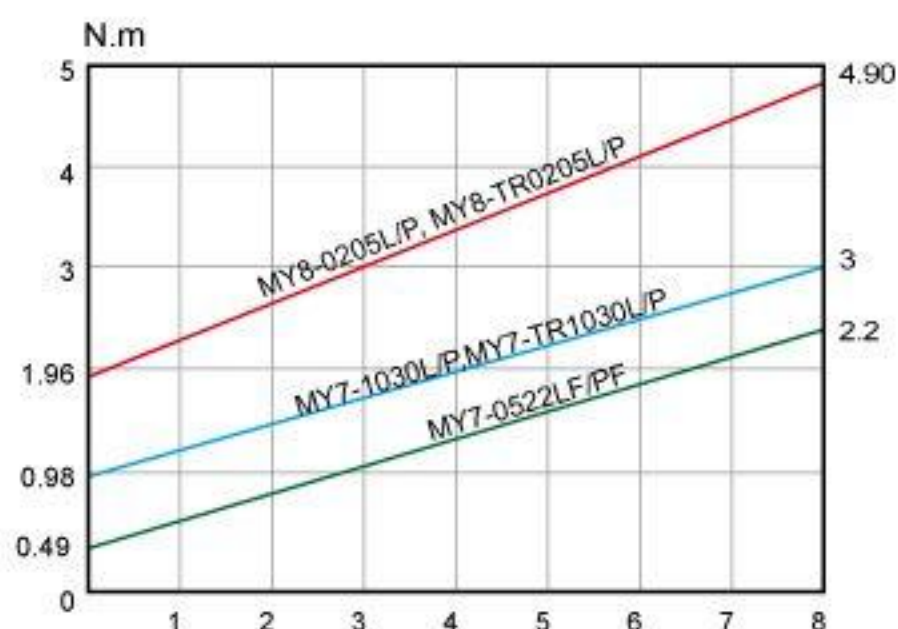

## Accessories



## Specifications

| Model                    | Torque(N.m) |            | Repeatability Torque Accuracy(%) | Free Speed (r.p.m) |     | Screw Size Dia (mm) |               | Weight (g) | Length (mm) | Power Controller | Bit Type  |
|--------------------------|-------------|------------|----------------------------------|--------------------|-----|---------------------|---------------|------------|-------------|------------------|-----------|
|                          | Hard Joint  | Soft Joint |                                  | HI                 | LO  | Machine Screw       | Tapping Screw |            |             |                  |           |
| MY8-0205L<br>MY8-0205P   | 1.96~4.90   | 1.96~3.92  | ±3%                              | 1000               | -   | 4.0~5.0             | ≤4            | 790        | 290         | MYP40-500        | B、B 9.5   |
| MY7-1030L<br>MY7-1030P   | 0.98~2.94   | 0.98~2.35  | ±3%                              | 1200               | 900 | 2.6~4.0             | 2.6~3.5       | 790        | 290         | MYP32-300        | A、B、B 9.5 |
| MY7-0522LF<br>MY7-0522PF | 0.49~2.16   | -          | ±3%                              | 2000               | -   | 2.6~4.0             | 2.6~3.5       | 790        | 290         | MYP32-300        | A、B、B 9.5 |

※ CE (Not included MY7-0522LF/PF)  
RoHS

