

BRUSHLESS LOW TORQUE DC-TYPE AUTO SHUT OFF WITH ERROR PROOF COUNTER TRIGGER AND PUSH START CLUTCH TYPE SERIES

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.


MY2-EP Series



(optional)




External Dimension

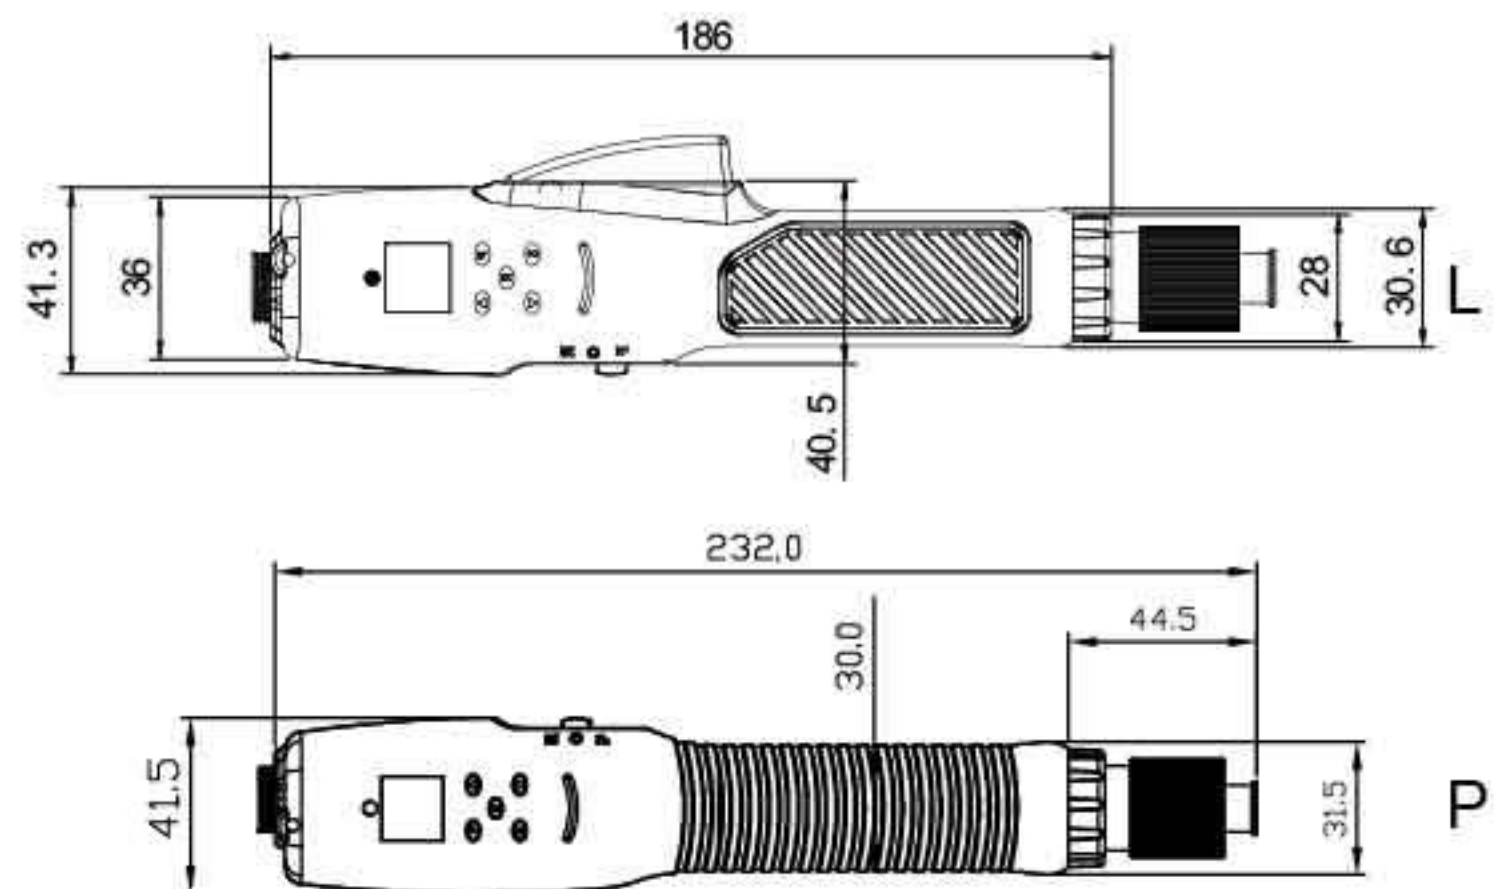

Unit: mm

Torque Range Reference Chart

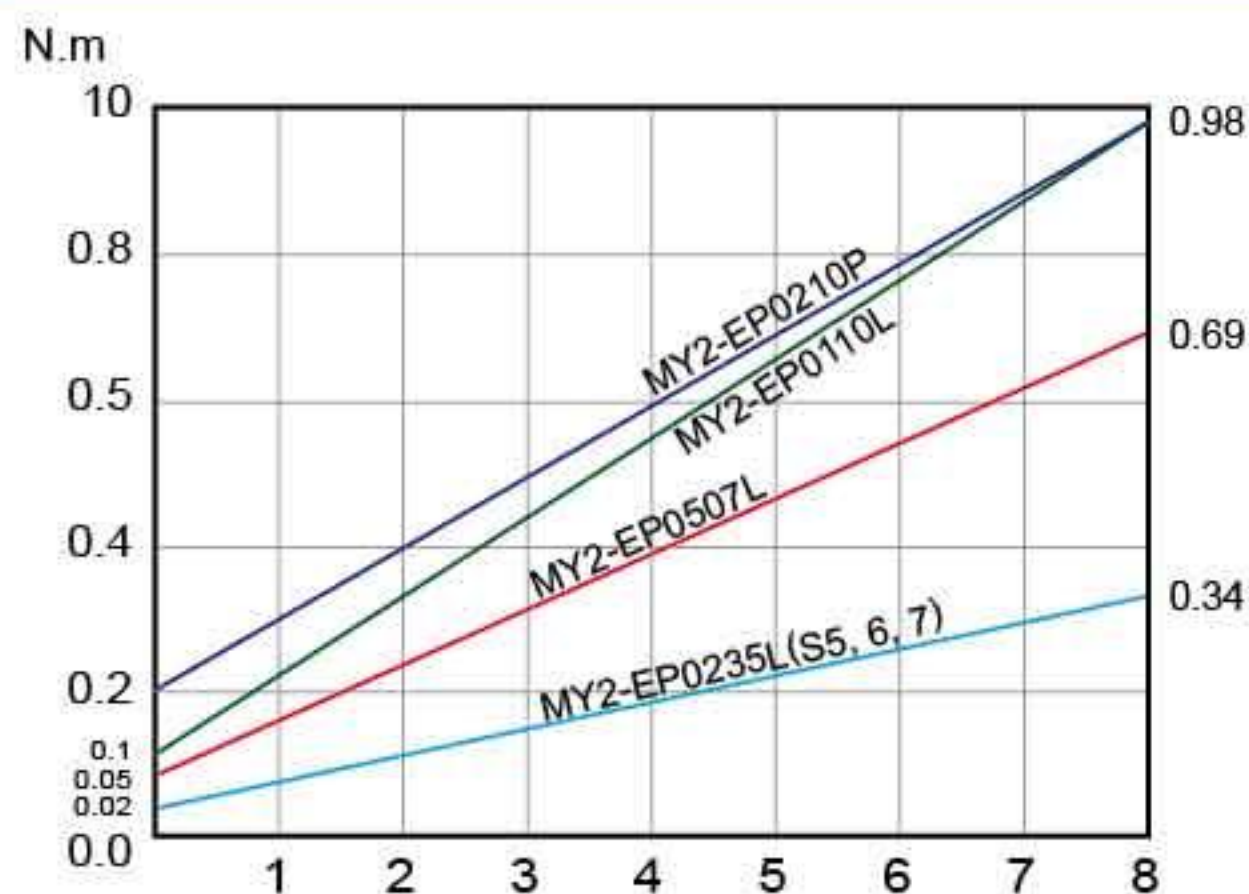

Accessories

Torque Locker
KC-13C



Torque Adjuster
KW-4



Screwdriver Holder
KH-5



Spring Balancer
KL-600




Power Controller
MYP32-60



Specifications

Model	Torque			Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (g)	Length (mm)	Power Controller	Bit Type
	(N.m)	(kgf.cm)	(Lbf.in)		HI	LO	Machine Screw	Tapping Screw				
MY2-EP0235L	0.02~0.34	0.2~3.5	0.18~3.08	±3%	1000	700	1.0~2.3	1.0~2.0	330	LC:226 LB:240	MYP32-60	B 9.5 · C
MY2-EP0235LS5	0.02~0.34	0.2~3.5	0.18~3.08	±3%	500	350	1.0~2.3	1.0~2.0	330	LC:226 LB:240	MYP32-60	B 9.5 · C
MY2-EP0235LS6	0.02~0.34	0.2~3.5	0.18~3.08	±3%	370	260	1.0~2.3	1.0~2.0	330	LC:226 LB:240	MYP32-60	B 9.5 · C
MY2-EP0235LS7	0.02~0.34	0.2~3.5	0.18~3.08	±3%	230	160	1.0~2.3	1.0~2.0	330	LC:226 LB:240	MYP32-60	B 9.5 · C
MY2-EP0507L	0.05~0.69	0.5~7	0.44~6.16	±3%	1000	700	1.4~2.6	1.4~2.3	330	LC:226 LB:240	MYP32-60	B 9.5 · C
MY2-EP0110L	0.10~0.98	1~10	0.88~8.8	±3%	1000	700	1.6~3.0	1.6~2.6	330	LC:226 LB:240	MYP32-60	B 9.5 · C
MY2-EP0210P	0.2~0.98	2~10	1.76~8.8	±3%	1000	700	1.6~3.0	1.6~2.6	310	230	MYP32-60	B 9.5 · C

※CE、RoHS

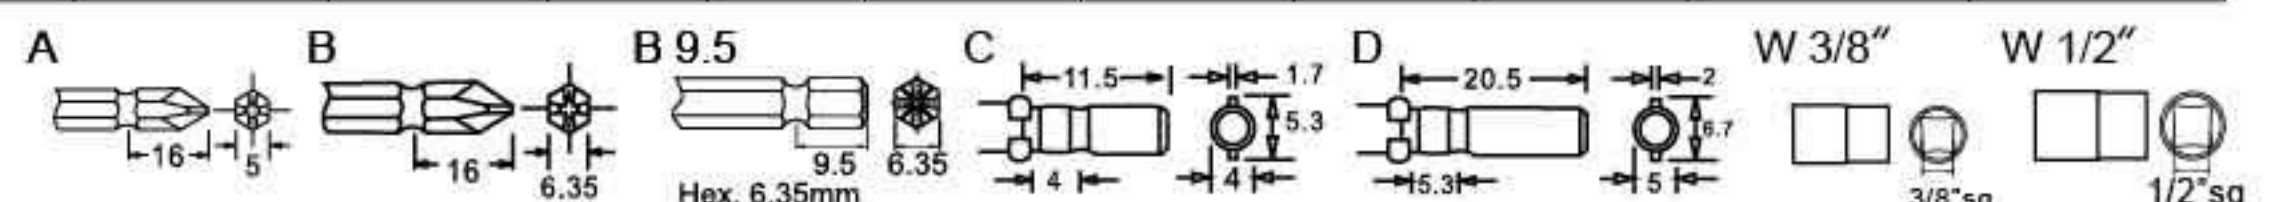

※Please contact your agent for special customization version.