

BRUSHLESS MEDIUM TORQUE DC-TYPE AUTO SHUT OFF WITH ERROR PROOF COUNTER TRIGGER AND PUSH START CLUTCH TYPE SERIES

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.


MY5-EP Series



(optional)




External Dimension

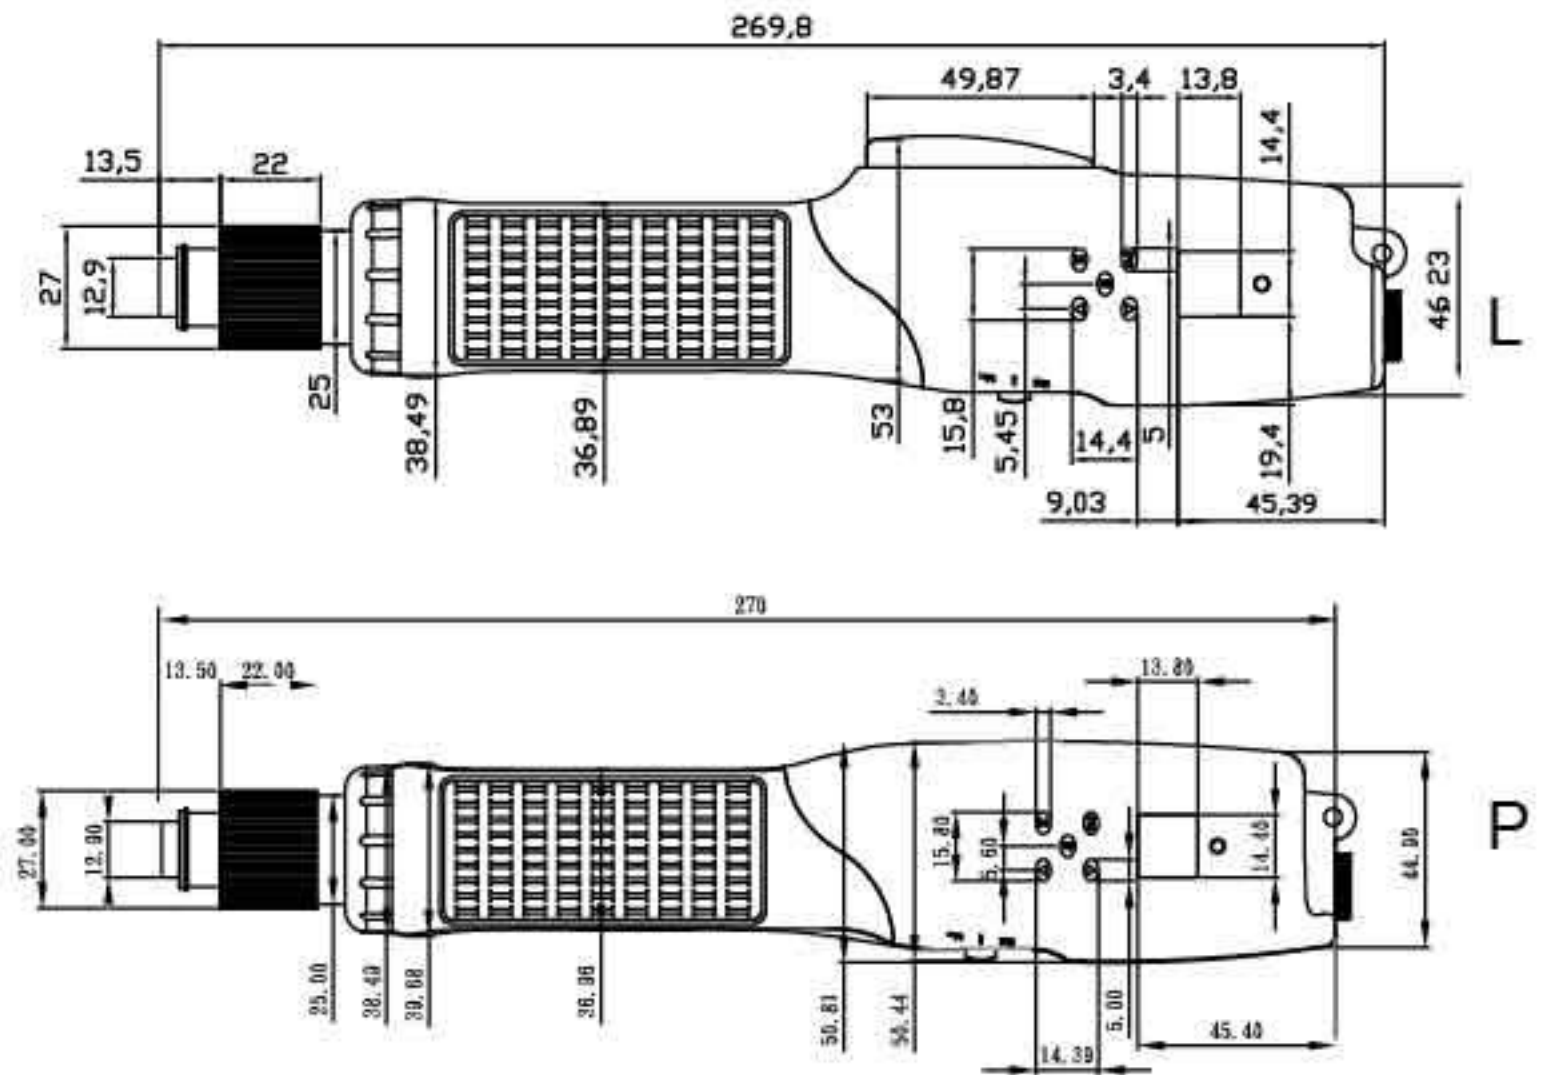

Unit: mm

Torque Range Reference Chart

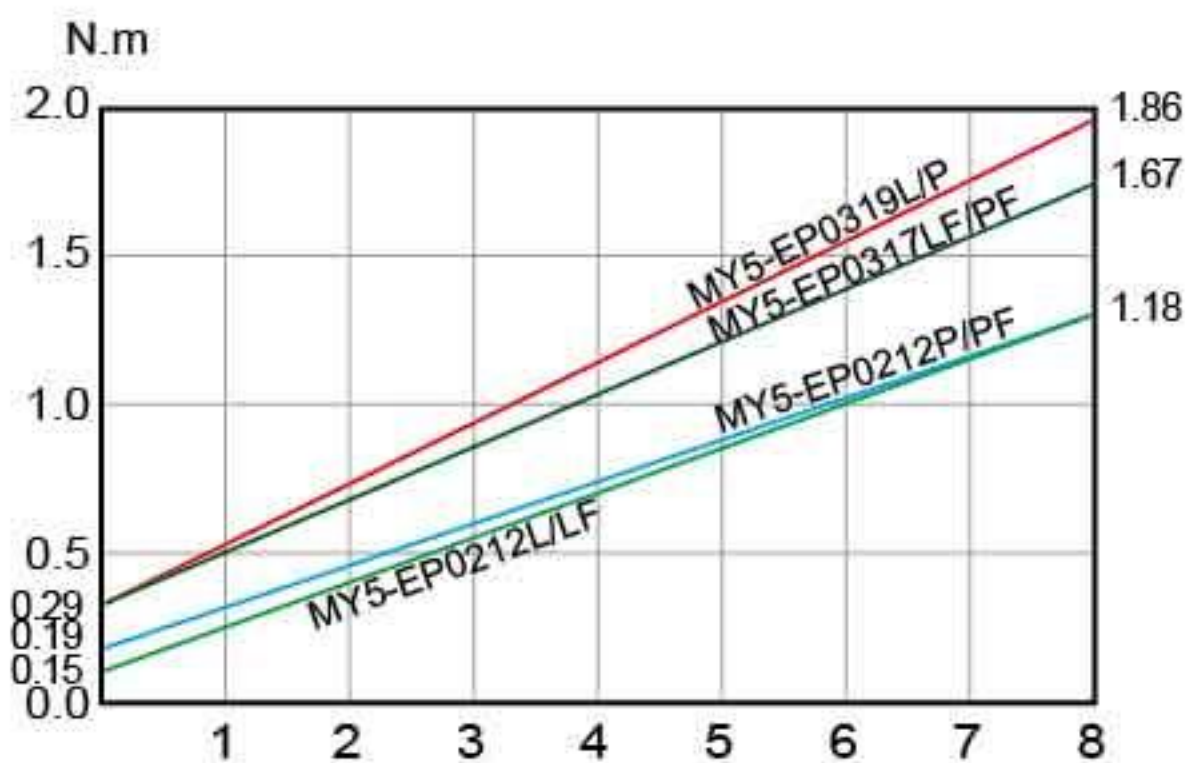


Accessories



Specifications

Model	Torque			Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (g)	Length (mm)	Power Controller	Bit Type
	(N.m)	(kgf.cm)	(Lbf.in)		HI	LO	Machine Screw	Tapping Screw				
MY5-EP0212L	0.15~1.18	1.5~12	1.32~10.56	±3%	1000	700	1.6~3.0	1.6~2.6	580	270	MYP32-60	A、B、B 9.5、C、D
MY5-EP0212P	0.19~1.18	2~12	1.76~10.56	±3%	1000	700	1.6~3.0	1.6~2.6	580	270	MYP32-60	A、B、B 9.5、C、D
MY5-EP0212LF	0.15~1.18	1.5~12	1.32~10.56	±3%	2000	---	1.6~3.0	1.6~2.6	580	270	MYP-32-300	A、B、B 9.5、C、D
MY5-EP0212PF	0.19~1.18	2~12	1.76~10.56	±3%	2000	---	1.6~3.0	1.6~2.6	580	270	MYP-32-300	A、B、B 9.5、C、D
MY5-EP0317LF MY5-EP0317PF	0.29~1.67	3~17	2.64~14.96	±3%	2000	---	1.6~3.0	1.6~2.6	580	270	MYP-32-300	A、B、B 9.5、C、D
MY5-EP0319L MY5-EP0319P	0.29~1.86	3~19	2.64~16.72	±3%	1000	700	2.3~3.5	2.3~3.0	580	270	MYP32-60	A、B、B 9.5、C、D

※CE、RoHS

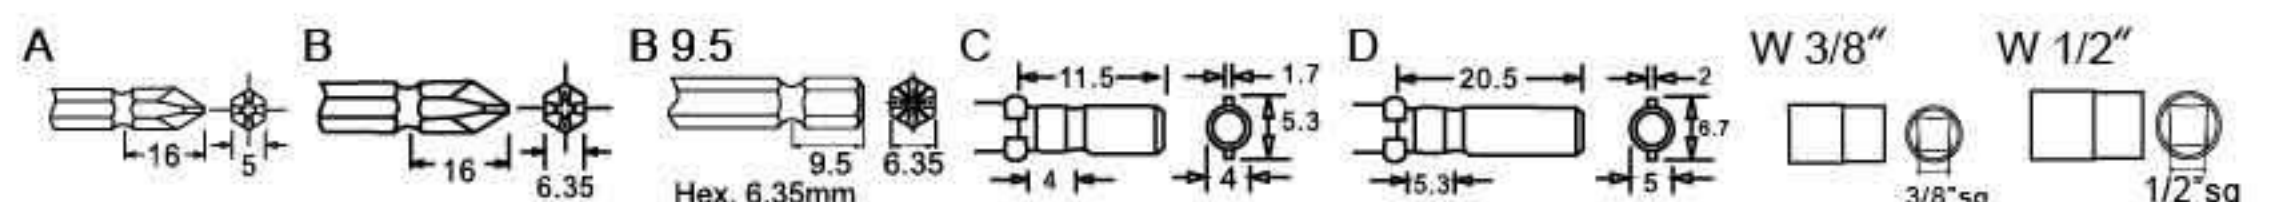

※Please contact your agent for special customization version.