



BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF COUNTER TRIGGER AND PUSH START CLUTCH TYPE SERIES

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.


MY8-EP Series



External Dimension

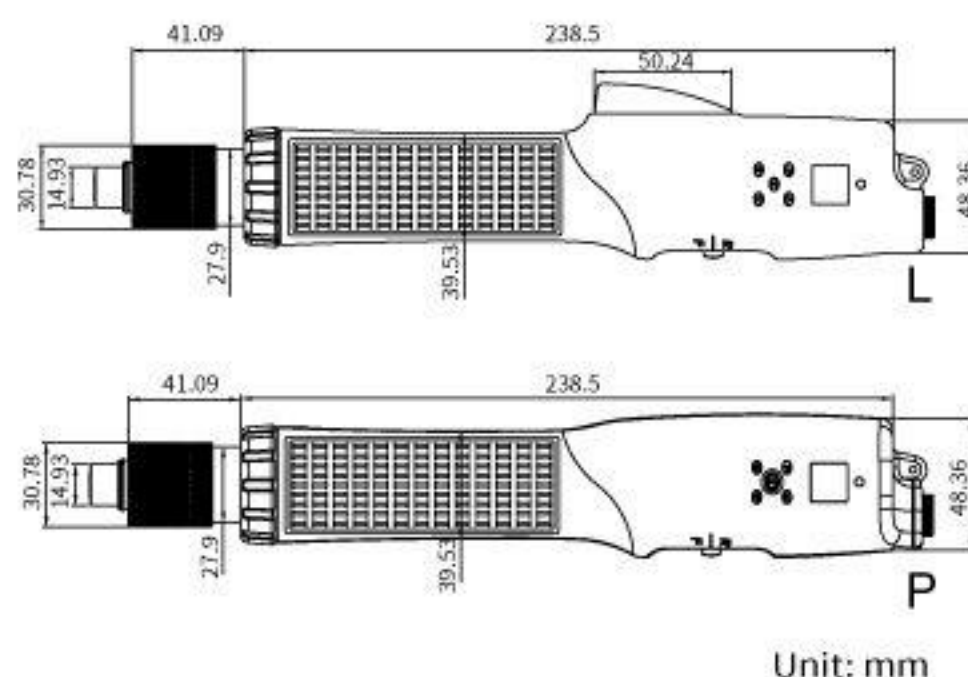

Torque Range Reference Chart

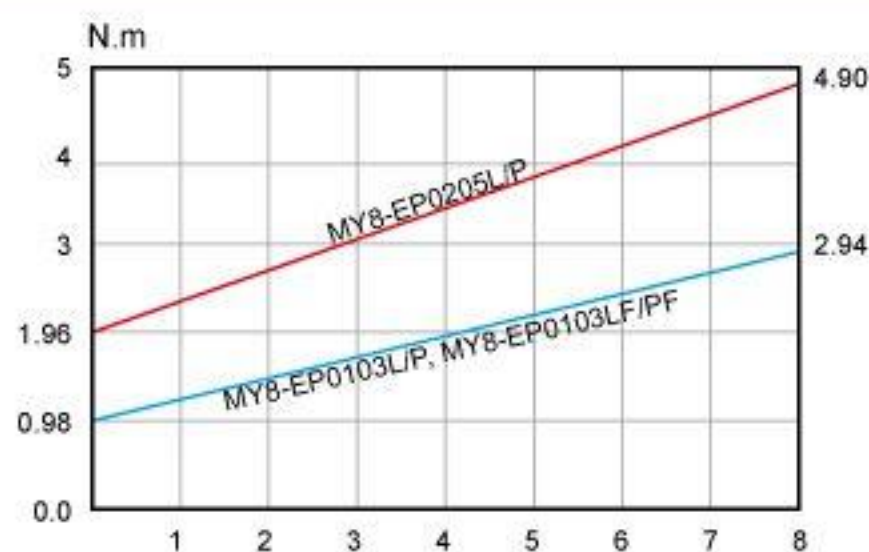

Accessories



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (g)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MY8-EP0103L MY8-EP0103P	0.98~2.94	0.98~2.35	±3%	1000	-	2.6~4.0	2.6~3.5	820	294	MYP40-500	A · B · B 9.5
MY8-EP0103LF MY8-EP0103PF	0.98~2.94	0.98~2.35	±3%	2000	-	2.6~4.0	2.6~3.5	820	294	MYP40-500	A · B · B 9.5
MY8-EP0205L MY8-EP0205P	1.96~4.90	1.96~3.92	±3%	1000	-	4.5~5.0	≤ 4	820	294	MYP40-500	B · B 9.5

※ CE、RoHS

