


MYBT-SC Series



MYBT-SC0612

External Dimension

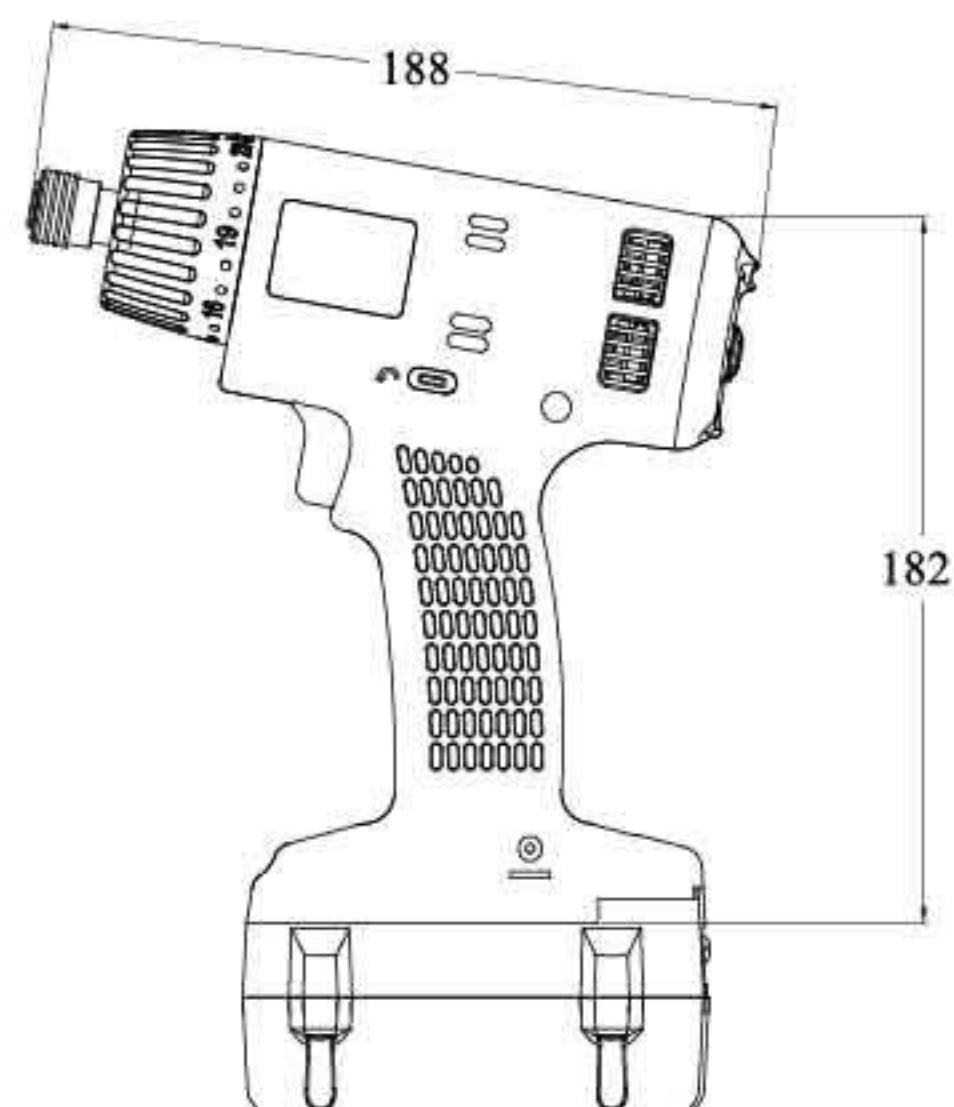


MYBT-SC0612

Unit: mm

Features


- Maintenance free brushless motor with 2 years warranty
- Long lasting contactless micro switch trigger
- 23 steps of slip clutch mechanical design
- High / Low speed
- Suitable for all general assembly applications

Torque Range Reference Chart

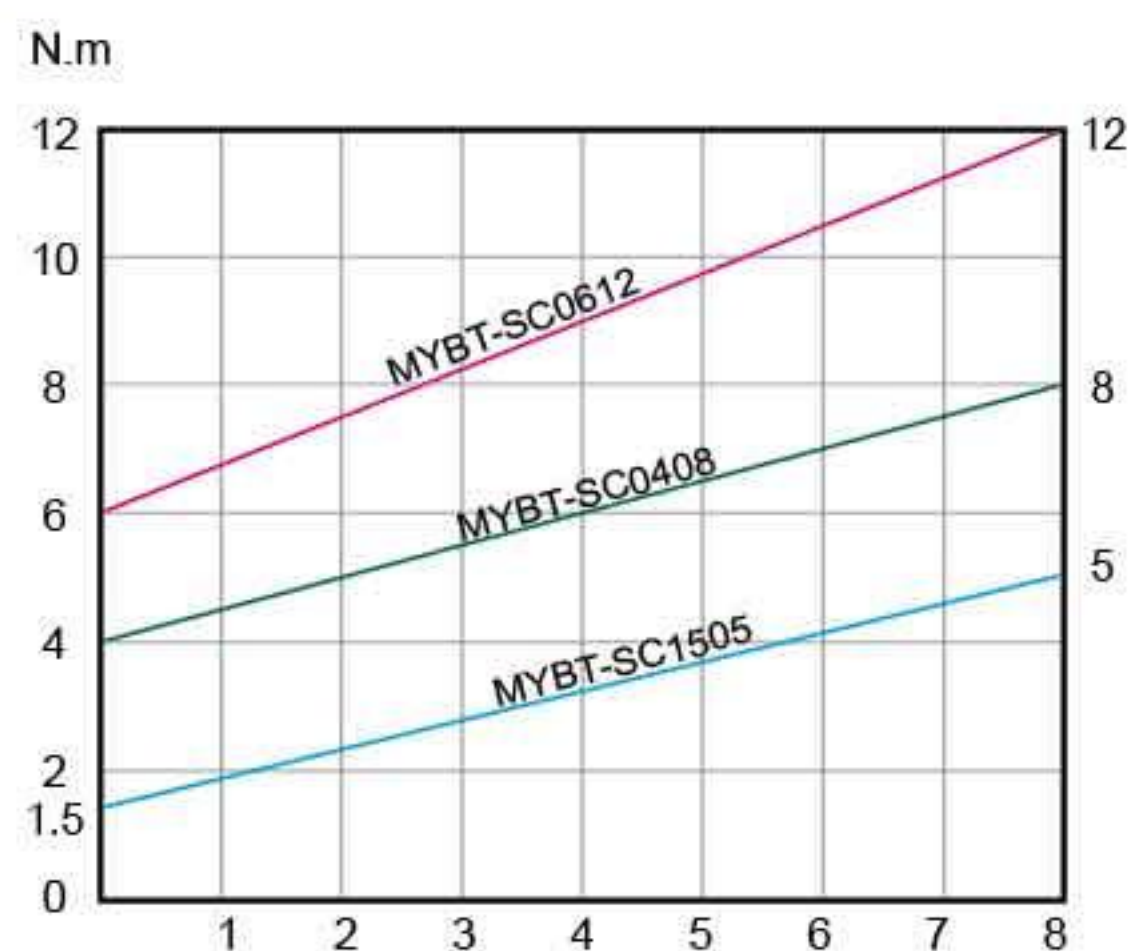

Specifications

Model	Input Voltage	Torque (N.m)	Repeatable Torque Accuracy(%)	Torque Adjustment	Free Speed (r.p.m) $\pm 10\%$			Weight (kg)	Size (mm)	Applicable Battery	Applicable Charger	Bit Type
					HI	MID	LO					
MYBT-SC1505	18V	1.5~5	$\pm 10\%$	23+MAX	2200	1600	1100	1.0	188x182	SKC-LB1820 SKC-LB1840	MYCS-ID120 MYCS-ID80 MYCS-80	B、B9.5 W 3/8"
MYBT-SC0408	18V	4~8	$\pm 10\%$	23+MAX	1200	900	600	1.0	188x182	SKC-LB1820 SKC-LB1840	MYCS-ID120 MYCS-ID80 MYCS-80	B、B9.5 W 3/8"
MYBT-SC0612	18V	6~12	$\pm 10\%$	23+MAX	700	500	350	1.0	188x182	SKC-LB1820 SKC-LB1840	MYCS-ID120 MYCS-ID80 MYCS-80	B、B9.5 W 3/8"

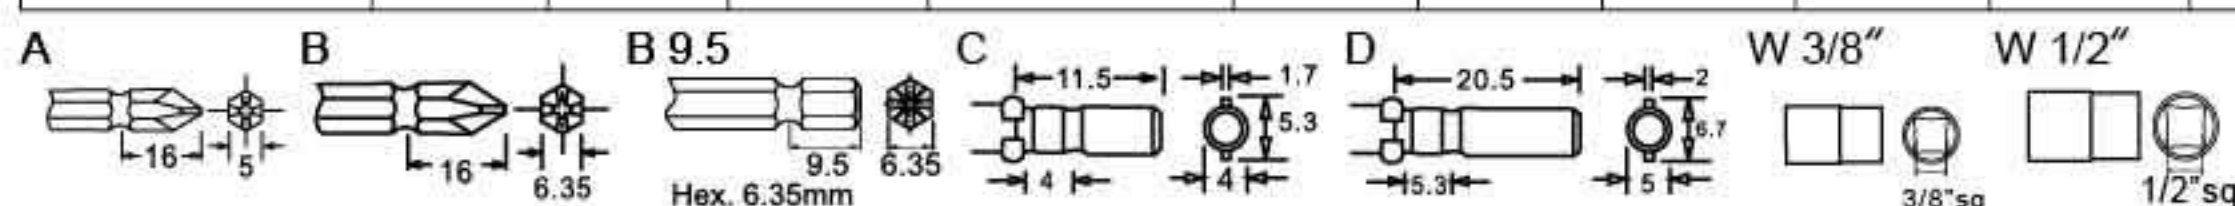

※Tool Weight & Size indications without battery.