

MYCS Series



MYCS-ID120



MYCS-ID80/80



MYCS-ID80-D



MYCS-ID70+




MYCS-ID50




MYCS-ID25

Features


- Built-in LCD display shows recharging status. If the temperature is over the limit when recharging, the charge station will activate the protection function to stop recharging.
- Charge station can identify whether battery is supplied by KILEWS. When other brands of batteries installed on the charge station, it will not start charging process for the safety protection.
- Charge station can detect recharging time and battery capacity automatically. If any unusual situation happens during recharging, it will give an alert beeps and warning light to warn users.
- Auto buzzer reminds when battery is fully recharged.
- Small size, light weight, quick recharge, and wide voltage range 100~240ACV can be applicable worldwide.

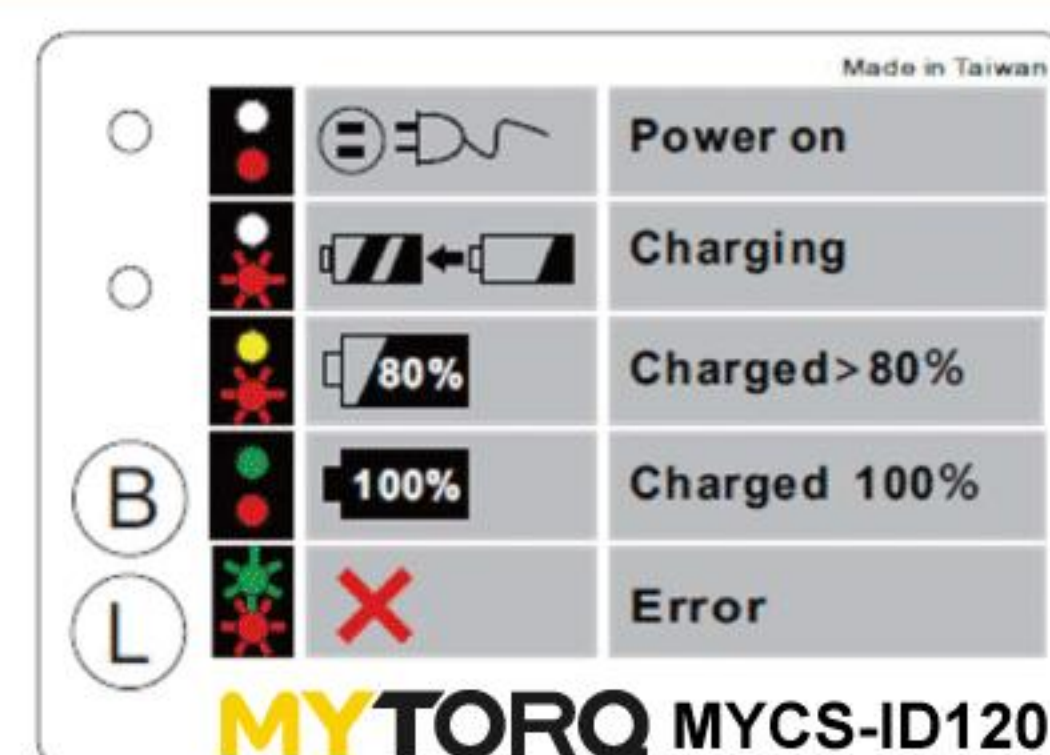

MYCS-ID120

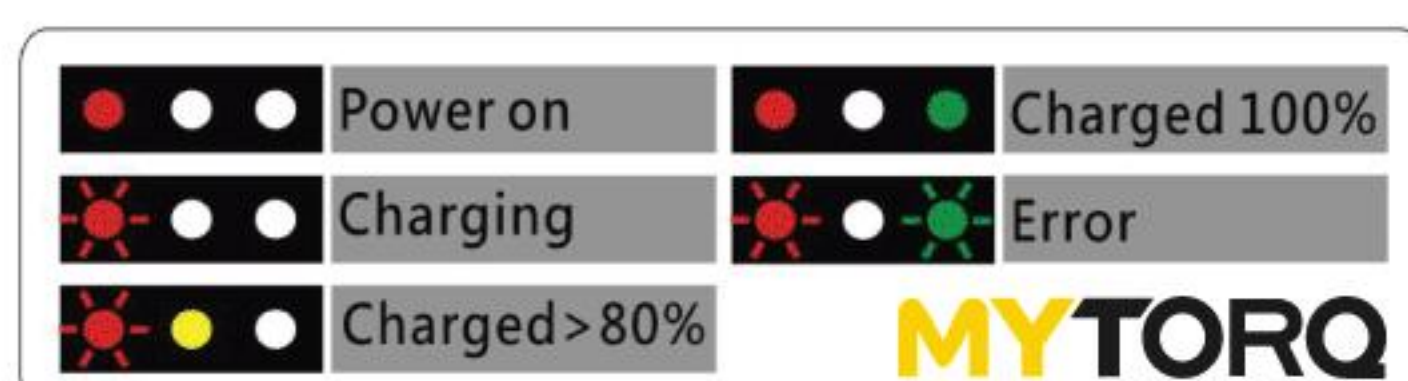

MYCS-ID80 / MYCS-80 / MYCS-ID80-D

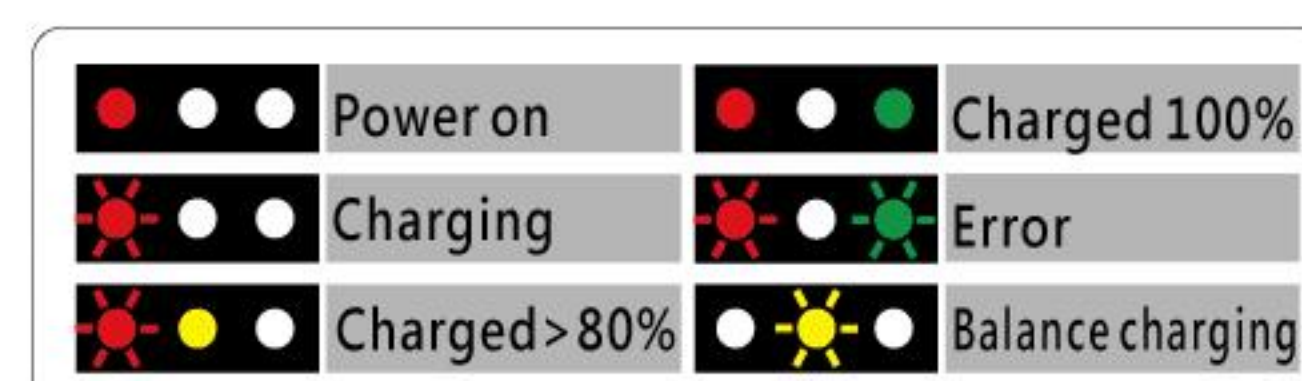

MYCS-ID70+ / MYCS-ID50 / MYCS-ID25

Specifications

Model	MYCS-ID120	MYCS-ID80	MYCS-80	MYCS-ID80-D	MYCS-ID70+	MYCS-ID50	MYCS-ID25
Input Voltage	100V~240V	100V~240V	100V~240V	100V~240V	100V~240V	100V~240V	100V~240V
Output Voltage	21V DC	21V DC	21V DC	21V DC	16.8V	12.6V	8.4V
Output Current	3.0~4.5A	3.0A	3.0A	3.0A	3.0A	3.0A	3.0A
Applicable battery model	SKC-LB1820/1840	SKC-LB1820/1840	SKC-LB1820/1840	SKC-LB1830C	SKC-LB1430	SKC-LB1030S	SKC-LB0730S
Battery Identification	V	V	-	V	V	V	V
Buzzer	V	V	-	V	V	V	V
Cooling fan	V	-	-	-	-	-	-
Dimensions(WXLXH)	160X170X80mm	145X115X80mm	145X115X80mm	145X115X80mm	145X115X75mm	145X115X93mm	115X145X101mm
Weight	1068g	530g	530g	530g	460g	470g	430g
LCD Display	V	-	-	-	-	-	-
Safety Certification	CE,ETL	CE,ETL	CE,ETL	CE,ETL	CE,ETL	CE,ETL	CE,ETL

MYCS-ID120 Will display battery ID, each recharging time, cell temperature, battery voltage, recharge status.