

AUTO SHUT OFF SCREWDRIVER TORQUE ADJUSTMENT EXTERNAL

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.

MYBT-AE Series




MYBT-AE0206



MYBT-AE0309

External Dimension

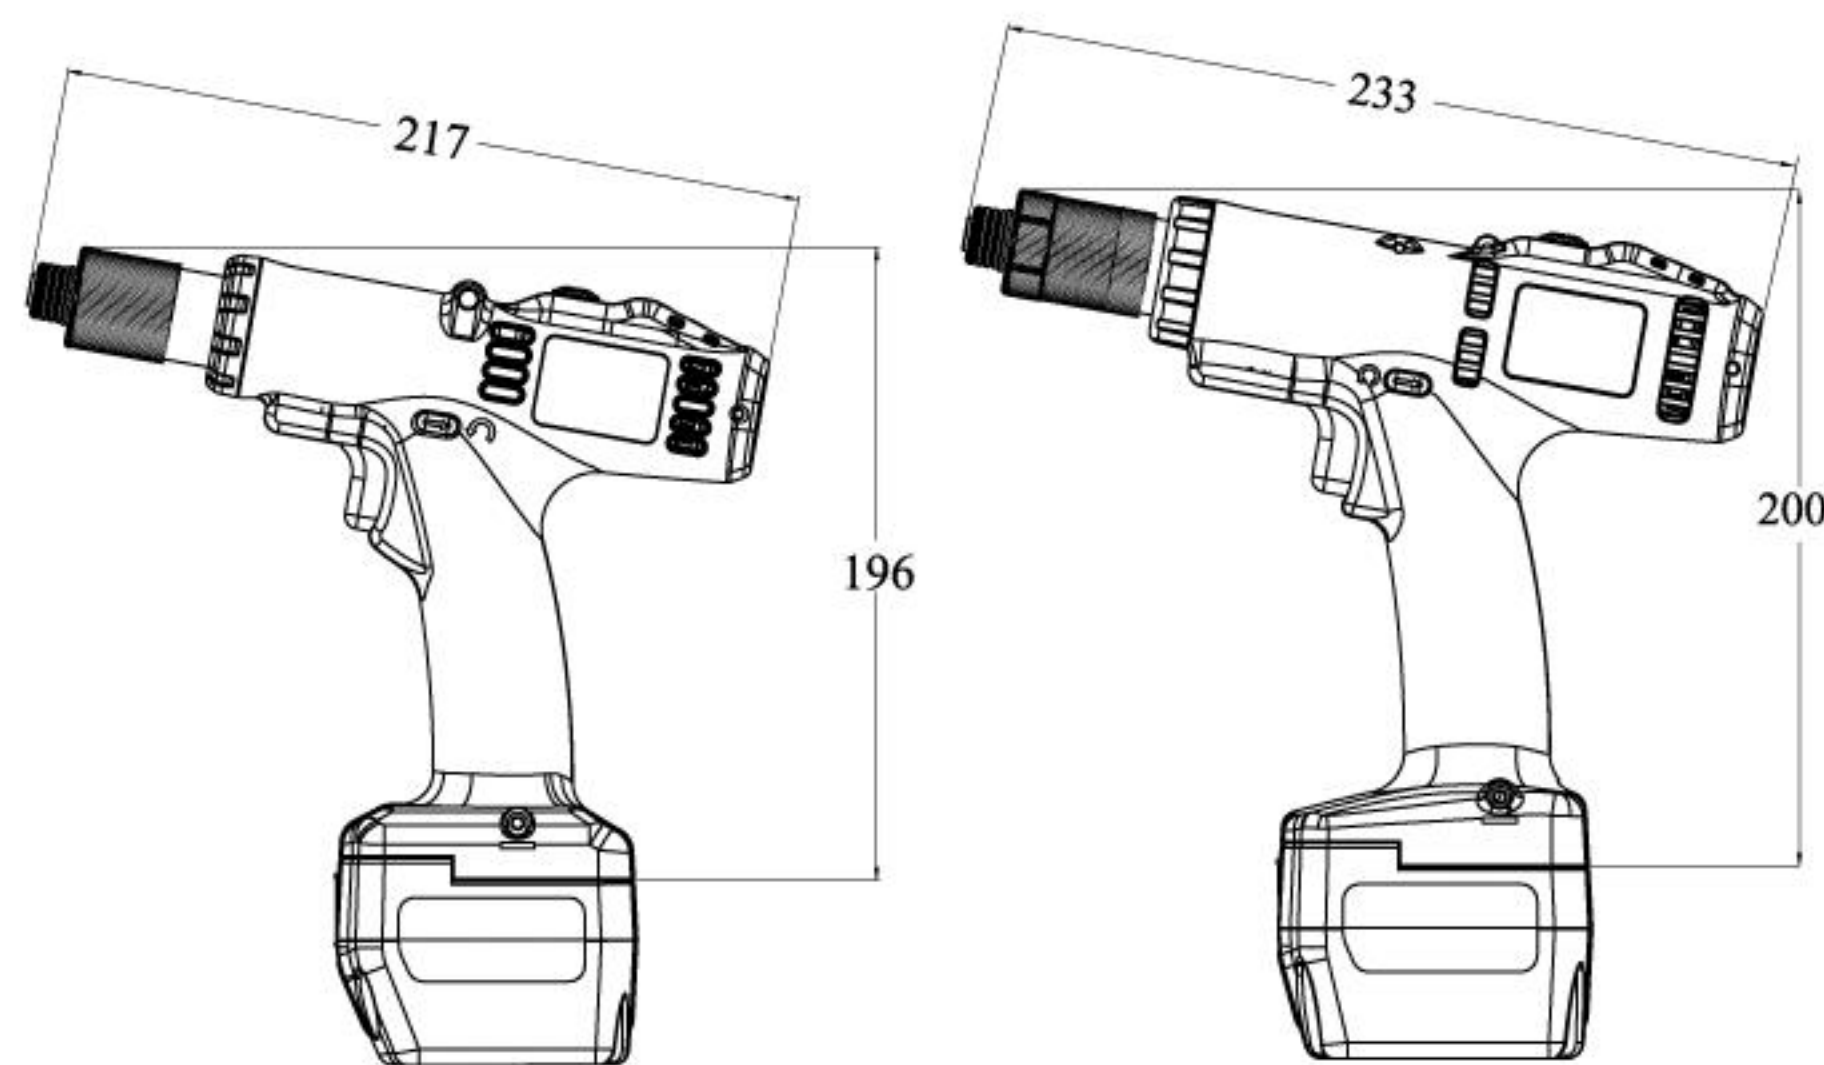

MYBT-AE0206

MYBT-AE0309

Unit: mm

Features

MYBT-AE0135/MYBT-AE0135F/MYBT-AE0206

- Maintenance free brushless motor with 2 years warranty
- Long lasting contactless micro switch trigger
- Precision auto shut off clutch
- Durable mechanical clutch allows 2 million tightening
- OK/NG status LED indicator
- Compact & ergonomic design
- High / Low speed selections
- LED illuminate tightening area
- Quick external torque adjustment


MYBT-AE0205F/MYBT-AE0309/MYBT-AE0612

- LED illumination to light up dark areas
- Status LED to indicate users tightening results
- 10x lifespan long-lasting contactless micro switch trigger
- The durable auto shut off clutch guarantee 2 million tightening
- The sophisticated auto shut off clutch provides outstanding $\pm 3\%$ torque accuracy
- Adopted maintenance-free brushless motor for clean, quiet, and accurate operation
- A fully charged 18V lithium-ion battery can tighten up to 2,400 screws
- Auto cut off when low battery to avoid insufficient torque applied to screws
- 40 minutes quick charge

Torque Identification Ring




Torque Range Reference Chart

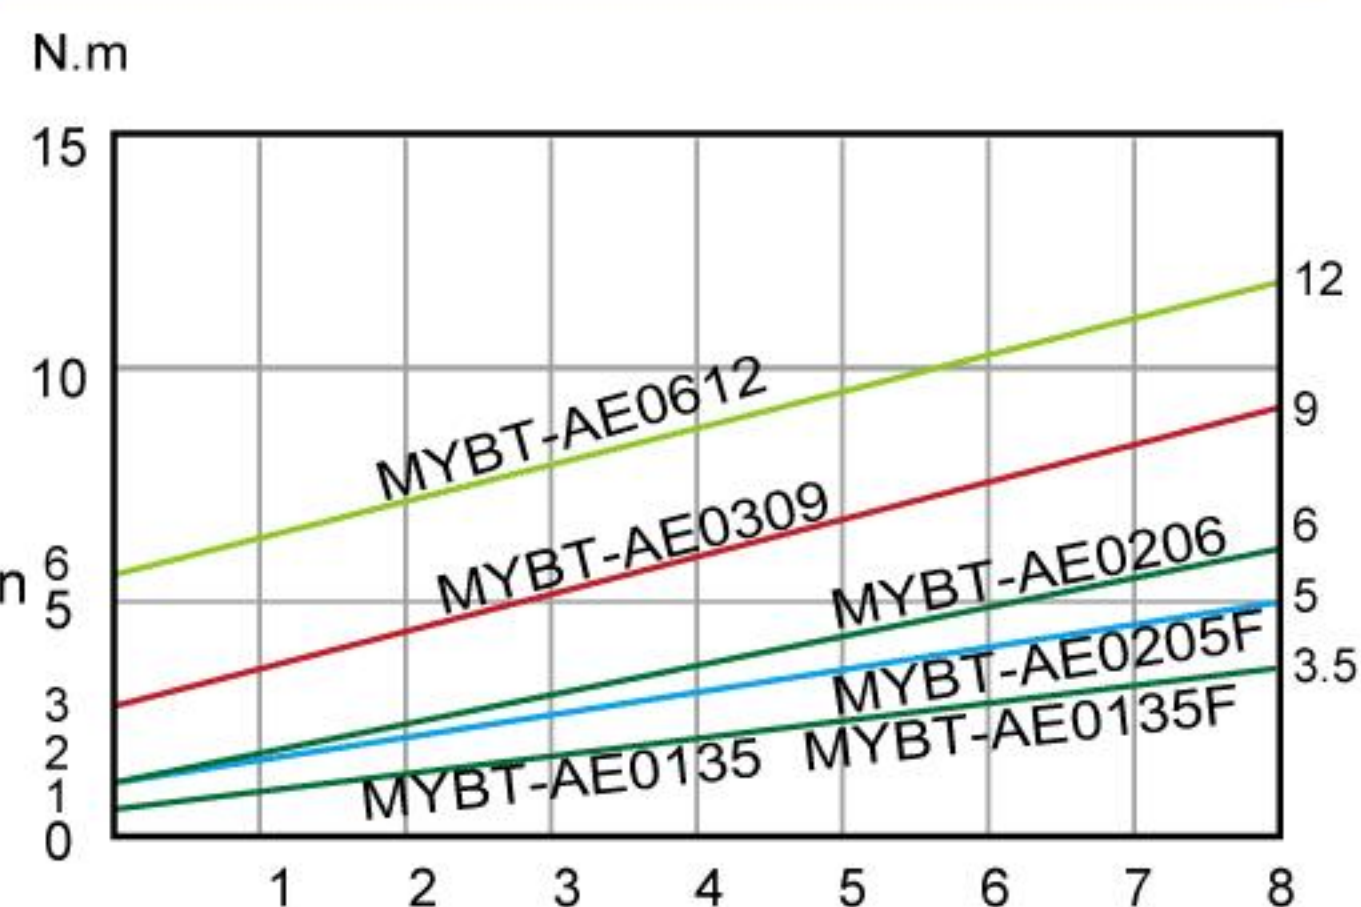

Specifications

Model	Input Voltage	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Weight (kg)	Size (mm)	Applicable Battery	Applicable Charger	Applicable Torque Meter	Bit Type
		Hard Joint	Soft Joint		HI	LO						
MYBT-AE0135	18V	1~3.5	1~2.8	$\pm 3\%$	1000	650	0.98	217X196	SKC-LB1830C	MYCS-ID80-D	KTM-150	B、B9.5
MYBT-AE0135F	18V	1~3.5	1~2.8	$\pm 3\%$	2000	-	0.98	217X196	SKC-LB1830C	MYCS-ID80-D	KTM-150	B、B9.5
MYBT-AE0206	18V	2~6	2~4.8	$\pm 3\%$	1000	650	0.98	217X196	SKC-LB1830C	MYCS-ID80-D	KTM-150	B、B9.5
MYBT-AE0205F	18V	2~5	2~4	$\pm 3\%$	2200	-	1.1	233X200	SKC-LB1830C	MYCS-ID80-D	KTM-150	B、B9.5
MYBT-AE0309	18V	3~9	3~7.2	$\pm 3\%$	1000	650	1.1	233X200	SKC-LB1830C	MYCS-ID80-D	KTM-150	B、B9.5
MYBT-AE0612	18V	6~12	6~9.6	$\pm 3\%$	880	570	1.1	233X200	SKC-LB1830C	MYCS-ID80-D	KTM-150	B、B9.5

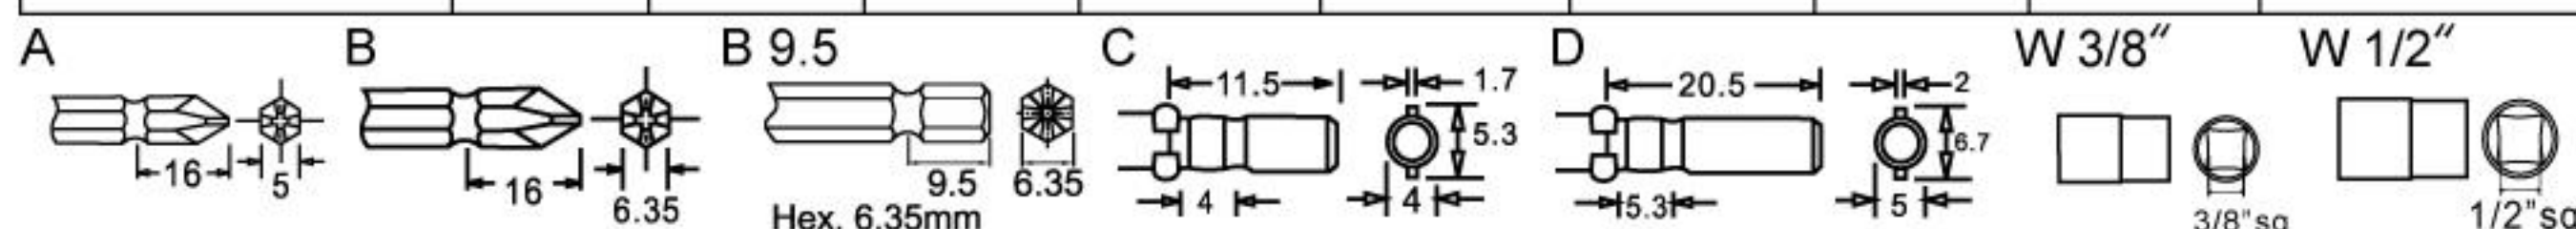

※ Free load speed will be fixed when battery volume is more than 17V (17~21V)

※ Tool Weight & Size indications without battery.