


ERROR PROOF COUNTER

MYPC40-500 / MYPC40-1500 [Counter / Power Supply]

External Dimension

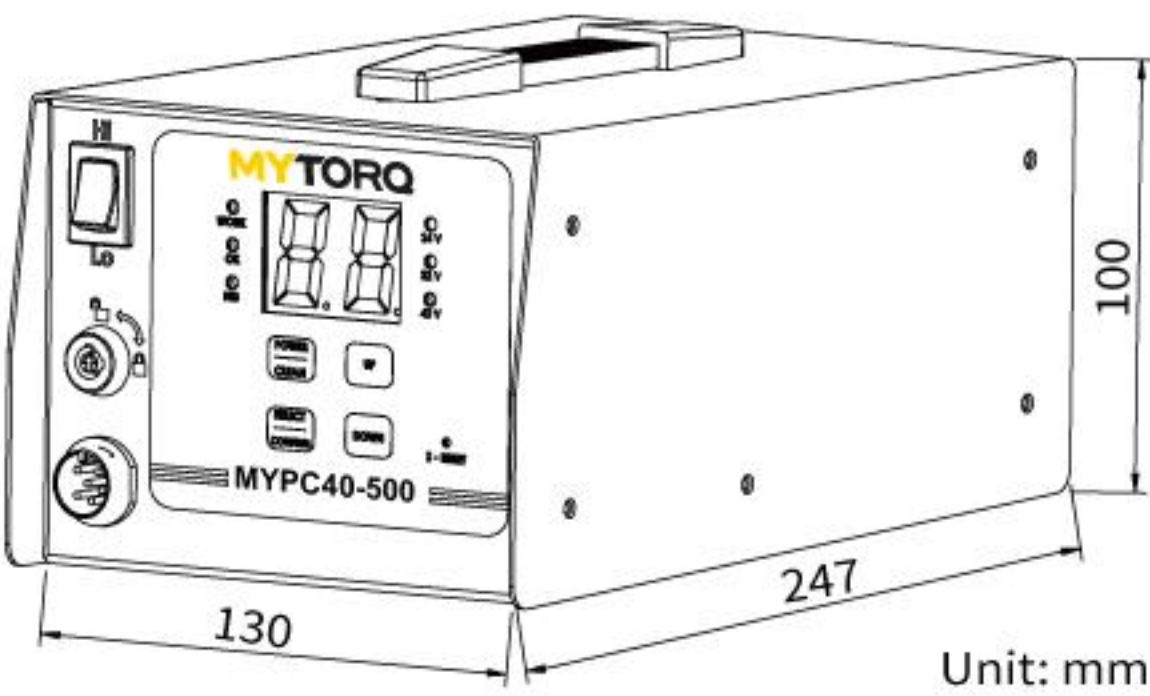

Specifications

Model	MYPC40-500	MYPC40-1500
Input Voltage	AC 100V~240V / 50HZ / 60HZ	AC 110V / 50HZ, 230V / 60HZ
Output Voltage	DC 40V / 32V / 24V 5A	DC 40V / 32V / 24V 9A
Power Consumption	200W	360W
Batch Count	1~99	
Count method	Count-up / Count-down	
Reverse Resuming	ON / OFF	
Work with Sensor	ON / OFF	
GATE Sensor	ON(2 Sensors) / OFF(1 Sensor)	
Slow-start time adjustable	0~9.9 seconds	
Slow-start speed adjustable	LO:100%, 30%~90% L1~L9 Rated speed	
Running Time limit-LO	0.00~9.90 seconds	
Running Time limit-HI	0.0~9.9 seconds	
Reminder Mode	ON / OF / FF / EF with LED and buzzer	
Auto ZERO	ON / OFF	
External inputs	Forward / Reverse / Disable / Confirm / Sensor / Clear	
External outputs	OK / NG / OK ALL	
Screwdriver Control	HI / LO : Slow-Start	
Dimensions	247X130X100(mm)	
Weight(Kg)	2.4	
Accessories	Power cordX1 、 KeyX2	
Remark	  	
Applicable Models	MY2 Series MY5 Series MY7 Series MY8 Series MYT-0320/0830/0205 (Not included fast speed type / MYT-2507)	All High Torque Models