


MY-Sirius Screwdriver Series




(Optional)


External Dimension

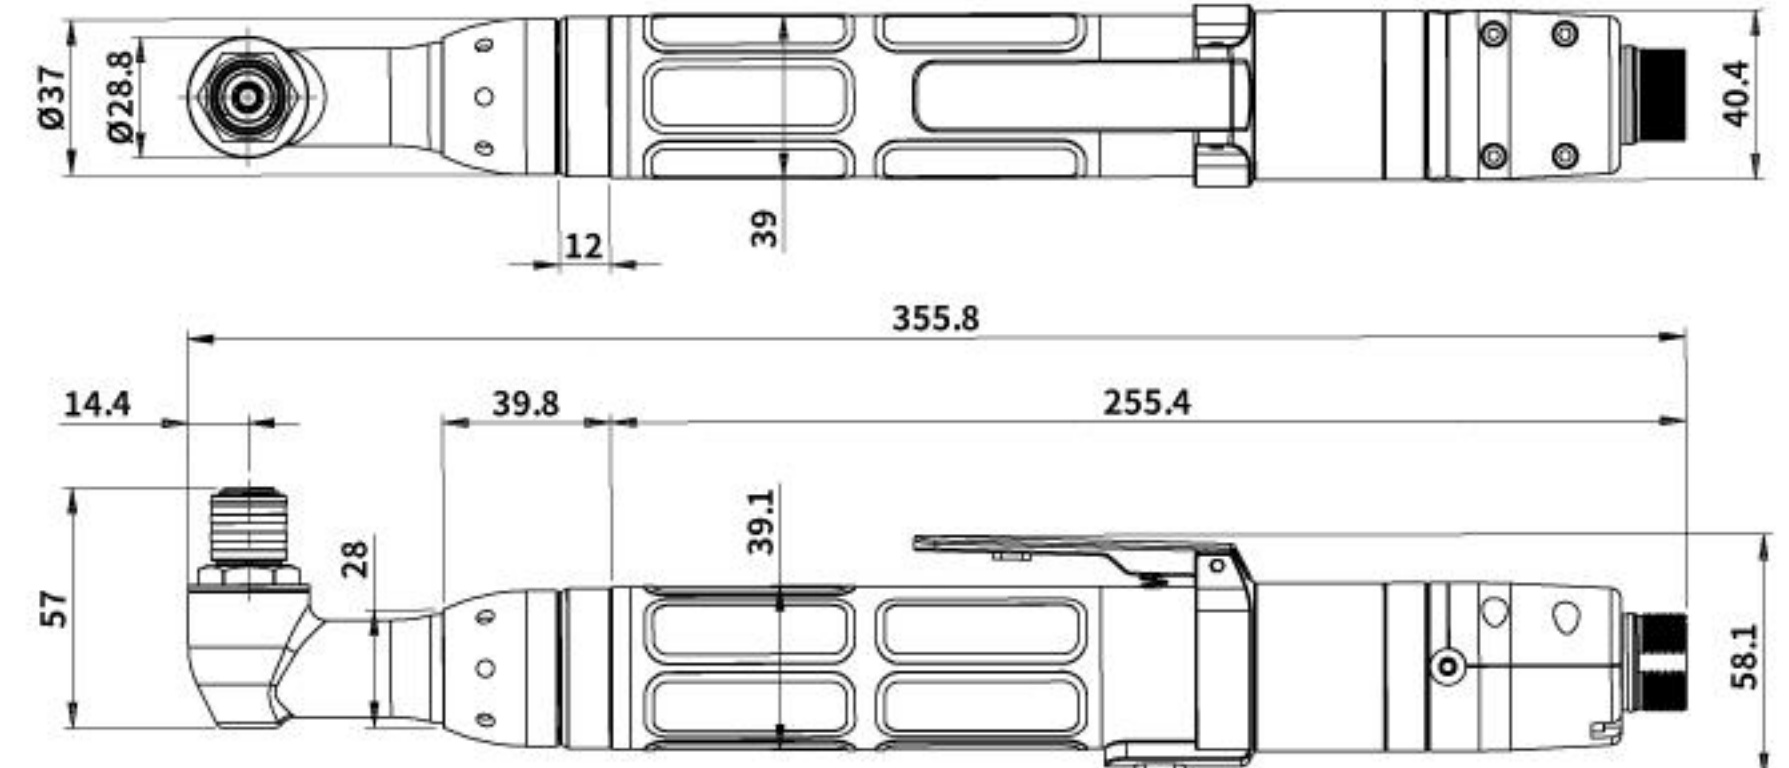


MY-Sirius 3 / 5 / 7 RA

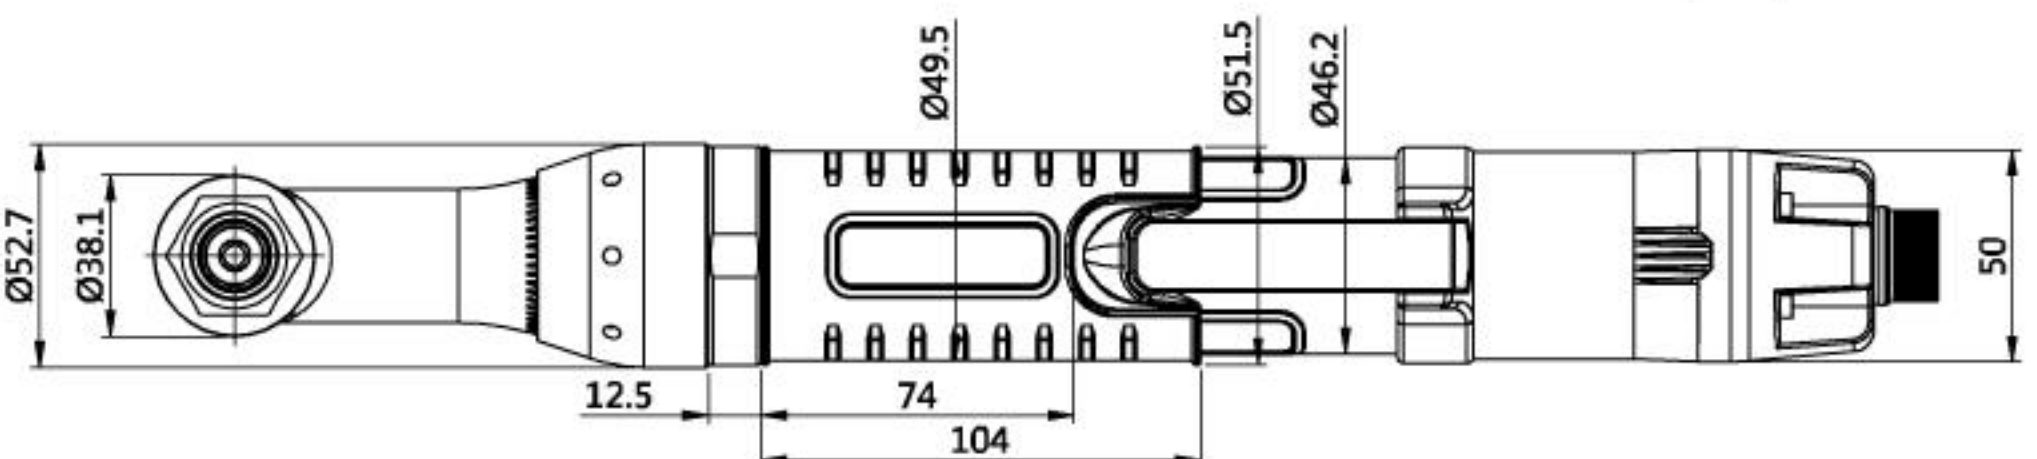

MY-Sirius 12 / 18 RA

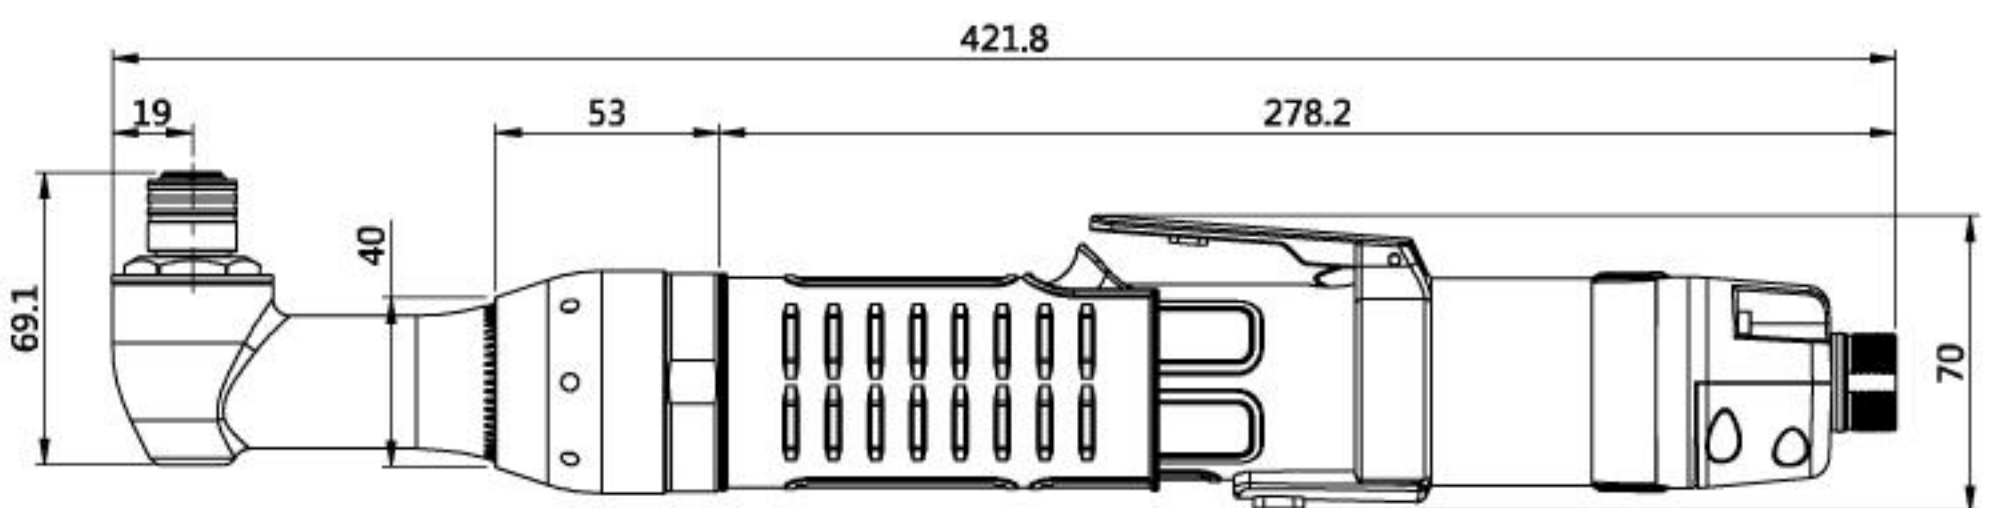

MY-Sirius 25 RA

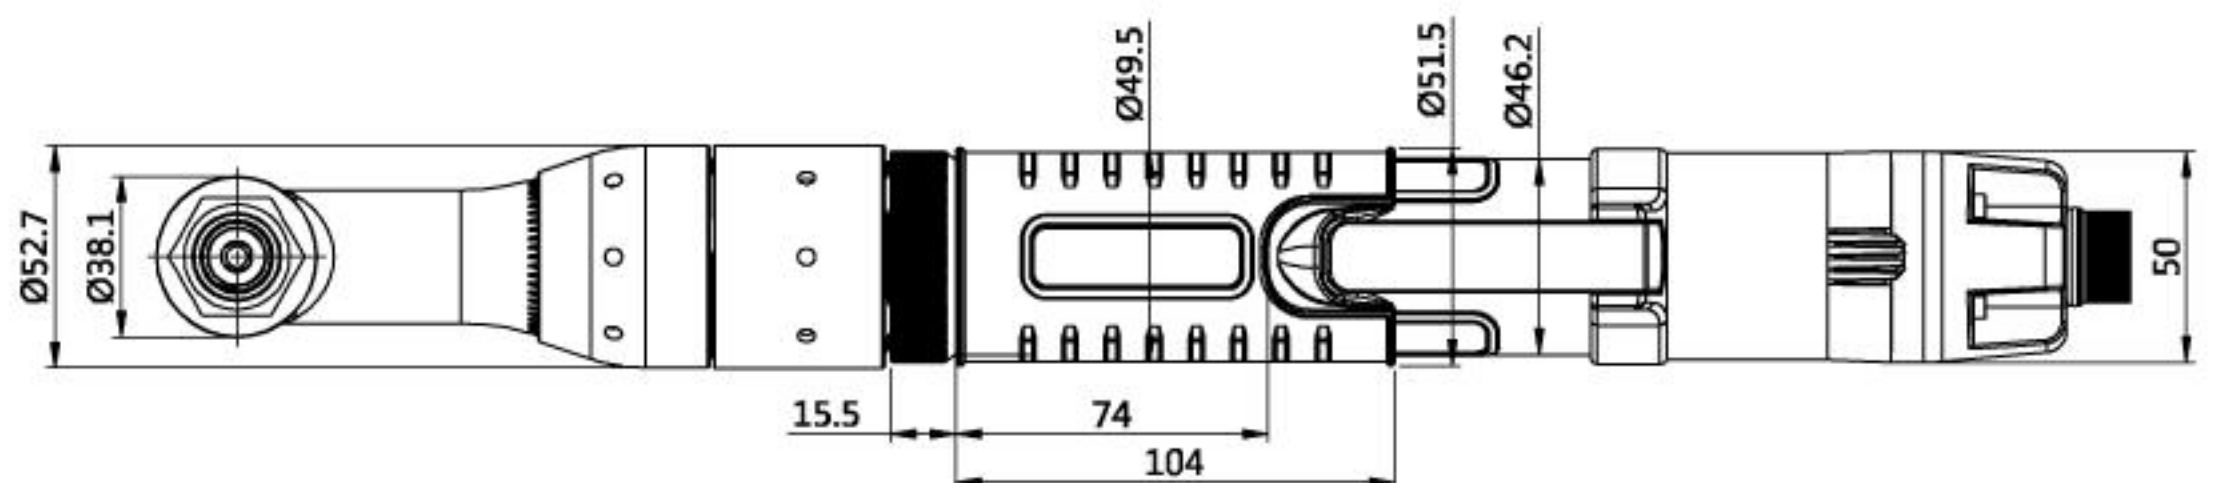

MY-Sirius 25 RA
Unit: mm

Specifications

Model	Input voltage	Torque			Free Speed (r.p.m)	Power Consumption	Weight (g)	Length (mm)	Applicable controller	Bit Type
		(N.m)	(kgf.cm)	(Lbf.in)						
MY-Sirius 3 RA	DC40	0.38 ~ 3	3.88 ~ 30.60	3.36 ~ 26.55	1100~60	90W	1233	356	MY-Sirius	B 9.5 、W3/8"
MY-Sirius 5 RA	DC40	0.63 ~ 5	6.43 ~ 51.00	5.58 ~ 44.26	800~60	90W	1233	356	MY-Sirius	B 9.5 、W3/8"
MY-Sirius 7 RA	DC40	0.88 ~ 7	8.98 ~ 71.40	7.79 ~ 61.96	450~60	90W	1233	356	MY-Sirius	B 9.5 、W3/8"
MY-Sirius 12 RA	DC40	1.5 ~ 12	15.30 ~ 122.40	13.28~ 106.21	600~40	90W	2300	422	MY-Sirius	B 9.5 、W3/8"
MY-Sirius 18 RA	DC40	2.25 ~ 18	22.95 ~ 183.6	19.91~ 159.3	400~30	90W	2300	422	MY-Sirius	B 9.5 、W3/8"
MY-Sirius 25 RA	DC40	3.13 ~ 25	31.93 ~255	27.70 ~ 221.28	250~20	90W	2930	468	MY-Sirius	B 9.5 、W3/8"

※CE、RoHS

