


MY-SAVER Controller Series



External Dimension

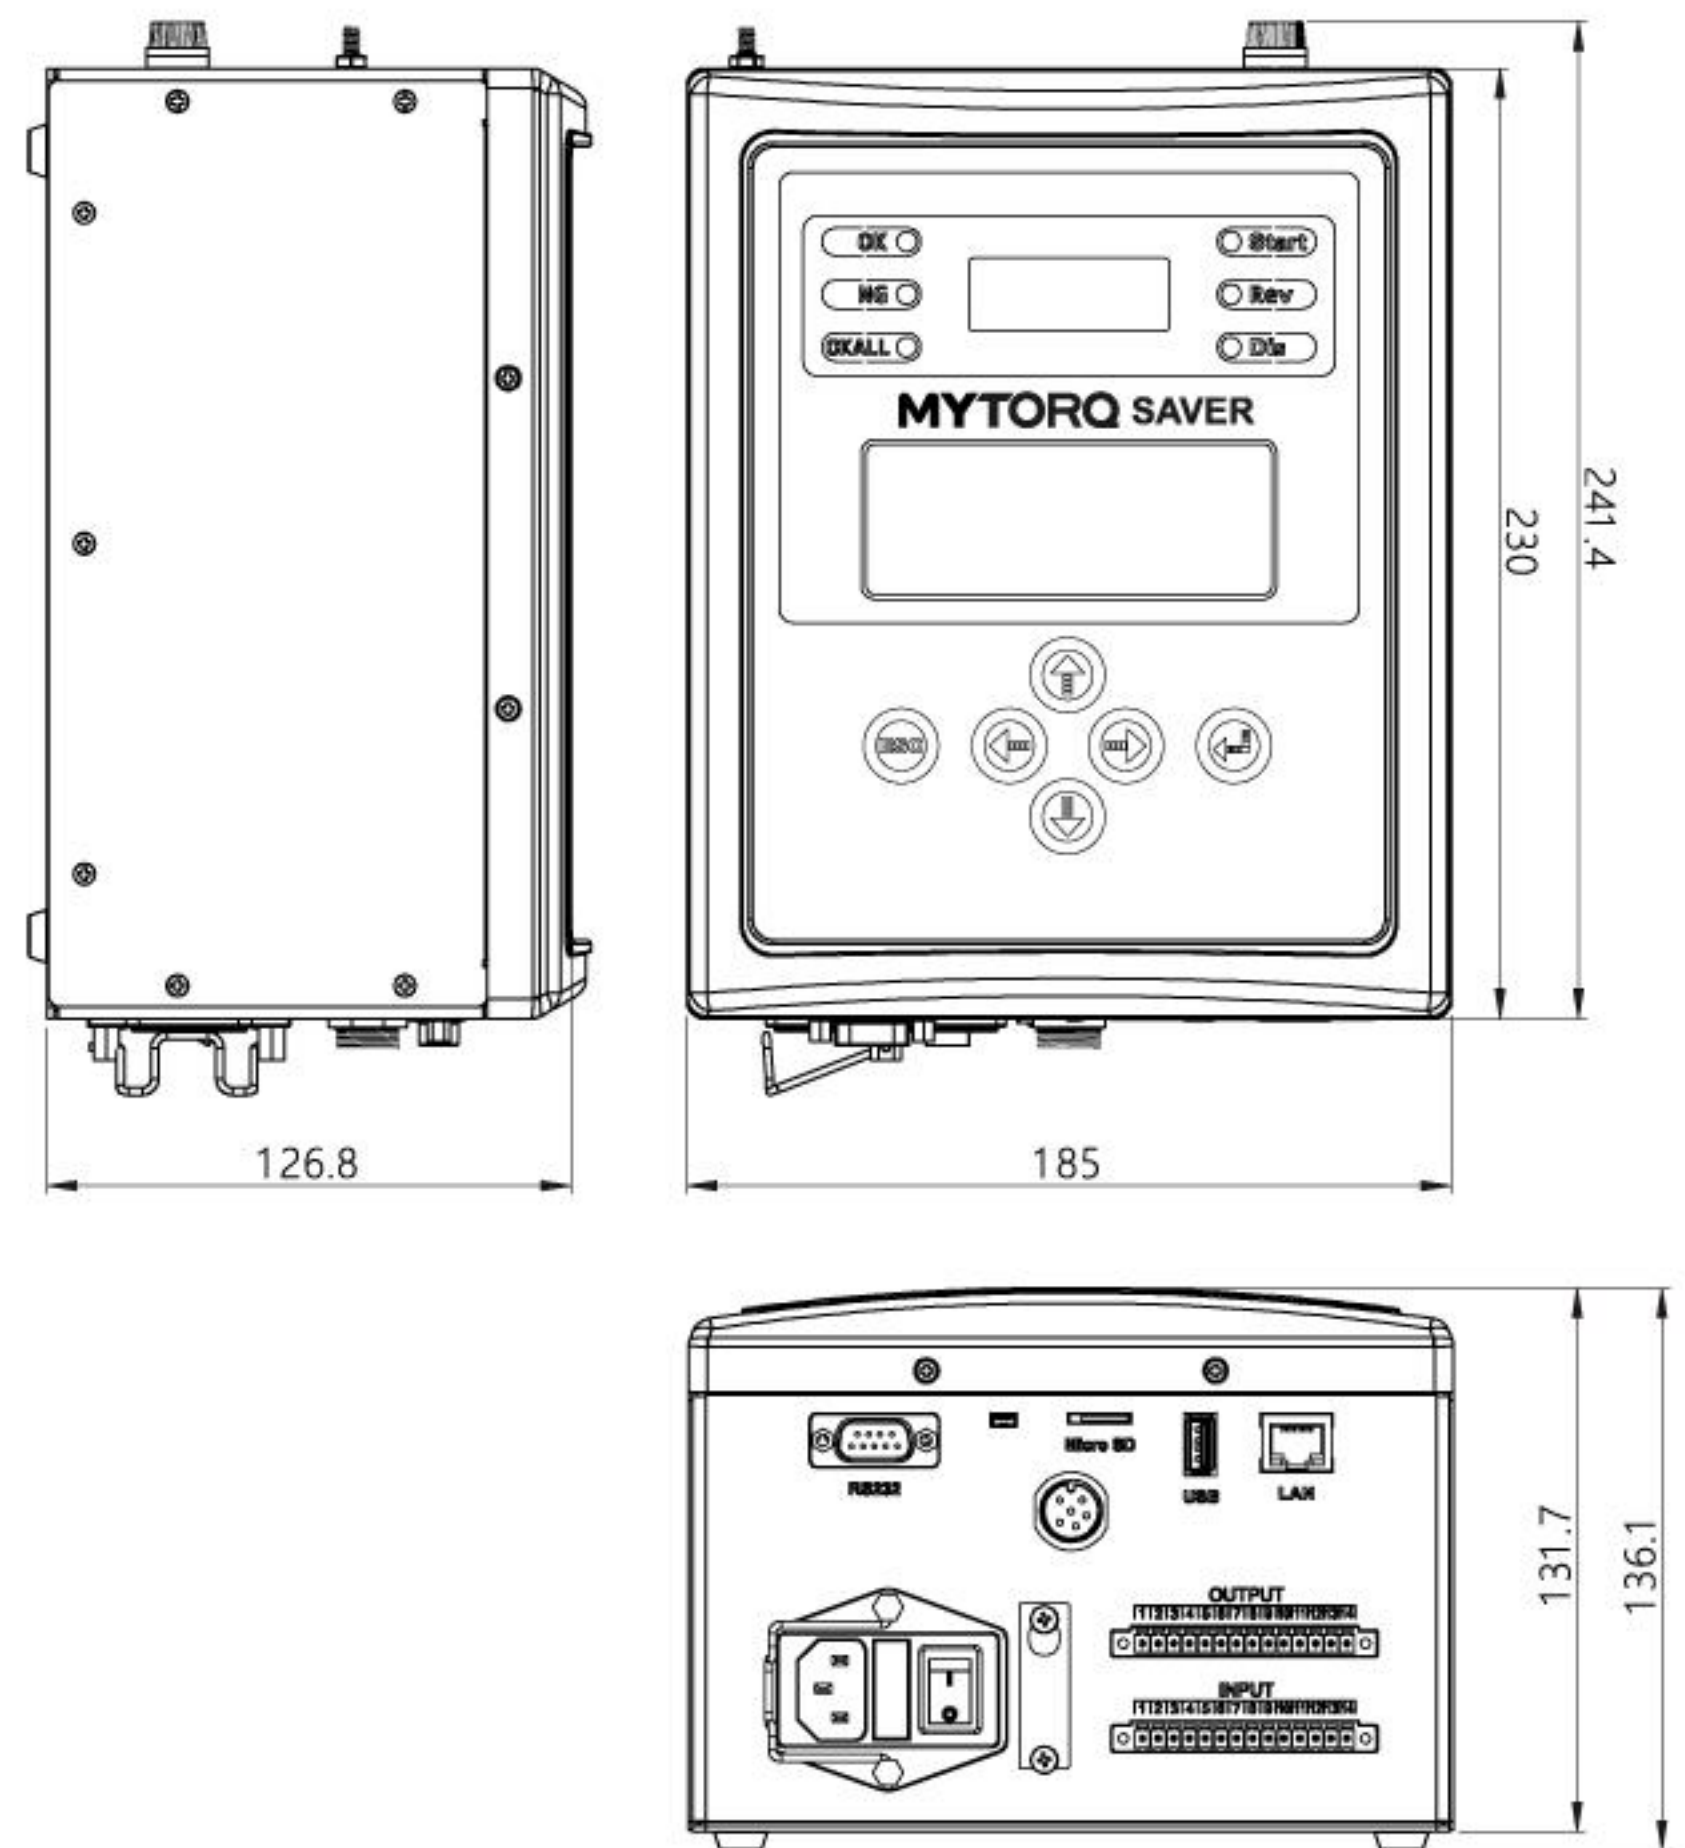

Unit: mm

Features

- RS232/ ethernet interfaces for data collection
- SD card available for temporary data storage (Support 32GB and below)
- Up to 5 rundown steps for process control (Torque / Time / Thread / RPM / Forward / Reverse)
- Save up to 250 steps, 50 sequences & 50 jobs
- Can quickly switch between sequences & jobs, suitable for low volume high mix order
- Preventive maintenance reminder to avoid production down time
- Cost effective torque control screw tightening solution for Industry 4.0
- Free setting program & data acquisition software
- User friendly human machine interface

Specifications

Model	MY-SAVER	MY-SAVER mega
Input Voltage	AC 115 / 230V 50-60Hz	
Output Voltage	DC 40V	
Count	1~99	
Count method	Count-up / Count-down	
Detection torque value	According to the screwdriver specifications	
Detection screw thread number	0.0~999.9	
External connection input	Start / Reverse / Disable / Confirm / Cleared / Gate / Sequence	
External connection output	OK/NG/OK ALL/Start/Reverse	
Serial interface	RS-232 , Micro SD , LAN	
Assembly management	MY-DAS / MY Assembly Office	
External dimensions	241 x 185 x127 (mm)	
Weight(Kg)	3.4 Kg	
Applicable Models	MY-SAVER 1 / 2.4F / 3 mini MY-SAVER 3 / 5 / 7 MY-SAVER 3 / 5 / 7 RA	MY-SAVER 12 / 18 / 25 MY-SAVER 12 / 18 / 25 RA MY-SAVER PISTOL 12 Series