


MY-Sirius Controller



External Dimension

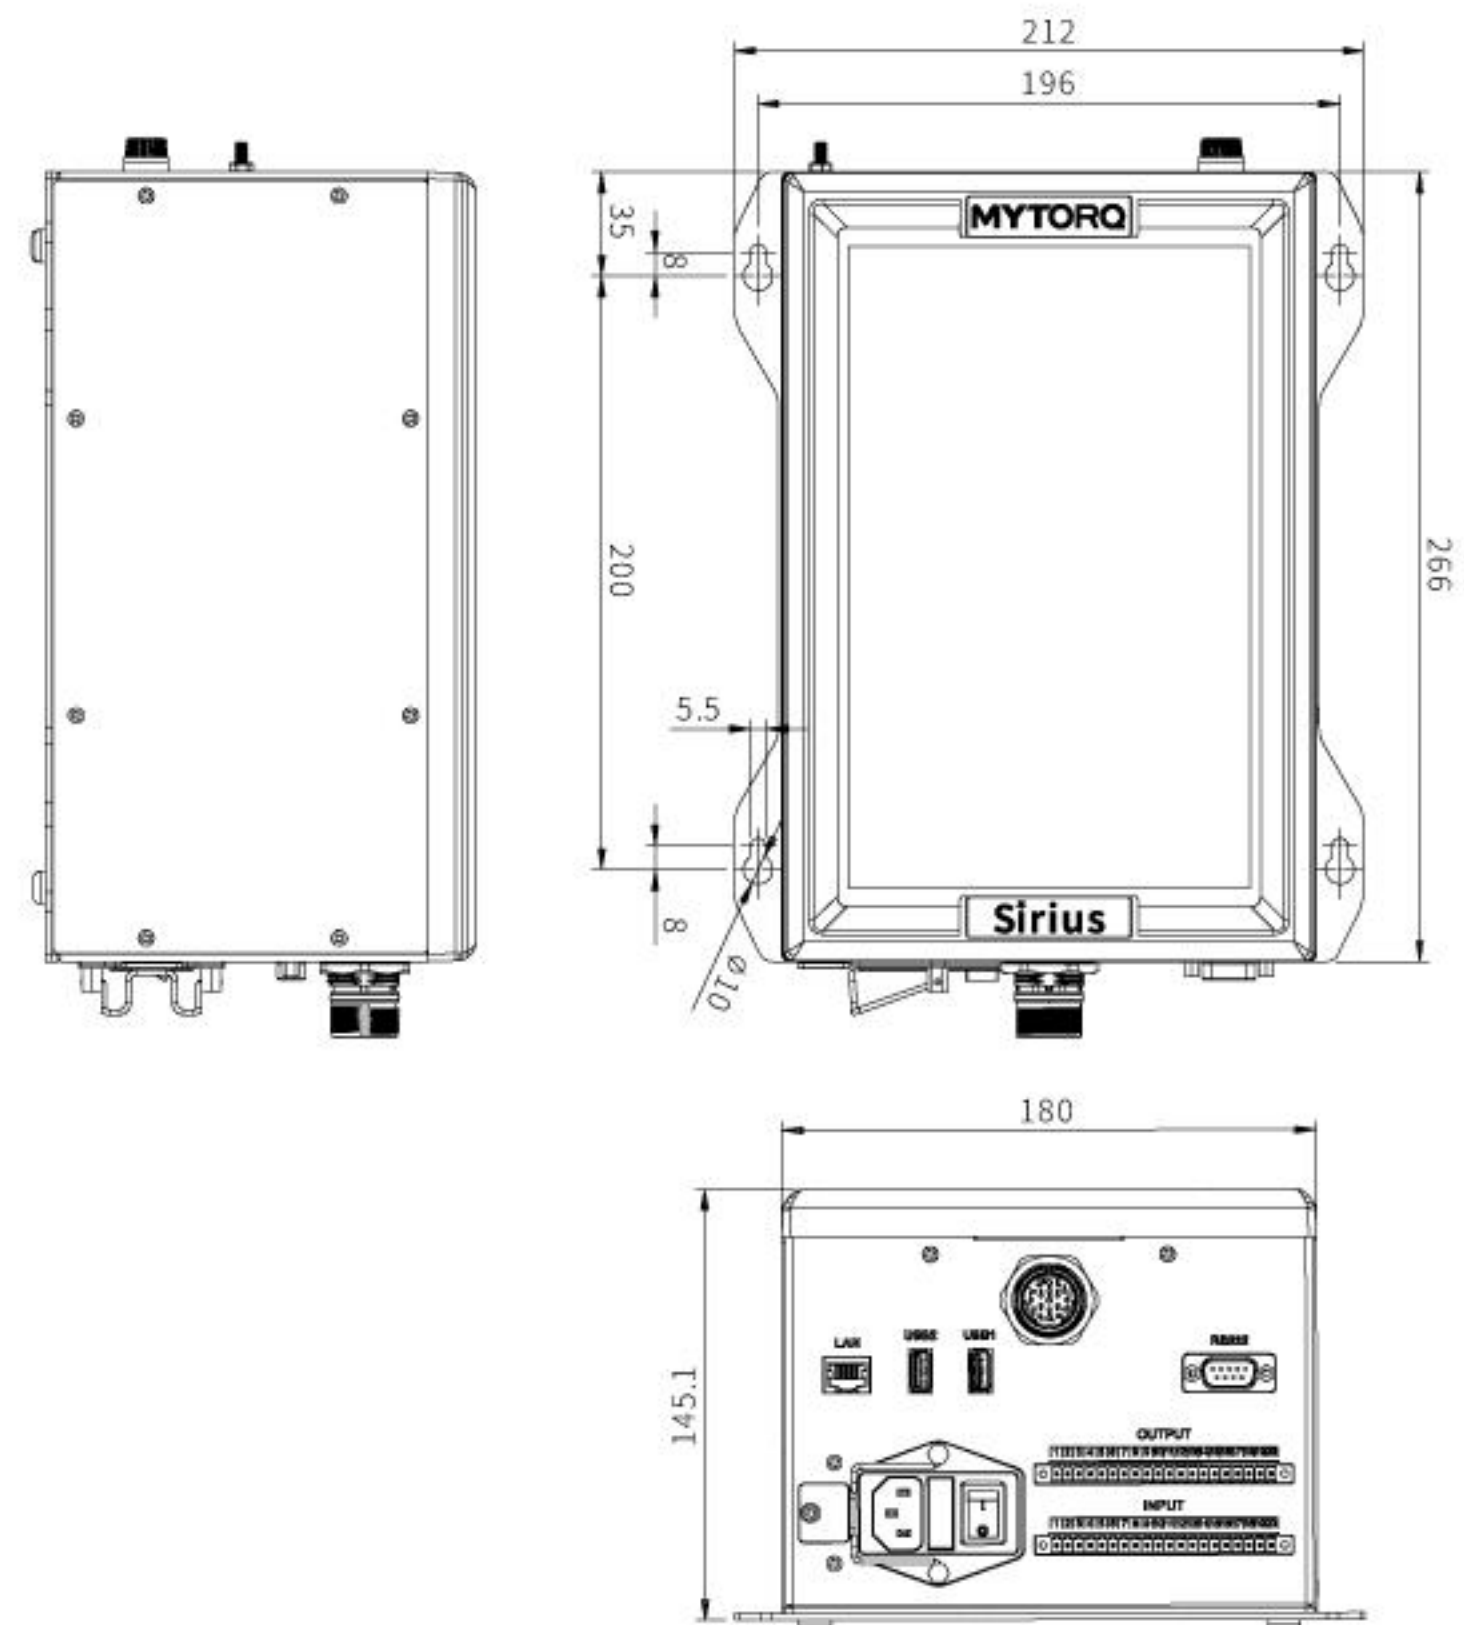

Unit: mm

Features

- Smart transducerized high precision torque & angle control tightening system for industry 4.0
- High-resolution encoder technology enables precise and strict control of screw tightening angle
- < 1% tolerance torque transducer, allows all fasteners to reach target torque with exceptional precision
- User friendly UI design with 10" color LCD touch screen
- Save up to 99 jobs in normal mode and 70 jobs in advanced mode
- Beginner-friendly downshift and threshold settings in normal mode
- 8 available rundown steps to customize your screw rundown process
- Real-time torque & angle control + rundown monitor to achieve in-process tightening control & 0 defect assembly line
- Real-time data collection & rundown down graph
- Save up to 1 million tightening data
- Programmable 9 input & 9 output I/O
- Communication RS232*1 & Ethernet*1
- Protocol: Modbus & MYTORQ open protocol
- Transfer controller settings via FTP/USB
- Compact and ergonomic design for long time operation without hand fatigue
- Rubberized grip provides a non-slip surface to secure hold, absorbs shock and vibration

Specifications

Model	MY-Sirius
Input Voltage	AC 115V / 230V
Input Frequency	50 - 60Hz
Input Current	6.3A
Output Voltage	DC 40V
Output Current	Max 9A
power consumption	360W
External dimensions(mm)	266*180*145
Weight(g)	4080
Applicable Model	MY-Sirius Series MY-Sirius RA Series