

RT 15Q

Sit-on Reach Truck

RT15Q light duty reach truck is designed for light duty application scenario. It adopts 24V battery, EPS system, manual operated multiple-way valve, with capacity of 1500kg, the maximum lifting height is up to 5500mm. It has small turning radius, and is flexible and smart in use. It is applicable to store and stack goods in factories, warehouses, supermarkets, docks and other places.

- 

Robust & reliable design
- 

High operability
- 

High cost performance
- 

Capacity 1500Kg
- 

Easy maintenance
- 

Low noise





Safety, high efficiency and energy saving

Hydraulic system:

Reasonable soft and hard pipe layout ensures heat dissipation, sealing, durability, safety and high efficiency of the hydraulic system.

Mast system:

The mast has the function of moving forward to realize the taking and placing of goods before and after when the truck does not need to move, which is convenient and safe. High strength mast ensures high load capacity of the whole truck.

Energy saving system:

When braking, the motor automatically cuts off power to minimize power consumption and prolong battery working time. The application of regenerative braking technology can effectively reduce the wear of braking system, effectively ensure the safety of braking and high efficiency of energy recovery.


Safety system:

The mast pipeline system is equipped with safety speed limiting valve to effectively control the falling speed of goods. The high standard of technology and high quality materials enable NOBLELIFT forklift to perform excellently even under harsh conditions.

Flexible turning radius

The truck in narrow aisle can safely turn to load and unload goods.

Comfortable driving





Reliable quality and convenient stacking

AC drive system, floating drive axle, electric steering, and high precision gearbox ensure the flexible steering and excellent driving function.



Types		RT15Q		
Door frame		5500mm		
h3 (mm)	Q (kg)			
6000	800	600	500	
5500	1000	800	600	
5000	1100	900	700	
4500	1200	1000	800	
4000	1300	1100	900	
3300	1500	1300	1100	
C (mm)	500	600	700	

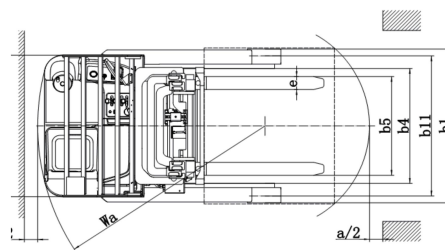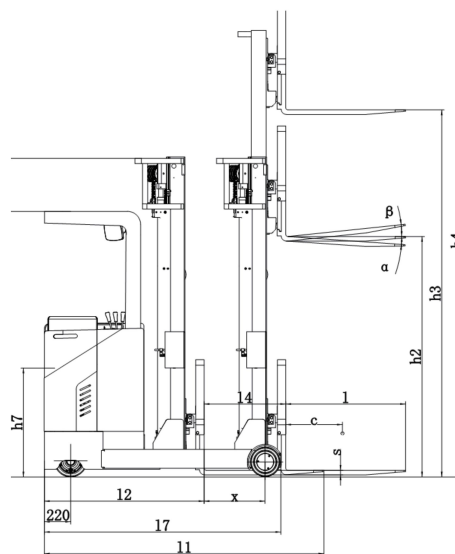

Parameter

Model		RT15Q
Load capacity / rated load	kg	1500
Tilt of fork, forward/backward	deg	2°/-4°
Lift height	mm	5500
Overall width	mm	1184
Aisle width for pallets 1000 x 1200 crossways	mm	2748
Turning radius	mm	1745
Battery voltage, nominal capacity K5	V/Ah	24/400

RT15-20-25ST2

Stand-on Reach Truck Lifting up to 7000mm

The model range of RT15ST2-20ST2-25ST2 Reach Truck is designed for operation in narrow aisles, ideal for storing and retrieving pallets in racks, in medium and large size warehouses.

It features in mast reach and small turning radius, convenient for getting on/off.



Regenerative braking

When you apply brake while driving, regenerative braking helps to minimize energy consumption and extend battery working time.

Mast system

The mast system and cylinder (reinforced) is unified for the full model range, and internal mast also fits sit-down reach truck RT B/P series. The mast reach makes it more convenient and safer to load goods without the movement of chassis. Besides, the high-quality H type channel steel ensures the load capacity of the truck.

Safety

Four-wheel design ensures stronger adaptability to the ground. The hydraulic system is equipped with speed limit valve to effectively control the lowering speed of the loads. With high standard craftsmanship and high quality materials, the truck performs great even under harsh working conditions.



Fork lowering buffering system

The buffering system increases the safety and comfort in fork lowering. The mast ensures perfect visibility.



Electronic control function

Battery power, timing and fault display helps operator to know truck condition and carry out maintenance periodically. Electrical system is waterproof and dustproof. Fully enclosed central control unit with heat dissipation design makes the circuit simpler and more reliable.

Comfortable and attractive design

The newly-designed operating space makes it more comfortable to operate.

Global brands configuration

Fully AC system, with standard electric power steering(EPS), Schabmüller steering motor from Germany; Multi valves and gear pump from Shimadzu, profile imported from Germany.

Hydraulic system

The high-end connectors, hoses and wear-resistant, high-temperature resistant and highly flexible seals of international brands, as well as the reasonable layout of all the pipes, ensure the sealing, durability, safety and efficiency of the entire hydraulic system.

Parameter

Model		RT15-ST2	RT20-ST2	RT25-ST2
Load capacity / rated load	kg	1500	2000	2500
Tilt of fork, forward/backward	deg	4°/-2°	4°/-2°	4°/-2°
Lift height	mm	7000	7000	7000
Overall width	mm	1100	1100	1100

Aisle width for pallets 1000 x 1200 crossways	mm	2760	2830	2920
Turning radius	mm	1685	1770	1885
Battery voltage, nominal capacity K5	V/Ah	48/280	48/350	48/420

RT15DP Double Reach

RT15/20SP Single Reach

Stand-on Scissor Reach Truck

Superior Efficiency

- ▶ Effortless 360° in situ steering in confined space is available thanks to small turning radius.
- ▶ Compact chassis allows easy access to narrow aisle applications.
- ▶ Small and short load wheels facilitate access to multiple mast height configurations between racks, making it easy to use in warehouses and racks of different sizes.
- ▶ Versatile battery capacities for various travel distances and running times.
- ▶ Optional driving modes for versatile scenarios.
- ▶ Enhanced efficiency with swift lifting and travelling.

Safety and Reliability

- ▶ Automatic deceleration when cornering prevents accidents.
- ▶ Adaptive safety load-sensing system adjusts lifting height based on load capacity.
- ▶ Dual foot pedals for high efficiency and safety.
- ▶ Automatic fork leveling function, safe and efficient.
- ▶ Fully proportional hydraulic control for precision and durability.
- ▶ The cab's full wraparound design ensures driver safety.

Quick and Easy Maintenance

- ▶ The integrated battery is conveniently located in the middle of the chassis, facilitating easy removal, inspection, or replacement.
- ▶ The chassis door is easily accessible for viewing internal issues, inspections, and replacements.
- ▶ All components are methodically arranged, ensuring effortless part identification during service checks.



High-performance Scissor Structure


- ▶ The scissor structure is highly robust and stable, enabling a smooth reaching of the forks while minimizing vibrations and rocking.
- ▶ The conversion between movements is seamlessly achieved through the equilibrium of shear force, delivering substantial torque. When raised to a height of 10.5 meters, it can effortlessly lift loads of up to 1.2 tons.
- ▶ The scissor mechanism seamlessly adjusts and neatly folds, significantly minimizing the truck's footprint and maximizing space utilization.

Ergonomic Design

- ▶ Enhanced mast structure design and optimized cylinder and chain arrangement for a better view.
- ▶ Spacious standing platform accommodating various personnel.
- ▶ Convenient standing platform height for easy boarding.
- ▶ Comfortable waist and elbow support to alleviate driver fatigue.
- ▶ Integrated shock absorption on the standing platform for a smoother ride.
- ▶ Newly improved roof guard for an expanded upward view.
- ▶ Ergonomically designed multifunctional integrated handle.
- ▶ Versatile functions including warning lights, illumination, and blue lights.

Excellent Stability

- ▶ One-touch leveling function ensures stable loading and unloading of goods from the shelves.
- ▶ The end-of-scissor retraction includes cushioning for reduced impact and improved stability.



Parameter

Model		RT15DP	RT15SP	RT20SP
Load capacity	kg	1500	1500	2000
Tilt of fork, forward/backward	deg	3/4	3/4	3/4
Width Overall	mm	1080	1080	1080
Track width	mm	800	800	800
Width Across Forks	mm	200-760	200-760	240-760
Reach	mm	1060	570	570



The image shows a Noblelith RT16Li lithium battery reach truck in a warehouse environment. The truck is primarily orange and black. It features a high mast with the 'NOBLELIFT' logo at the top. The operator's cab is enclosed with a protective frame. The truck is positioned in front of tall industrial shelving units.

RT16Li

Lithium battery reach truck

Lithium battery ride-on reach truck RT16Li with unique design. The cabin adopts four columns to penetrate the frame which is both beautiful and safe. Wide field of vision and driving space, high elastic shock-absorbing seats, give a unique driving pleasure.

The German 6.4kW three-phase AC drive motor and the American controller are selected to ensure stronger vehicle power and smoother acceleration and deceleration. At the same time, it is equipped with EPS electronic power steering system for easy steering. The 180°/360° steering mode can be switched in real time with the German thumb switch, centralized type central console, fingertip operation, convenient and precise, ensuring high efficiency and driving comfort. Multi-function LCD instrument can display steering wheel position, battery power, power alarm, fault code, running time, driving speed and other information.

Suspension seat

The highly elastic shock-absorbing seat greatly reduces the transmission of vibration to the driver. At the same time, the combination of the automotive-grade bionic curved backrest can effectively reduce the driver's driving fatigue; the seat can be adjusted in multiple positions to meet the operation of different heights and body shapes. According to the needs of users, this car adopts lithium battery which can be charged quickly to meet the requirements of multi-shift working system. The steering wheel and center console can be adjusted freely in all directions to adapt to your best operating habits.

High performance guarantees high efficiency



The AC variable frequency speed control technology enables the driving, hoisting, and steering drive to realize stepless closed-loop speed control, which is accurate and reliable. Electro-hydraulic proportional control system, good fretting performance, more stable work and more precise control.

Enjoy the driving experience





Multi-function LCD instrument can display steering wheel position, battery power, power alarm, fault code, running time, driving speed and other information.



The multi-function password lock can manually enter the password or swipe the card to start, which simplifies the authorization operation process and meets the requirements of multi-shift work.



Multifunctional armrest, German thumb switch, direction switch, EPS electronic power steering system, horn switch, emergency power off switch, etc., realize fingertip operation, convenient and accurate.



Suspension seat The highly elastic shock-absorbing seat greatly reduces the transmission of vibration to the driver. At the same time, the combination of the automotive-grade bionic curved backrest can effectively reduce the driver's driving fatigue; the seat can be adjusted in multiple positions to meet the operation of different heights and body shapes. user needs.



Wide vision and driving space, ergonomic layout, embodies the humanized design.



Spacious foot space allows any operator to find a comfortable position and ensures adequate comfort during operation throughout the shift.



Parameter

Model		RT16Li
Load capacity / rated load	kg	1600
Tilt of fork, forward/backward	deg	4°/-2°
Lift height	mm	9500
Overall width	mm	1270
Aisle width for pallets 1000 x 1200 crossways	mm	2770
Turning radius	mm	1650
Battery voltage, nominal capacity K5	V/Ah	48/350



RT16/20Pro RT16/20B

Lifting height up to 9500mm

Comfortable driving and easy operation


Safe and reliable:

- The tilting of the fork can effectively improve the stability of the whole vehicle and the loading capacity at height.
- The electro-hydraulic proportional control system has good fretting performance, more stable work and more precise control.
- Speed limit function, when the forklift lifts to a certain height, the driving speed of the forklift will automatically decrease to ensure the safety of high position operation.
- The height limit function, the lifting motor will automatically power off to ensure the safety of lifting when the forks lift to the maximum height.
- Turning speed limit control prevents the truck from tipping sideways when turning, ensuring the safety of the truck when turning.
- Smooth deceleration when the mast reaches/backwards to the end can ensure the stability of the mast movement.
- The motor temperature detection and control can effectively prevent the motor from being damaged due to excessive temperature.
- The motor current detection and control can effectively prevent the motor from being damaged due to excessive current.
- The combination of electromagnetic brake and hydraulic brake has a short braking distance, no deviation, no impact, and is safe and reliable.
- The parking electromagnetic brake can realize the one-key start operation function no matter it is on the slope or on the smooth ground.
- Using CAN bus communication technology, electrical wiring is simple, the compatibility is good, and the reliability is high.
- AC frequency conversion speed control technology enables stepless closed-loop speed control of driving, lifting, and steering drives, which is accurate and reliable.

Energy efficient:

- High-speed lifting and lowering control improves your work efficiency.
- It adopts AC drive motor, hydraulic pump motor and steering motor, with long service life, maintenance-free and reliable performance.
- Regenerative braking to achieve energy recovery and extend battery life.
- All lights use LED, durable and energy-saving.

Robust Design & Excellent Stability



The powerful chassis structure and reasonable center of mass distribution make the forklift have excellent stability.




The large arc of the back wall of the chassis coincides with the turning radius of the vehicle, which is beautiful and has a small turning radius.



The reasonable layout of the lifting cylinder and pipeline system, the mast pipeline is simple and beautiful, and the vision is good.



The high-precision forward sliding rail and excellent clearance compensation design make the forward movement of the masts more stable.



Optional function



◀ Side battery extraction.

▶ HD video camera.



◀ Electronic height preselected system.



▶ Integrated side-shift.



Comfortable driving and easy operation



Low-noise gear hydraulic pump reduces the lifting noise of the whole vehicle. Travel motor controllers, hydraulic pump motor controllers and steering motor controllers of international well-known brands are self-protected, maintenance-free, and have superior performance.



Multi-function color LCD instrument can display information such as steering wheel position, battery power, power alarm, fault code, running time, driving speed etc. The driving speeds of low, medium and high third gear can be set through the meter.



Shock-absorbing seat, adjustable backrest, and seat belt as standard.




The spacious driving space and ergonomic layout reflect the humanized design of the vehicle.



Adopting AC EPS electronic power steering system, the steering is light and has automatic centering function, and the 180°/360° steering mode can be switched in real time.




Centralized control console, fingertip operation, convenient and accurate.



In order to replace the battery its tray should be reached forwards. The mechanism for battery's tray release is located near with operator's foot.



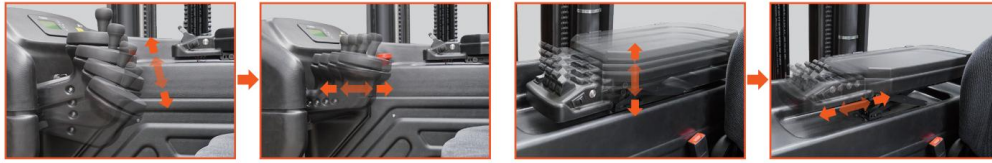

The steering wheel and central control console can be adjusted freely in all directions to suit your best operating habits.



Parameter

Model		RT16Pro	RT20Pro	RT16B	RT20B
Load capacity / rated load	kg	1600	2000	1600	2000
Tilt of fork, forward/backward	deg	4°/-2°	4°/-2°	4°/-2°	4°/-2°
Lift height	mm	9500	9500	9500	9500
Overall width	mm	1270	1270	1270	1270

Aisle width for pallets 1000 x 1200 crossways	mm	2720	2840	2720	2840
Turning radius	mm	1650	1750	1650	1750
Battery voltage, nominal capacity K5	V/Ah	48/420,560	48/560	48/420,560	48/560

RT20PH


RT Series Sit-on Reach Truck with capacity 2000kg Lifting height up to 13500mm

Safe and reliable:

- The tilting of the fork can effectively improve the stability of the whole vehicle and the loading capacity at height.
- The electro-hydraulic proportional control system has good fretting performance, more stable work and more precise control.
- Speed limit function, when the forklift lifts to a certain height, the driving speed of the forklift will automatically decrease to ensure the safety of high position operation.
- The height limit function, the lifting motor will automatically power off to ensure the safety of lifting when the forks lift to the maximum height.
- Turning speed limit control prevents the truck from tipping sideways when turning, ensuring the safety of the truck when turning.
- Smooth deceleration when the mast reaches/backwards to the end can ensure the stability of the mast movement.
- The motor temperature detection and control can effectively prevent the motor from being damaged due to excessive temperature.
- The motor current detection and control can effectively prevent the motor from being damaged due to excessive current.
- The combination of electromagnetic brake and hydraulic brake has a short braking distance, no deviation, no impact, and is safe and reliable.
- The parking electromagnetic brake can realize the one-key start operation function no matter it is on the slope or on the smooth ground.
- Using CAN bus communication technology, electrical wiring is simple, the compatibility is good, and the reliability is high.
- AC frequency conversion speed control technology enables stepless closed-loop speed control of driving, lifting, and steering drives, which is accurate and reliable.

Energy efficient:

- High-speed lifting and lowering control improves your work efficiency.
- It adopts AC drive motor, hydraulic pump motor and steering motor, with long service life, maintenance-free and reliable performance.
- Regenerative braking to achieve energy recovery and extend battery life.
- All lights use LED, durable and energy-saving.

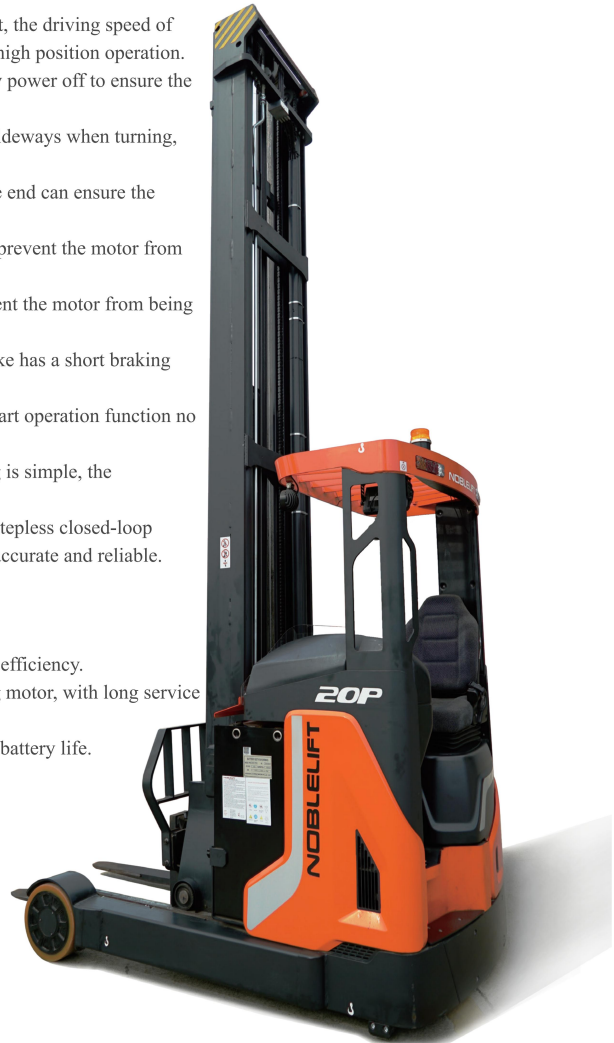



Parameter

Model		RT20ProH
Load capacity	kg	2000
Tilt of fork, forward/backward	deg	4°/-2°
Lift height	mm	12500
Overall width	mm	1430

Aisle width for pallets 1000 x 1200 crossways	mm	2975
Turning radius	mm	1840
Battery voltage, nominal capacity K5	V/Ah	48/700

RT16/20P-CS

Cold Storage Reach Truck with Cab



Features:

- Drive motor (low-temperature)
- Pump motor (low-temperature)
- Display (low-temperature)
- Waterproof harness
- Waterproof control box
- High traction wheel
- Waterproof electromagnetic brake
- Heated seats
- Heated glass
- Heater

 Small Turning Radius	 Capacity 1600/2000Kg	 Easy Maintenance
 Powerful Battery	 Robust Design	 Low noise



Parameter

Model		RT16-CS	RT20-CS
Load capacity/rated load	kg	1600	2000
Tilt of fork, forward/backward	deg	4°/-2°	4°/-2°
Lift height	mm	9500	9500
Overall width	mm	1270	1270

Aisle width for pallets 1000 x 1200 crossways	mm	2770	2890
Turning radius	mm	1700	1800
Battery voltage, nominal capacity K5	V/Ah	48/420, 560	48/560

OPX 15

**NOBLELIFT Man-down
Very Narrow Aisle(VNA) Truck**



· High flexibility

The fork can rotate left and right, so the truck can drive into the aisle without turning, making it very flexible and convenient to pick up goods.

· High Efficiency

Compared with the reach truck, it can save 35% warehouse space. And compared with the counterbalanced truck, it can save 50% warehouse space.



· High Performance

The truck adopts powerful high quality AC drive system and big capacity battery, and can be used for long time and multiple shifts.

· High Intelligent

The multi-function display shows information like parking brake, driving direction, driving speed, hour meter, fault code and so on.

· High Ergonomic

The finger-tip hydraulic control and adjustable steering wheel improve the working efficiency. The high suspension seat greatly reduces the vibration transmission to the driver.



· High Rigidity

The truck has strong chassis, VNA forklift dedicated door frame system, high precision transverse slide rail and excellent gap compensation design, making material stacking more stable.

Parameter

Model		OPX15
Load Capacity/ rated load	kg	1500
Lift height	mm	5500/6500/7500/8500/9500/10500/11500/12500/13000
Overall width	mm	1270/1520
Aisle width for pallets 1200×800	mm	1700
Turning radius	mm	2100
Battery voltage, nominal capacity K5	V/Ah	48/900