

T30-60Q

Sit-on Tow Tractor

Usually used for material traction in airports, stations, workshops and warehouses. It is used as an important transportation tool for baggage traction, regional logistics and circulation.

The truck is designed with compact structure, good maneuverability, and suitable for narrow operation. It's powerful, stable and reliable in operation.

Rubber shock absorption is adopted for both front and rear axles, greatly improving the driving experience and effectively reducing the vehicle vibration on the operator.



NOBLELIFT

www.noblelift.com

T30-60Q

Sit-on Tow Tractor



NEW *Noblelift Products*
ARRIVAL

Features of T30-60Q Sit-on Tow Tractor



Rearview mirrors and steering wheel

The rearview mirrors on both sides provide a good view. Specially designed steering wheel greatly reduces the operator's steering force when driving, and effectively alleviates driving fatigue after long-term operation.




Drive motor and battery

Highly efficient AC drive motor and large capacity battery to meet with demand of long working hours.




Coasting button

The coasting button is convenient for fine adjustment.



Storage bag and battery cover

Storage bag can be used for carrying tools. The truck is also equipped with a convenient battery cover latch.



Blue light

The standard blue light is not only used for turning forward, but also for turning back.




Three traction couplers

The reinforced couplers can be set as three heights so as to ensure reliable connection to various trailers to meet different needs of working conditions.



Spacious driving space

Spacious driving space and rubber pedals provide the operator with more convenience and comfort.



Multifunction instrument

Standard multifunction instrument cluster displays battery status, travel speed, and other information.

Parameter

Manufacturer's type designation		T30Q	T60Q
Load capacity/rated load	Q(kg)	3	6

Service weight incl. battery(see line 6.5)	kg	1080	1245
Seat height	h7	980	980
Overall width	b1(mm)	996	996
Turning radius	Wa(mm)	1590	1680
Battery voltage,nominal capacity K5	V/Ah	Pb-acid: 48/240; 48/270; 48/300	Pb-acid: 48/320; 48/360; 48/400

TE 10Li

Electric Tow Tractor





Robust Design



High-performance lithium battery



Cost-effective



Capacity 1000Kg



Easy Maintenance



Low noise



The TE10Li is an entry-level electric tractor for all light-duty works. Compactness and portability are the core of TE10Li philosophy. With an ultra-compact footprint, it can move freely through complex scenarios such as supermarkets, factories, hospitals and airports. The effortlessly replaceable plug-and-play Li-ion battery provides a solid guarantee of continuous operation when it is required; moreover, the maximum weight of the battery is only approx. 8 kg, everyone can replace the battery within seconds.

Compact in appearance but mighty in power. Thanks to the battery's high energy density and the durable drive axle, the TE10Li can move loads of a staggering 1000KG, covering almost all light industrial demands.

Being User-friendly is the design purpose of the TE10Li. The innovative handle adjustment mechanism and low-speed mode allow the operator to adjust the height of the handle and reduce the running speed rapidly, based on application needs. Ergonomically designed handle ensures operation comfort.

The truck is equipped with an emergency reverse button, which forces the truck to move in reverse in case an operator is jammed in confined area, minimizing the risk of injuries. The truck is equipped with detachable coupling arm having stepless height adjustment, with its pivot point close to wheelbase making maneuverability higher. Various options of available couplings, including electric coupling, ensure that TE10Li is suitable for broad applications. The existing structure also allows to design and connect any custom-type of hook, if required.

USER-FRIENDLY AND SAFE



ERGONOMIC BUTTONS

The ergonomically designed buttons are comfortable for operation. In terms of functionality, there is also a slow speed mode, an emergency reverse function and a horn switch, which is perfectly fitted to the demands of users.

ADJUSTABLE TILLER

The height of tiller can be freely adjusted, making it easy to adapt the truck to the habits of different operators.



PIN CODE PANEL



CASTORS



WHEEL GUARD

MULTIPLE SELECTION OF COUPLINGS

The TF10L's couplings are designed to maximize the user satisfaction in differ-

The TELETRAC couplings are designed to maximize the user satisfaction in different scenarios.



STANDARD MANUAL COUPLING

The standard coupling with effective height of hooking plate 25 mm is customizable through repositioning of clamping bracket within the nominal range 5-60 mm, the decoupling is prevented with help of spring loaded pin with manual release, which position is adjustable through reposition to one of the available holes.



PIN COUPLING (OPTIONAL)

The pin coupling is equipped with top holding spring loaded bracket, preventing decoupling. The diameter of pin is 20 mm, available nominal height of pin under the holding bracket is 70 mm.



LKE COUPLING (OPTIONAL)

The coupling for LKE pin connectors.



ELECTRIC COUPLING (OPTIONAL)

The coupling is equipped with linear actuator allowing to make coupling/decoupling operations from the tiller of towing tractor. The clamping distance is available in a nominal range of 20-60 mm. The effective height of hooking plate is 25 mm. The limiting bolt located on movable plate allows to prevent decoupling of trolley to the top, its position is adjustable according to your needs via repositioning to one of the available holes.



CUSTOMIZED COUPLINGS

Design your own coupling or request it from us.

Coupling arm is included to the standard supply set, it can be fixed with towing tractor and adjusted vertically on its sliding guides steplessly. It is equipped with centering spring on rotating hinge. The arm can be mounted to the towing tractor by its either flange depending on your application needs.

To the free end of coupling arm a coupling can be mounted. Refer to selection of offered couplings (standard and optional); it is also possible to install customized couplings which can be mounted to the flange with help of M8 screws. The pattern of holes is 60x60 mm diameter 8,5 mm.





The drive axle with differential mechanism provides smooth and effortless steering while driving with consistent transfer of torque from motor to both wheels in any time; Moreover, a steady acceleration of the truck can be achieved with the help of the electronic control system.



Soft rubber non-marking solid wheels ensure high traction with various ground surfaces, making truck having a great grip during the operation and supplying consistent towing force.

Parameter

Manufacturer's type designation		TE10Li
Load Capacity / rated load	Q(t)	1
Rated drawbar pull	F(N)	200
Wheelbase	Y(mm)	325
Service weight(without battery)	kg	67
Overall length	ll (mm)	915
Overall width	bl (mm)	503
Turning radius	Wa (mm)	560
Battery voltage, nominal capacity K5	V/Ah	24/36

T30N/50N

Stand-on tow tractor

Rated capacity:

3000kg/5000kg



T30N/50N

T30N/50N is a stand-on tow tractor equipped with German three-phase AC drive motor and Italian ZAPI controller which ensures strong power and smooth acceleration and deceleration. Electric Power Steering(EPS) and German REMA handle ensures high efficiency and provides excellent driving experience.

4-point stucture with floating platform and rubber pad helps to minimize vibration. Automotive grade curved backrest can reduce worker's fatigue greatly. Side extraction allows for fast replacement of battery so as to fulfill the needs of multi shifts.

Other options available include extension bracket, warning light, blue spot light, electric coupling, big storage tray, double USB charging ports,storage tray etc. which helps to make your work easier and more efficient.



Other optional parts



A variety of expansion brackets can be selected to meet the installation requirements of different expansion equipment, such as: WMS display, barcode scanner, storage box, folder board, etc.



Steering light, brake light and parking light make driving safer.

The reinforced couplers can be set at three different heights so as to ensure the reliable connection to various trailers.



T50N

- Rated capacity:5t
- Rated pulling capacity:1000N
- Travel speed(laden/unladen):7/12 km/h
- Drive unit:2.6kW
- Standard 24V465Ah lead acid battery
- Wheels' number 1x+2/2(x=driven wheels)

T50N




T30N



T30N

- Rated capacity:3t
- Rated pulling capacity:800N
- Travel speed(laden/unladen):6/9km/h
- Drive unit:1.9kW
- Standard 24V375Ahlead acid battery
- Wheels' number1x+2(x=driven wheels)

Display whole truck condition information via control instrument and multifunctional handle





The multifunctional control instrument can display truck conditions, battery capacity, working time, travel speed and steering angle. When something goes wrong, the outer ring light of the instrument will turn to red from green, and the fault code will be displayed.

pin code switch can set multiply start passwords, the ID card is also supported to start the truck.



German REMA multifunctional handle

Reliable and ergonomically designed Rema handle, each button can be easily reached and controlled, which makes driving more comfortable.



USB charging port

Double USB charging port power up more equipment.

Robust and durable structure, high power and efficient driving technology




German AC drive technology

AC drive system performs perfectly thanks to the powerful Schabmüller maintenance free AC motor and Kordel gearbox imported from Germany, regardless of smooth or fast acceleration.



Italian Zapi controller

The Italian Zapi drive controller provides clients with reliable, flexible and high-performance control system solution.

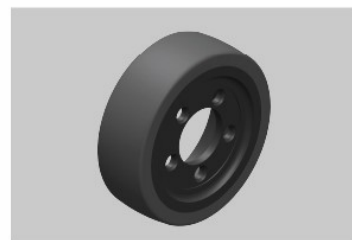

German drive wheel tyre delivers much longer service life with high loading capacity and extraordinary abrasive resistance.

Safe and comfortable, easy storage



Safety flanks and non-slip surface materials on both sides of the backrest ensure the operator not to be thrown off while the truck turns at high speed. This design greatly improves the safety of driving. Meanwhile, the handle above the backrest provides a grasping point for the operator while getting on/off the truck, provides superior comfort for the operator.



Double storage tray can separate storage tools or garbage, makes work more efficient.



Large storage tray can be used for storing stretch film, art knife, marker pen, or other tools.



The standard blue light is not only automatically activated when the truck is driving forward, but also turns simultaneously with the handle while steering, which will increase the safety of operation.

Well-designed and easy to maintain





The coasting button on both sides of the truck and emergency stop button allow the operator to operate truck forward/backward while walking beside. There is no need to get in and out of the truck frequently to operate it. At the same time, it reduces the speed while driving forward/backwards under coasting mode, making the traction safer and more efficient.



Sideways battery exchange compartment plus adjustable handling bracket makes battery replacement easier and quicker.



Suspension castors from both side make the vehicle run more smoothly and safely.



Warning light makes driving safer.

Parameter

Manufacturer's type designation		T30N	T50N
Load Capacity / rated load	Q(t)	3	5
Rated drawbar pull	F(N)	800	1000
Wheelbase	Y(mm)	1155	1155
Service weight(incl. battery)	kg	950	1020
Overall length	l_1 (mm)	1429	1429
Overall width	b_1 (mm)	810	810
Turning radius	Wa (mm)	1333	1333
Battery voltage, nominal capacity K5	V/Ah	24/375	24/465