



OLE-200 is equipped with a high-performance drive motor and controller, ensuring strong power, smooth acceleration and deceleration. It also features electronic power steering and a multifunctional handle, guaranteeing efficient picking performance and driving comfort.

The four-point shock-absorbing floating pedals and shock-absorbing rubber foot mats significantly reduce vibration transmission to the driver. Additionally, the ergonomically designed curved backrest effectively reduces driver fatigue.

This car also provides varies of configurations, for instance expansion bracket, warning light, blue light, large capacity storage tray and USB connector. Comprehensive upgrade of functions to achieve easier and more efficient picking operation.

RELIABLE & ERGONOMIC



multi-function handle and control system. Each button can be easily reached and controlled, making driving and operation more comfortable.



Large storage tray can be used for storing stretch film, cutter knife, marker pen, or other tools.

MULTIFUNCTION

The multifunctional control instrument can display truck conditions, battery capacity, working time, travel speed and steering angle.



The standard pin code switch can set several starting passwords, and ID card is also applicable to start the truck.



USB charging port, providing power for more devices.

SAFETY



The standard blue light not only automatically turns on when the vehicle moves forward, enhancing operational safety.



Safety flanks and anti-slip materials greatly improve the driving safety. The handle above the backrest provides better comfort for the operator to get on and off the vehicle and reverse the car.

EFFICIENCY



Side-out battery design, along with a height-adjustable handling trolley to ensure easier and quicker battery change.



The jog button on both sides of the truck allows the operator to operate the truck forward/backward or lift the fork while walking beside.



Parameter

Manufacturer's type designation		OLE-200
Load capacity/rated load	Q(kg)	2000
Net weight without battery	kg	1180

Lift	mm	115
Height of tiller	mm	1280
Overall width	mm	810
Turning radius	mm	2965
Battery voltage,nominal capacity K5	V/Ah	24 / 375

OPL25N

Low-level Order picker

OPL25N is a low-level order picker that has strong power and better stability when increasing or decreasing speed thanks to the German AC drive and Italian Controller. Plus its electric steering system and German REMA multi-functional handle make it has high working efficiency and driving comfort.

Fully upgraded features make picking easier and more efficient and it provides various optional configurations such as extension bracket, caution light, blue light, entry rollers, storage tray, double USB charging port. etc.



Display Whole Truck Condition Information Via Control Instrument & Multifunctional Handle



German REMA multifunctional handle

Reliable and ergonomically designed REMA handle, which makes driving more comfortable.



Usb Charging Port

Double USB charging port power up more equipment.



The multifunctional control instrument can display truck conditions, battery capacity, working time, travel speed, steering angle.

The standard pin code switch can support start passwords, the ID card is supported to start the truck.

Robust And Durable Structure, High Power And Efficient Driving Technology



German AC Drive Technology

AC drive system performs perfectly thanks to its high power maintenance-free German Schabmüller AC drive motor and KORDEL gearbox while smoothly increasing or decreasing speed.



Italian ZAPI Controller

Provide clients with reliable, flexible and high-performance control system solution as adopting Italian ZAPI drive controller.



High power and performance

Make lift easier and efficient by using power and performance pump.



German drive wheel ring has a long service life, high load, and is not easy to wear.

Well-designed and easy to maintain



▲ Sideways battery exchange compartment plus adjustable handling bracket makes battery replacement easier and quicker.



▲ A variety of extension supports are available to meet the installation requirements of different extension equipment, such as WMS display, bar-code scanner, storage tray, file plywood, etc.



▲ The upper adjustable balance wheel can realize the easy adjustment of the balance wheel.



▲ Easier to entry Australian pallet with entry rollers.



▲ The jog button on both sides of the truck allows the operator to control the truck forward/ backward or lift while walking beside. There is no need for the operator to get on/off the truck frequently to operate. That greatly improved the productivity and operation safety by controlling the speed controlled by the jog button.



Safe and comfortable, easy storage



▶ The standard blue light does not only automatically lit while the ruck forwarding but also follows the handle to turn while the truck turns. It greatly improves the safety of the operation.



▶ Safety flanks and anti-slip materials greatly improves the driving safety. The handle above the backrest provides better comfort for the operator to get on and off the vehicle and reverse the car.




▶ Large storage tray can be storing stretch film, art knife pen, or other tools.

Other optional parts

A: The storage platform used with the lifting operation platform allows putting or retrieving more cargo and make work more efficient.

B: The operation platform can be lifted to the second rack which allows picking or retrieving more efficient.

C: Operating platform descent by using footswitch releases the hands to make more work.

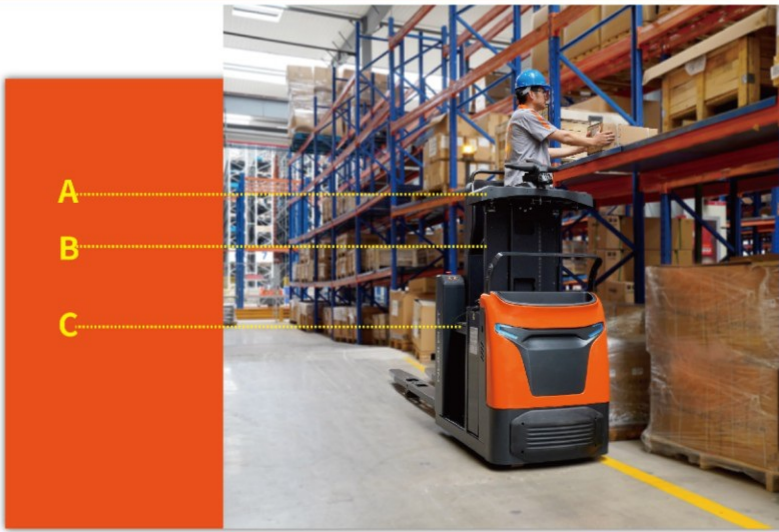

Parameter

Manufacturer's type designation		OPL12N	OPL25N
Load capacity/rated load	Q(kg)	1200	2500
Net weight without battery	kg	900	968
Lift	mm	720	115
Height of tiller	mm	1280	
Overall width	mm	810	
Turning radius	mm	2115	2965
Battery voltage,nominal capacity K5	V/Ah	24/465	

OPH 01/01E

Electric Order Picker

OPH01/01E is a compact and efficient modern flexible multi-functional picking vehicle. The max working height of 5m is suitable for manual package picking at almost all related facilities. It is ideal for many applications, from material stacking to facilities maintenance. It is 750mm in width, with 1454mm lowest height, which means it can easily enter narrow areas (elevators, doors, etc.). Full-load operation with long battery life makes it perfect for heavy tasks. Undoubtedly, this is a great choice to assist operators in various indoor applications.




High performance and high efficiency


Unique 360° rotating function of OPH01 ensures min turning radius as low as 1300mm, meeting the demand of various narrow spaces. With high-performance low noise Amer AC drives (Italy), OPH01 can quickly arrive at any designated place.




Travel speed 5.5km/h



Gradeability, laden 5%

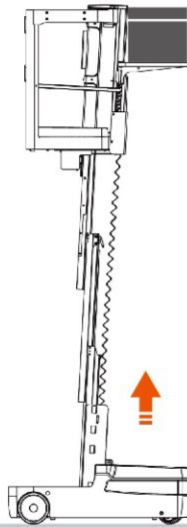

Lifting speed, laden 0.2m/s

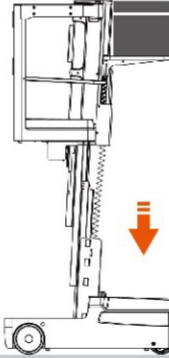

Lowering speed, laden 0.21m/s



Turning radius only
1300mm



Speed deceleration functions

While platform is raising to its maximum height, the maximum available lift and drive speeds will go through three steps of speed settings according to the following lift height ranges for the platform: 0-500mm, 500-1500mm, 1500-3000mm to ensure the truck's stability and operator's safety.

The working height can reach 5 meters, making it possible to collect materials from the 3rd rack layer.



Travel speed up to 5.5km/h
Lifting height below 500 mm



Travel speed 3.2km/h
Lifting height between 500-1500 mm



Travel speed
Lifting height between

Intelligent operation, safe and reliable



LCD display shows necessary information, such as safety warnings, speed, steering angle and fault codes. Ensures easier operation and provides hints to a user.



Customized left and right multi-function handles provide quick and accurate response. Lifting, traveling and steering can be operated simultaneously.



Equipped with the PIN code lock function of RFID card access, sin access to the truck, especially for users operating one truck.



The trucks is equipped with a buzzer, warning light, rear light and blue ray running light.



Side light and optional headlight can provide the operator with enough light to take/put the goods in the right place regardless of ambient light.



Both models are with automatic c preventing the c the truck when c opened.

High-strength al profiles help to s stability due to t gravity center.

Perfect observation

Adjustable height of the front shelf allows to ensure good visibility and avoid overlapping of operator's field of view by goods located on it.



adjustment range
400 mm





Parameter

Environment-friendly
High cost-performance ratio

Lithium battery is more environment-friendly during its operational life-time, more cost-effective and maintenance-free. No hydrogen evaporation or pollution during charging, therefore, lithium batteries are suitable for the application with environmental concerns, such as food, chemical and pharmaceutical industries.

In comparison with lead-acid batteries, lithium batteries have much longer lifetime, about 3 times of lead-acid battery. Combining with their maintenance-free feature, lithium batteries' cost-performance ratio is better and cost of ownership is lower.

Optional Lithium

Fast charging any time and place

Lithium battery thanks to its fast charging and charging allows to extend working time of the truck. Lithium batteries do not produce flammable gas during charging, therefore, do not require ventilation during charging allowing to achieve higher operation

Safety
High power and maintenance-free

Lithium battery is using LiFePO4 chemistry with high safety level, battery is equipped with Battery Management System (BMS), which helps to ensure battery safety at each moment of its discharging and charging

BMS controls temperature of the battery, voltage conditions, provides data exchange via CAN bus devices of the truck.


Manufacturer's type designation			OPH01	OPH01E
Load capacity	Platform	Q(kg)	135	
	Storage table		100	
	Battery panel		150	
Service weight incl. battery		kg	750	690
Platform Lift		mm	3015	
Overall width		mm	750	
Turning radius		mm	1300	
Maintenance-free battery (5h discharge rate)		V/Ah	24/200	24/106

Electric Order Picker

Safety Assured for High-Level Tasks



Safety Assured for High-Level Tasks

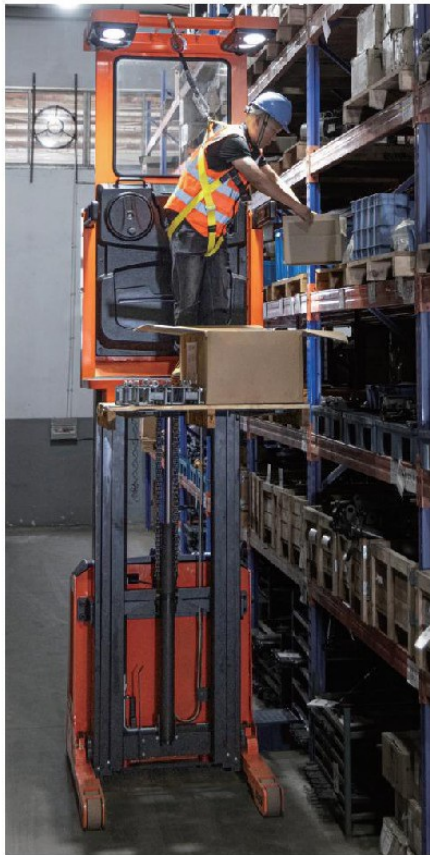

Speed reduction at turns

Speed reduction at turns helps to ensure better maneuverability especially at high speed mode.

Pallet-locking


Auto Pallet-locking Device - capable of securely clamping pallet stringers ranging from 32 mm(1.25in) to 150mm(5.9in), providing instant load stabilization and significantly boosting load handling speed.

Safety device

Equipped with self-retracting fall limiter and safety belt, which provides good protection for operator.

Real-time dynamic adjustment of key parameters on basis of the truck's current state

- 1.Load linkage system:Intelligently Controls MAX.height.
- 2.Load linkage system:Intelligently Controls MAX.speed.

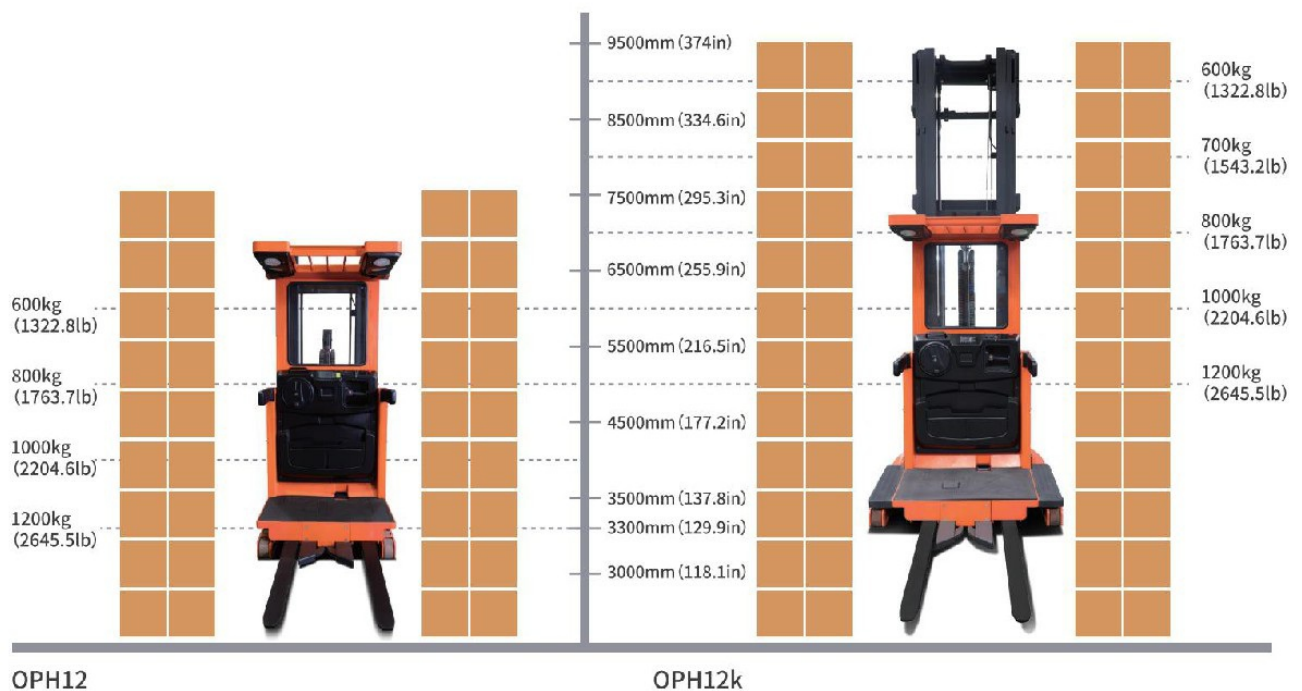

Easy to operate, flexible and swift.



Type: OPH12

Load Capacity: 1200kg/2646lb

Max Lift Height: 6000mm/236.2in

Max Mast extended height:
8215mm/323.4in

Type: OPH12K

Load Capacity: 1200kg/2646lb

Max Lift Height: 9000mm/354.3in

Max Mast extended height:
11215mm/441.5in


360° in-situ steering available with both chassis sizes,

Min. Turning radius only **1830mm/72in**

Min. aisle width **1300mm/51.2in**



Unrivalled Stability

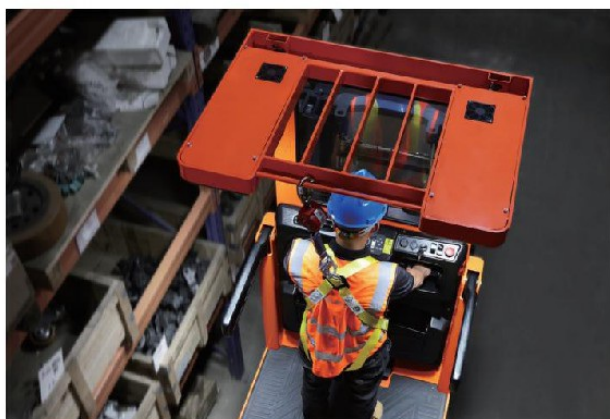

Mast Durability

The mast mechanism is crafted from high-strength and high-precision steel sections, and the excellent gap compensation structure design ensures the stability of the mast operation.

Robust Chassis

The entire model range is constructed using imported channel steel. The chassis is available in two widths, 1080mm (42.5in) and 1420mm (55.9in), and the wide chassis allows the platform to reach a higher pick-up area, with a maximum picking height of up to 9 meters (354.3in).



Top notch configuration as standard

- Multi-functional handle, striking a perfect balance between safety and functionality.
- High-quality LED screen: lifting weight, lifting height, speed, power, steering, fault code, alarm and other information all at a glance.
- Highly configured core components: enhancing efficiency, minimizing energy consumption. featuring AC drive, high-performance motors, imported gearbox, control programs tailored for high racks, satisfying various working conditions.
- Platform and rack lights are fitted as standard for easy retrieval of goods in dimly lit areas
- Standard high-power platform fan keeps operators comfortable in high temperatures.
- Standard safety warning lights; buzzer; blue light for a safe driving.



Optional

- Smart start: optional PIN-code panel with RFID card access
- Headlights for driving at night and in dark places
- Large-capacity battery, maximum battery capacity 24V/1000Ah; optional lithium battery, to meet the daily work of most of the warehouses.



Parameter

Manufacturer's type designation		OPH12	OPH12K
Load capacity/rated load	Q(kg)	1200	

Service weight incl. battery	kg	3610/3640/3760	3790/3820/3940/4065/4170/4275
Lift height	mm	4500/4800/6000	4500/4800/6000/7000/8000/9000
Overall width	mm	1080	1080/1420
Turning radius	mm	1830	
Battery voltage,nominal capacity K5	V/Ah	24v/1000	24v/1000,48V/420