


DC IONISING EQUIPMENT

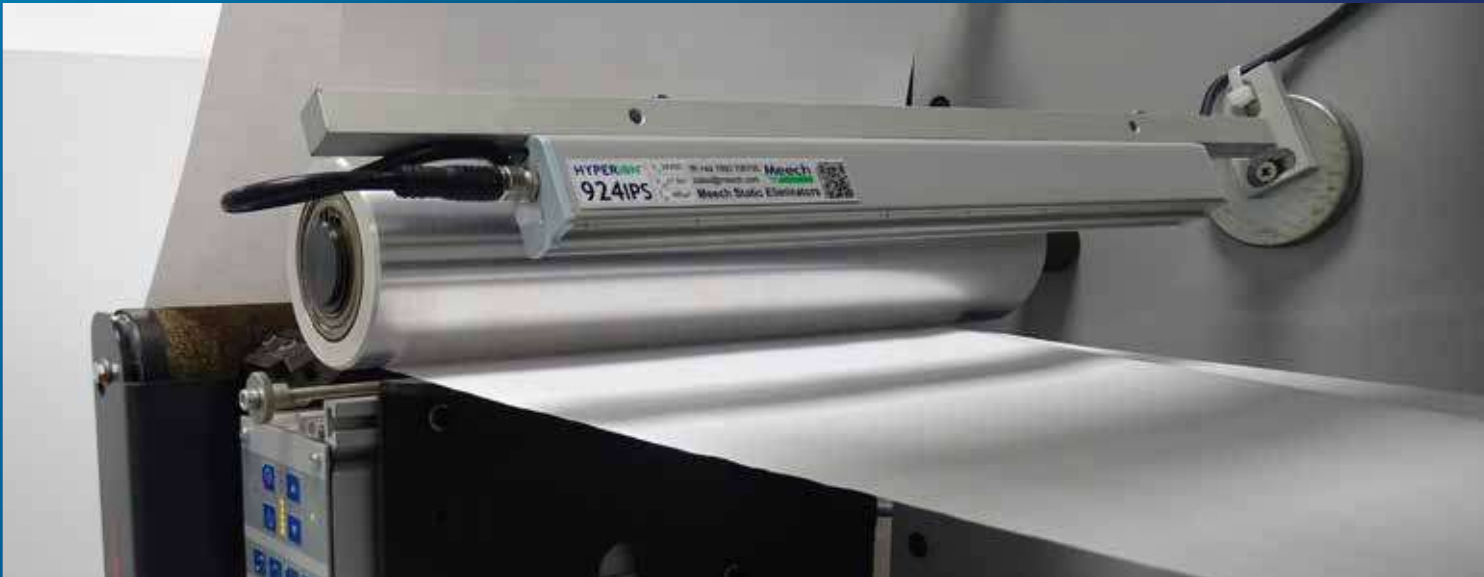

What is DC Static Elimination?

DC technology allows control of frequency and ion balance (the relative proportion of positive and negative ions). Mains voltage is transformed into high voltage that is split into positive and negative outputs and connected to dedicated emitters. Alternating clouds of positive and negative ions are produced in accordance with

the chosen frequency setting (between 0.5 and 20Hz). The lower frequencies allow longer distance ionisation to be achieved in still air whilst the balance control allows the ion output to be adjusted to suit the charge polarity on the target.

DC Applications


DC Applications

		DrinksFoodProduct PackagingConveying & Product HandlingThermoformingPlastic RigidBlow MouldingPlastics Film ExtrusionPlastic Film ConvertingPrinting SheetPrinting WebPrinting OtherPrint FinishingConverting PaperTextilesBag MakingMedicalPharmaceuticalCosmeticsElectronicsClean RoomAutomotiveMetal/Glass Processing																
Popular Application Example	Product	Food and Drinks				Rigid Plastics		Flexible Plastics	Printing			Converting		Pharma / Medical		Other		
Preventing Blockages During Air Conveying Of Waste Trim	261 Bulkhead																	
Components Sticking To Vibrating Bowl Feeder	971 Ionising Bar																	
Contamination & ESD Control During Conveying & Collection Of Plastic Parts	971 Ionising Bar																	
Static On A Plastic Web During Rewinding Process	971 Ionising Bar																	
Conveying & Palletising Of Bottles	971 Ionising Bar																	
Weighing Or Assembly Of Small Parts	971 Ionising Bar																	
Electronic Weighing Scales	971 Ionising Bar																	
Slitter Rewinding Machines	971 Ionising Bar																	
Alignment Of Parisons During Small Bottle Manufacture	261v2 Flexi Nozzle																	
Preventing Damage Or Weakening Of RFID Tags Due To ESD	261v2 Flexi Nozzle , 971																	
Tamper Seal Issues Due To Powder Inclusion In Seal	261v2 Flexi Nozzle, 912 Circular Ionising Bar																	
Stacking Of Shingled Sheets On A Sheeting Machine	DC Ionising Guns and Nozzles , 915 Ionising Bar																	
Air Conveyor Diverter Valves	261v2 Bulkhead Ion Nozzle																	
Issues With Self-Adhesive Labels	261v2 Flexi Nozzle																	
Window Patcher Film Sticking To Knife & Rollers	Hyperion 924IPS Bar																	
Neutralising Static Generated While 3D Printing	Hyperion 929IPS Bar																	
Cans On Plastic Conveyors	Hyperion 929IPS Bar																	
Electrical Cable Manufacturing	Hyperion 929IPS Bar																	
Bottle Overwrapper Wrap Machine	935 Ionising Blower, 915 Ionising Bar, 971 Ionising Bar																	
Thermoform Tray Delivery & Waste Rewind	935 Ionising Blower, 971 Ionising Bar																	
Cleaning Containers	957 Ionising Air Curtain, 261v2 Ion Nozzle																	
Injection Moulding	957 Ionising Air Curtain, 935 Ionising Blower, 971 Ionising Bar																	
Blister Pack & Horizontal Filling	971 Ionising Bar, 915 Ionising Bar																	
Conveyer Problems With Plastic Blow Moulded Bottles	971 Ionising Bar, Hyperion 929IPS Bar																	
Tyre Manufacture	971 Ionising Bar, 935 Ionising Blower																	
Blow Moulding Parison Misalignment	971 Ionising Bar, Hyperion 971IPS Bar, Hyperion 929IPS Bar																	
ESD Damage Or Weakening Of RFID Tags During Die Cutting	971 Ionising Bar, 977CM DC Controller, 261v2 Flexi Nozzle																	
Stenter Elaker Machines	Hyperion 971IPS Bar																	

DC Controllers

The Meech DC power supplies provide a power source for all DC Ionising equipment (excluding the Hyperion Range). The Power Units feature either an LCD display screen or a series of LED lights.

	977CM DC Controller	977HL DC Controller	233v3 DC Controller
			
Input Connection	IEC Socket C13	IEC socket C13	2.5mm jack socket
Input voltage	100 V - 250 V AC/ 24V DC	100 V - 250 V AC	24V DC
Input current	40 mA maximum	40 mA maximum	200mA maximum
Input frequency	45 - 65 Hz	45 - 65 Hz	n/a
Dimensions	190 x 171 x 45mm	190 x 171 x 45mm	158 x 95 x 37mm
Weight	600 g	600g	300g
Enclosure	ABS; fire retardant - UL94: V0	ABS, fire retardant - UL94: V0	ABS
Max. Temperature (LCD)	45°C	45°C	60°C
Output voltage	up to 15kV	up to 9.6kV	4-8kV
Output frequency	1Hz - 20Hz	1Hz - 20Hz	0.5 - 20Hz
Output balance	20/80 to 80/20 Positive/Negative		
Output current	120µA		
Alarm Relay	Connection via 8-way DIN	Connection via 8-way DIN	Connection via 8-way DIN
Remote HV switch	3.5mm jack plug	3.5mm jack plug	3.5mm jack plug
Compressed air connection	N/A	N/A	6mm push-in fitting
Scan QR Code for Operating Manual			

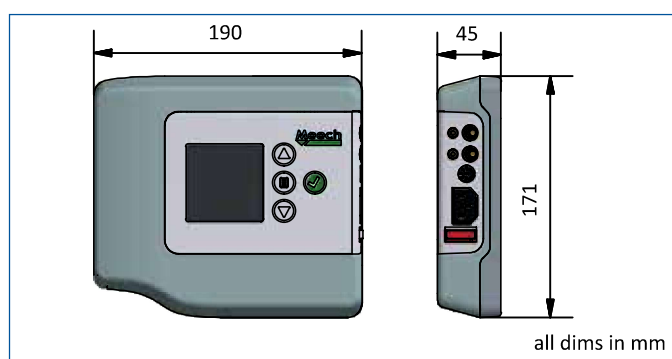


977CM DC Controller

The 977CM (Current Monitoring) Pulsed DC Controller brings together powerful long-range ionisation; closed-loop feedback; self-monitoring and remote reporting. These features allow optimum control of static for much longer periods than previously possible.

- Ion Current Monitoring and control maintains optimum performance for longer periods.
- 20/80 to 80/20 balance adjustment.
- The adjustable alarm setting gives notice of required maintenance.
- Integral feedback simplifies and reduces overall cost of 'Closed Loop' feedback installation.
- Internal switchmode power supply accommodates all standard AC supplies worldwide.
- Remote on/off allows simple interlocking with the machines running state.
- Analogue outputs allows easy remote logging of performance and residual balance.

977HL DC Controller

The 977HL Pulsed DC controller is used with the Meech 976EX hazardous area ionising bars. In-built performance monitoring guarantees that the operator can keep the ionising system running effectively: ensuring correct static control in critical applications.

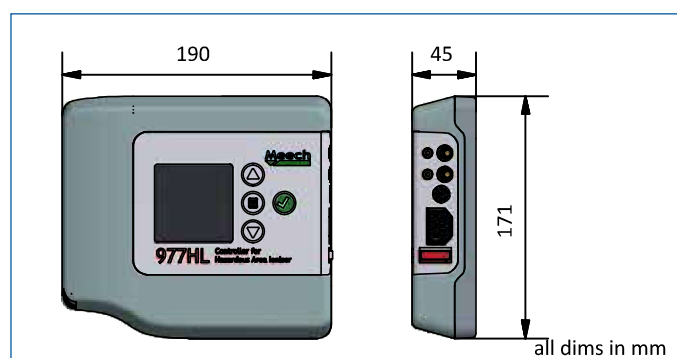


- All the benefits of standard 977CM DC Controller.
- Suitable for use with hazard area ionisers.
- Enclosure – ABS, fire retardant – UL94: V01.



233v3 DC Controller

The 233v3 Pulsed DC Controller works with the Meech Cleanroom 200 series of ionisers and is designed for ESD applications. The 233v3 is light, compact and features lockable plug and socket connectors for quick release. It also provides the option of Steady State DC (SSDC) output.

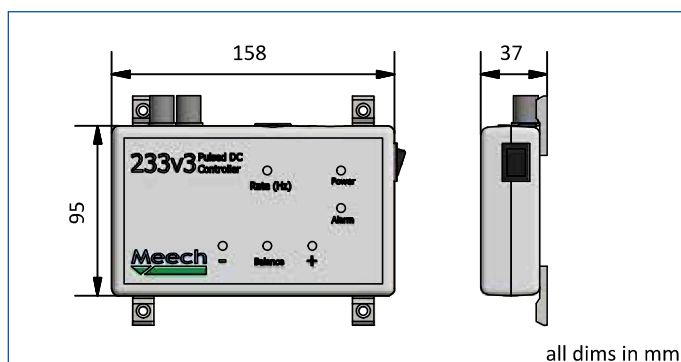

- Extended pulse rate/frequency range.
- Extended balance adjustment.
- Integral air connections; allows easy tidy connection of air supply pipe(s).
- Built in alarm circuit; detection of a fault in the ionisation system results in automatic shutdown.
- Provision for remote alarm indicator and 24V supply (through 8-way DIN connector). Enables system installations to be monitored from remote locations.
- Provision for remote on/off allows simple interlocking with the machines running state.
- SSDC output option; provides tight balance in applications where air flow is required.



DC Ionising Bars

Meech DC Ionising Bars are powered by either a 24V integrated Power Supply (IPS) or from an external DC Power supply. Included is the powerful and flexible Hyperion Range, packed with features the Hyperion range of Ionising bars have been developed for today's modern, fast moving equipment.


	Hyperion 924IPS	Hyperion 929IPS	Hyperion 971IPS-15	Hyperion 971IPS-30	971 Ionising Bar
					
Dimensions (W x H)	22mm x 31mm	25mm x 45mm	63mm x 69mm	63mm x 69mm	63mm x 69mm
Max. Length	3960mm	2965mm	3950mm	3950mm	4000mm
Weight	900g/metre	900g/metre	1.2kg/metre	1.2kg/metre	1.2kg/metre
Construction	FR ABS	PVC/FR ABS	FR ABS	FR ABS	FR ABS
Input Current	Max 500mA	Max 500mA	Max 500mA	Max 500mA	Via 977CM
Input Voltage	24V DC	24V DC	24V DC	24V DC	max 15kV
Output Voltage	3-7.5kV DC	+/- 10kV DC	+/- 15kV DC	+/- 30kV DC	+/- 15kV DC
Electrical Connection	4 Pole M8	4 pole M8	4 pole M8	4 pole M8	Via 977CM
Output Balance	80:20 to 20:80 Pos:Neg	80:20 to 20:80 Pos:Neg	80:20 to 20:80 Pos:Neg	80:20 to 20:80 Pos:Neg	80:20 to 20:80 Pos:Neg
Environmental Protection	IP66	IP66	IP64	IP64	IP64
Output Frequency	1Hz to 20Hz				
Max Ambient Temperature	60°C				
Mounting	'T' Slot with M4 x 20mm studs				
Emitters	Titanium				
Air Boost Connection	n/a	n/a	6mm push-fit	6mm push-fit	6mm push-fit
Air Consumption	n/a	n/a	5cfm/ 1000mm at 1 bar	5cfm/ 1000mm at 1 bar	5cfm/ 1000mm at 1 bar
Optimum Working Distance	20-200mm	100-500mm	300-900mm (1200 with Airboost)	450-1200mm (1500 with Airboost)	150-750mm (1050 with Airboost)
Scan QR Code for Operating Manual					



Hyperion 924IPS Bar

The Hyperion 924IPS is the most compact pulsed DC bar available on the market. Designed for short range applications, the 924IPS is powered by an internal 24V DC power supply. The 924IPS features Meech's Ion Current Monitoring (ICM) technology, this ensures performance is maintained with local and remote alerts when the bar needs cleaning. Fully BarMaster compatible, the output voltage, frequency and balance can all be adjusted.

- Optimum working distance of 20-200mm suitable for short range applications.
- Compact size and full length ionisation.
- Low voltage 24V DC supply removes the need for high voltage wiring to the ionising bar.
- Integrated Power Supply (IPS) simplifies installation and reduces the overall size of the bar.
- Adjustable voltage, frequency and balance optimises the ionising bars performance.
- IP66 Construction makes the bar suitable for harsh environments.
- Remote output signal will activate when bar needs cleaning or a fault has been detected.
- Fully BarMaster compatible.

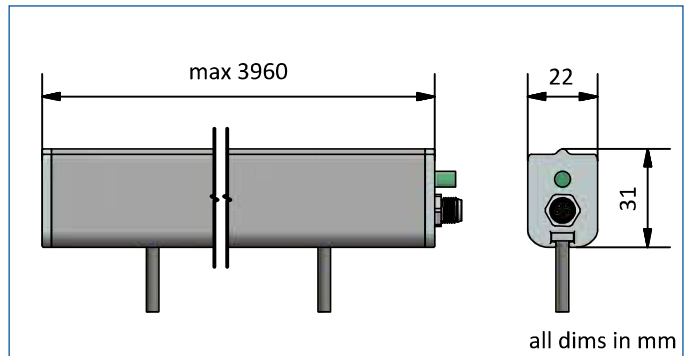




Hyperion 929IPS Bar

The Hyperion 929IPS is a compact mid-range pulsed DC ionising bar. Powered by an internal 24V DC power supply the 929IPS is designed to be easily installed onto printing and converting machinery. The class-leading +/-10kV pulsed DC output provides extremely powerful ionisation. The bar features Meech's Ion Current Monitoring (ICM) technology, this ensures performance is maintained with local and remote alerts cleaning is required.

- Optimum working distance of 100-500mm suitable for mid-range applications.
- Low voltage 24V DC supply removes the need for high voltage wiring to the ionising bar.
- Integrated Power Supply (IPS) simplifies installation and reduces the overall size of the bar.
- Adjustable voltage, frequency and balance optimises the ionising bars performance.
- IP66 Construction makes the bar suitable for harsh environments.
- Remote output signal will activate when bar needs cleaning or a fault has been detected.
- Fully BarMaster compatible.

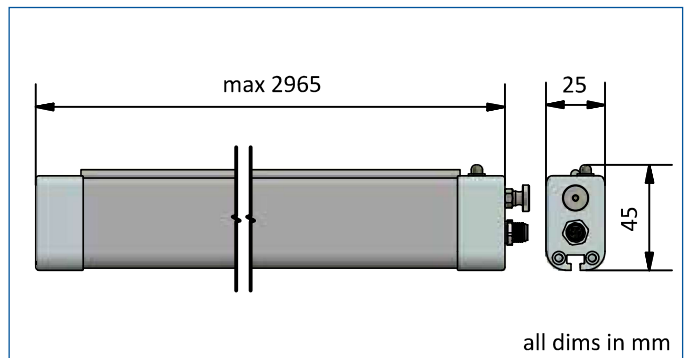




Hyperion 971IPS-15 Bar

The Hyperion 971IPS-15 is a pulsed DC ionising bar. Powered by a +/- 15kV 24V DC Integrated Power Supply (IPS), the 971IPS-15 provides excellent long range ionisation. Designed to be easily installed, the 971IPS-15 eliminates the need for high voltage cabling. The bar features Meech's Ion Current Monitoring (ICM) technology, this ensures performance is maintained with local and remote alerts when the bar needs cleaning.


- Optimum working distance of 300-900mm (1200mm with air boost) suitable for long range applications.
- Low voltage 24V DC supply removes the need for high voltage wiring to the ionising bar.
- Integrated Power Supply (IPS) simplifies installation and reduces the overall size of the bar.
- Adjustable voltage, frequency and balance optimises the ionising bars performance.
- Remote output signal will activate when bar needs cleaning or a fault has been detected.
- Fully BarMaster compatible.
- Integrated air boost can be used to offer ionisation at longer distances.

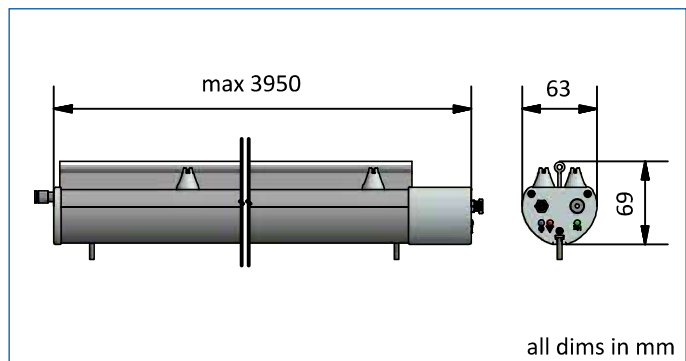

Hyperion 971IPS-30 Bar

The Hyperion 971IPS-30 is the latest addition to the Hyperion range and the most powerful bar Meech have ever produced. Powered by a +/- 30kV 24V DC Integrated Power Supply (IPS), the 971IPS-30 provides excellent extra-long range ionisation. Designed to be easily installed, the 971IPS-30 eliminates the need for high voltage cabling. The 971IPS-30 features Meech's Ion Current Monitoring (ICM) technology, this ensures performance is maintained with local and remote alerts when the bar needs cleaning.


- Optimum working distance of 450-1200mm (1500mm with air boost) suitable for long range applications.
- Low voltage 24V DC supply removes the need for high voltage wiring to the ionising bar.
- Integrated Power Supply (IPS) simplifies installation and reduces the overall size of the bar.
- Adjustable voltage, frequency and balance optimises the ionising bars performance.
- Remote output signal will activate when bar needs cleaning or a fault has been detected.
- Fully BarMaster compatible.
- Integrated air boost can be used to offer ionisation at longer distances.

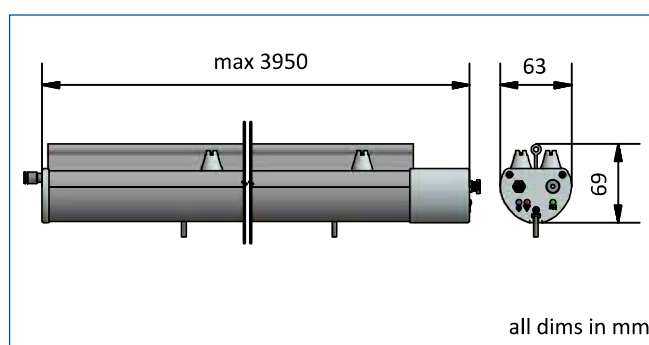

971 Ionising Bar


The 971 Pulsed DC bar delivers powerful, long range ionisation to control static electricity on a wide range of printing, converting and process machinery. Its great long range ability makes it ideal for use on applications such as rewinds and collection bins. The design has been optimised to reduce the effects of contamination and to allow easy maintenance.

- Powerful long range ionisation offers excellent static control on modern, fast machinery.
- Rigid profile minimises the number of mounting points required.
- Resistive coupling means the bar is safe for operators to handle.
- Titanium emitter pins - hard wearing and easy to clean.
- Replaceable emitter pins allows periodic replacement to extend the life of the bar.
- Integrated air boost can be used to offer ionisation at longer distances.

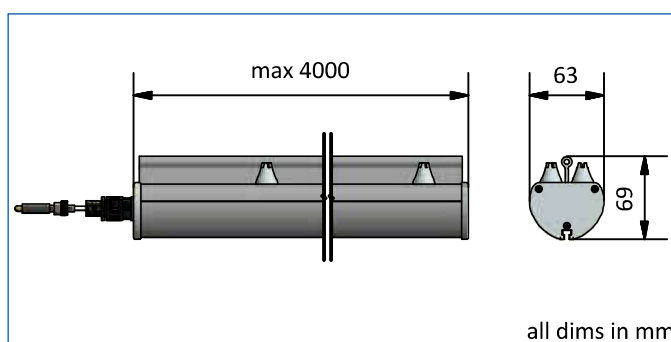

242 Ion Bar

The 242 Ion Bar delivers powerful, long range ionisation on assembly benches and ESD applications. Its long range ability makes it ideal for use on applications such as phone and PC assembly or repairs. The design has been optimised to reduce the effects of contamination and to allow easy maintenance. The 242 Ion Bar is part of the Meech Cleanroom 200 series.

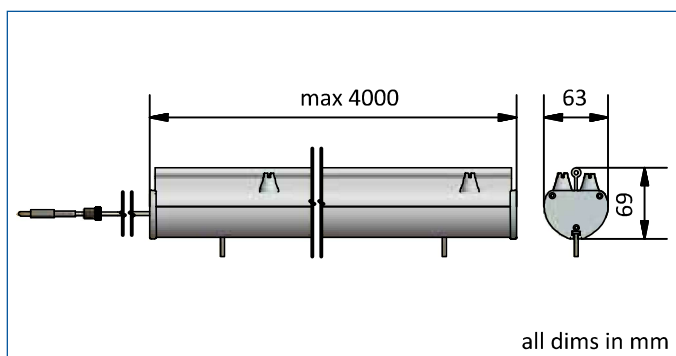

- Powerful Long range ionisation.
- Rigid profile minimises the number of mounting point required.
- Resistive coupling make it safe for operators to handle.

DC Ionising Blowers and Air Curtains

Meech DC Ionising Blower and Air Curtains are powered by either a 24V integrated Power Supply (IPS) or from an external DC Power supply. The DC Blower and Air Curtains include products from the Cleanroom 200 product range and the Hyperion Range.


	212v2 Benchtop Ioniser	221 & 225 Ionising Blowers	Hyperion 959IPS
			
Dimensions	166 x 181 x 85mm	200 x 100 x 600 or 1200mm	28 x 55 x up to 1800mm
Weight	860g	4.7kg/600mm; 9.3kg/1.2m	2.7kg/1m length
Construction	FR ABS	Powder Coated Steel	FR ABS / Aluminium
Mounting	n/a	Mounting bracket	M4 x 20mm studs
Emitters	Titanium	Titanium	Titanium
Input Current	Max 500mA	Max 500mA	Max 500mA
Input Voltage	24V DC	220V	24V DC
Output Voltage	3-7.5kV DC	+/- 10kV DC	+/- 7.5kV DC
Electrical Connection	24V power jack	IEC	4 Pole M8
Output Frequency	1Hz to 20Hz		
Output Balance	80:20 to 20:80 Pos:Neg	80:20 to 20:80 Pos:Neg	80:20 to 20:80 Pos:Neg
Max Ambient Temperature	60°C	60°C	60°C
Air Boost Connection	n/a	n/a	1/4" BSP female
Air Consumption	n/a	n/a	43cfm(122l/min)@80psi / 1m 5.4 Bar per 25mm
Optimum Working Distance			50-300mm
Scan QR Code for Operating Manual			



212v2 Benchtop Ioniser


The 212v2 Benchtop Ioniser is a compact unit that provides excellent work station coverage and a high level of ESD protection. Designed to prevent possible ESD damage in sensitive electronic applications. The 212v2 is part of the Meech Cleanroom 200 series.

- Balanced ionisation (Typically +/- 10v) prevents ESD damage.
- Dirty pin indicator and audible alarm helps to maintain balanced ionisation and informs operator when maintenance is required.
- Removable pins makes maintenance and cleaning easy.
- Two fan settings that can be set for optimum operator comfort and ionisation range.

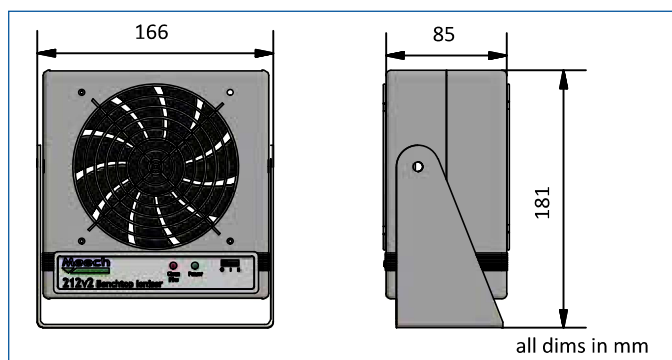

221 & 225 Ionising Blowers

The 221 & 225 Ionising Blowers provide a high level of ESD protection with excellent workstation coverage. The 221 Blower is the entry level model, whereas the 225 Blower is provided with an extensive range of features and options. Both the 221 & 225 are part of the Meech Cleanroom 200 series.

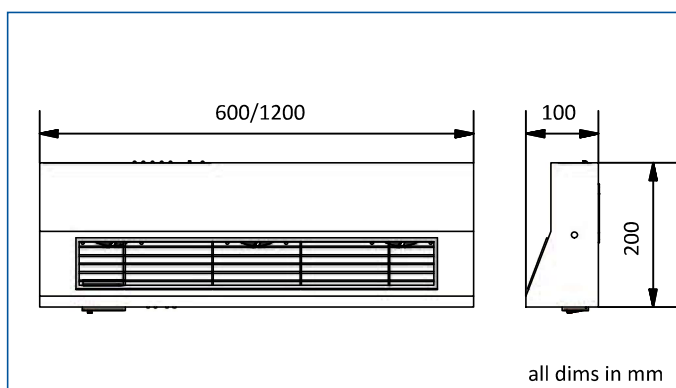


- Balanced ionisation (typically +/- 10v) prevents ESD damage.
- Dirty pin indicator and audible alarm informs operator when maintenance is required.
- Three fan settings that can be set for optimum operator comfort and ionisation range.
- Auto tracking alarm - Ensures that alarms are set at the correct levels.
- Clear indication of blower status (225 Blower only).
- Auto Shutdown when an out of balance or dirty pin condition is encountered (225 Blower only).



Hyperion 959IPS


The Hyperion 959IPS Ionising Air Curtain is a versatile product that provides effective static neutralisation and dust removal for a wide range of applications. The 959IPS comprises of a Hyperion 924IPS mounted on a Meech Energy Saving Air Curtain, combined they provide a high speed laminar sheet of ionised air.

- Optimum working distance of 50-300mm.
- Energy Saving Air Curtain can cut compressed air demand by 70%.
- Low voltage 24V DC supply removes the need for high voltage wiring to the ionising bar.
- Integrated Power Supply (IPS) simplifies installation.
- Adjustable voltage, frequency and balance optimises the ionising bars performance.
- Meech Ion Current Monitoring (ICM) technology detects when the bar needs to be cleaned.
- IP66 Construction makes the bar suitable for harsh environments.
- Remote output signal will activate when bar needs cleaning or a fault has been detected.
- Fully BarMaster compatible.

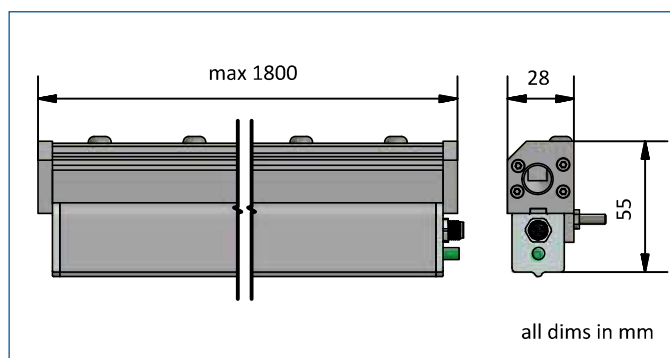


DC Ionising Guns and Nozzles

Meech DC Ionising Guns and Nozzles are primarily used to remove both static charges and dust. The DC Guns and Nozzles include products from the Cleanroom 200 series and the Hyperion Range.

	251 Ionising Gun	261v2-32 Nozzles Family	271 Flexi Nozzle	976 Mini	976 Pulsed DC Ionising Head
					
Body	PTFE	PTFE	PTFE	PTFE	PTFE
Dimensions	193 x 119 x 30mm	32 x 32 x 74mm	32 x 32 x 74mm + 300mm trunking + base	127 x 34 x 25mm	50 x 35 x 12mm
Weight	550g	200g	870g		
Max. Air Pressure	100 Psi (7 bar)	100 Psi (7 bar)	100 Psi (7 bar)	N/A	N/A
Typical Pressure	20 to 40Psi (1.5 to 3 bar)	20 to 40Psi (1.5 to 3 bar)	20 to 40Psi (1.5 to 3 bar)	N/A	N/A
Noise Level	68 dB(A) 20 Psi(1.5 bar) / 1m	668 dB(A) 20 Psi(1.5 bar) / 1m	68 dB(A) 20 Psi(1.5 bar) / 1m	N/A	N/A
Emitter Pins	Titanium				
Decay Time (1000V-100V)	0.8 sec at 150mm at 30 Psi (2 bar)	0.8 sec at 150mm at 30 Psi (2 bar)	0.8 sec at 150mm at 30 Psi (2 bar)		
Input Voltage	+/- 9kV DC	+/- 9kV DC	+/- 9kV DC	+/- 15kV DC	+/- 15kV DC
Ion Balance	+/- 10V	+/- 10V	+/- 10V		
Inlet	6mm push-fit	6mm push-fit	6mm push-fit	N/A	N/A
Outlet	6mm	6mm	1/4" BSP	N/A	N/A
Optimum Working Distance		150mm	150mm		
Scan QR Code for Operating Manual					

251 Ionising Gun

The 251 Ionising Gun is a robust, lightweight gun handle used with the 233v3 Pulsed DC Controller. The 251 is part of the Meech Cleanroom 200 series.

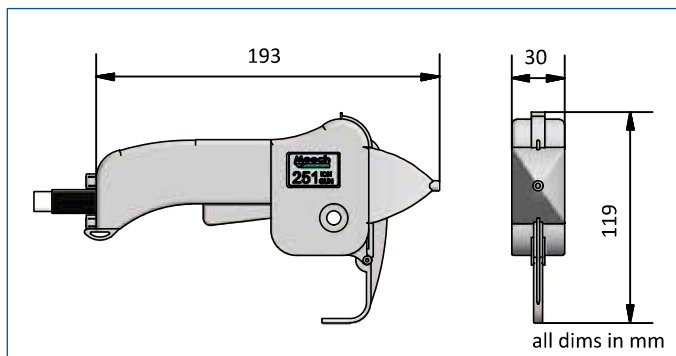


- Suitable for contamination blow-off and neutralisation of static charges in electronic applications and cleanroom environments.
- Quick, easy and safe to use.
- Supplied with 2 meter of cable as standard.



261v2 Ion Nozzle


The 261v2 Ion Nozzle is a small, robust ioniser. Suitable for industrial and cleanroom environments, it provides fast static control and excellent dust removal. It meets OSHA dead-end pressure requirements and is powered by either a 233v3 or 977CM Pulsed DC Controller.

- “Bulkhead” version for use in enclosures of ducting.
- Adjustable balance and frequency.
- Requires minimal maintenance.
- Small and Compact.

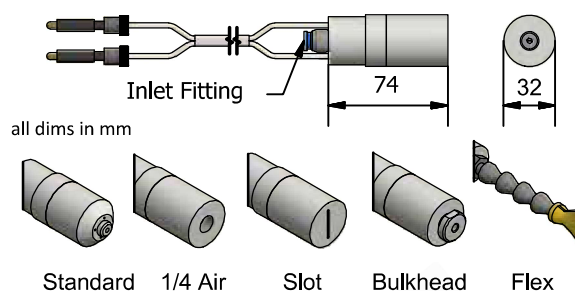

261v2-1/4 Ion Nozzle


The 261v2-1/4 Ion Nozzle includes 1/4" BSP connections that allow integration into existing plastic pipe work. When used on automated cleaning machinery the 261v2-1/4 ionises the airflow used to clean and neutralise components. The 261v2 can be powered by either a 233v3 or 977CM Pulsed DC Controller.

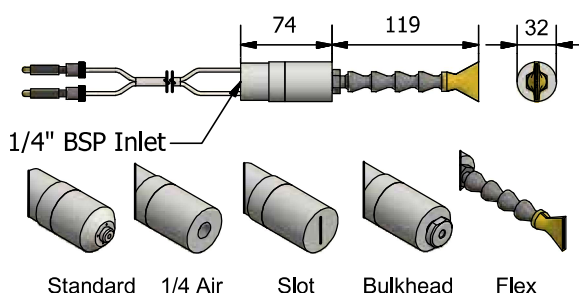


- Low compressed air consumption.
- Various options available.

271, 272 & 273 Flexi Nozzle

The 271 Flexi Ion Nozzle is a compact, “hands free” ioniser designed for repetitive cleaning tasks. The 272 Flexi Nozzle includes a pneumatic foot pedal which allows the operator to regulate the flow of air and activate the ionisation. The 273 includes a standard foot switch which allows the operator to regulate the air flow.

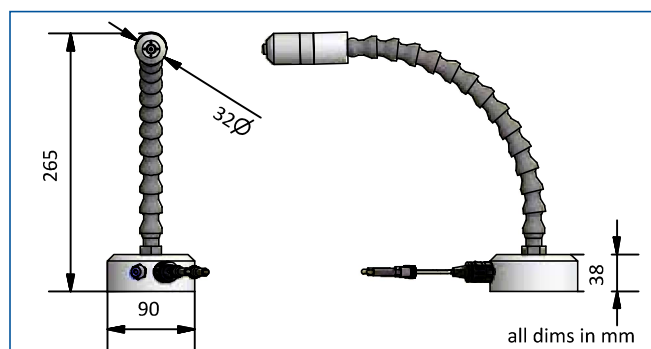


- Compact design easy to position in workplace.
- Low air consumption.
- OSHA compatible dead-end pressure relief.
- Weighted base that provides stability.

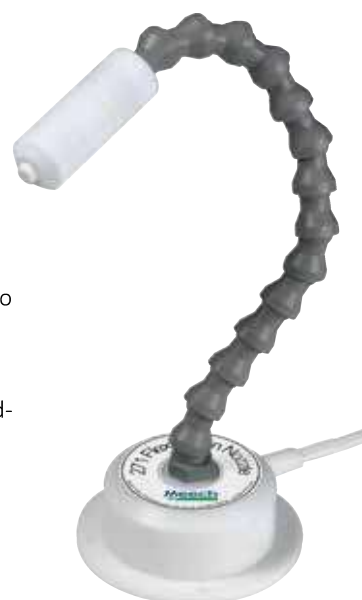

976 Pulsed DC Ionising Head

The 976 Pulsed DC Ionising Head is a small and lightweight ioniser which is designed to be used with the 977 series of Pulsed DC Controllers.


- Suitable for installation into machinery and equipment used within electronics and cleanroom environments.
- The small size makes it ideal where localised ionisation is required in restricted spaces.

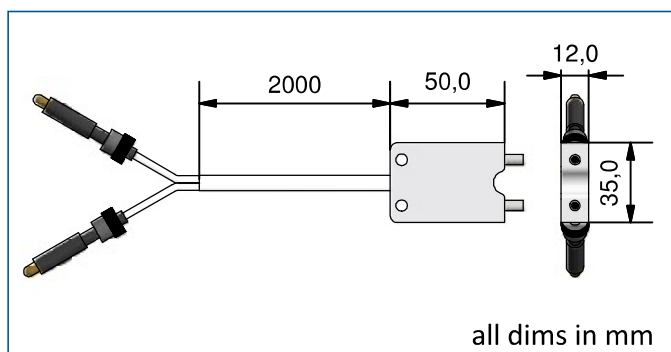

976 Mini

The 976 Mini is designed to be used primarily with digital printers. The small and compact size means that it can be easily mounted to the printer head, providing direct ionisation to the print area.

- Suitable for digital printing applications.
- Small and lightweight ioniser.

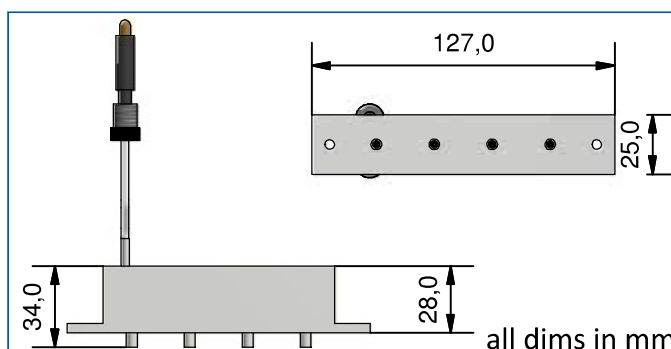

Options for DC Equipment



Hyperion BarMaster Remote Programmer

The Hyperion BarMaster is a remote programmer designed to connect with any Hyperion product. The BarMaster temporarily connects in line with the 24V power supply to the bar and allows adjustment of the output and clean pin alert settings.



Hyperion Distance Sensor for Hyperion 971IPS

Connects to any feedback enabled 971IPS bar and is designed to automatically adjust the output frequency to match the target distance, decreasing the frequency if the target is far away and increasing it when the target is closer.



Hyperion Feedback Sensor for Hyperion 929IPS and 971IPS

The sensor measures the voltage on the web downstream of the ionising bar. This measurement is fed back to the bar which automatically adjusts the balance of the output to achieve a completely neutral web. Used with Hyperion 929IPS or 971IPS feedback enabled bar.



2, 3, 5, 10m M8 power cables

Power cables available in 2m, 3m, 5m and 10m. These are suitable for use with the Hyperion range.



Switchmode Power Adaptor 15W

A general 24V DC 15W Power Adaptor. Switchmode Power Adaptors take the local electrical supply and convert it to a stable and filtered 24V DC output. The adaptors are very versatile, accepting a wide range of input voltages from 100V to 240V AC and either 47 or 63 Hz.



M8 1, 3, 8M Male - Female extension cable

Meech offers extension cables in lengths of 1m, 3m and 8m. These can be used to extend the distance between the bar and the switchmode to allow for greater adaptability.



Series 200 Cable Extensions

Cable extensions are available in one metre increments. Standard plugs and sockets are fitted to each end for connection to existing equipment installations.




200 Series Fixing Bracket

Used with the model 261 Ion Nozzle the universal mounting bracket not only simplifies installation but also allows accurate positioning and directional control for the air flow from the 261 Ion Nozzle.



988 Sensor Bar

The 988 Sensor Bar works in conjunction with the Meech 977CM Pulsed DC Controller; enabling the system to provide closed-loop static control. It senses the charge on the material and provides a control signal to the 977CM, allowing it to adjust its output to give optimum static control.

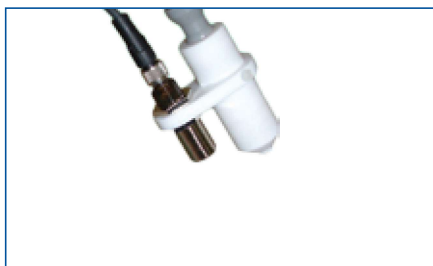

200 Sensor System

The 200 Sensor System has been designed for use with the Series 200 range of ionising nozzles.



DC High Voltage Cable Splitters

DC High Voltage Cable Splitters have been developed to enable a number of ionising products to be powered from the Meech Pulsed DC Controllers. They are available as 2 way, 4 way or 8 way.



976-PINSET - Replacement Pin Assemblies

Replacement pins allow the model 976 pulsed DC bar to be kept in as-new condition. The pinset is supplied as a bag of 5 green and 5 red replacement pin assemblies for the model 976.



Switchmode Power Adaptor 45W

A general 24V DC 45W Power Adaptor. Switchmode Power Adaptors take the local electrical supply and convert it to a stable and filtered 24V DC output. The adaptors are very versatile, accepting a wide range of input voltages from 90V to 264V AC and either 50 or 60 Hz.



Pneumatic footswitch

Used with the 273 Flexi Nozzle, the pneumatic footswitch allows the operator the ability to control the intensity of airflow. The footswitch also features a signal cable which, on the application of pressure, turns the 273 Flexi Nozzle on and off standby mode.



971 Interconnect

For use in situations where it would be preferable to connect two or more 971 bars without an expanse of cabling. This leads to a tidier and safer working environment when connecting bars within a close proximity.




935 Brackets

The 935 brackets are used to mount the 935 ionising blowers in the most suitable position within the application. The brackets have been designed for strength and stability.



971 Replacement Pin Set

Whilst our titanium emitter pins are extremely durable, it is sometimes necessary to replace them for optimised productivity after natural deterioration. The replacement pin set contains a quantity of 10 titanium emitter pins, which are easy to install in order to refresh bar efficiency.

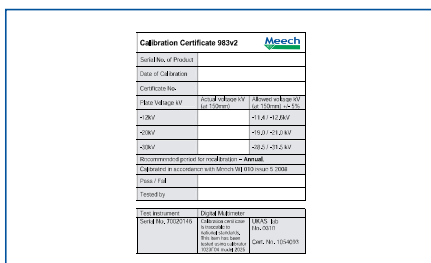

Calibration Certificate

A document of essential information about the condition of the product. Will demonstrate all measurements and settings at the time of calibration with recommendations.