

# Small Payload Handling Intelligent Robot

**FANUC** Robot **M-10iA**  
**FANUC** Robot **M-20iA**



## FEATURES


FANUC Robot M-10iA / M-20iA is a small payload handling robot whose payload is 7 to 35kg.

- Two wrist types are available. Hollow wrist realizes the user cable easy wiring. High inertia wrist is appropriate for large work piece handling.
- Standard arm, short arm and long arm are available for variable working area.
- High rigidity arm and advanced servo technology enable to increase acceleration performance. This decreases cycle time and realizes high productivity.
- Various intelligent functions with iRVision (integrated vision) and force sensor are available.

## Application Examples



Small parts bin picking



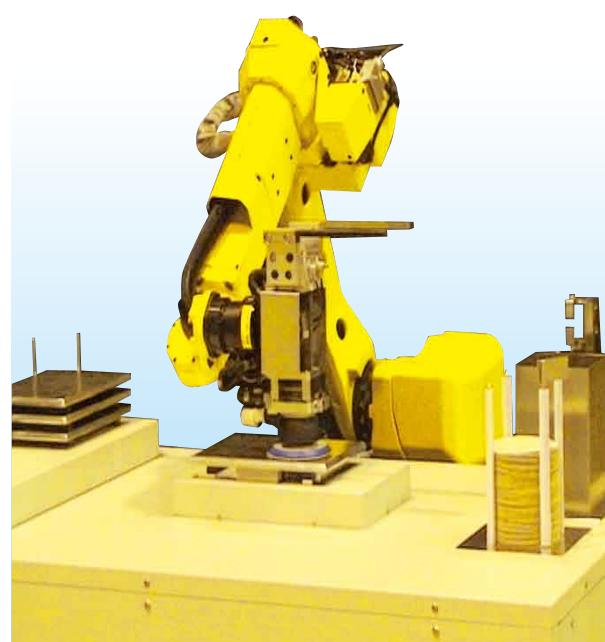


Case parts polishing

# Operating space


**M-10iA/12S, /12, /7L**

**M-20iA**

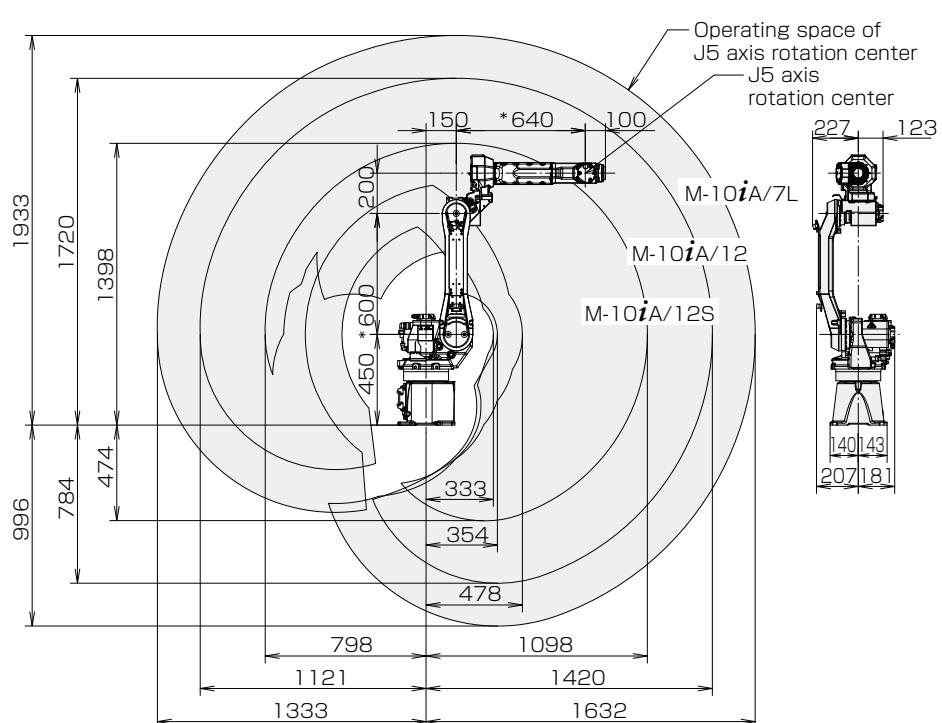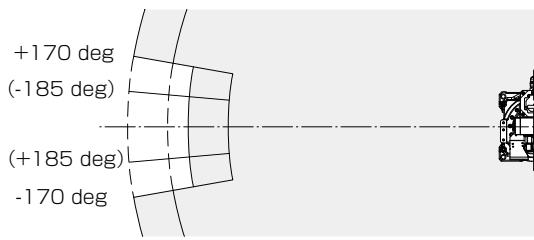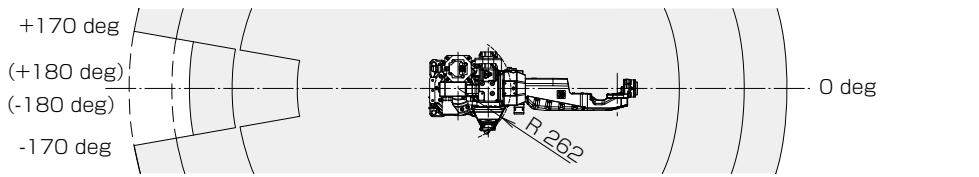

\*J2 arm length  
M-10iA/12S : 400mm  
M-10iA/12 : 600mm  
M-10iA/7L : 600mm

\*J3 arm length  
M-10iA/12S : 510mm  
M-10iA/12 : 640mm  
M-10iA/7L : 860mm

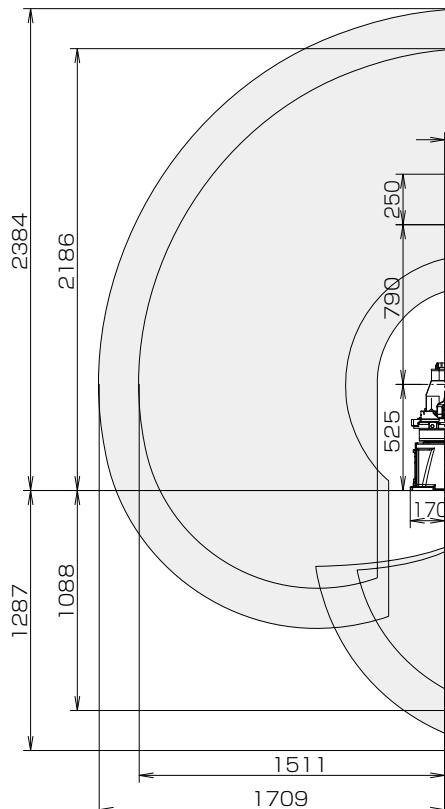

\*J3 arm length  
M-20iA : 835mm  
M-20iA/12L : 1040mm

## Specifications

Model	M-10iA/12S	M-10iA/12	M-10iA/7L
Controlled axes			
Reach	1098mm	1420mm	1632mm
Installation			
Motion range (Maximum speed) (Note 1, 2)	J1 axis rotation 340°/360°(Option) (260°/s) 5.93 rad/6.28 rad (Option) (4.54 rad/s)  J2 axis rotation 250°(280°/s) 4.36 rad (4.89 rad/s)  J3 axis rotation 340°(315°/s) 5.93 rad (5.50 rad/s)	J1 axis rotation 340°/360°(Option) (230°/s) 5.93 rad/6.28 rad (Option) (4.01 rad/s)  J2 axis rotation 250°(225°/s) 4.36 rad (3.93 rad/s)	J1 axis rotation 340°/360°(Option) (230°/s) 5.93 rad/6.28 rad (Option) (4.01 rad/s)  J2 axis rotation 250°(225°/s) 4.36 rad (3.93 rad/s)
J4 axis wrist rotation		380°(430°/s) 6.63 rad (7.50 rad/s)	447°(230°/s) 7.80 rad (4.01 rad/s)
J5 axis wrist swing		380°(430°/s) 6.63 rad (7.50 rad/s)	
J6 axis wrist rotation		720°(630°/s) 12.57 rad (11.0 rad/s)	
Max load capacity at wrist	12 kg		7 kg
Allowable load moment at wrist	J4 axis 22.0 N·m J5 axis 22.0 N·m J6 axis 9.8 N·m		15.7 N·m 10.1 N·m 5.9 N·m
Allowable load inertia at wrist	J4 axis 0.65 kg·m² J5 axis 0.65 kg·m² J6 axis 0.17 kg·m²		0.63 kg·m² 0.38 kg·m² 0.061 kg·m²
Repeatability (Note 3)			± 0.0
Mass (Note 4)		130 kg	
Installation environment	Ambient temperature : 0 to 45°C Ambient humidity : Normally 75%RH or less (No dew nor frost allowed), Short term 95%RH or less (within one month) Vibration acceleration : 4.9m/s²(0.5G) or less		


Note 1) In case of angle mounting, J1 and J2 axis motion range are restricted.

Note 2) In case of short distance motion, the axis speed may not reach the maximum value stated.



Note 3) Compliant with ISO 9283.

Note 4) Without controller

# A, /12L

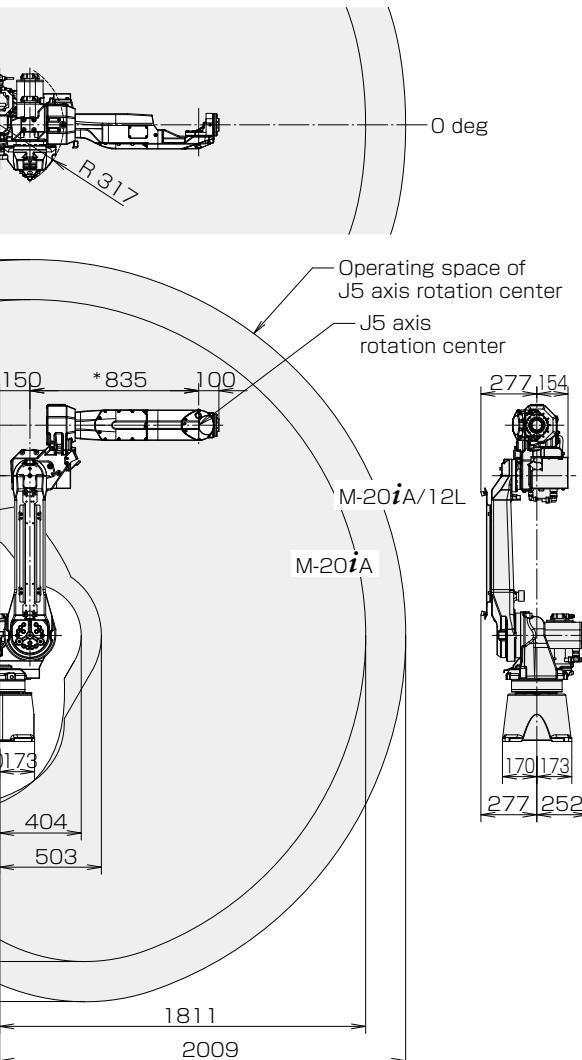

# M-10iA/10M, /10MS

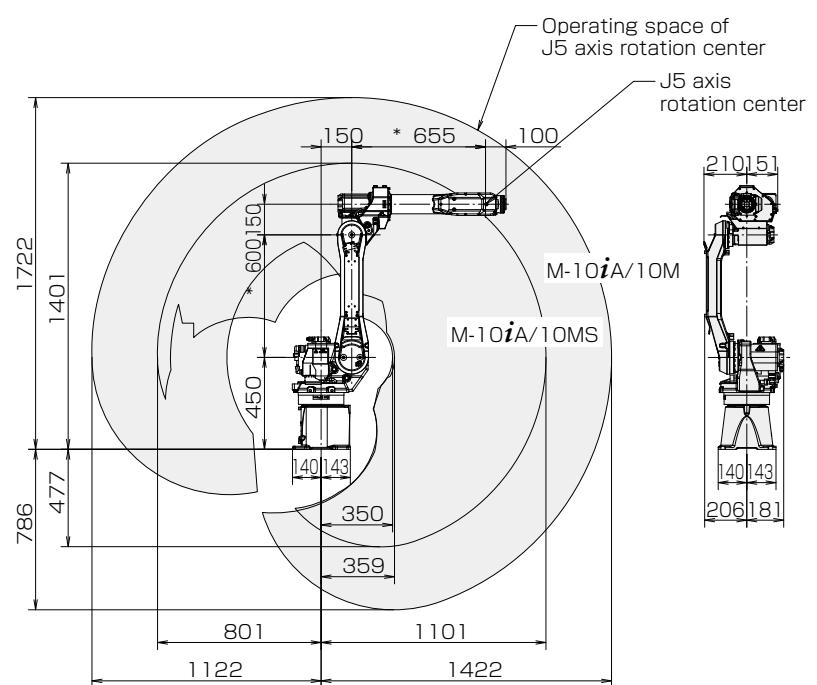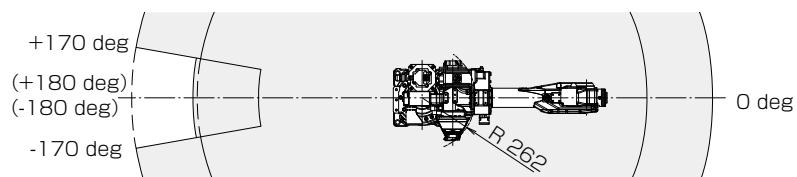

\*J2 arm length

M-10iA/10MS : 400mm

M-10iA/10M : 600mm

\*J3 arm length


M-10iA/10MS : 530mm

M-10iA/10M : 655mm

M-20iA	M-20iA/12L	M-10iA/10M	M-10iA/10MS
6 axes (J1, J2, J3, J4, J5, J6)			
1811mm	2009mm	1422mm	1101mm
Floor, Upside-down, Angle mount			
340°/370°(Option) (195°/s)	340°/370°(Option) (200°/s)	340°/360°(Option) (225°/s)	340°/360°(Option) (290°/s)
5.93 rad/6.45 rad (Option) (3.40 rad/s)	5.93 rad/6.45 rad (Option) (3.49 rad/s)	5.93 rad/6.28 rad (Option) (3.93 rad/s)	5.93 rad/6.28 rad (Option) (5.06 rad/s)
260°(175°/s) 4.54 rad (3.05 rad/s)		250°(205°/s) 4.36 rad (3.58 rad/s)	250°(280°/s) 4.36 rad (4.89 rad/s)
458°(180°/s) 8.00 rad (3.14 rad/s)	460°(190°/s) 8.04 rad (3.32 rad/s)	445°(225°/s) 7.76 rad (3.93 rad/s)	341°(315°/s) 5.95 rad (5.50 rad/s)
400°(360°/s) 6.98 rad (6.28 rad/s)	400°(430°/s) 6.98 rad (7.50 rad/s)	380°(420°/s) 6.63 rad (7.33 rad/s)	
360°(360°/s) 6.28 rad (6.28 rad/s)	360°(430°/s) 6.28 rad (7.50 rad/s)	280°(420°/s) 6.63 rad (7.50 rad/s)	
900°(550°/s) 15.71 rad (9.60 rad/s)	900°(630°/s) 15.71 rad (11.0 rad/s)	720°(700°/s) 12.57 rad (12.22 rad/s)	720°(720°/s) 12.57 rad (12.57 rad/s)
20 kg	12 kg		10 kg
44.0 N·m	22.0 N·m		26.0 N·m
44.0 N·m	22.0 N·m		26.0 N·m
22.0 N·m	9.8 N·m		11.0 N·m
1.04 kg·m²	0.65 kg·m²		0.90 kg·m²
1.04 kg·m²	0.65 kg·m²		0.90 kg·m²
0.28 kg·m²	0.17 kg·m²		0.30 kg·m²
3 mm	250 kg		130 kg

# Operating space

## M-20iA/20M, /35M

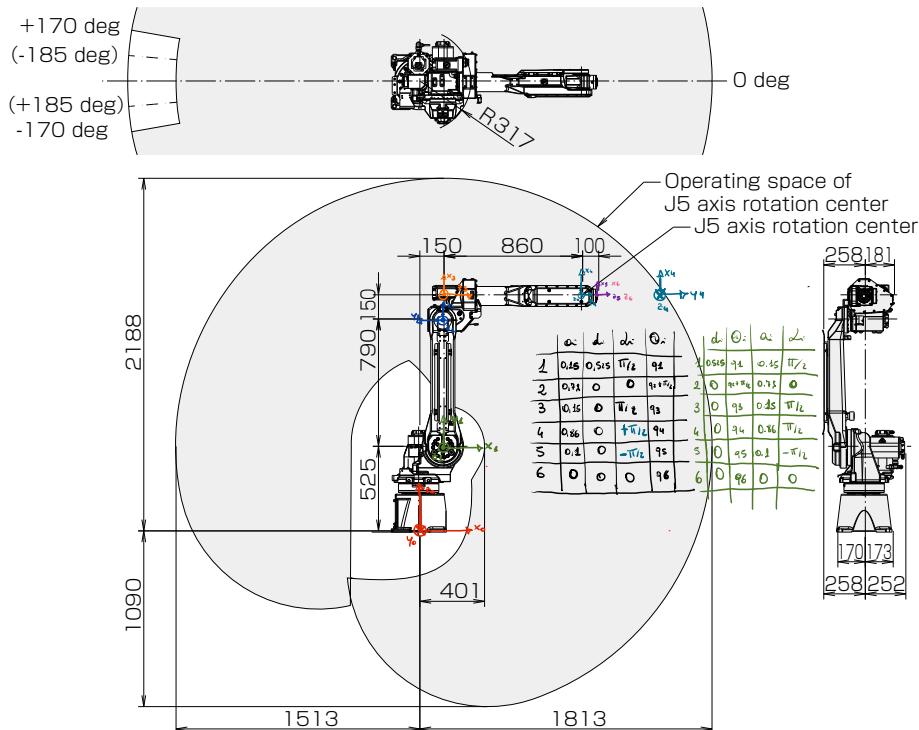

## Specifications

Model	M-20iA/20M	M-20iA/35M
Controlled axes	6 axes (J1, J2, J3, J4, J5, J6)	
Reach	1813mm	
Installation	Floor, Upside-down, Angle mount	
Motion range (Maximum speed) (Note 1, 2)	J1 axis rotation	340°/370°(Option) (195°/s) 5.93 rad/6.45 rad (Option) (3.40 rad/s)
	J2 axis rotation	260°(175°/s) 4.54 rad (3.05 rad/s)
	J3 axis rotation	458°(180°/s) 8.00 rad (3.14 rad/s)
	J4 axis wrist rotation	400°(405°/s) 6.98 rad (7.07 rad/s)
	J5 axis wrist swing	280°(405°/s) 4.89 rad (7.07 rad/s)
	J6 axis wrist rotation	900°(615°/s) 15.71 rad (10.73 rad/s)
Max load capacity at wrist	20 kg	35 kg
Allowable load moment at wrist	J4 axis	45.1 N·m
	J5 axis	45.1 N·m
	J6 axis	30.0 N·m
Allowable load inertia at wrist	J4 axis	2.01 kg·m²
	J5 axis	2.01 kg·m²
	J6 axis	1.01 kg·m²
Repeatability Note 3)	± 0.03 mm	
Mass Note 4)	250 kg	252 kg
Installation environment	Ambient temperature : 0 to 45°C Ambient humidity : Normally 75%RH or less (No dew nor frost allowed). Short term 95%RH or less (within one month) Vibration acceleration : 4.9m/s²(0.5G) or less	

Note 1) In case of angle mounting, J1 and J2 axis motion range are restricted.

Note 2) In case of short distance motion, the axis speed may not reach the maximum value stated.

Note 3) Compliant with ISO 9283.

Note 4) Without controller

# FANUC CORPORATION

• Headquarters Oshino-mura, Yamanashi 401-0597, Japan  
Phone: 81-555-84-5555 Fax: 81-555-84-5512 <http://www.fanuc.co.jp>

• Overseas Affiliated Companies

FANUC America Corporation  
FANUC Europe Corporation, S.A.  
SHANGHAI-FANUC Robotics Co., LTD.  
KOREA FANUC CORPORATION  
TAIWAN FANUC CORPORATION  
FANUC INDIA PRIVATE LIMITED  
FANUC SINGAPORE PTE. LTD.  
FANUC THAI LIMITED  
FANUC MECHATRONICS (MALAYSIA) SDN. BHD.

PT. FANUC INDONESIA  
FANUC OCEANIA PTY. LIMITED  
FANUC SOUTH AFRICA (PROPRIETARY) LIMITED

3900 West Hamlin Road, Rochester Hills, MI 48309-3253, U.S.A.  
Zone Industrielle, L-6468 Echternach, Grand-Duché de Luxembourg  
No. 1500 Fulian Road, Baoshan Area, Shanghai, China  
101, Wanam-ro(st), Seongsan-gu, Changwon-si, Gyeongsangnam-do, 642-290 Republic of Korea  
No.10, 16th Road, Taichung Industrial Park, Taichung, Taiwan  
41-A, Electronics City, Bangalore, 560 100, India  
No.1 Teban Gardens Crescent, Singapore 608919, Singapore  
1301 Pattanakan Road, Kwaeng Suanluang, Khet Suanluang, Bangkok 10250 Thailand  
No.32, Jalan Pengacara U1/48, Temasya Industrial Park, Section U1, Glenmarie,  
40150 Shah Alam, Selangor, Darul Ehsan, Malaysia

JL. Boulevard Bukit Gading Raya Blok R, Jakarta 12420 Indonesia  
10 Healey Circuit, Huntingwood, NSW 2148, Australia  
17 Loper Ave, Aerport Industrial Ests, Spartan Ext.2 P.O.Box 219, Isando 1600, Republic of South Africa

Phone: 1-248-377-7000 Fax: 1-855-774-7051  
Phone: 352-727777-1 Fax: 352-727777-403  
Phone: 86-21-5032-7700 Fax: 86-21-5032-7711  
Phone: 82-55-278-1200 Fax: 82-55-284-9826  
Phone: 886-4-2359-0522 Fax: 886-4-2359-0771  
Phone: 91-80-2852-0057 Fax: 91-80-2852-0051  
Phone: 65-6567-8566 Fax: 65-6566-5937  
Phone: 66-2-714-6111 Fax: 66-2-714-6120

Phone: 60-3-7628-0110 Fax: 60-3-7628-0220  
Phone: 62-21-4584-7285 Fax: 62-21-4584-7288  
Phone: 61-2-8822-4600 Fax: 61-2-8822-4666  
Phone: 27-11-392-3610 Fax: 27-11-392-3615

All specifications are subject to change without notice.  
No part of this catalog may be reproduced in any form.

The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.