


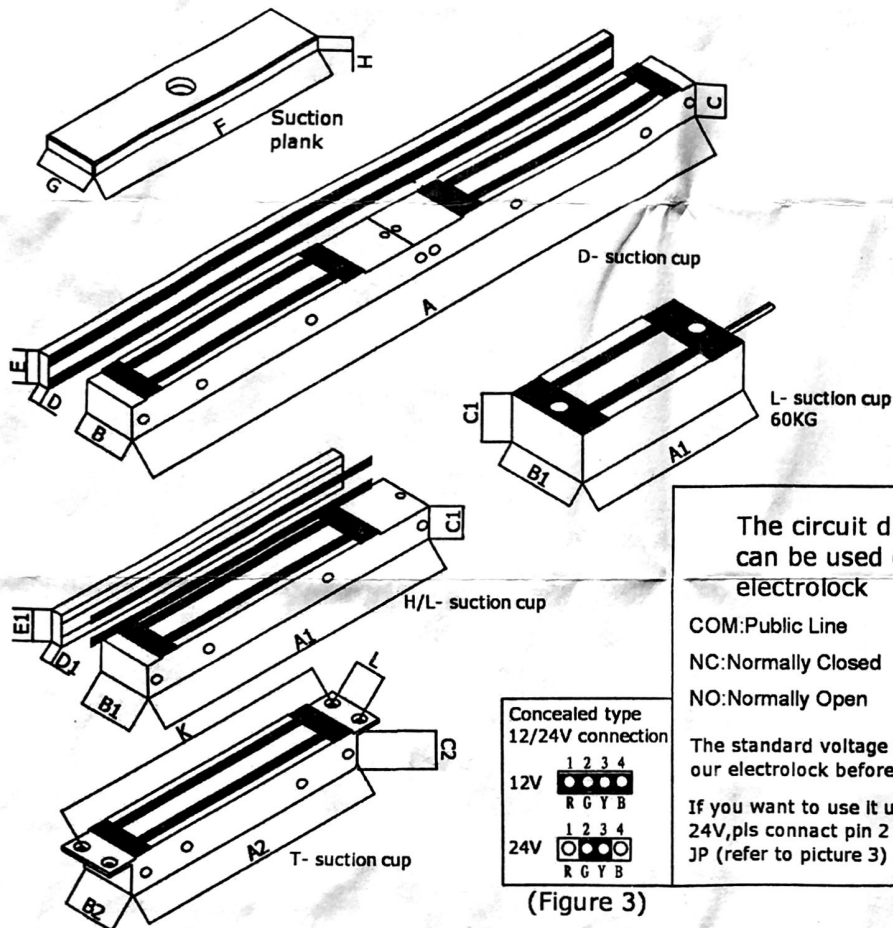


# Magnetic Lock Installation Instructions

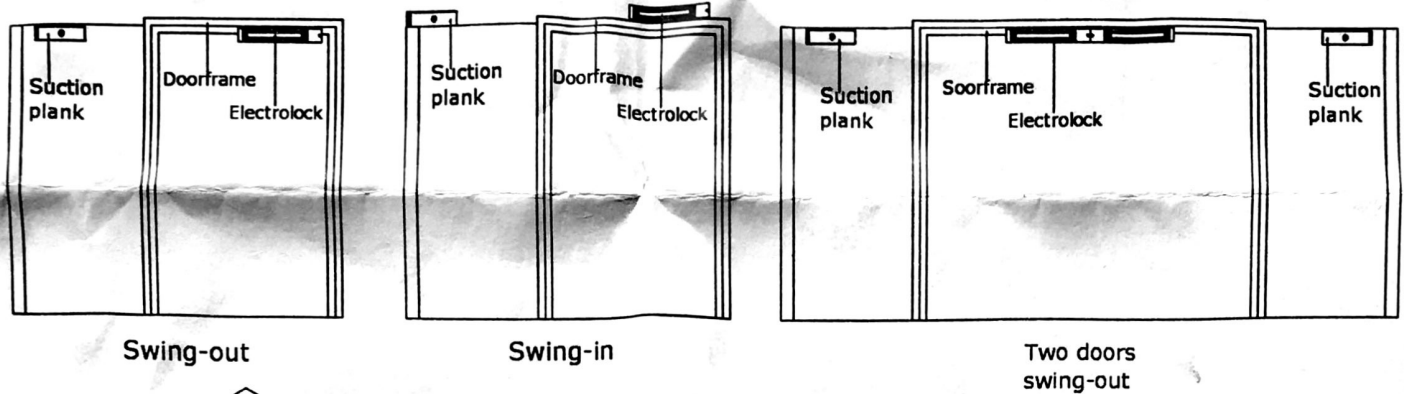

(Figure 3)

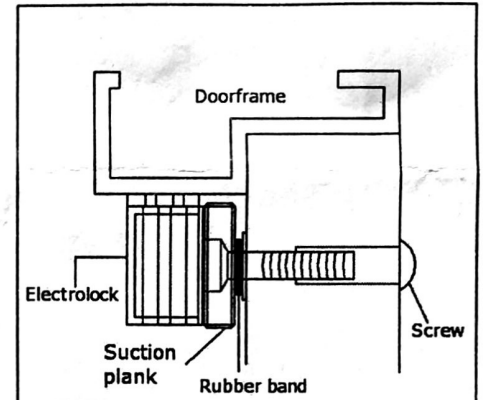

(Figure 2)

The circuit diagram just can be used on L type electrolock


COM:Public Line

NC:Normally Closed

NO:Normally Open

The standard voltage is 12V for our electrolock before delivery.

If you want to use it under 24V,pls connect pin 2 to pin 3 of JP (refer to picture 3) .

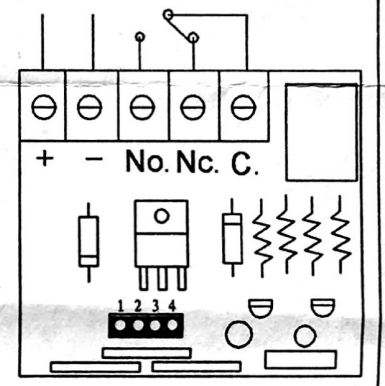

(Figure 1)

Connection instruction (refer to picture 1)

Suction plank installation instruction:

1.The rubber band in the accessory baggage should be installed between the suction plank and the door,it can weaken the force when closing the door.

2.Don't fasten the screw too tight,need to leave suitable flexibility to keep suction (refer to picture 2).

Note: Dimensions are in mm treated as a unit

Style No.		Size marking							
		A	B	C	D	E	F	G	H
D- suction cup	two doors installation 180KG	348	35	21	6	21	140	35	10
	two doors installation 280KG	476	47	26	6	25	185	40	10
H/L- suction cup		A1	B1	C1	D1	E1	F	G	H
	one doors installation 60KG	80	35	21			80	35	10
	one doors installation 180KG	174	35	21	6	21	140	35	10
	one doors installation 280KG	238	47	25	6	25	185	40	10
	one doors installation 500KG	280	70	38.5	7	38.5	185	58	14.5
T- suction cup		A2	B2	C2			F	G	H
	one door concealed installation 180KG	174	35	21			140	35	10
	one door concealed installation 280KG	215	42	26			185	40	10