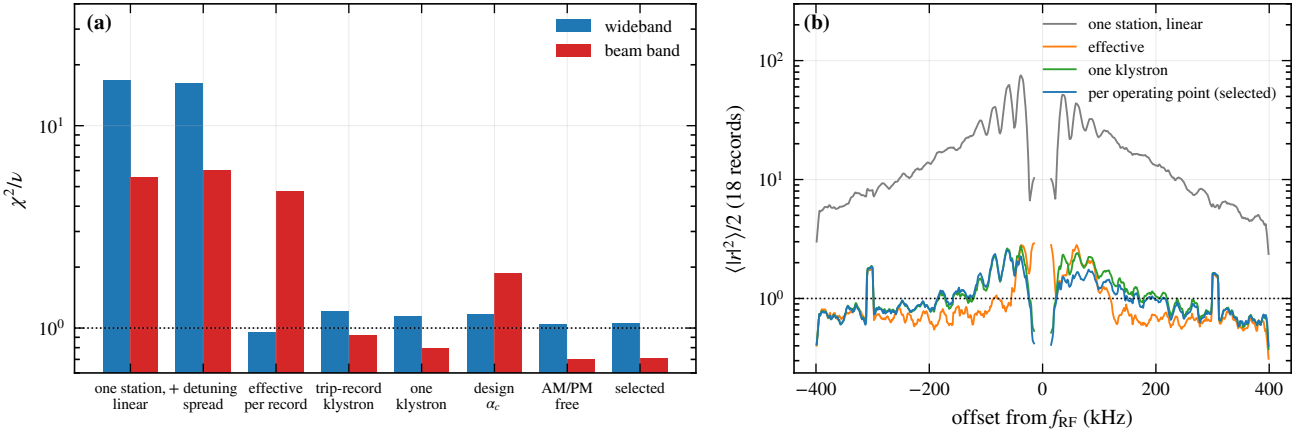
(a)
wideband
beam band
χ^2/ν
10^1
10^0
one station, linear
+ detuning spread
effective per record
trip-record klystron
one klystron
design α_c
AM/PM free
selected
(b)
one station, linear
effective
one klystron
per operating point (selected)
$\langle|r|^2\rangle/2$ (18 records)
10^2
10^1
10^0
−400
−200
0
200
400
offset from f_{RF} (kHz)