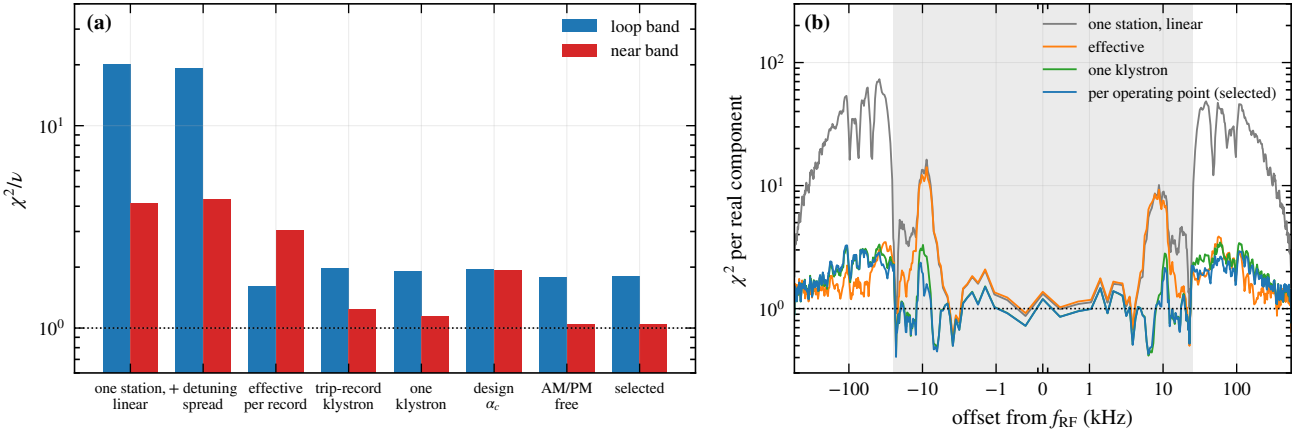
(a)
loop band
near band
χ^2/ν
10^1
10^0
one station, linear
+ detuning spread
effective per record
trip-record klystron
one klystron
design α_c
AM/PM free
selected
(b)
one station, linear
effective
one klystron
per operating point (selected)
χ^2 per real component
10^2
10^1
10^0
−100
−10
−1
0
1
10
100
offset from f_{RF} (kHz)