

DREAMHOUSE

in Amelia

Faye Bell





DREAMHOUSE *in Amelia*

SKU: DH04

A durable Type II vinyl wallcovering suitable for use in commercial and residential spaces

Design Format

Large repeat that is sold on panels at lengths of 9', 12' and 15'+

Repeat

52" W x 55" H

Match

Straight Match

Material Width

52" Wide Trimmed

Ships 54" Untrimmed

Grounds

Type II Vinyl (See p.4 for details)

Standard clay coated paper available

Stock

Print to order

Lead Time

4-6 weeks to ship

Rush available

Minimum Order

5 yds

Fully Customizable

Ordering

We love to help! Reach out to us at info@fayebell.com OR estimate quantities in real time & submit for a quote using our online calculator.

DREAMHOUSE

Colorways are available on Standard Clay Coated Paper or Type II Vinyl. Below is their standard specification.

Standard Clay Coated Paper



Fleur • DH12



Camo • DH13




Atlantis • DH14

Type II Vinyl



Celeste • DH01

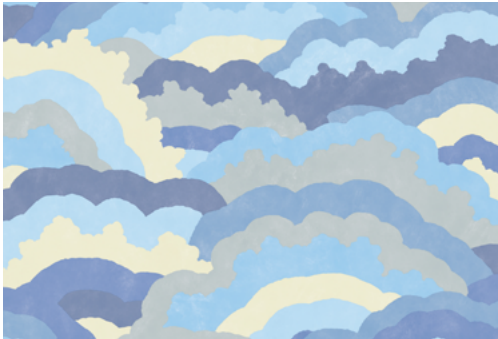

Elmer • DH02



Radley • DH03



Amelia • DH04



Harriet • DH05



Daphne • DH06



Penn • DH07



Monie • DH08

SPECIFICATIONS FOR TYPE II VINYL GROUNDS

Commercial grade vinyl wallcovering media intended for indoor use in environmentally controlled spaces

Construction

Embossed vinyl face with laminated fabric backing

Installation

Standard commercial wallcovering pastes, primers and techniques

Packaging

3” core / wound print side out / shipped in heavy-duty cardboard

Weight

20oz. per lineal yard / 13 oz. per sq yd / 457g/m2

Thickness

Thickness 0.017in to 0.027in. / 0.432mm to 0.686mm

Federal Specification

CCC-408-D Type II

WA Specification

WA-101 , NSF/ANSI 342 Sustainability Standard

NFPA Life Safety Code 101

Meets or exceeds requirements for flame spread, smoke developed and flashover

Testing

- ASTM-E84 Tunnel Test / Passed Class A
- EU Class Flame (EN15102) / Passed Class B, s2
- BS476 Parts 6&7 / Passed all requirements
- CAN/ULC-S102 / Passed all requirements

Mold / Mildew

ASTM-G21 Specifications / Passed all requirements

Type II Properties

Passes all criterion for WA 101 Type II:

- Break Strength
- Tear Strength
- Cold Crack
- Heat Aging
- Shrinkage
- Stain Resistance
- Coating Adhesion (Bond)
- Colorfastness
- Washability
- Scrubability
- Blocking
- Crocking

Environmental Properties:

- NSF-342 / Certified for Silver compliance
- HPD / Health Product Declaration available
- EPD / Environmental Product Declaration available / UL third party certified for wallcovering industry average
- Low VOC / Meets California CDPH Standard for Schools and Offices when tested to CA 01350
- Contributes to LEED v4
- Meets or exceeds EU Toxicity standard EN 12149 A,B,C for heavy metals and formaldehyde
- Phthalate free formulation
- Prop 65 compliant
- Manufactured without the use of Brominated flame retardants

CARE INSTRUCTIONS FOR TYPE II VINYL GROUNDS

General Conditions / Removal of Day-to-Day Soil

1. Ordinary dirt & smudges can be removed with a mild soap and warm water
2. Clean from the bottom of the wall upward. Rinse thoroughly with clean water from the top down using a soft sponge.
3. Dry wallcovering with a soft lint free cloth or towel
4. For more difficult surface-deep stains, the use of a strong detergent is recommended
5. Always test an inconspicuous area with the stronger detergent to be sure that surface and ink are not damaged.
6. DO NOT USE STEEL WOOL OR POWDERED ABRASIVE BECAUSE THEY CAN DAMAGE THE IMAGE AND TEXTURED SURFACE.
7. DO NOT USE SOLVENTS, ALCOHOL, PINE OIL, OR CLEANERS THAT CONTAIN THESE KINDS OF PRODUCTS AS THEY CAN REMOVE THE IMAGE AND DAMAGE THE TEXTURED SURFACE.
8. WHEN CLEANING, ALWAYS TAKE MEASURES TO PREVENT WATER FROM DRIPPING BEHIND MOLDING.

**NEVER MIX CLEANING AGENTS TOGETHER.
VIOLENT REACTIONS MAY OCCUR.**

Surface Protection

1. Always protect new installations with a high quality topcoat to minimize damage by dirt, scratches and abrasion. This is especially important in high traffic areas where people and objects will have frequent contact with the surface.
2. DreamScape's DreamGuard Protex3 is a non-hazardous, water-based protective topcoat that is
3. designed specifically to protect your valuable customwallcovering from scratches, abrasions, smudges and many types of food stains. DreamGuard can be applied with commercial liquid laminatingequipment as well as on site with a paint roller.