
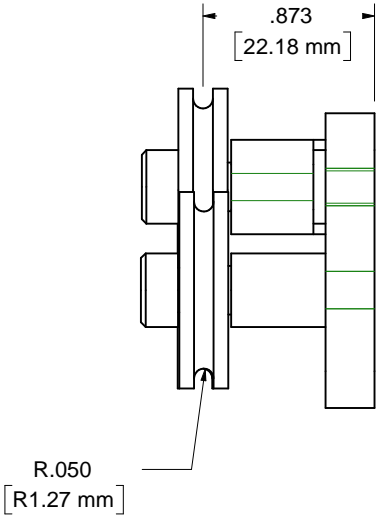
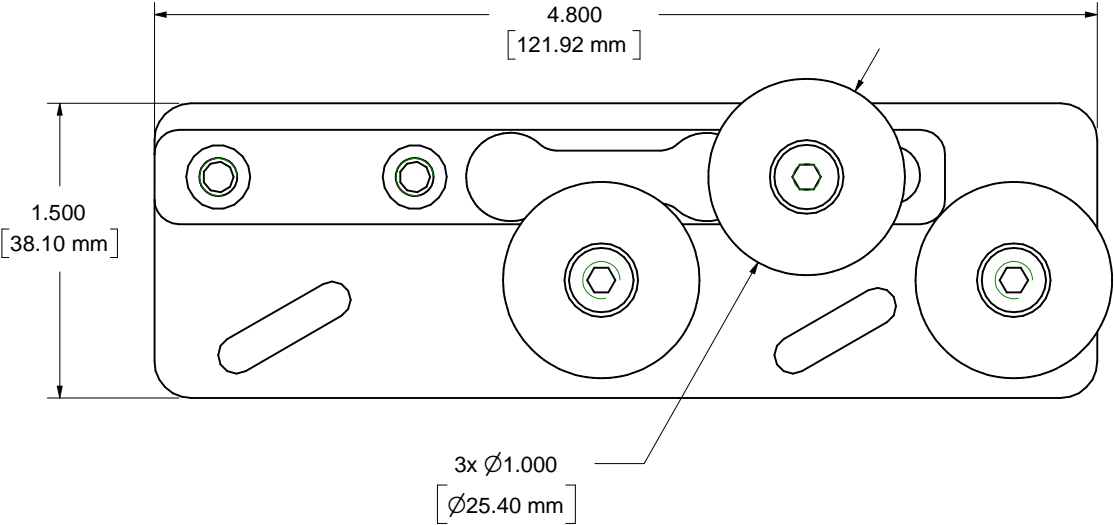



Typical Transducer Specifications

- *Tension Range: Supplied to Customer's requirements.
- *Contact Elements: To fit application.
- *Operating Temperature: 70° ± 25° F. (Special ranges available)
- *Connecting Terminals: 5 pin Amphenol plug or terminated ends.
- *Excitation Voltage: 4-10 VDC.
- *Bridge Resistance: 350 ohms nominal.
- *Output Signal: 1.0 - 2.0 mv/V nominal.
- *Resistance to Ground: Exceeding 500 Megaohms.
- *Zero Balance: Less than 1.5% FS
- *Drift at Midpoint: 0.2%
- *Noise Level: Less than 0.2%
- *Linearity: 0.5%
- *Combined Linearity & Hysteresis: ± .75%
- *Total Error: 1% FS
- *Overload Tension: 50% Overated
- *Shielded Cable: 10' standard length.

Revisions			
SYM	Description	Date	Approval

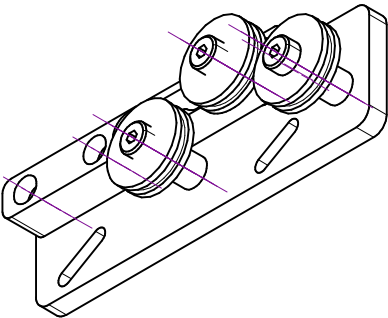

Material ALUMINUM			Finish CLEAR ANODIZE		Heat Treat		
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED			TITLE LOW PROFILE THREE ROLLER SENSOR		Weight		
					<div>TENSITRON^{INC.}</div> <div></div> <div>733 South Bowen Street Longmont, CO 80501</div>		
FRAC.	DEC.	ANG.					
± 1/64	± .005	± 30°					
Scale 1:1		No. Req'd	Drawn SHS	Date 6-22-07	Size	Drawing Number	Issue
Next Assy			Checked			FT-116	
			Approved				