

An Explainable Data-Driven Platform for Optimal Wind Farm Siting

Francesco Bizzarri

Student ID:
35740639

Supervisors:
Tim Dwyer (Monash University)
Simone Marinai (University of Florence)

Submitted for FIT5126 as an exchange student at Monash University, May 2025

1 Introduction

Wind farm site selection is a crucial yet highly complex challenge. Optimal siting involves much more than simply identifying windy locations; it requires balancing multiple, often competing factors including, but not limited to, proximity to the electricity grid, consistency of wind resources, land use constraints, environmental concerns, community acceptance, and economic viability [1–3]. The goal is to select locations that will not only generate the most reliable energy over time but also integrate well into the broader power system and surrounding landscape. However, this decision-making process is often not systematically optimized.

This issue has become even more pressing in the context of growing climate change awareness and the global transition toward sustainable energy systems. In Australia, policy commitments such as the Victorian Renewable Energy Targets, legislated in the *Renewable Energy Act (2017)* [4], reinforce this shift. These targets include:

- 40% of Victoria’s electricity generation to be renewable by 2025
- 65% by 2030
- 95% by 2035

Meeting such goals will demand not only increased renewable energy capacity, but also smarter, more coordinated deployment strategies. This underscores the need for data-driven and holistic planning tools that can guide decision-making.

Currently, wind farm development in Australia is largely driven by a bottom-up planning ap-

proach. While site selection occurs within a defined legal framework and requires approval from energy market regulators, final decisions are often shaped by the interests of local stakeholders, like landowners, and by wind resource assessments conducted over relatively short timescales. Given that wind farms typically operate for 20 to 30 years, this approach can result in long-term inefficiencies [5]. Studies have shown that such a fragmented planning process can lead to suboptimal outcomes in terms of both total energy generation and supply stability. In contrast, a top-down planning model, where wind farm locations are determined with long-term demand patterns in mind, has demonstrated the potential for significantly greater efficiency and reliability [6].

1.1 Aim

This literature review aims to explore existing methods for wind farm site selection, both globally and within Australia. It will examine traditional approaches as well as recent techniques that incorporate artificial intelligence, with a particular focus on how explainable these methods are, both in terms of technical transparency (e.g., explainable AI) and in their ability to clearly justify decisions to non-technical audiences.

Findings from the review will inform the design of a user-friendly, explainable decision-support platform intended for a diverse range of users. These can include both technical actors such as infrastructure planners, power operators (e.g., AEMO, VicGrid) and decision makers, as well as ordinary citizens and local communities. In this context, clear and interactive representations of site selection criteria can help build trust, reduce misunderstandings, and support more inclu-

sive planning. This is particularly important because the question of where to produce renewable electricity is often controversial, and the acceptance of new energy infrastructures, especially by the communities living near proposed sites, is critical, and it can lead to tension between stakeholders with different priorities or levels of technical understanding. [2, 7–9].



Figure 1: Recent protests against wind farms in Australia. **(Center)** A protest in Wollongong against plans for an offshore wind farm, May 2025 (Photo: Anna Warr, The Advocate). **(Right)** A rally on the front lawns of Parliament House in Canberra, February 24 (Photo: Mike Bowers, The Guardian). **(Left)** A sign photographed by the author in Warnambool, March 2025

1.2 Document structure

Following the introduction, this report presents a structured literature review divided into several sections. The review explores the types of commonly used input data and critically examines traditional and AI based methods for wind farm site selection, with a particular focus on how explainable the methods are. It includes comparisons between approaches used across different countries, as well as a section dedicated to Australian visual and interactive tools, mainly focusing on mapping systems. These tools, coming from different domains than wind energy planning, offer inspiration and practical features that will help shape the design of the proposed platform. The State of the Art Summary then identifies gaps in the existing literature, particularly the lack of explainable and accessible visual tools that allow the creation of “what-if” scenarios. The Research Project Plan outlines a practical approach to addressing these gaps, including a section on the technical tools to be used, such as programming languages and frameworks. Finally, the Conclusion section highlights the key findings and provides a concise summary of the report.

2 Literature review

2.1 Data Inputs for Wind Farm Site Suitability Modeling

Before delving into the various methods used for wind farm site selection, it is important to first understand the types of data commonly employed in these studies. The selection of suitable wind farm sites is inherently data-driven, relying on a wide range of datasets to evaluate the feasibility, efficiency, and sustainability of potential locations. These datasets, which span technical, environmental, and social factors, are fundamental in determining the most appropriate sites for wind farm development. After reviewing numerous studies it becomes evident that the types of data used are similar, regardless of geographical location or the specific approach employed. The most common siting factors identified across these studies are summarized in the table below:

Siting Factor
Wind Speed
Distance to Protected or Wildlife Areas
Slope
Distance to Urban Centers
Distance to Roads
Distance to Transmission Lines or Substations
Life Cycle Costs
Distance to Airports
Distance to Water Bodies
Elevation
Distance to Animal Habitats or Migration Zones
Wind Power Density
Distance to Agricultural Areas
Flood Risk
Landslide Risk
Distance to Historic Places
Distance to Railroads
Distance to Military Zones

Table 1: Common siting factors used in (onshore) wind farm site selection

However, even with these shared factors, a significant challenge persists: the lack of standardization in how data is represented and utilized. As highlighted in [10], a consistent and standardized approach to data representation is absent across the studies. This variability in data handling can create discrepancies in the results and undermines the reliability of findings across different studies,

especially if applied to the same region of interest. The wind speed, for example, may be categorized either as an economic factor [11, 12], or as a technical factor [13, 14]; as a constraint [15] (setting a minimum threshold) or as an evaluation criterion [16] (taken into account in order to maximize potential energy output). Furthermore, the choice of data sources often remains unclear, with many studies failing to specify where their datasets were obtained [1, 13, 17–20], which hinders transparency and replicability in site selection research.

2.2 Methods

The methods used for wind farm site selection (WiFSS) have grown more sophisticated over the past decade, driven by the growing demand for renewable energy. In general, these methods can be grouped into two main categories:

- Multi Criteria Decision Making (MCDM) methods
- Non-MCDM methods

Each group including a range of different techniques, differing in how they handle and process data.

2.2.1 Multi Criteria Decision Making (MCDM) methods

MCDM has been an active area of research since the 1970s [21] and its methods are applied across a wide range of research fields, including mathematics, energy systems, computer science, and economics [22]. MCDM methods address decision problems involving multiple, often conflicting criteria, typically measured in incomparable units. MCDM methods are designed to support the evaluation and selection of alternatives in complex scenarios where trade-offs are inevitable [23], such as in wind farm site selection. Determining importance coefficients (weights) for each factor of the problem is the central challenge in MCDM methods.

Analytic Hierarchy Process (AHP) In the context of wind farm site selection, the Analytic Hierarchy Process is probably the most extensively applied MCDM method, with numerous studies employing it across different regions in England [24], Saudi Arabia [25], Ecuador [26], India [27], Spain [28], among others. AHP is a rank-order

weighting method, which means that each factor is considered to have a different level of importance when determining the best location for a wind farm. This method is composed of two key stages: pairwise comparisons and weighted linear combination (WLC). The pairwise comparison stage is needed to assign relative importance weights to the factors of the problem (e.g. distance from electrical grid, averaged wind speed). While WLC is used in the final step to evaluate and rank each potential wind farm location based on the calculated weights [29]. For instance, one wind farm location may have a certain distance from a national park, a specific distance from the electrical grid, and a particular average wind speed. Another location, in turn, might have different values for these same factors. Experts, using their knowledge and judgment, compare the criteria by performing pairwise scenario comparisons. Their opinions are then used to generate a comparison matrix, which is subsequently used to establish the relative weights. These weights determine which factors are more or less important in the context of the overall goal of identifying the best location. The main advantage of this method lies in its ability to break down a large problem into smaller, more manageable subproblems (such as comparing pairs of scenarios at different hierarchical levels) [30]. On the other hand, a major challenge is the reliance on expert opinions, which can be difficult to obtain and select. Moreover, these opinions can be conflicting and uncertain, as they are based on human judgment, which inherently involves subjectivity [1]. To overcome this issue, such methods also embed the calculation of a consistency index, which serves as a proxy for the logical coherence of judgments and helps ensure that the decision making process remains as reliable as possible [23].

Fuzzy Analytic Hierarchy Process (FAHP)

Despite the use of a consistency index, the traditional AHP methods still face limitations in handling the ambiguity and vagueness inherent in human judgment. Experts' evaluations are often imprecise or linguistically expressed (e.g., “slightly more important” or “being far from the electrical grid is much less favorable than being far from a national park”), which makes it challenging to make precise judgments in pairwise comparisons. To better capture this uncertainty, the Fuzzy Analytic Hierarchy Process (FAHP) extends the con-

ventional AHP by incorporating fuzzy set theory [31]. In a notable application of these principles, a study focusing on on-shore wind farm site selection in South Korea [1] employed the FAHP method to determine factors weights more robustly. Similar approaches have also been used in other countries, such as Greece [32] and Nigeria [33].

Technique for Order of Preference by Similarity to Ideal Solution (TOPSIS) TOPSIS is a popular MCDM technique, originally introduced over four decades ago [34], and still remains (together with its variations) one of the most widely applied methods in multi-criteria analysis. The core idea is intuitive: the optimal alternative should be closest to the ideal solution, representing the best possible performance across all criteria, and farthest from the negative ideal solution, which represents the worst case scenario. By calculating the relative distances to these two reference points, TOPSIS provides a simple ranking of the alternatives. Its appeal lies in its simplicity and compatibility with a variety of decision making contexts. For example, in the context of wind farm site selection, the ideal location might correspond to high wind speed, a short distance to the grid, and low environmental impact. These criteria can be represented as a vector. Each site in the region of interest is also represented as a vector of values and then compared to the ideal and negative-ideal vectors. TOPSIS calculates the geometric distance of each site to both extremes and assigns a relative closeness score. The site with the highest score is considered the most suitable. TOPSIS allows for the inclusion of weights to reflect the relative importance of factors, adjusting the distance computations to the ideal and negative-ideal solutions. This is why techniques like AHP and TOPSIS are often used together. For example, in a study conducted in Turkey [35], a FAHP method was applied to determine the weights of the factors. These weights were then used in the TOPSIS framework to rank the alternatives. A similar idea was used in Eastern Macedonia and Thrace [36]. However, while TOPSIS offers an intuitive solution to the problem, it is not without limitations. A key concern arises during the data normalization phase, where vector representations are constructed. Since TOPSIS is highly sensitive to the way data is normalized,

selecting an appropriate normalization method is critical. Poor choices at this stage can lead to distorted distances and, ultimately, unreliable rankings. This is particularly problematic when dealing with factors that have different units or highly skewed distributions. Recent studies have highlighted this issue [37, 38]. Additionally, TOPSIS during the distances calculation assumes that criteria are statistically independent [39], overlooking potential interactions that may exist between them. Finally, the method relies on human input to define the ideal and negative ideal solutions, which introduces subjectivity into the process. As with Fuzzy AHP, fuzzy extensions of TOPSIS have also been developed to address this uncertainty [40].

The methods discussed so far, regardless of their specific type, commonly utilize Geographic Information Systems (GIS) to visualize the results. GIS refers to a system designed to capture, store, manipulate, analyze, manage, and present geographical data. In the context of wind farm site selection, GIS tools are essential for integrating various spatial datasets. These systems allow for the visualization of complex, multi dimensional data in a geographical context, making it easier to identify locations that are more suitable or less suitable. Each of the methods typically produces a ranking or a score for each location. This ranking or score can then be used as a form of legend on the GIS map. Several examples are provided in Figure 3.

2.2.2 Non-MCDM Methods

While MCDM methods offer structured frameworks for decision making, they rely heavily on subjective judgments to assign importance to the different factors. Making them inherently dependent on experts opinions and qualitative assessments. In contrast, Non-MCDM methods are predominantly fully data driven approaches. Although expert input may still be incorporated at certain stages, these methods fundamentally rely on computational models and algorithmic logic to derive conclusions. Within this broader category, AI models have emerged as a hot topic in recent years, due to their ability to handle complex, high-dimensional data and uncover patterns that traditional methods might miss. In the following section, we will discuss some examples of these Non-MCDM methods.

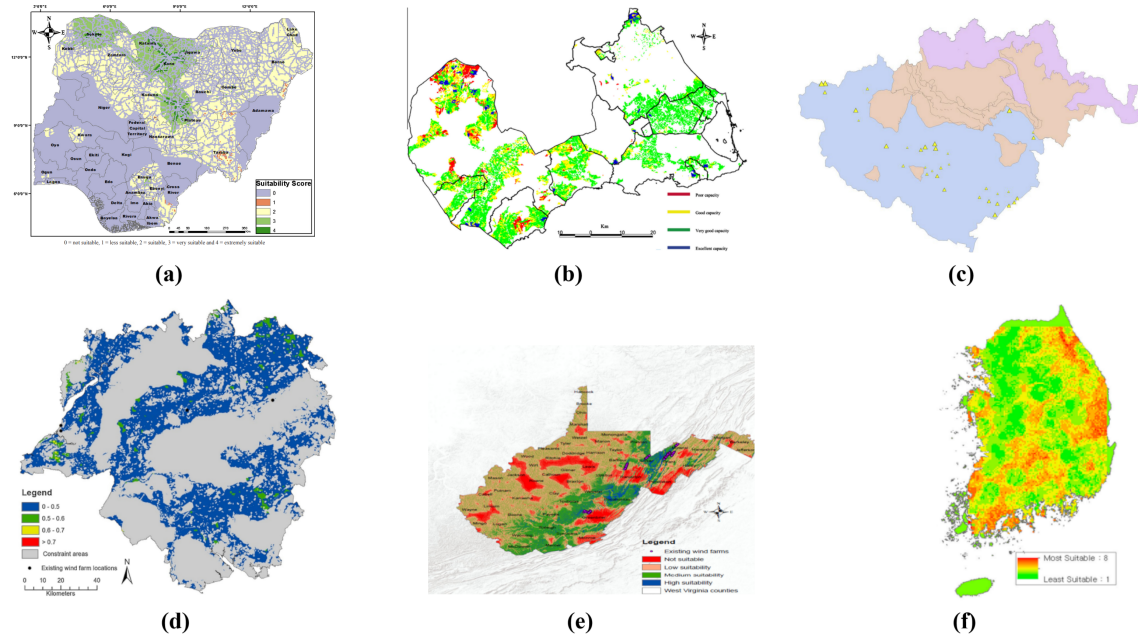


Figure 2: GIS-based visualizations showing the spatial distribution of site suitability for wind farm development. Regardless of the specific method used, each map represents suitability scores or rankings derived from multiple criteria.

(a) Nigeria, FAHP method [33] (b) Murcia region, Spain, FAHP method [28] (c) East Macedonia, Greece, AHP+TOPSIS method. Bigger triangles represent higher suitability [36] (d) South Central England, AHP method [16] (e) West Virginia, USA, AHP method [13] (f) South Korea, FAHP method [1]

Cost/Benefit Models Unlike the MCDM methods described before, which emphasize a broader set of factors such as environmental, technical, and social criteria, cost/benefit models focus primarily on the economic aspects of wind farm site selection. These models are designed to evaluate the financial feasibility of different site options by comparing the costs associated with wind farm development and operation against the anticipated economic benefits, primarily in terms of energy production and long term revenues. In the study by Kim et al. [41] for example, the cost estimation for offshore wind farms involves a comprehensive breakdown of all economic factors. Each cost category is meticulously calculated, including:

- Turbine cost
- Foundation cost
- Electric system
- Grid interface cost
- Project development cost

The benefit estimation is also detailed, taking into account the annual energy production and efficiency loss. The potential locations are then

ranked based on the cost/benefit ratio and visualized using GIS. Such an approach leaves very little room for subjectivity, as it relies heavily on quantitative data and objective calculations. Similarly, a study focusing on Turkey's wind energy potential [42] applies a similar cost/benefit approach to evaluate optimal sites. What is particularly interesting in this study is their use of the ARIMA (AutoRegressive Integrated Moving Average) model to forecast where the highest energy demand will be in the future. By predicting energy consumption trends, the researchers are able to strategically place turbines closer to areas where energy demand is expected to peak. This ensures that the wind farms are aligned with future energy needs, making the entire planning process more forward looking and efficient. Also in this case, the estimation is entirely data-driven, as a mixed-integer nonlinear programming model is used to minimize installation, maintenance, and operational costs while accounting for wind potential, demand forecasts, and budget limits across the Turkish provinces.

Supervised Machine Learning Algorithms

Machine learning algorithms represent a powerful evolution of data-driven wind farm site selection

methods, offering predictive capabilities and advanced pattern recognition that go beyond traditional statistical or optimization models. Several supervised learning models have been explored in this context. For instance, in a study conducted in the Masovian Voivodeship of Poland, an Artificial Neural Network (Multilayer Perceptron) was trained to evaluate land suitability for wind farm placement using spatial and topographic features [43]. The training data was created by dividing the region into $100\text{ m} \times 100\text{ m}$ land squares, each of which was evaluated by experts. Experts assessed each grid square and assigned a suitability score, which served as the target variable for training the model. The performance of the trained ANN showed strong predictive capability, with an accuracy value higher than 0.80 on the test set, indicating that the model was able to accurately capture the relationship between the input features and the land suitability. Similar good performance results were achieved using Support Vector Machines (SVM) and Random Forests (RF), as demonstrated by a study that employed global wind farm installation data [44]. Note that a common issue when using supervised learning methods is the imbalance in the dataset. In most cases, the labeled data, representing the actual locations where wind farms are placed or the optimal ones, is significantly smaller than the set of all possible land locations. This class imbalance can cause the model to be biased toward predicting negative outcomes (unsuitable land). To address this issue, oversampling techniques like SMOTE (Synthetic Minority Over-sampling Technique) [45] are commonly used. SMOTE helps by generating synthetic samples for the underrepresented class, thus improving the model's ability to learn the characteristics of both classes more effectively and eventually obtain more accurate predictions. Other types of supervised models, such as Logistic Regression [46], are also used for similar purposes. However, we will not go into the specifics of these methods, as the underlying concept remains the same.

Unsupervised Machine Learning Algorithms

Unsupervised Machine Learning offers an alternative approach to wind farm site selection that addresses some of the limitations associated with supervised learning models. Unsupervised techniques do not require ground truth data (labels). One critical issue with supervised learning in the

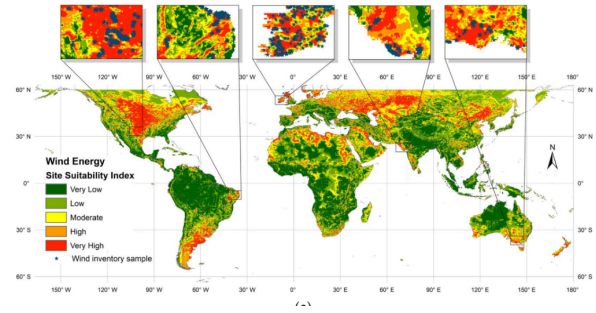


Figure 3: Global wind farm suitability map generated through supervised machine learning, trained on a dataset containing worldwide wind farm locations [44].

context of our problem is the risk of model bias. When current wind farm locations are used as ground truth for training, the model basically learns to replicate the decisions made in the past, potentially reinforcing biases in site selection. This can result in the new model favoring areas similar to those where wind farms were previously established, even if those locations may not represent the most optimal set of choices. In other words, the model might automate a suboptimal decision-making process. If the supervised learning model is trained based on experts suggested locations (such as in [43]), instead of actual wind farm sites, it faces the same challenge previously discussed: human judgment. While experts can provide valuable input, their assessments can also be subjective.

The majority of unsupervised methods for wind farm location selection involve some form of clustering. A study demonstrated that Australian existing and planned wind farms produce less power and show greater energy output variability compared to a hypothetical optimal set of farms with the same capacity (even when the hypothetical set is constrained to locations within 100 km from the electrical grid) [6]. They arrived at this result by employing clustering technique and by minimizing correlations in wind power potential between different sites. They applied hierarchical clustering techniques to analyze historical wind speed time series data. What they discovered was significant: the existing and planned wind farms are largely concentrated within the same clusters. This means that these farms are highly correlated (i.e. if one zone experiences low wind conditions, other nearby farms will likely face the same issue). This interdependence creates a problem and it is particularly crucial when considering the need

to complement solar energy, especially since solar power is unavailable at night and relies on wind or other sources for consistent, reliable energy production. Hierarchical clustering is not the only algorithm employed in these studies. K-Means and DBSCAN are also popular choices, as demonstrated by another Australian study [47] and in Pakistan [48].

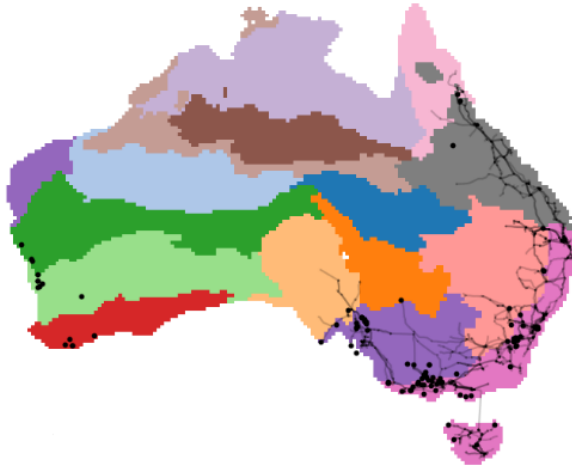


Figure 4: This figure illustrates the clustering of wind correlation zones based on historical wind speed data, showing that the majority of existing and planned wind farms (dots) are concentrated within a few key clusters. This concentration is understandable, as these regions align with the locations of the electrical grid (lines) and Australia's population centers. However, the analysis also reveals that there are also better and optimal sites for wind farms within a 100 km radius from the grid, suggesting potential for reducing interdependence among farms, which could improve energy reliability. [6].

Gap explainable ai Mostra foto della mappa fino al 2022, e poi un solo studio dopo il 2022 Non spiegabili, static maps, not what if scenarios easily done (it requires new computation) No python integration for future models (climate change)

3 Australian visual interfaces

References

- [1] S. Ali, S.-M. Lee, and C.-M. Jang, "Determination of the most optimal on-shore wind farm site location using a gis-mcdm methodology: evaluating the case of south korea," *Energies*, vol. 10, no. 12, p. 2072, 2017.
- [2] M. Drechsler, J. Egerer, M. Lange, F. Masurowski, J. Meyerhoff, and M. Oehlmann, "Efficient and equitable spatial allocation of renewable power plants at the country scale," *Nature Energy*, vol. 2, no. 9, pp. 1–9, 2017.

- [3] J. Huenteler, T. Tang, G. Chan, and L. D. Anadon, "Why is china's wind power generation not living up to its potential?" *Environmental Research Letters*, vol. 13, no. 4, p. 044001, 2018.
- [4] State of Victoria, "Renewable Energy (Jobs and Investment) Act 2017 (Vic)," Retrieved from: <https://www.legislation.vic.gov.au/in-force/acts/renewable-energy-jobs-and-investment-act-2017/002>, 2017.
- [5] J. M. Weinand, E. Naber, R. McKenna, P. Lehmann, L. Kotzur, and D. Stolten, "Historic drivers of onshore wind power siting and inevitable future trade-offs," *Environmental Research Letters*, vol. 17, no. 7, p. 074018, 2022.
- [6] A. Gunn, R. Dargaville, C. Jakob, and S. McGregor, "Spatial optimality and temporal variability in australia's wind resource," *Environmental Research Letters*, vol. 18, no. 11, p. 114048, 2023.
- [7] G. S. Nieminen and E. Laitinen, "Understanding local opposition to renewable energy projects in the nordic countries: A systematic literature review," *Energy Research & Social Science*, vol. 122, p. 103995, 2025.
- [8] L. Susskind, J. Chun, A. Gant, C. Hodgkins, J. Cohen, and S. Lohmar, "Sources of opposition to renewable energy projects in the united states," *Energy Policy*, vol. 165, p. 112922, 2022.
- [9] C.-L. Shen and H.-S. Tai, "National goal, local resistance: How institutional gaps hinder local renewable energy development in taiwan," *Energy for Sustainable Development*, vol. 83, p. 101586, 2024.
- [10] J. J. Wimhurst, C. C. Nsude, and J. S. Greene, "Standardizing the factors used in wind farm site suitability models: A review," *Heliyon*, vol. 9, no. 5, 2023.
- [11] H. Eroğlu, "Multi-criteria decision analysis for wind power plant location selection based on fuzzy ahp and geographic information systems," *Environment, Development and Sustainability*, vol. 23, no. 12, pp. 18 278–18 310, 2021.

- [12] D. J. Pojadas and M. L. S. Abundo, "Spatio-temporal assessment and economic analysis of a grid-connected island province toward a 35% or greater domestic renewable energy portfolio: a case in bohol, philippines," *International Journal of Energy and Environmental Engineering*, vol. 12, pp. 251–280, 2021.
- [13] B. A. Ajanaku, M. P. Strager, and A. R. Collins, "Gis-based multi-criteria decision analysis of utility-scale wind farm site suitability in west virginia," *GeoJournal*, vol. 87, no. 5, pp. 3735–3757, 2022.
- [14] P. Díaz-Cuevas, "Gis-based methodology for evaluating the wind-energy potential of territories: A case study from andalusia (spain)," *Energies*, vol. 11, no. 10, p. 2789, 2018.
- [15] M. S. Genç, F. Karipoğlu, K. Koca, and Ş. T. Azgın, "Suitable site selection for offshore wind farms in turkey's seas: Gis-mcdm based approach," *Earth Science Informatics*, vol. 14, no. 3, pp. 1213–1225, 2021.
- [16] A. Ouammi, V. Ghigliotti, M. Robba, A. Mimet, and R. Sacile, "A decision support system for the optimal exploitation of wind energy on regional scale," *Renewable Energy*, vol. 37, no. 1, pp. 299–309, 2012.
- [17] J. Kazak, J. Van Hoof, and S. Szezwanski, "Challenges in the wind turbines location process in central europe—the use of spatial decision support systems," *Renewable and Sustainable Energy Reviews*, vol. 76, pp. 425–433, 2017.
- [18] M. Kabak and G. Taşkınöz, "Determination of the installation sites of wind power plants with spatial analysis: A model proposal," *Sigma Journal of Engineering and Natural Sciences*, vol. 38, no. 1, pp. 441–457, 2020.
- [19] A. Azadeh, A. Rahimi-Golkhandan, and M. Moghaddam, "Location optimization of wind power generation–transmission systems under uncertainty using hierarchical fuzzy dea: A case study," *Renewable and Sustainable Energy Reviews*, vol. 30, pp. 877–885, 2014.
- [20] A. Azadeh, S. Ghaderi, and M. Nasrollahi, "Location optimization of wind plants in iran by an integrated hierarchical data envelopment analysis," *Renewable Energy*, vol. 36, no. 5, pp. 1621–1631, 2011.
- [21] Wikipedia, "Multiple-criteria decision analysis," Retrieved from: https://en.wikipedia.org/wiki/Multiple-criteria_decision_analysis.
- [22] H. Taherdoost and M. Madanchian, "Multi-criteria decision making (mcdm) methods and concepts," *Encyclopedia*, vol. 3, no. 1, pp. 77–87, 2023.
- [23] S. D. Pohekar and M. Ramachandran, "Application of multi-criteria decision making to sustainable energy planning—a review," *Renewable and sustainable energy reviews*, vol. 8, no. 4, pp. 365–381, 2004.
- [24] J. J. Watson and M. D. Hudson, "Regional scale wind farm and solar farm suitability assessment using gis-assisted multi-criteria evaluation," *Landscape and urban planning*, vol. 138, pp. 20–31, 2015.
- [25] M. Baseer, S. Rehman, J. P. Meyer, and M. M. Alam, "Gis-based site suitability analysis for wind farm development in saudi arabia," *Energy*, vol. 141, pp. 1166–1176, 2017.
- [26] G. Villacreses, G. Gaona, J. Martínez-Gómez, and D. J. Jijón, "Wind farms suitability location using geographical information system (gis), based on multi-criteria decision making (mcdm) methods: The case of continental ecuador," *Renewable energy*, vol. 109, pp. 275–286, 2017.
- [27] S. Saraswat, A. K. Digalwar, S. Yadav, and G. Kumar, "Mcdm and gis based modelling technique for assessment of solar and wind farm locations in india," *Renewable Energy*, vol. 169, pp. 865–884, 2021.
- [28] J. Sánchez-Lozano, M. García-Cascales, and M. Lamata, "Gis-based onshore wind farm site selection using fuzzy multi-criteria decision making methods. evaluating the case of southeastern spain," *Applied Energy*, vol. 171, pp. 86–102, 2016.
- [29] M. Shao, Z. Han, J. Sun, C. Xiao, S. Zhang, and Y. Zhao, "A review of multi-criteria decision making applications for renewable energy site selection," *Renewable Energy*, vol. 157, pp. 377–403, 2020.

- [30] H. Z. Al Garni and A. Awasthi, "Solar pv power plant site selection using a gis-ahp based approach with application in saudi arabia," *Applied energy*, vol. 206, pp. 1225–1240, 2017.
- [31] X. Ruoning and Z. Xiaoyan, "Extensions of the analytic hierarchy process in fuzzy environment," *Fuzzy sets and Systems*, vol. 52, no. 3, pp. 251–257, 1992.
- [32] D. Latinopoulos and K. Kechagia, "A gis-based multi-criteria evaluation for wind farm site selection. a regional scale application in greece," *Renewable Energy*, vol. 78, pp. 550–560, 2015.
- [33] T. R. Ayodele, A. Ogunjuyigbe, O. Odigie, and J. L. Munda, "A multi-criteria gis based model for wind farm site selection using interval type-2 fuzzy analytic hierarchy process: The case study of nigeria," *Applied energy*, vol. 228, pp. 1853–1869, 2018.
- [34] G.-H. Tzeng and J.-J. Huang, *Multiple attribute decision making: methods and applications*. CRC press, 2011.
- [35] M. Çolak and İ. Kaya, "Prioritization of renewable energy alternatives by using an integrated fuzzy mcdm model: A real case application for turkey," *Renewable and sustainable energy reviews*, vol. 80, pp. 840–853, 2017.
- [36] I. Konstantinos, T. Georgios, and A. Garyfalos, "A decision support system methodology for selecting wind farm installation locations using ahp and topsis: Case study in eastern macedonia and thrace region, greece," *Energy Policy*, vol. 132, pp. 232–246, 2019.
- [37] Z. Bánhidi and I. Dobos, "Sensitivity of topsis ranks to data normalization and objective weights on the example of digital development," *Central European Journal of Operations Research*, vol. 32, no. 1, pp. 29–44, 2024.
- [38] V. Anes and A. Abreu, "Adaptive cluster-based normalization for robust topsis in multicriteria decision-making," *Applied Sciences*, vol. 15, no. 7, p. 4044, 2025.
- [39] G. D. Pelegrina, L. T. Duarte, and J. M. T. Romano, "Application of independent component analysis and topsis to deal with dependent criteria in multicriteria decision problems," *Expert Systems with Applications*, vol. 122, pp. 262–280, 2019.
- [40] B. Daneshvar Rouyendegh, A. Yildizbasi, and Ü. Z. Arıkan, "Using intuitionistic fuzzy topsis in site selection of wind power plants in turkey," *Advances in Fuzzy Systems*, vol. 2018, no. 1, p. 6703798, 2018.
- [41] J.-Y. Kim, K.-Y. Oh, K.-S. Kang, and J.-S. Lee, "Site selection of offshore wind farms around the korean peninsula through economic evaluation," *Renewable Energy*, vol. 54, pp. 189–195, 2013.
- [42] O. Derse and E. Yılmaz, "Optimal site selection for wind energy: a case study," *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, vol. 44, no. 3, pp. 6660–6677, 2022.
- [43] K. Pokonieczny, "Using artificial neural networks to determine the location of wind farms. miedzna district case study," *Journal of Water & Land Development*, vol. 30, no. 1, 2016.
- [44] M. S. Sachit, H. Z. M. Shafri, A. F. Abdullah, A. S. M. Rafie, and M. B. A. Gibril, "Global spatial suitability mapping of wind and solar systems using an explainable ai-based approach," *ISPRS International Journal of Geo-Information*, vol. 11, no. 8, p. 422, 2022.
- [45] N. V. Chawla, K. W. Bowyer, L. O. Hall, and W. P. Kegelmeyer, "Smote: synthetic minority over-sampling technique," *Journal of artificial intelligence research*, vol. 16, pp. 321–357, 2002.
- [46] M. Harper, B. Anderson, P. A. James, and A. S. Bahaj, "Onshore wind and the likelihood of planning acceptance: Learning from a great britain context," *Energy Policy*, vol. 128, pp. 954–966, 2019.
- [47] I. Rahimi, M. Li, J. Choon, D. Pamuspusan, Y. Huang, B. He, A. Cai, M. R. Nikoo, and

A. H. Gandomi, "Optimizing renewable energy site selection in rural australia: Clustering algorithms and energy potential analysis," *Energy Conversion and Management: X*, vol. 25, p. 100855, 2025.

- [48] F. Amjad and L. A. Shah, "Identification and assessment of sites for solar farms development using gis and density based clustering technique-a case of pakistan," *Renewable Energy*, vol. 155, pp. 761–769, 2020.