




POWER / ONBOARD ME6211




ESP32-C3 / BLE

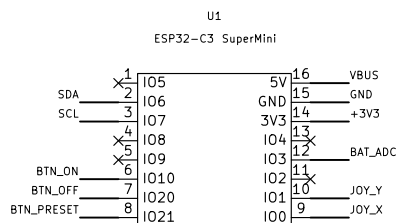



OLED / I2C




ADC / BATTERY

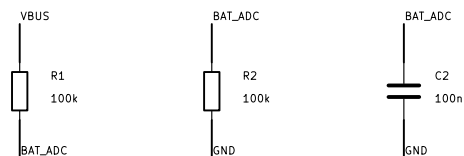

JOYSTICK / 2x10k / NO PUSH SWITCH

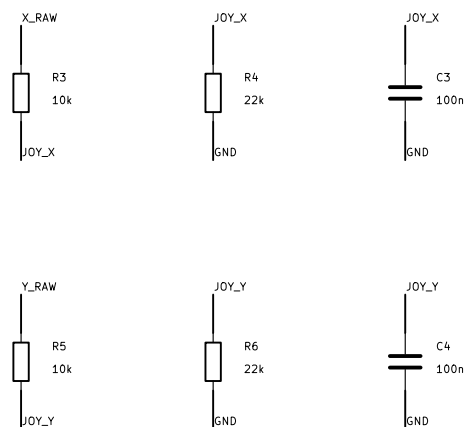

THUMB BUTTONS / INTERNAL PULLUPS



Joystick: GPIO0/1, ADC 12 dB attenuation, 10k/22k dividers limit full-scale to 2.27 V.
Battery: GPIO3 reads VBUS/2. Buttons GPIO10/20/21: internal pull-ups.
I2C GPIO6/7: pull-ups on OLED module. No boot strapping pins used.
Battery OFF + JP1 open before USB. Onboard diode does NOT isolate a battery sharing USB VBUS.
Single externally charged 18650. Test low-voltage operation with the actual SuperMini.

Sheet: /

File: esp32c3_remote.kicad_sch

Title: BLE REMOTE / 18650 / DIRECT THUMBSTICK

Size: A4 Date: 2026-09-20

KiCad E.D.A. 10.0.1

Rev: G

Id: 1/1