

We thank you for your price request and are pleased to present you the following quotation today:

8 October 2026

Administrative details

Your references

Offer nr.	B5457977	Purchase reference	Interface_IAl_Coffret
Service	PCB proto	Project reference	Interface_IAl_Coffret
Board name	Interface_IAl_Coffret	Article number	Interface_IAl_Coffret

Invoicing & delivery details

Invoice to:

frank.buloup@univ-amu.fr
Frank Buloup
Avenue de Luminy 163
Faculté des Sciences du Sport
13288 Marseille
France
33 0768300085
frank.buloup@univ-amu.fr

Delivered to:


Frank Buloup
Frank Buloup
Avenue de Luminy 163
Faculté des Sciences du Sport
13288 Marseille
France
33 0768300085
frank.buloup@univ-amu.fr

PCB


PCB Visualizer

PCB images


Top view :

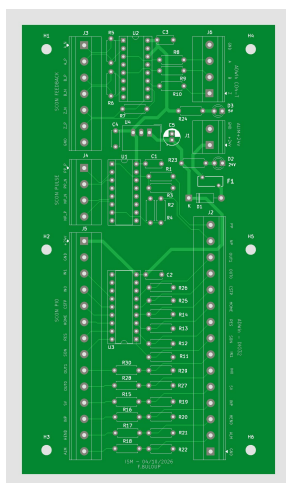

Bottom view:

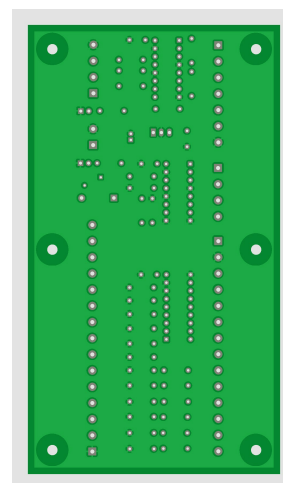

Buildup & Mechanical plan

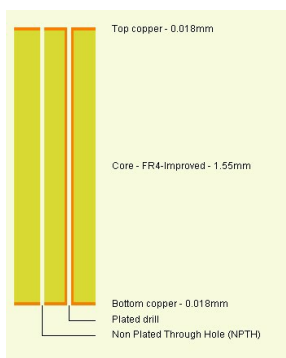

Technology & options

Board definition

Number of layers	2	Delivery format	Single PCB
PCB width (X)	79.33 mm	PCB height (Y)	141.00 mm
eC-registration compatible	No		

Board definition

Top soldermask	Green	Bottom soldermask	Green
Top legend	White	Bottom legend	No
Surface finish	Any lead free finish	Bare board testing	Yes

Board technology

Pattern class	4	Drill class	Drill A
Outer layer trackwidth (OL-TW)	0.250 mm	Hole density	< 1000/dm2
Outer layer isolation distance (OL-TT-TP-PP)	0.200 mm	Holes <= may be reduced	0.45 mm
Outer layer annular ring (OAR)	0.200 mm	Smallest final hole	0.60 mm
		Component pad pitch	0.50 mm

Material definition

Board thickness	1.55 mm	Board buildup	Standard
Base material	FR4IMP	Material Tg	145-150°C
Outer layer copper foil	18µm(End-Cu +/-35µm)	Inner layer copper foil	0
Extra PTH runs	0	Extra press cycles	0
Reversed buildup	No	Inner layer core thickness	Standard

Advanced options

Milling	No	Peelable mask	No
Edge connector gold surface mm²	0	Edge connector bevelling	No
Copper up to board edge	No	Plated holes on the board edge	No
Carbon contacts	No	Viafill	No
Top heatsink paste	No	Bottom heatsink paste	No
Press-fit holes	No	Depth routing	No
Round-edge plating	No	Chamfered mechanical holes	No
Specific marking	No	UL marking	No
Specific hole tolerance	No	Specific dimensional tolerances	No
Wire bonding	No	High-Voltage board	No

OFFER REFERENCE	LEAD TIME			NET PRICE	VAT (20.0%)	GROSS PRICE
B5457977	3 WD			EUR 88.12	EUR 17.62	EUR 105.74
CATEGORY	DELIVERY TERM	QTY	UNIT PRICE	NET	VAT	GROSS
P C B	3 WD	2	EUR 44.06	EUR 88.12	EUR 17.62	EUR 105.74
Transport	Express			EUR 0.00	EUR 0.00	EUR 0.00

Validity conditions, lead time and payment terms

This offer is valid for 30 days from the date on the document. It has been prepared in accordance with our terms of sales, available on our website, and accepted by you upon registration of your Eurocircuits online customer account.

The prices and delivery terms listed are based on the information and/or data provided by you. If these change, the final price and terms of delivery may also change.

Upon receiving your order for this offer, we will conduct several checks before confirming or declining your order:

- Whether any newly provided information and/or data still corresponds to those that formed the basis of this quotation.
- Your credit status with Eurocircuits.
- Compliance with our [Terms of Sales](#)

The lead time of your order starts to run the next working day after receipt of your order, provided it has been accepted by us.

The payment term of our invoices is 30 days invoice date unless there are circumstances or arrangements (credit status or specific agreements) that change this to payment before fulfilment (pre-payment).