

FCC SAR




Measurement and Test Report

For

ARB Corporation Ltd

42-44 Garden St, Kilsyth, Victoria, Australia

FCC ID: 2AA2H-LINXD2

Test Standards:	FCC Part 2.1093 ANSI / IEEE C95.1 ::2005+A1:2010 ANSI / IEEE C95.3 : 2002(R2008) <u>IEEE 1528 :2013</u>
Product Description:	<u>ARB LINX</u>
Tested Model:	<u>7450502</u>
Report No.:	<u>STR18018138H</u>
Sample Received Date:	<u>2018-01-29</u>
Tested Date:	<u>2018-01-29 to 2018-02-05</u>
Issued Date:	<u>2018-02-05</u>
Tested By:	<u>Lucy Wei / Engineer</u> 
Reviewed By:	<u>Silin Chen / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> 
Prepared By:	

Shenzhen SEM Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. General Information	3
1.1 Product Description for Equipment Under Test (EUT)	3
1.2 Test Standards	6
1.3 Test Methodology	6
1.4 Test Facility	6
2. Summary of Test Results	7
3. Specific Absorption Rate (SAR)	8
3.1 Introduction	8
3.2 SAR Definition	8
4. SAR Measurement System	9
4.1 The Measurement System	9
4.2 Probe	9
4.3 Probe Calibration Process	11
4.4 Phantom	12
4.5 Device Holder	12
4.6 Test Equipment List	13
5. Tissue Simulating Liquids	14
5.1 Composition of Tissue Simulating Liquid	14
5.2 Tissue Dielectric Parameters for Head and Body Phantoms	15
5.3 Tissue Calibration Result	16
6. SAR Measurement Evaluation	17
6.1 Purpose of System Performance Check	17
6.2 System Setup	17
6.3 Validation Results	18
7. EUT Testing Position	19
7.1 Define Two Imaginary Lines on The Handset	19
7.2 Cheek Position	20
7.3 Tilted Position	20
7.4 Body Worn Position	21
7.5 EUT Antenna Position	21
7.6 EUT Testing Position	22
8. SAR Measurement Procedures	23
8.1 Measurement Procedures	23
8.2 Spatial Peak SAR Evaluation	23
8.3 Area & Zoom Scan Procedures	24
8.4 Volume Scan Procedures	24
8.5 SAR Averaged Methods	24
8.6 Power Drift Monitoring	24
9. SAR Test Result	25
9.1 Conducted RF Output Power	25
9.2 Test Results for Standalone SAR Test	59
9.3 Simultaneous Multi-band Transmission SAR Analysis	70
10. Measurement Uncertainty	80
10.1 Uncertainty for EUT SAR Test	80
10.2 Uncertainty for System Performance Check	81
Annex A. Plots of System Performance Check	83
Annex B. Plots of SAR Measurement	107
Annex C. EUT Photos	167
Annex D. Test Setup Photos	169
Annex E. Calibration Certificate	174

1. General Information

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: ARB Corporation Ltd
Address of applicant: 42-44 Garden St, Kilsyth, Victoria, Australia

Manufacturer: ZXD Technology Development Limited
Address of manufacturer: Unit 415-418, Building C, Baoan New Generation Technology Information Industry Park, Baoan District, Shenzhen, P.R.China

General Description of EUT:	
Product Name:	ARB LINX
Brand Name:	ARB
Model No.:	7450502
Adding Model(s):	/
Rated Voltage:	DC 3.8V by Battery
Battery Capacity:	2000mAh
Device Category:	Portable Device
<i>The EUT Main board support GSM850/ PCS1900, WCDMA Band 2/5, LTE Band 2/4/5/7/17/40 function. It is intended for speech, Multimedia Message Service (MMS) transmission. It is equipped with GPRS/EDGE class 12 for GSM850/900/DCS1800/PCS1900, GPS, FM, Bluetooth, and Wi-Fi functions. For more information see the following datasheet</i>	
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 33.93dBm, GSM1900: 30.82dBm EDGE850: 28.15dBm, EDGE1900: 26.17dBm
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: -0.64dBi; GSM1900: 0.67dBi
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 22.42dBm, WCDMA Band 5: 23.19dBm
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: 0.67dBi, WCDMA Band 5: -0.64dBi
4G	
Support Networks:	FDD-LTE, TDD-LTE
Support Band:	FDD-LTE Band 2, 4, 5, 7, 17, TDD-LTE Band 40
Uplink Frequency:	FDD-LTE Band 2: Tx: 1850-1910MHz, FDD-LTE Band 4: Tx: 1710-1755MHz, FDD-LTE Band 5: Tx: 824-849MHz, FDD-LTE Band 7: Tx: 2500-2570MHz, FDD-LTE Band 17: Tx: 704-716MHz, TDD-LTE Band 40: Tx: 2305-2315MHz&2350-2360MHz
Downlink Frequency:	FDD-LTE Band 2: Rx: 1930-1990MHz, FDD-LTE Band 4: Rx: 2110-2155MHz, FDD-LTE Band 5: Rx: 869-894MHz, FDD-LTE Band 7: Rx: 2620-2690MHz, FDD-LTE Band 17: Rx: 734-746MHz, TDD-LTE Band 40: Rx: 2305-2315MHz&2350-2360MHz
RF Output Power:	FDD-LTE Band 2: 22.56dBm, FDD-LTE Band 4: 23.04dBm,

	FDD-LTE Band 5: 23.15dBm FDD-LTE Band 7: 24.24dBm FDD-LTE Band 17: 23.83dBm TDD-LTE Band 40: 22.15dBm
Type of Modulation:	QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	FDD-LTE Band 2: 0.67dBi, FDD-LTE Band 4: 0.61dBi, FDD-LTE Band 5: -0.64dBi, FDD-LTE Band 7: 0.55dBi, FDD-LTE Band 17: -1.27dBi, TDD-LTE Band 40: 0.46dBi
WIFI	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
RF Output Power:	16.26dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11/7
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	0.75dBi
Bluetooth	
Bluetooth Version:	V4.0
Frequency Range:	2402-2480MHz
RF Output Power:	5.544dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79/40
Channel Separation:	1MHz/2MHz
Antenna Type:	Integral Antenna
Antenna Gain:	0.75dBi

1.2 Test Standards

The following report is prepared on behalf of the ARB Corporation Ltd in accordance with FCC 47 CFR Part 2.1093, ANSI/IEEE C95.1-2005, ANSI / IEEE C95.3 :2002, IEEE 1528-2013, KDB 447498 D01 v06, KDB 648474 D04 v01r03, KDB 248227 D01 v02r02, KDB 941225 D01 v03r01, KDB 941225 D05 v02r05 ,KDB 941225 D06 v02r01, and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Head SAR	Body-worn (10mm Gap)	Hotspot (10mm Gap)	SAR _{1g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	
GSM	0.554	0.752	0.752	1.6
WCDMA	0.185	0.263	0.263	1.6
FDD-LTE	0.198	0.457	0.592	1.6
WLAN 2.4G	0.159	0.031	0.031	1.6
Simultaneous Transmission	0.720	0.835	0.835	1.6

Remark:

*The highest reported SAR values for head, body-worn accessory, wireless router(hotspot), and simultaneous transmission conditions are **0.554W/kg, 0.752W/kg, 0.752W/kg, and 0.835W/kg** respectively.*

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013 and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE5 SN 09/13 EP168 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm
- Distance between dipoles / probe extremity: 2.7mm

- Probe linearity: <0.25 dB
 - Axial Isotropy: <0.25 dB
 - Spherical Isotropy: <0.50 dB
 - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

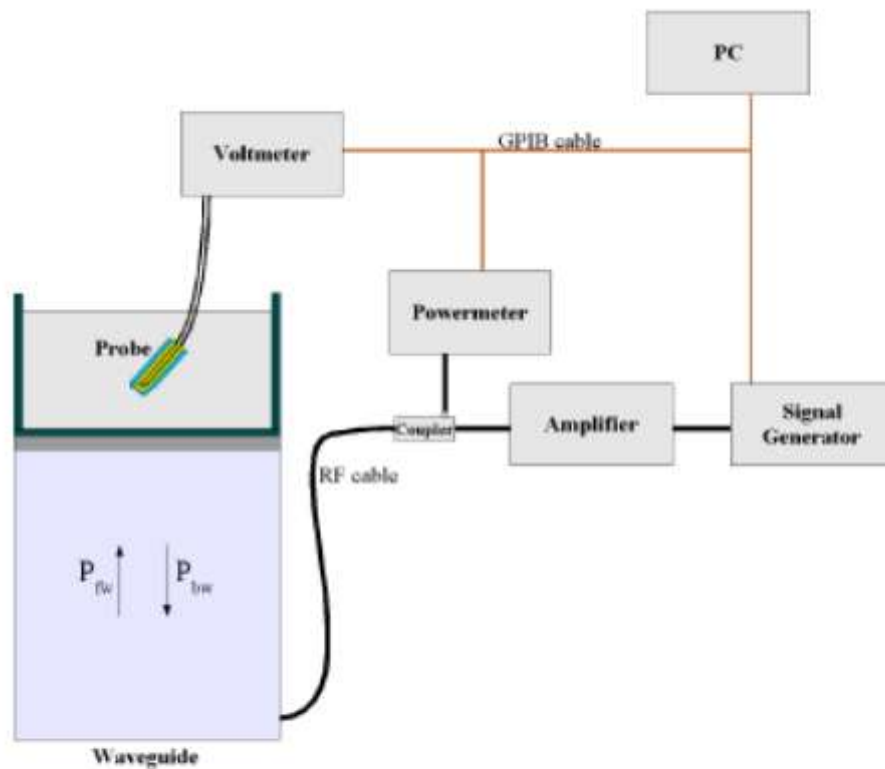

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 °.

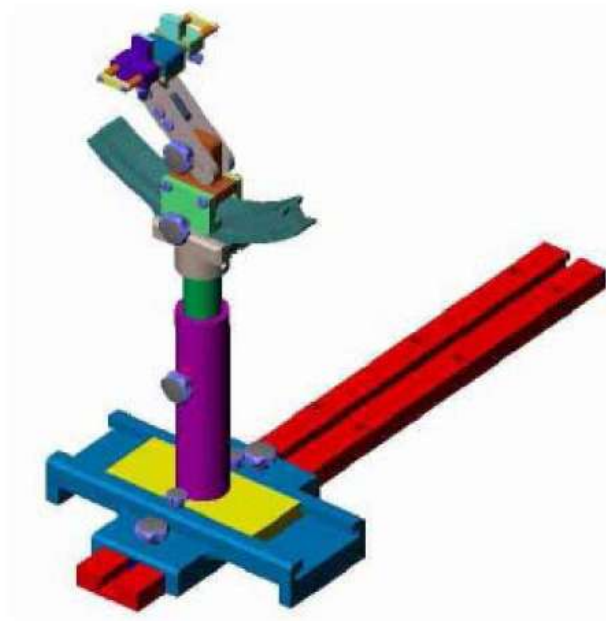

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	MVG	SSE5	SN 09/13 EP168	2017-06-01	2018-05-31
750MHz Dipole	MVG	SID750	SN 47/12 DIP 0G750-203	2017-03-16	2018-03-15
835MHz Dipole	MVG	SID835	SN 47/12 DIP 0G835-204	2017-03-16	2018-03-15
1800MHz Dipole	MVG	SID1800	SN 47/12 DIP 1G800-206	2017-03-16	2018-03-15
1900MHz Dipole	MVG	SID1900	SN 47/12 DIP 1G900-207	2017-03-16	2018-03-15
2450MHz Dipole	MVG	SID2450	SN 13/15 DIP 2G450-364	2017-03-16	2018-03-15
2600MHz Dipole	MVG	SID2600	SN 13/15 DIP 2G600-365	2017-03-16	2018-03-15
Dielectric Probe Kit	MVG	SCLMP	SN 47/12 OCPG49	2017-03-16	2018-03-15
SAM Phantom	MVG	SAM	SN/ 47/12 SAM95	N/A	N/A
MULTIMETER	KEITHLEY	Keithley 2000	4006367	2017-06-12	2018-06-11
Signal Generator	Rohde & Schwarz	SMR20	100047	2017-06-12	2018-06-11
Universal Tester	Rohde & Schwarz	CMU200	112012	2017-06-12	2018-06-11
Communications Tester	Rohde & Schwarz	CMW500	148650	2017-06-12	2018-06-11
Network Analyzer	HP	8753C	2901A00831	2017-06-12	2018-06-11
Directional Couplers	Agilent	778D	20160	2017-06-12	2018-06-11

5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.



Liquid Height for Head SAR



Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
Head						
750	41.1	1.4	57.0	0.2	0.3	0
835	40.3	1.4	57.9	0.2	0.2	0
1700-1900	55.2	0.3	0	0	0	44.5
2450	55.0	0.1	0	0	0	44.9
2600	54.9	0.1	0	0	0	45.0
Body						
750	50.0	0.8	48.8	0.2	0.2	0
835	50.8	0.9	48.1	0.1	0.1	0
1700-1900	70.2	0.4	0	0	0	29.4
2450	68.6	0.1	0	0	0	31.3
2600	68.2	0.1	0	0	0	31.7

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head		Body	
	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
750	0.89	41.9	0.96	55.5
835	0.90	41.5	0.97	55.2
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
1750	1.37	40.1	1.49	53.4
1800-2000	1.40	40.0	1.52	53.3
2450	1.80	39.2	1.95	52.7
3000	2.40	38.5	2.73	52.0
5800	5.27	35.3	6.00	48.2

5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Head Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
750	21.2	0.86	0.89	-3.37	41.32	41.90	-1.38	± 5	2018-01-29
835	21.2	0.87	0.90	-3.33	41.11	41.50	-0.94	± 5	2018-01-29
1750	21.3	1.37	1.37	0.00	39.02	40.1	-2.69	± 5	2018-01-30
1800	21.3	1.37	1.40	-2.14	39.02	40.0	-2.45	± 5	2018-01-30
1900	21.3	1.38	1.40	-1.43	38.56	40.00	-3.60	± 5	2018-01-30
2450	21.3	1.74	1.80	-3.33	38.15	39.20	-2.68	± 5	2018-01-31
2600	21.3	1.93	1.96	-1.53	38.63	39.0	-0.95	± 5	2018-01-31

Body Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
750	21.2	0.93	0.96	-3.12	54.96	55.50	-0.97	± 5	2018-01-29
835	21.2	0.95	0.97	-2.06	54.85	55.20	-0.63	± 5	2018-01-29
1750	21.3	1.46	1.49	-2.01	51.22	53.40	-4.08	± 5	2018-01-30
1800	21.3	1.46	1.52	-3.95	51.22	53.30	-3.90	± 5	2018-01-30
1900	21.3	1.50	1.52	-1.32	52.42	53.30	-1.65	± 5	2018-01-30
2450	21.3	1.91	1.95	-2.05	52.01	52.70	-1.31	± 5	2018-01-31
2600	21.3	2.12	2.16	-1.85	52.24	52.50	-0.50	± 5	2018-01-31


6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz and 1900 MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

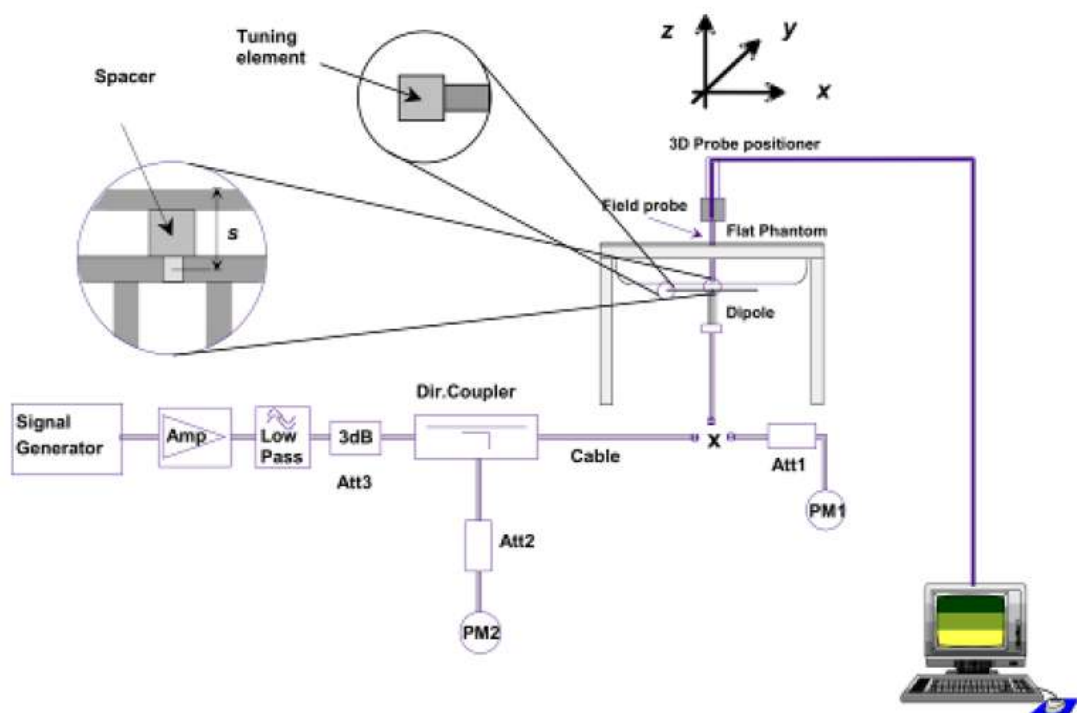

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

The output power on dipole port must be calibrated to 24 dBm(250 mW) before dipole is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Targeted SAR _{1g}	Measured SAR _{1g}	Normalized SAR _{1g}	Tolerance
MHz	(W/kg)	(W/kg)	(W/kg)	(%)
Head				
750	8.40	2.16	8.64	2.86
835	9.65	2.41	9.64	-0.10
1800	38.49	9.61	38.44	-0.13
1900	39.59	9.91	39.64	0.13
2450	53.76	13.45	53.8	0.07
2600	55.07	13.67	54.68	-0.71
Body				
750	8.40	2.12	8.48	0.95
835	9.36	2.35	9.4	0.43
1800	38.29	9.58	38.32	0.08
1900	39.01	9.78	39.12	0.28
2450	50.33	12.59	50.36	0.06
2600	53.92	13.43	53.72	-0.37

Remark: Referring to IEEE 1528-2013, Section 8.2, The system check shall be performed at a test frequency that

is within $\pm 10\%$ or ± 100 MHz of the compliance test mid-band frequency, so the 1750 MHz system verification is made of 1800MHz Dipole.

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.

7. EUT Testing Position

7.1 Define Two Imaginary Lines on The Handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

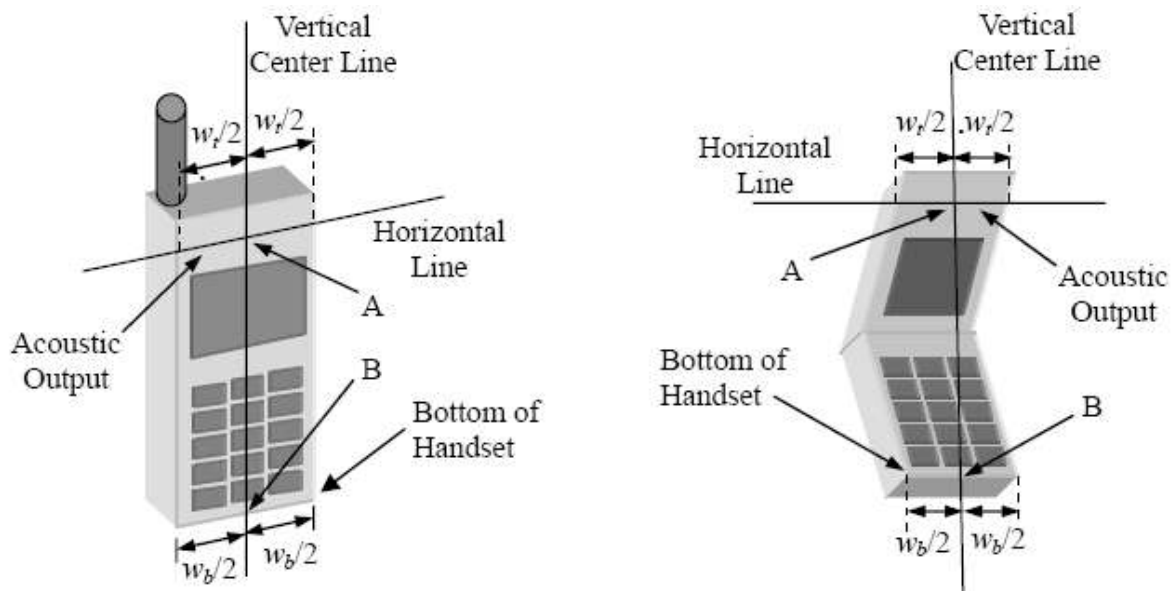


Illustration for Handset Vertical and Horizontal Reference Lines

7.2 Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 7.2).

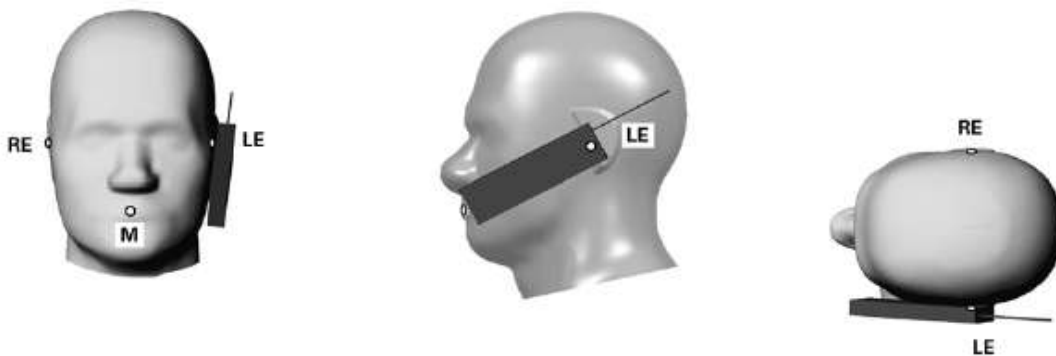


Illustration for Cheek Position

7.3 Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 7.3).



Illustration for Tilted Position

7.4 Body Worn Position

- To position the device parallel to the phantom surface with either keypad up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 10mm.


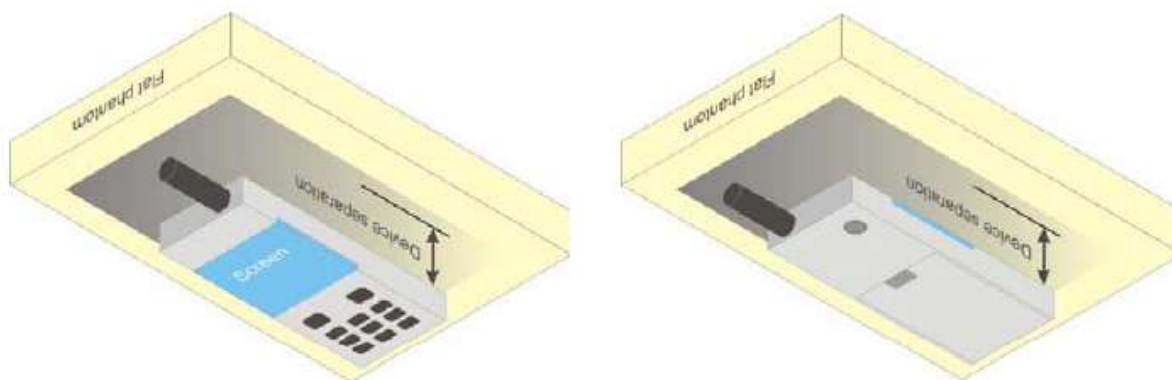


Illustration for Body Worn Position

7.5 EUT Antenna Position

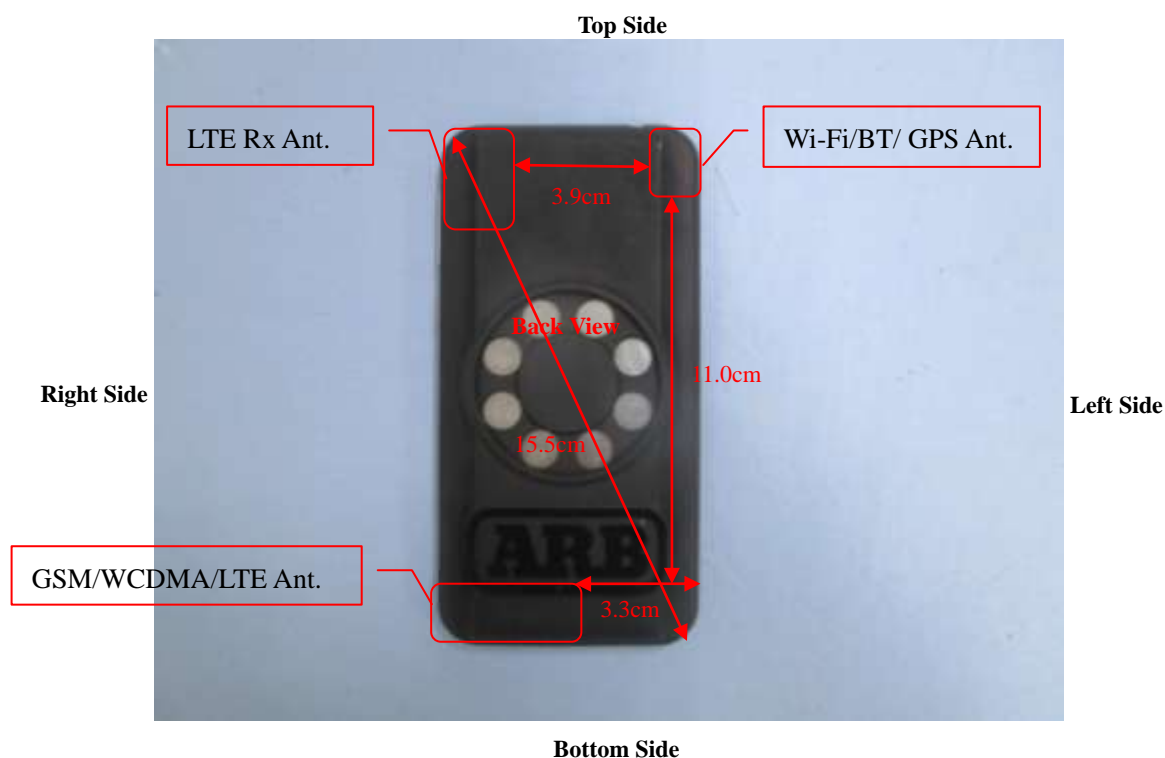

Block Diagram for EUT Antenna Position

7.6 EUT Testing Position

Head/Body-worn/Hotspot mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Head SAR tests				
Antennas	Right Cheek	Left Cheek	Right Tilted	Left Tilted
WWAN	Yes	Yes	Yes	Yes
WLAN	Yes	Yes	Yes	Yes

Hotspot SAR tests, Test distance: 10mm						
Antennas	Front	Back	Right Side	Left Side	Top Side	Bottom Side
WWAN	Yes	Yes	Yes	No	No	Yes
WLAN	Yes	Yes	No	Yes	Yes	No

Body-worn SAR tests		
Antennas	Front	Back
WWAN	Yes	Yes
WLAN	Yes	Yes

Remark:

- Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test separation distances is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

Please refer to Annex D for the EUT test setup photos.

8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9. SAR Test Result

9.1 Conducted RF Output Power

GSM - Burst Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	33.93	33.67	33.75	34.5	30.80	30.69	30.63	31.0
GPRS (1 slot)	33.93	33.86	33.74	34.5	30.82	30.72	30.66	31.0
GPRS (2 slots)	33.23	33.12	33.01	33.5	30.20	30.06	29.97	30.5
GPRS (3 slots)	31.50	31.43	31.29	32.0	28.53	28.38	28.33	29.0
GPRS (4 slots)	30.41	30.30	30.20	30.5	27.39	27.27	27.20	27.5
EDGE (1 slot)	28.15	28.08	28.01	28.5	26.17	25.96	26.03	26.5
EDGE (2 slots)	27.25	27.20	27.10	27.5	25.27	25.15	25.30	25.5
EDGE (3 slots)	25.08	25.11	24.95	25.5	23.23	23.22	23.42	24.0
EDGE (4 slots)	23.84	23.84	23.75	24.0	22.76	22.76	22.83	23.0

GSM - Source-Based Time-Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	24.93	24.67	24.75	25.5	21.80	21.69	21.63	22.0
GPRS (1 slot)	24.93	24.86	24.74	25.5	21.82	21.72	21.66	22.0
GPRS (2 slots)	27.23	27.12	27.01	27.5	24.20	24.06	23.97	24.5
GPRS (3 slots)	27.25	27.18	27.04	27.5	24.28	24.13	24.08	24.5
GPRS (4 slots)	27.41	27.30	27.20	28.0	24.39	24.27	24.20	24.5
EDGE (1 slot)	19.15	19.08	19.01	19.5	17.17	16.96	17.03	17.5
EDGE (2 slots)	21.25	21.20	21.10	21.5	19.27	19.15	19.30	19.5
EDGE (3 slots)	20.83	20.86	20.70	21.0	18.98	18.97	19.17	19.5
EDGE (4 slots)	20.84	20.84	20.75	21.0	19.76	19.76	19.83	20.0

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

Remark:

1. For Head SAR testing, GSM and GPRS (4TX slots) should be evaluated, therefore the EUT was set in GSM and GPRS (4TX slots) for GSM850 and GSM1900 due to its highest source-based time-average power.
2. For Body SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (4TX slots) for GSM850 and GSM1900 due to its highest source-based time-average power.

3. Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. The DUT do not support DTM function.
5. This device supports VOIP capability through 3rd party apps software.

WCDMA - Average Power (dBm)								
Band	WCDMA Band II				WCDMA Band V			
Channel	9262	9400	9538	Tune-up power (dBm)	4132	4182	4233	Tune-up power (dBm)
Frequency (MHz)	1852.4	1880.0	1907.6		826.4	836.6	846.6	
RMC 12.2k	22.37	22.34	22.42	23.0	23.19	23.03	23.06	23.5
HSDPA Subtest-1	21.51	21.36	21.25	22.0	22.31	22.15	22.17	22.5
HSDPA Subtest-2	21.32	21.18	21.04	22.0	22.16	22.00	22.01	22.5
HSDPA Subtest-3	21.40	21.13	21.01	22.0	22.11	21.97	22.06	22.5
HSDPA Subtest-4	21.37	21.21	21.13	22.0	22.11	21.96	22.06	22.5
HSUPA Subtest-1	21.07	20.97	20.87	21.5	21.89	21.68	21.63	22.0
HSUPA Subtest-2	20.97	20.85	20.62	21.5	21.76	21.55	21.47	22.0
HSUPA Subtest-3	20.95	20.72	20.73	21.5	21.75	21.53	21.52	22.0
HSUPA Subtest-4	20.86	20.79	20.72	21.5	21.69	21.47	21.43	22.0
HSUPA Subtest-5	20.91	20.85	20.62	21.5	21.68	21.55	21.50	22.0

Remark:

1. For Head SAR, per KDB 941225 D01 v03, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 1/4 dB higher than RMC, SAR tests with AMR 12.2kbps can be excluded.
2. For Body SAR, per KDB 941225 D01 v03, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA subset-1 output power is < 1/4 dB higher than RMC, and SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/kg}$, HSDPA SAR evaluation can be excluded

FDD-LTE Band 2:

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.46	0
		1	3	22.43	0
		1	5	22.43	0
		3	0	21.47	0
		3	2	21.29	0
		3	3	21.21	0
		6	0	21.11	1
	MCH	1	0	22.24	0
		1	3	21.82	0
		1	5	21.95	0
		3	0	21.62	0
		3	2	21.86	0
		3	3	21.75	0
		6	0	20.85	1
	HCH	1	0	21.71	0
		1	3	21.38	0
		1	5	21.35	0
		3	0	21.36	0
		3	2	21.18	0
		3	3	21.18	0
		6	0	20.63	1
16QAM	LCH	1	0	21.83	1
		1	3	21.84	1
		1	5	21.73	1
		3	0	21.48	1
		3	2	21.30	1
		3	3	21.25	1
		6	0	20.40	2
	MCH	1	0	21.44	1
		1	3	21.26	1
		1	5	21.25	1
		3	0	21.09	1
		3	2	20.93	1
		3	3	20.82	1
		6	0	20.42	2
	HCH	1	0	21.00	1
		1	3	20.66	1

		1	5	20.79	1
		3	0	20.63	1
		3	2	20.71	1
		3	3	20.56	1
		6	0	20.48	2

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	21.82	0
		1	7	21.58	0
		1	14	21.53	0
		8	0	20.72	1
		8	4	20.63	1
		8	7	20.58	1
		15	0	21.02	1
	MCH	1	0	22.04	0
		1	7	21.57	0
		1	14	21.43	0
		8	0	21.67	1
		8	4	21.49	1
		8	7	21.40	1
		15	0	20.85	1
	HCH	1	0	21.96	0
		1	7	21.47	0
		1	14	21.25	0
		8	0	20.91	1
		8	4	20.80	1
		8	7	20.86	1
		15	0	20.79	1
16QAM	LCH	1	0	21.13	1
		1	7	20.91	1
		1	14	20.87	1
		8	0	20.59	2
		8	4	20.52	2
		8	7	20.55	2
		15	0	20.49	2
	MCH	1	0	22.05	1
		1	7	21.90	1
		1	14	21.70	1
		8	0	20.91	2
		8	4	20.78	2
		8	7	20.69	2

	HCH	15	0	20.65	2
		1	0	21.29	1
		1	7	20.85	1
		1	14	20.67	1
		8	0	20.81	2
		8	4	20.58	2
		8	7	20.51	2
		15	0	20.57	2

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	21.62	0
		1	12	21.18	0
		1	24	21.18	0
		12	0	21.04	1
		12	6	20.82	1
		12	13	20.86	1
		25	0	20.91	1
	MCH	1	0	22.24	0
		1	12	21.63	0
		1	24	21.76	0
		12	0	20.95	1
		12	6	20.61	1
		12	13	20.55	1
		25	0	20.72	1
	HCH	1	0	22.05	0
		1	12	21.99	0
		1	24	21.96	0
		12	0	21.34	1
		12	6	20.95	1
		12	13	20.78	1
		25	0	20.53	1
16QAM	LCH	1	0	21.84	1
		1	12	21.41	1
		1	24	21.64	1
		12	0	20.98	2
		12	6	20.78	2
		12	13	20.82	2
		25	0	20.74	2
	MCH	1	0	21.38	1
		1	12	21.15	1
		1	24	21.23	1

		12	0	20.84	2
		12	6	20.55	2
		12	13	20.51	2
		25	0	20.69	2
	HCH	1	0	21.06	1
		1	12	20.84	1
		1	24	20.74	1
		12	0	21.07	2
		12	6	20.72	2
		12	13	20.75	2
		25	0	20.76	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	21.96	0
		1	24	21.74	0
		1	49	21.63	0
		25	0	20.75	1
		25	12	20.67	1
		25	25	20.64	1
		50	0	20.71	1
	MCH	1	0	22.09	0
		1	24	21.57	0
		1	49	21.66	0
		25	0	20.91	1
		25	12	20.54	1
		25	25	20.63	1
		50	0	20.58	1
	HCH	1	0	21.97	0
		1	24	21.51	0
		1	49	21.27	0
		25	0	20.80	1
		25	12	20.41	1
		25	25	20.87	1
		50	0	20.34	1
16QAM	LCH	1	0	21.25	1
		1	24	21.12	1
		1	49	20.97	1
		25	0	21.05	2
		25	12	20.95	2
		25	25	20.94	2
		50	0	20.99	2

	MCH	1	0	21.41	1
		1	24	20.97	1
		1	49	20.64	1
		25	0	21.18	2
		25	12	20.83	2
		25	25	20.47	2
		50	0	20.79	2
	HCH	1	0	21.37	1
		1	24	20.96	1
		1	49	20.76	1
		25	0	21.02	2
		25	12	20.66	2
		25	25	20.55	2
		50	0	20.58	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.07	0
		1	37	21.71	0
		1	74	22.27	0
		37	0	20.66	1
		37	18	20.60	1
		37	38	20.84	1
		75	0	20.75	1
	MCH	1	0	22.33	0
		1	37	21.40	0
		1	74	21.49	0
		37	0	20.97	1
		37	18	20.46	1
		37	38	20.89	1
		75	0	20.47	1
	HCH	1	0	21.52	0
		1	37	21.66	0
		1	74	21.33	0
		37	0	20.75	1
		37	18	20.63	1
		37	38	20.57	1
		75	0	20.42	1
16QAM	LCH	1	0	21.35	1
		1	37	21.09	1
		1	74	21.57	1
		37	0	20.89	2

		37	18	20.85	2
		37	38	21.12	2
		75	0	20.99	2
	MCH	1	0	21.61	1
		1	37	20.79	1
		1	74	20.84	1
		37	0	20.23	2
		37	18	20.73	2
		37	38	20.17	2
		75	0	20.71	2
	HCH	1	0	20.86	1
		1	37	21.00	1
		1	74	20.73	1
		37	0	20.96	2
		37	18	20.87	2
		37	38	20.33	2
		75	0	20.60	2

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.13	0
		1	49	21.92	0
		1	99	21.60	0
		50	0	20.59	1
		50	25	20.73	1
		50	50	21.11	1
		100	0	20.90	1
	MCH	1	0	22.56	0
		1	49	21.45	0
		1	99	21.40	0
		50	0	21.90	1
		50	25	21.31	1
		50	50	20.64	1
		100	0	21.33	1
	HCH	1	0	21.81	0
		1	49	21.82	0
		1	99	21.22	0
		50	0	21.24	1
		50	25	21.55	1
		50	50	21.12	1
		100	0	21.21	1
16QAM	LCH	1	0	21.24	1

		1	49	21.13	1
		1	99	21.79	1
		50	0	20.85	2
		50	25	20.99	2
		50	50	20.40	2
		100	0	20.42	2
	MCH	1	0	21.41	1
		1	49	20.70	1
		1	99	20.59	1
		50	0	20.94	2
		50	25	20.55	2
		50	50	20.94	2
		100	0	20.58	2
	HCH	1	0	21.16	1
		1	49	21.19	1
		1	99	20.66	1
		50	0	20.46	2
		50	25	20.80	2
		50	50	20.41	2
		100	0	20.40	2

FDD-LTE Band 4:

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.88	0
		1	3	22.87	0
		1	5	22.89	0
		3	0	21.96	0
		3	2	21.92	0
		3	3	21.96	0
		6	0	20.90	1
	MCH	1	0	22.92	0
		1	3	22.89	0
		1	5	22.92	0
		3	0	21.90	0
		3	2	21.92	0
		3	3	21.83	0
		6	0	20.90	1
	HCH	1	0	21.88	0
		1	3	21.65	0

		1	5	21.83	0
		3	0	21.65	0
		3	2	21.57	0
		3	3	21.59	0
		6	0	20.77	1
16QAM	LCH	1	0	22.09	1
		1	3	22.14	1
		1	5	22.11	1
		3	0	22.08	1
		3	2	22.00	1
		3	3	22.02	1
		6	0	20.85	2
	MCH	1	0	22.12	1
		1	3	22.19	1
		1	5	22.09	1
		3	0	22.10	1
		3	2	22.03	1
		3	3	22.05	1
		6	0	20.85	2
	HCH	1	0	21.32	1
		1	3	21.16	1
		1	5	21.34	1
		3	0	20.82	1
		3	2	20.78	1
		3	3	20.79	1
		6	0	20.90	2

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.81	0
		1	7	22.89	0
		1	14	22.85	0
		8	0	21.91	1
		8	4	21.93	1
		8	7	21.94	1
		15	0	21.92	1
	MCH	1	0	22.88	0
		1	7	22.73	0
		1	14	22.69	0
		8	0	21.92	1
		8	4	21.90	1
		8	7	21.89	1

	HCH	15	0	21.91	1
		1	0	21.96	0
		1	7	21.70	0
		1	14	21.61	0
		8	0	20.86	1
		8	4	20.80	1
		8	7	20.74	1
		15	0	20.80	1
16QAM	LCH	1	0	22.08	1
		1	7	22.15	1
		1	14	22.10	1
		8	0	20.96	2
		8	4	20.99	2
		8	7	20.96	2
		15	0	20.88	2
	MCH	1	0	22.16	1
		1	7	22.11	1
		1	14	22.02	1
		8	0	20.98	2
		8	4	21.00	2
		8	7	20.94	2
		15	0	20.88	2
	HCH	1	0	21.43	1
		1	7	21.17	1
		1	14	21.14	1
		8	0	21.03	2
		8	4	20.99	2
		8	7	20.98	2
		15	0	20.97	2

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.94	0
		1	12	22.75	0
		1	24	22.99	0
		12	0	22.00	1
		12	6	21.99	1
		12	13	22.04	1
		25	0	21.95	1
	MCH	1	0	23.01	0
		1	12	22.64	0
		1	24	22.82	0

		12	0	21.80	1
		12	6	21.72	1
		12	13	21.79	1
		25	0	21.81	1
	HCH	1	0	22.44	0
		1	12	21.79	0
		1	24	21.98	0
		12	0	21.13	1
		12	6	20.91	1
		12	13	20.89	1
		25	0	21.03	1
16QAM	LCH	1	0	22.32	1
		1	12	22.29	1
		1	24	22.36	1
		12	0	21.11	2
		12	6	21.11	2
		12	13	21.16	2
		25	0	20.97	2
	MCH	1	0	22.12	1
		1	12	22.10	1
		1	24	22.17	1
		12	0	21.15	2
		12	6	21.05	2
		12	13	21.05	2
		25	0	20.95	2
	HCH	1	0	21.50	1
		1	12	20.99	1
		1	24	21.07	1
		12	0	20.86	2
		12	6	20.68	2
		12	13	20.68	2
		25	0	20.71	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.91	0
		1	24	23.02	0
		1	49	22.55	0
		25	0	22.01	1
		25	12	22.04	1
		25	25	22.09	1
		50	0	22.06	1
	MCH	1	0	22.51	0
		1	24	22.80	0
		1	49	22.18	0
		25	0	21.76	1
		25	12	21.80	1
		25	25	21.86	1
		50	0	21.81	1
	HCH	1	0	22.30	0
		1	24	22.18	0
		1	49	21.96	0
		25	0	21.46	1
		25	12	21.27	1
		25	25	20.96	1
		50	0	21.21	1
16QAM	LCH	1	0	22.19	1
		1	24	22.29	1
		1	49	22.00	1
		25	0	21.00	2
		25	12	21.05	2
		25	25	21.08	2
		50	0	21.04	2
	MCH	1	0	21.94	1
		1	24	22.14	1
		1	49	21.61	1
		25	0	20.97	2
		25	12	20.95	2
		25	25	20.84	2
		50	0	20.92	2
	HCH	1	0	21.79	1
		1	24	21.71	1
		1	49	21.94	1
		25	0	20.84	2

		25	12	20.79	2
		25	25	20.61	2
		50	0	20.53	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.92	0
		1	37	22.93	0
		1	74	22.55	0
		37	0	22.09	1
		37	18	22.00	1
		37	38	21.81	1
		75	0	22.02	1
	MCH	1	0	22.83	0
		1	37	22.64	0
		1	74	22.19	0
		37	0	21.70	1
		37	18	21.63	1
		37	38	21.55	1
		75	0	21.67	1
	HCH	1	0	22.49	0
		1	37	22.12	0
		1	74	21.73	0
		37	0	21.57	1
		37	18	21.38	1
		37	38	21.00	1
		75	0	21.38	1
16QAM	LCH	1	0	22.20	1
		1	37	22.29	1
		1	74	21.94	1
		37	0	21.03	2
		37	18	21.08	2
		37	38	21.05	2
		75	0	21.12	2
	MCH	1	0	22.21	1
		1	37	21.97	1
		1	74	21.65	1
		37	0	20.84	2
		37	18	20.81	2
		37	38	20.77	2
		75	0	20.81	2
	HCH	1	0	21.88	1

		1	37	21.57	1
		1	74	20.93	1
		37	0	20.84	2
		37	18	20.75	2
		37	38	20.76	2
		75	0	20.69	2

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.04	0
		1	49	22.91	0
		1	99	22.44	0
		50	0	22.39	1
		50	25	21.86	1
		50	50	21.58	1
		100	0	21.89	1
	MCH	1	0	23.02	0
		1	49	22.76	0
		1	99	22.08	0
		50	0	21.70	1
		50	25	21.63	1
		50	50	21.49	1
		100	0	21.66	1
	HCH	1	0	22.86	0
		1	49	22.32	0
		1	99	21.93	0
		50	0	21.65	1
		50	25	21.47	1
		50	50	21.11	1
		100	0	21.52	1
16QAM	LCH	1	0	22.23	1
		1	49	22.16	1
		1	99	21.60	1
		50	0	21.06	2
		50	25	21.02	2
		50	50	20.79	2
		100	0	21.02	2
	MCH	1	0	22.15	1
		1	49	21.99	1
		1	99	21.35	1
		50	0	20.88	2
		50	25	20.80	2

		50	50	20.72	2
		100	0	20.83	2
	HCH	1	0	22.22	1
		1	49	21.85	1
		1	99	20.88	1
		50	0	20.65	2
		50	25	20.53	2
		50	50	20.49	2
		100	0	20.52	2

FDD-LTE Band 5:

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.04	0
		1	3	23.00	0
		1	5	23.02	0
		3	0	22.08	0
		3	2	22.05	0
		3	3	22.07	0
		6	0	21.01	1
	MCH	1	0	23.09	0
		1	3	23.06	0
		1	5	23.07	0
		3	0	22.14	0
		3	2	22.15	0
		3	3	22.11	0
		6	0	21.05	1
	HCH	1	0	23.01	0
		1	3	23.02	0
		1	5	23.01	0
		3	0	22.06	0
		3	2	22.04	0
		3	3	22.07	0
		6	0	21.02	1
16QAM	LCH	1	0	22.26	1
		1	3	22.33	1
		1	5	22.31	1
		3	0	21.22	1
		3	2	21.15	1
		3	3	21.19	1
		6	0	20.98	2
	MCH	1	0	22.36	1
		1	3	22.43	1
		1	5	22.38	1
		3	0	21.33	1
		3	2	21.25	1
		3	3	21.30	1
		6	0	21.05	2
	HCH	1	0	22.20	1
		1	3	22.31	1
		1	5	22.26	1

		3	0	21.22	1
		3	2	21.12	1
		3	3	21.17	1
		6	0	20.98	2

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.99	0
		1	7	22.99	0
		1	14	22.96	0
		8	0	22.07	1
		8	4	22.03	1
		8	7	22.04	1
		15	0	22.03	1
	MCH	1	0	23.07	0
		1	7	23.11	0
		1	14	23.04	0
		8	0	22.10	1
		8	4	22.11	1
		8	7	22.13	1
		15	0	22.10	1
	HCH	1	0	22.93	0
		1	7	23.01	0
		1	14	22.96	0
		8	0	22.01	1
		8	4	22.03	1
		8	7	22.03	1
		15	0	22.02	1
16QAM	LCH	1	0	22.26	1
		1	7	22.31	1
		1	14	22.25	1
		8	0	21.10	2
		8	4	21.11	2
		8	7	21.09	2
		15	0	20.97	2
	MCH	1	0	22.35	1
		1	7	22.12	1
		1	14	22.36	1
		8	0	21.18	2
		8	4	21.21	2
		8	7	21.18	2
		15	0	21.08	2

	HCH	1	0	22.17	1
		1	7	22.28	1
		1	14	22.23	1
		8	0	21.05	2
		8	4	21.10	2
		8	7	21.07	2
		15	0	20.99	2

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.10	0
		1	12	22.50	0
		1	24	23.03	0
		12	0	22.13	1
		12	6	21.59	1
		12	13	21.64	1
		25	0	21.88	1
	MCH	1	0	23.13	0
		1	12	23.07	0
		1	24	22.61	0
		12	0	22.20	1
		12	6	22.03	1
		12	13	21.61	1
		25	0	22.09	1
	HCH	1	0	23.08	0
		1	12	23.07	0
		1	24	23.04	0
		12	0	22.11	1
		12	6	22.08	1
		12	13	22.11	1
		25	0	22.04	1
16QAM	LCH	1	0	22.32	1
		1	12	21.96	1
		1	24	22.13	1
		12	0	21.25	2
		12	6	20.92	2
		12	13	20.98	2
		25	0	21.05	2
	MCH	1	0	22.37	1
		1	12	22.35	1
		1	24	22.14	1
		12	0	21.34	2

		12	6	21.33	2
		12	13	21.14	2
		25	0	21.16	2
	HCH	1	0	22.33	1
		1	12	22.32	1
		1	24	22.32	1
		12	0	21.23	2
		12	6	21.20	2
		12	13	21.24	2
		25	0	21.05	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.11	0
		1	24	22.90	0
		1	49	23.10	0
		25	0	22.04	1
		25	12	22.06	1
		25	25	22.08	1
		50	0	22.08	1
	MCH	1	0	23.07	0
		1	24	23.15	0
		1	49	22.18	0
		25	0	22.33	1
		25	12	22.14	1
		25	25	21.44	1
		50	0	22.17	1
	HCH	1	0	22.56	0
		1	24	22.80	0
		1	49	23.05	0
		25	0	21.70	1
		25	12	22.10	1
		25	25	22.04	1
		50	0	22.09	1
16QAM	LCH	1	0	22.32	1
		1	24	22.25	1
		1	49	22.39	1
		25	0	21.08	2
		25	12	21.05	2
		25	25	21.07	2
		50	0	21.07	2
	MCH	1	0	22.36	1

		1	24	22.27	1
		1	49	21.57	1
		25	0	21.17	2
		25	12	21.17	2
		25	25	20.80	2
		50	0	21.15	2
	HCH	1	0	21.92	1
		1	24	22.18	1
		1	49	22.33	1
		25	0	20.84	2
		25	12	21.09	2
		25	25	21.02	2
		50	0	21.09	2

FDD-LTE Band 7:

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.90	0
		1	12	23.34	0
		1	24	23.24	0
		12	0	22.16	1
		12	6	22.27	1
		12	13	22.37	1
		25	0	22.23	1
	MCH	1	0	24.14	0
		1	12	24.20	0
		1	24	24.24	0
		12	0	22.91	1
		12	6	22.96	1
		12	13	22.98	1
		25	0	22.94	1
	HCH	1	0	23.74	0
		1	12	23.61	0
		1	24	23.35	0
		12	0	22.22	1
		12	6	22.13	1
		12	13	22.05	1
		25	0	22.07	1
16QAM	LCH	1	0	21.78	1
		1	12	22.01	1
		1	24	22.10	1
		12	0	21.34	2
		12	6	21.39	2
		12	13	21.49	2
		25	0	21.25	2
	MCH	1	0	22.73	1
		1	12	22.84	1
		1	24	22.80	1
		12	0	21.93	2
		12	6	21.95	2
		12	13	21.99	2
		25	0	21.92	2
	HCH	1	0	21.78	1
		1	12	21.71	1

		1	24	21.47	1
		12	0	21.25	2
		12	6	21.14	2
		12	13	21.07	2
		25	0	21.12	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.05	0
		1	24	23.38	0
		1	49	23.69	0
		25	0	22.33	1
		25	12	22.47	1
		25	25	22.65	1
		50	0	22.47	1
	MCH	1	0	23.85	0
		1	24	24.01	0
		1	49	24.07	0
		25	0	22.87	1
		25	12	22.96	1
		25	25	23.03	1
		50	0	22.93	1
	HCH	1	0	23.22	0
		1	24	22.80	0
		1	49	22.76	0
		25	0	22.49	1
		25	12	22.30	1
		25	25	22.15	1
		50	0	22.31	1
16QAM	LCH	1	0	22.30	1
		1	24	21.61	1
		1	49	21.98	1
		25	0	21.30	2
		25	12	21.46	2
		25	25	21.66	2
		50	0	21.45	2
	MCH	1	0	22.90	1
		1	24	23.01	1
		1	49	23.11	1
		25	0	21.85	2
		25	12	21.93	2
		25	25	21.99	2

	HCH	50	0	21.92	2
		1	0	22.38	1
		1	24	22.06	1
		1	49	21.77	1
		25	0	21.50	2
		25	12	21.34	2
		25	25	21.17	2
		50	0	21.35	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.09	0
		1	37	23.06	0
		1	74	23.04	0
		37	0	22.55	1
		37	18	22.78	1
		37	38	22.02	1
		75	0	22.80	1
	MCH	1	0	23.77	0
		1	37	24.04	0
		1	74	24.06	0
		37	0	23.13	1
		37	18	23.23	1
		37	38	23.26	1
		75	0	23.19	1
	HCH	1	0	23.70	0
		1	37	23.18	0
		1	74	23.05	0
		37	0	22.41	1
		37	18	22.20	1
		37	38	21.90	1
		75	0	22.17	1
16QAM	LCH	1	0	22.36	1
		1	37	22.97	1
		1	74	22.33	1
		37	0	21.51	2
		37	18	21.72	2
		37	38	21.98	2
		75	0	21.75	2
	MCH	1	0	22.83	1
		1	37	23.10	1
		1	74	23.17	1

		37	0	21.98	2
		37	18	22.08	2
		37	38	22.14	2
		75	0	22.08	2
	HCH	1	0	22.72	1
		1	37	22.27	1
		1	74	21.73	1
		37	0	21.38	2
		37	18	21.15	2
		37	38	20.86	2
		75	0	21.10	2

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.29	0
		1	49	23.89	0
		1	99	23.38	0
		50	0	22.56	1
		50	25	22.86	1
		50	50	22.17	1
		100	0	21.86	1
	MCH	1	0	23.82	0
		1	49	24.20	0
		1	99	24.24	0
		50	0	22.88	1
		50	25	23.00	1
		50	50	23.29	1
		100	0	22.96	1
	HCH	1	0	24.07	0
		1	49	23.44	0
		1	99	22.71	0
		50	0	22.60	1
		50	25	22.25	1
		50	50	21.95	1
		100	0	22.23	1
16QAM	LCH	1	0	22.43	1
		1	49	22.05	1
		1	99	22.56	1
		50	0	21.54	2
		50	25	21.86	2
		50	50	21.15	2
		100	0	21.84	2

	MCH	1	0	22.86	1
		1	49	23.15	1
		1	99	23.26	1
		50	0	21.84	2
		50	25	21.95	2
		50	50	22.05	2
		100	0	21.94	2
	HCH	1	0	23.17	1
		1	49	22.48	1
		1	99	21.90	1
		50	0	21.62	2
		50	25	21.28	2
		50	50	20.98	2
		100	0	21.23	2

FDD-LTE Band 17:

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.01	0
		1	12	22.08	0
		1	24	22.95	0
		12	0	21.85	1
		12	6	21.75	1
		12	13	21.18	1
		25	0	21.99	1
	MCH	1	0	22.90	0
		1	12	23.24	0
		1	24	23.59	0
		12	0	21.94	1
		12	6	22.24	1
		12	13	22.36	1
		25	0	22.43	1
	HCH	1	0	23.81	0
		1	12	23.74	0
		1	24	22.98	0
		12	0	22.33	1
		12	6	22.31	1
		12	13	22.27	1
		25	0	22.29	1
16QAM	LCH	1	0	22.03	1
		1	12	21.34	1
		1	24	22.38	1
		12	0	21.29	2
		12	6	21.21	2
		12	13	21.60	2
		25	0	21.28	2
	MCH	1	0	22.10	1
		1	12	22.32	1
		1	24	22.87	1
		12	0	21.17	2
		12	6	21.45	2
		12	13	21.33	2
		25	0	21.18	2
	HCH	1	0	23.06	1
		1	12	22.95	1
		1	24	22.30	1

		12	0	21.39	2
		12	6	21.24	2
		12	13	21.27	2
		25	0	21.30	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.39	0
		1	24	22.74	0
		1	49	23.49	0
		25	0	21.27	1
		25	12	21.81	1
		25	25	22.57	1
		50	0	22.07	1
	MCH	1	0	22.26	0
		1	24	23.25	0
		1	49	23.09	0
		25	0	21.59	1
		25	12	22.24	1
		25	25	22.59	1
		50	0	22.29	1
	HCH	1	0	22.35	0
		1	24	23.83	0
		1	49	22.63	0
		25	0	22.05	1
		25	12	22.56	1
		25	25	22.69	1
		50	0	22.43	1
16QAM	LCH	1	0	21.71	1
		1	24	22.09	1
		1	49	22.48	1
		25	0	20.54	2
		25	12	21.02	2
		25	25	21.71	2
		50	0	21.24	2
	MCH	1	0	21.61	1
		1	24	22.57	1
		1	49	22.52	1
		25	0	20.85	2
		25	12	21.41	2
		25	25	21.84	2
		50	0	21.44	2

	HCH	1	0	21.95	1
		1	24	22.09	1
		1	49	22.26	1
		25	0	21.29	2
		25	12	21.77	2
		25	25	21.83	2
		50	0	21.62	2

FDD-LTE Band 40: 2305-2315MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	22.12	0
		1	12	22.13	0
		1	24	22.09	0
		12	0	21.10	1
		12	6	21.10	1
		12	13	21.08	1
		25	0	20.99	1
	HCH	1	0	22.10	0
		1	12	22.08	0
		1	24	22.01	0
		12	0	21.06	1
		12	6	21.02	1
		12	13	20.98	1
		25	0	20.97	1
16QAM	LCH	1	0	21.32	1
		1	12	21.32	1
		1	24	21.38	1
		12	0	20.45	2
		12	6	20.45	2
		12	13	20.44	2
		25	0	20.35	2
	HCH	1	0	21.26	1
		1	12	21.20	1
		1	24	21.08	1
		12	0	20.48	2
		12	6	20.35	2
		12	13	20.34	2
		25	0	20.37	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	MCH	1	0	22.15	0
		1	24	21.99	0
		1	49	22.00	0
		25	0	21.38	1
		25	12	21.02	1
		25	25	20.99	1
		50	0	21.00	1
16QAM	MCH	1	0	21.12	1
		1	24	21.25	1
		1	49	21.26	1
		25	0	20.43	2
		25	12	20.43	2
		25	25	20.41	2
		50	0	20.41	2

FDD-LTE Band 40: 2350-2360MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	LCH	1	0	21.49	0
		1	12	21.48	0
		1	24	21.40	0
		12	0	20.84	1
		12	6	20.86	1
		12	13	20.78	1
		25	0	20.74	1
	HCH	1	0	21.45	0
		1	12	21.41	0
		1	24	21.31	0
		12	0	20.88	1
		12	6	20.86	1
		12	13	20.79	1
		25	0	20.76	1
16QAM	LCH	1	0	20.71	1
		1	12	20.72	1
		1	24	20.66	1
		12	0	20.46	2
		12	6	20.46	2

		12	13	20.43	2
		25	0	20.35	2
	HCH	1	0	20.85	1
		1	12	20.79	1
		1	24	20.69	1
		12	0	20.37	2
		12	6	20.37	2
		12	13	20.41	2
		25	0	20.49	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dBm)
		Size	Offset		
QPSK	MCH	1	0	21.50	0
		1	24	22.12	0
		1	49	21.31	0
		25	0	21.37	1
		25	12	21.36	1
		25	25	21.29	1
		50	0	21.32	1
16QAM	MCH	1	0	21.19	1
		1	24	21.10	1
		1	49	21.01	1
		25	0	20.37	2
		25	12	20.34	2
		25	25	20.38	2
		50	0	20.36	2

Remark:

1. Per KDB941225 D05 v02r05, Start with the largest channel bandwidth then measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. 6 When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
2. Per KDB941225 D05 v02r05, The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
3. Per KDB941225 D05 v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB941225 D05 v02r05, For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in 5.2.1, 5.2.2, and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher

order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

WLAN - Maximum Average Power					
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	16.07	16.5
		CH 06	2437	16.26	16.5
		CH 11	2462	14.97	16.5
802.11g	54Mbps	CH 01	2412	12.66	14.5
		CH 06	2437	14.14	14.5
		CH 11	2462	12.25	14.5
802.11n (20MHz)	MCS7	CH 01	2412	12.64	14.5
		CH 06	2437	14.11	14.5
		CH 11	2462	12.41	14.5
802.11n (40MHz)	MCS7	CH 03	2422	14.11	14.5
		CH 06	2437	12.54	14.5
		CH 09	2452	12.14	14.5

Remark:

1. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
2. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements ,when the reported SAR of the highest measured maximum output power channel (see 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- 3 .For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.

Bluetooth - Maximum Average Power			
Test Mode	Data Rate	Average Power(dBm)	Tune-up power (dBm)
GFSK	1Mbps	5.544	6.0
Pi/4 QDPSK	2Mbps	4.858	6.0
8DPSK	3Mbps	5.207	6.0

Bluetooth - Maximum Average Power					
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
BLE	1Mbps	CH 00	2402	-3.007	-1.0
		CH 19	2440	-1.465	-1.0
		CH 39	2480	-4.553	-1.0

Remark:

Bluetooth maximum output power is 5.544dBm, and Maximum Tune-Up output power is 6.0dBm and -40dBm. Per KDB 447498 D01 V06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, } 4.87\text{mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f}(\text{GHz})] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR,16 where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

Bluetooth:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	Result	Limit
6.0	3.98	5	2.441	1.24	3

The exclusion thresholds is $1.24 < 3$, therefore, the RF exposure evaluation is not required.

9.2 Test Results for Standalone SAR Test

Head SAR

GSM850 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1.	GSM	Right Cheek	128	824.2	33.93	34.5	1.140	0.316	0.360
2.	GSM	Right Tilted	128	824.2	33.93	34.5	1.140	0.178	0.203
3.	GSM	Left Cheek	128	824.2	33.93	34.5	1.140	0.309	0.352
4.	GSM	Left Tilted	128	824.2	33.93	34.5	1.140	0.136	0.155

GSM1900 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	M Hz					
5.	GSM	Right Cheek	512	1850.2	30.80	31.0	1.047	0.088	0.092
6.	GSM	Right Tilted	512	1850.2	30.80	31.0	1.047	0.036	0.038
7.	GSM	Left Cheek	512	1850.2	30.80	31.0	1.047	0.079	0.083
8.	GSM	Left Tilted	512	1850.2	30.80	31.0	1.047	0.041	0.043

GPRS850 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
9.	GPRS_4TX	Right Cheek	128	824.2	30.41	30.5	1.021	0.543	0.554
10.	GPRS_4TX	Right Tilted	128	824.2	30.41	30.5	1.021	0.247	0.252
11.	GPRS_4TX	Left Cheek	128	824.2	30.41	30.5	1.021	0.531	0.542
12.	GPRS_4TX	Left Tilted	128	824.2	30.41	30.5	1.021	0.238	0.243

GPRS1900 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	M Hz					
13.	GPRS_4TX	Right Cheek	512	1850.2	27.39	27.5	1.026	0.225	0.231
14.	GPRS_4TX	Right Tilted	512	1850.2	27.39	27.5	1.026	0.125	0.128
15.	GPRS_4TX	Left Cheek	512	1850.2	27.39	27.5	1.026	0.193	0.198
16.	GPRS_4TX	Left Tilted	512	1850.2	27.39	27.5	1.026	0.118	0.121

WCDMA Band 2 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
17.	RMC	Right Cheek	9538	1907.6	22.42	23.0	1.143	0.104	0.119
18.	RMC	Right Tilted	9538	1907.6	22.42	23.0	1.143	0.068	0.078
19.	RMC	Left Cheek	9538	1907.6	22.42	23.0	1.143	0.084	0.096
20.	RMC	Left Tilted	9538	1907.6	22.42	23.0	1.143	0.041	0.047

WCDMA Band 5 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
21.	RMC	Right Cheek	4132	826.4	23.19	23.5	1.074	0.172	0.185
22.	RMC	Right Tilted	4132	826.4	23.19	23.5	1.074	0.096	0.103
23.	RMC	Left Cheek	4132	826.4	23.19	23.5	1.074	0.167	0.179
24.	RMC	Left Tilted	4132	826.4	23.19	23.5	1.074	0.082	0.088

LTE Band 2– Head SAR Test								
Plot No.	Mode	Test Position Head	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
25.	RMC QPSK 20MHz 1RB	Right Cheek	1880.0	22.56	23.0	1.107	0.091	0.101
26.	RMC QPSK 20MHz 1RB	Right Tilted	1880.0	22.56	23.0	1.107	0.065	0.072
27.	RMC QPSK 20MHz 1RB	Left Cheek	1880.0	22.56	23.0	1.107	0.114	0.126
28.	RMC QPSK 20MHz 1RB	Left Tilted	1880.0	22.56	23.0	1.107	0.074	0.082
29.	RMC QPSK 20MHz 50%RB	Right Cheek	1880.0	21.90	22.0	1.023	0.069	0.071
30.	RMC QPSK 20MHz 50%RB	Right Tilted	1880.0	21.90	22.0	1.023	0.034	0.035
31.	RMC QPSK 20MHz 50%RB	Left Cheek	1880.0	21.90	22.0	1.023	0.094	0.096
32.	RMC QPSK 20MHz 50%RB	Left Tilted	1880.0	21.90	22.0	1.023	0.031	0.032

LTE Band 4– Head SAR Test								
Plot No.	Mode	Test Position Head	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
33.	RMC QPSK 20MHz 1RB	Right Cheek	1720.0	23.04	23.5	1.112	0.115	0.128
34.	RMC QPSK 20MHz 1RB	Right Tilted	1720.0	23.04	23.5	1.112	0.036	0.040
35.	RMC QPSK 20MHz 1RB	Left Cheek	1720.0	23.04	23.5	1.112	0.152	0.169
36.	RMC QPSK 20MHz 1RB	Left Tilted	1720.0	23.04	23.5	1.112	0.048	0.053
37.	RMC QPSK 20MHz 50%RB	Right Cheek	1720.0	22.39	22.5	1.026	0.095	0.097
38.	RMC QPSK 20MHz 50%RB	Right Tilted	1720.0	22.39	22.5	1.026	0.031	0.032
39.	RMC QPSK 20MHz 50%RB	Left Cheek	1720.0	22.39	22.5	1.026	0.111	0.114
40.	RMC QPSK 20MHz 50%RB	Left Tilted	1720.0	22.39	22.5	1.026	0.037	0.038

LTE Band 5– Head SAR Test								
Plot No.	Mode	Test Position Head	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
41.	RMC QPSK 10MHz 1RB	Right Cheek	836.5	23.15	23.5	1.084	0.168	0.182
42.	RMC QPSK 10MHz 1RB	Right Tilted	836.5	23.15	23.5	1.084	0.021	0.023
43.	RMC QPSK 10MHz 1RB	Left Cheek	836.5	23.15	23.5	1.084	0.183	0.198
44.	RMC QPSK 10MHz 1RB	Left Tilted	836.5	23.15	23.5	1.084	0.025	0.027
45.	RMC QPSK 10MHz 50%RB	Right Cheek	836.5	22.33	22.5	1.040	0.097	0.101
46.	RMC QPSK 10MHz 50%RB	Right Tilted	836.5	22.33	22.5	1.040	0.034	0.035
47.	RMC QPSK 10MHz 50%RB	Left Cheek	836.5	22.33	22.5	1.040	0.147	0.153
48.	RMC QPSK 10MHz 50%RB	Left Tilted	836.5	22.33	22.5	1.040	0.026	0.027

LTE Band 7– Head SAR Test								
Plot No.	Mode	Test Position Head	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
49.	RMC QPSK 20MHz 1RB	Right Cheek	2535.0	24.24	24.5	1.062	0.167	0.177
50.	RMC QPSK 20MHz 1RB	Right Tilted	2535.0	24.24	24.5	1.062	0.039	0.041
51.	RMC QPSK 20MHz 1RB	Left Cheek	2535.0	24.24	24.5	1.062	0.075	0.080
52.	RMC QPSK 20MHz 1RB	Left Tilted	2535.0	24.24	24.5	1.062	0.022	0.023
53.	RMC QPSK 20MHz 50%RB	Right Cheek	2535.0	23.29	23.5	1.050	0.125	0.131
54.	RMC QPSK 20MHz 50%RB	Right Tilted	2535.0	23.29	23.5	1.050	0.064	0.067
55.	RMC QPSK 20MHz 50%RB	Left Cheek	2535.0	23.29	23.5	1.050	0.084	0.088
56.	RMC QPSK 20MHz 50%RB	Left Tilted	2535.0	23.29	23.5	1.050	0.021	0.022

LTE Band 17– Head SAR Test								
Plot No.	Mode	Test Position Head	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
57.	RMC QPSK 10MHz 1RB	Right Cheek	711.0	23.83	24.0	1.040	0.106	0.110
58.	RMC QPSK 10MHz 1RB	Right Tilted	711.0	23.83	24.0	1.040	0.042	0.044
59.	RMC QPSK 10MHz 1RB	Left Cheek	711.0	23.83	24.0	1.040	0.058	0.060
60.	RMC QPSK 10MHz 1RB	Left Tilted	711.0	23.83	24.0	1.040	0.032	0.033
61.	RMC QPSK 10MHz 50%RB	Right Cheek	711.0	22.69	23.0	1.074	0.079	0.085
62.	RMC QPSK 10MHz 50%RB	Right Tilted	711.0	22.69	23.0	1.074	0.041	0.044
63.	RMC QPSK 10MHz 50%RB	Left Cheek	711.0	22.69	23.0	1.074	0.078	0.084
64.	RMC QPSK 10MHz 50%RB	Left Tilted	711.0	22.69	23.0	1.074	0.038	0.041

LTE Band 40:2305-2315MHz– Head SAR Test								
Plot No.	Mode	Test Position Head	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
65.	RMC QPSK 10MHz 1RB	Right Cheek	2310.0	22.15	22.5	1.084	0.013	0.014
66.	RMC QPSK 10MHz 1RB	Right Tilted	2310.0	22.15	22.5	1.084	0.011	0.012
67.	RMC QPSK 10MHz 1RB	Left Cheek	2310.0	22.15	22.5	1.084	0.020	0.022
68.	RMC QPSK 10MHz 1RB	Left Tilted	2310.0	22.15	22.5	1.084	0.01	0.011
69.	RMC QPSK 10MHz 50%RB	Right Cheek	2310.0	21.38	21.5	1.028	0.011	0.011
70.	RMC QPSK 10MHz 50%RB	Right Tilted	2310.0	21.38	21.5	1.028	0.01	0.010
71.	RMC QPSK 10MHz 50%RB	Left Cheek	2310.0	21.38	21.5	1.028	0.012	0.012
72.	RMC QPSK 10MHz 50%RB	Left Tilted	2310.0	21.38	21.5	1.028	0.011	0.011

LTE Band 40: 2350-2360MHz– Head SAR Test								
Plot No.	Mode	Test Position Head	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
73.	RMC QPSK 10MHz 1RB	Right Cheek	2355.0	22.12	22.5	1.091	0.016	0.017
74.	RMC QPSK 10MHz 1RB	Right Tilted	2355.0	22.12	22.5	1.091	0.013	0.014
75.	RMC QPSK 10MHz 1RB	Left Cheek	2355.0	22.12	22.5	1.091	0.018	0.020
76.	RMC QPSK 10MHz 1RB	Left Tilted	2355.0	22.12	22.5	1.091	0.015	0.016
77.	RMC QPSK 10MHz 50%RB	Right Cheek	2355.0	21.37	21.5	1.030	0.015	0.015
78.	RMC QPSK 10MHz 50%RB	Right Tilted	2355.0	21.37	21.5	1.030	0.012	0.012
79.	RMC QPSK 10MHz 50%RB	Left Cheek	2355.0	21.37	21.5	1.030	0.017	0.018
80.	RMC QPSK 10MHz 50%RB	Left Tilted	2355.0	21.37	21.5	1.030	0.011	0.011

WLAN 2.4GHz – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
81.	802.11b	Right Cheek	06	2437	16.26	16.5	1.057	0.150	0.159
82.	802.11b	Right Tilted	06	2437	16.26	16.5	1.057	0.025	0.026
83.	802.11b	Left Cheek	06	2437	16.26	16.5	1.057	0.044	0.046
84.	802.11b	Left Tilted	06	2437	16.26	16.5	1.057	0.015	0.016

Remark: Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

Body-worn SAR

GSM850 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
85.	GSM	Back	128	824.2	33.93	34.5	1.140	0.500	0.570
86.	GSM	Front	128	824.2	33.93	34.5	1.140	0.457	0.521

GSM1900 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
87.	GSM	Back	512	1850.2	30.80	31.0	1.047	0.115	0.120
88.	GSM	Front	512	1850.2	30.80	31.0	1.047	0.242	0.253

WCDMA Band 2 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
97	RMC 12.2k	Back Side	9538	1907.6	22.42	23.0	1.143	0.119	0.136
98	RMC 12.2k	Front Side	9538	1907.6	22.42	23.0	1.143	0.216	0.247

WCDMA Band 5 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
101	RMC 12.2k	Back Side	4132	826.4	23.19	23.5	1.074	0.245	0.263
102	RMC 12.2k	Front Side	4132	826.4	23.19	23.5	1.074	0.228	0.245

LTE Band 2–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power	Rated Limit	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB	Body	MHz	(dBm)	(dBm)			
105	RMC QPSK 20MHz 1RB	Back Side	1880.0	22.56	23.0	1.107	0.174	0.193
106	RMC QPSK 20MHz 1RB	Front Side	1880.0	22.56	23.0	1.107	0.335	0.371
109	RMC QPSK 20MHz 50%RB	Back Side	1880.0	21.90	22.0	1.023	0.112	0.115
110	RMC QPSK 20MHz 50%RB	Front Side	1880.0	21.90	22.0	1.023	0.268	0.274

LTE Band 4–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
113	RMC QPSK 20MHz 1RB	Back Side	1720.0	23.04	23.5	1.112	0.247	0.275
114	RMC QPSK 20MHz 1RB	Front Side	1720.0	23.04	23.5	1.112	0.388	0.431
117	RMC QPSK 20MHz 50%RB	Back Side	1720.0	22.39	22.5	1.026	0.198	0.203
118	RMC QPSK 20MHz 50%RB	Front Side	1720.0	22.39	22.5	1.026	0.274	0.281

LTE Band 5–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
121	RMC QPSK 10MHz 1RB	Back Side	836.5	23.15	23.5	1.084	0.185	0.201
122	RMC QPSK 10MHz 1RB	Front Side	836.5	23.15	23.5	1.084	0.182	0.197
125	RMC QPSK 10MHz 50%RB	Back Side	836.5	22.33	22.5	1.040	0.168	0.175
126	RMC QPSK 10MHz 50%RB	Front Side	836.5	22.33	22.5	1.040	0.144	0.150

LTE Band 7–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
129	RMC QPSK 20MHz 1RB	Back Side	2535.0	24.24	24.5	1.062	0.272	0.289
130	RMC QPSK 20MHz 1RB	Front Side	2535.0	24.24	24.5	1.062	0.367	0.390
133	RMC QPSK 20MHz 50%RB	Back Side	2535.0	23.29	23.5	1.050	0.247	0.259
134	RMC QPSK 20MHz 50%RB	Front Side	2535.0	23.29	23.5	1.050	0.357	0.375

LTE Band 17–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
137	RMC QPSK 10MHz 1RB	Back Side	711.0	23.83	24.0	1.040	0.175	0.182
138	RMC QPSK 10MHz 1RB	Front Side	711.0	23.83	24.0	1.040	0.187	0.194
141	RMC QPSK 10MHz 50%RB	Back Side	711.0	22.69	23.0	1.074	0.155	0.166
142	RMC QPSK 10MHz 50%RB	Front Side	711.0	22.69	23.0	1.074	0.159	0.171

LTE Band 40:2305-2315MHz–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
145	RMC QPSK 10MHz 1RB	Back Side	2310.0	22.15	22.5	1.084	0.292	0.317
146	RMC QPSK 10MHz 1RB	Front Side	2310.0	22.15	22.5	1.084	0.422	0.457

149	RMC QPSK 10MHz 50%RB	Back Side	2310.0	21.38	21.5	1.028	0.234	0.241
150	RMC QPSK 10MHz 50%RB	Front Side	2310.0	21.38	21.5	1.028	0.348	0.358

LTE Band 40: 2350-2360MHz–Body SAR Test (Gap: 10mm)

Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
153	RMC QPSK 10MHz 1RB	Back Side	2355.0	22.12	22.5	1.091	0.185	0.202
154	RMC QPSK 10MHz 1RB	Front Side	2355.0	22.12	22.5	1.091	0.245	0.267
157	RMC QPSK 10MHz 50%RB	Back Side	2355.0	21.37	21.5	1.030	0.137	0.141
158	RMC QPSK 10MHz 50%RB	Front Side	2355.0	21.37	21.5	1.030	0.217	0.224

WLAN 2.4GHz –Body SAR Test

Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
161	802.11b	Back Side	06	2437	16.26	16.5	1.057	0.015	0.016
162	802.11b	Front Side	06	2437	16.26	16.5	1.057	0.029	0.031

Hotspot SAR

GSM850 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
89.	GPRS_4TX	Back Side	128	824.2	30.41	30.5	1.021	0.737	0.752
90.	GPRS_4TX	Front Side	128	824.2	30.41	30.5	1.021	0.718	0.733
91.	GPRS_4TX	Bottom side	128	824.2	30.41	30.5	1.021	0.102	0.104
92.	GPRS_4TX	Right side	128	824.2	30.41	30.5	1.021	0.044	0.045

GSM1900 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
93.	GPRS_4TX	Back Side	512	1850.2	27.39	27.5	1.026	0.27	0.277
94.	GPRS_4TX	Front Side	512	1850.2	27.39	27.5	1.026	0.485	0.497
95.	GPRS_4TX	Bottom side	512	1850.2	27.39	27.5	1.026	0.540	0.554
96.	GPRS_4TX	Right side	512	1850.2	27.39	27.5	1.026	0.138	0.142

WCDMA Band 2 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
97.	RMC 12.2k	Back Side	9538	1907.6	22.42	23.0	1.143	0.119	0.136
98.	RMC 12.2k	Front Side	9538	1907.6	22.42	23.0	1.143	0.216	0.247
99.	RMC 12.2k	Bottom side	9538	1907.6	22.42	23.0	1.143	0.103	0.118
100.	RMC 12.2k	Right side	9538	1907.6	22.42	23.0	1.143	0.021	0.024

WCDMA Band 5 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
101.	RMC 12.2k	Back Side	4132	826.4	23.19	23.5	1.074	0.245	0.263
102.	RMC 12.2k	Front Side	4132	826.4	23.19	23.5	1.074	0.228	0.245
103.	RMC 12.2k	Bottom side	4132	826.4	23.19	23.5	1.074	0.057	0.061
104.	RMC 12.2k	Right side	4132	826.4	23.19	23.5	1.074	0.032	0.034

LTE Band 2–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
105.	RMC QPSK 20MHz 1RB	Back Side	1880.0	22.56	23.0	1.107	0.174	0.193
106.	RMC QPSK 20MHz 1RB	Front Side	1880.0	22.56	23.0	1.107	0.335	0.371
107.	RMC QPSK 20MHz 1RB	Bottom side	1880.0	22.56	23.0	1.107	0.314	0.347
108.	RMC QPSK 20MHz 1RB	Right side	1880.0	22.56	23.0	1.107	0.134	0.148
109.	RMC QPSK 20MHz 50%RB	Back Side	1880.0	21.90	22.0	1.023	0.112	0.115
110.	RMC QPSK 20MHz 50%RB	Front Side	1880.0	21.90	22.0	1.023	0.268	0.274
111.	RMC QPSK 20MHz 50%RB	Bottom side	1880.0	21.90	22.0	1.023	0.254	0.260
112.	RMC QPSK 20MHz 50%RB	Right side	1880.0	21.90	22.0	1.023	0.111	0.114

LTE Band 4–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
113.	RMC QPSK 20MHz 1RB	Back Side	1720.0	23.04	23.5	1.112	0.247	0.275
114.	RMC QPSK 20MHz 1RB	Front Side	1720.0	23.04	23.5	1.112	0.388	0.431
115.	RMC QPSK 20MHz 1RB	Bottom side	1720.0	23.04	23.5	1.112	0.214	0.238
116.	RMC QPSK 20MHz 1RB	Right side	1720.0	23.04	23.5	1.112	0.035	0.039
117.	RMC QPSK 20MHz 50%RB	Back Side	1720.0	22.39	22.5	1.026	0.198	0.203
118.	RMC QPSK 20MHz 50%RB	Front Side	1720.0	22.39	22.5	1.026	0.274	0.281
119.	RMC QPSK 20MHz 50%RB	Bottom side	1720.0	22.39	22.5	1.026	0.156	0.160
120.	RMC QPSK 20MHz 50%RB	Right side	1720.0	22.39	22.5	1.026	0.031	0.032

LTE Band 5–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
121.	RMC QPSK 10MHz 1RB	Back Side	836.5	23.15	23.5	1.084	0.185	0.201
122.	RMC QPSK 10MHz 1RB	Front Side	836.5	23.15	23.5	1.084	0.182	0.197
123.	RMC QPSK 10MHz 1RB	Bottom side	836.5	23.15	23.5	1.084	0.048	0.052
124.	RMC QPSK 10MHz 1RB	Right side	836.5	23.15	23.5	1.084	0.036	0.039
125.	RMC QPSK 10MHz 50%RB	Back Side	836.5	22.33	22.5	1.040	0.168	0.175
126.	RMC QPSK 10MHz 50%RB	Front Side	836.5	22.33	22.5	1.040	0.144	0.150
127.	RMC QPSK 10MHz 50%RB	Bottom side	836.5	22.33	22.5	1.040	0.034	0.035
128.	RMC QPSK 10MHz 50%RB	Right side	836.5	22.33	22.5	1.040	0.025	0.026

LTE Band 7–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
129.	RMC QPSK 20MHz 1RB	Back Side	2535.0	24.24	24.5	1.062	0.272	0.289
130.	RMC QPSK 20MHz 1RB	Front Side	2535.0	24.24	24.5	1.062	0.367	0.390
131.	RMC QPSK 20MHz 1RB	Bottom side	2535.0	24.24	24.5	1.062	0.558	0.592
132.	RMC QPSK 20MHz 1RB	Right side	2535.0	24.24	24.5	1.062	0.135	0.143
133.	RMC QPSK 20MHz 50%RB	Back Side	2535.0	23.29	23.5	1.050	0.247	0.259
134.	RMC QPSK 20MHz 50%RB	Front Side	2535.0	23.29	23.5	1.050	0.357	0.375
135.	RMC QPSK 20MHz 50%RB	Bottom side	2535.0	23.29	23.5	1.050	0.469	0.492
136.	RMC QPSK 20MHz 50%RB	Right side	2535.0	23.29	23.5	1.050	0.122	0.128

LTE Band 17–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
137.	RMC QPSK 10MHz 1RB	Back Side	711.0	23.83	24.0	1.040	0.175	0.182
138.	RMC QPSK 10MHz 1RB	Front Side	711.0	23.83	24.0	1.040	0.187	0.194
139.	RMC QPSK 10MHz 1RB	Bottom side	711.0	23.83	24.0	1.040	0.033	0.034
140.	RMC QPSK 10MHz 1RB	Right side	711.0	23.83	24.0	1.040	0.021	0.022
141.	RMC QPSK 10MHz 50%RB	Back Side	711.0	22.69	23.0	1.074	0.155	0.166
142.	RMC QPSK 10MHz 50%RB	Front Side	711.0	22.69	23.0	1.074	0.159	0.171
143.	RMC QPSK 10MHz 50%RB	Bottom side	711.0	22.69	23.0	1.074	0.048	0.052
144.	RMC QPSK 10MHz 50%RB	Right side	711.0	22.69	23.0	1.074	0.013	0.014

LTE Band 40:2305-2315MHz–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
145.	RMC QPSK 10MHz 1RB	Back Side	2310.0	22.15	22.5	1.084	0.292	0.317
146.	RMC QPSK 10MHz 1RB	Front Side	2310.0	22.15	22.5	1.084	0.422	0.457
147.	RMC QPSK 10MHz 1RB	Bottom side	2310.0	22.15	22.5	1.084	0.323	0.350
148.	RMC QPSK 10MHz 1RB	Right side	2310.0	22.15	22.5	1.084	0.015	0.016
149.	RMC QPSK 10MHz 50%RB	Back Side	2310.0	21.38	21.5	1.028	0.234	0.241
150.	RMC QPSK 10MHz 50%RB	Front Side	2310.0	21.38	21.5	1.028	0.348	0.358
151.	RMC QPSK 10MHz 50%RB	Bottom side	2310.0	21.38	21.5	1.028	0.259	0.266
152.	RMC QPSK 10MHz 50%RB	Right side	2310.0	21.38	21.5	1.028	0.012	0.012

LTE Band 40: 2350-2360MHz–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
153.	RMC QPSK 10MHz 1RB	Back Side	2355.0	22.12	22.5	1.091	0.185	0.202
154.	RMC QPSK 10MHz 1RB	Front Side	2355.0	22.12	22.5	1.091	0.245	0.267
155.	RMC QPSK 10MHz 1RB	Bottom side	2355.0	22.12	22.5	1.091	0.236	0.258
156.	RMC QPSK 10MHz 1RB	Right side	2355.0	22.12	22.5	1.091	0.035	0.038
157.	RMC QPSK 10MHz 50%RB	Back Side	2355.0	21.37	21.5	1.030	0.137	0.141
158.	RMC QPSK 10MHz 50%RB	Front Side	2355.0	21.37	21.5	1.030	0.217	0.224
159.	RMC QPSK 10MHz 50%RB	Bottom side	2355.0	21.37	21.5	1.030	0.2	0.206
160.	RMC QPSK 10MHz 50%RB	Right side	2355.0	21.37	21.5	1.030	0.064	0.066

WLAN 2.4GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
161.	802.11b	Back Side	06	2437	16.26	16.5	1.057	0.015	0.016
162.	802.11b	Front Side	06	2437	16.26	16.5	1.057	0.029	0.031
163.	802.11b	Left side	06	2437	16.26	16.5	1.057	0.011	0.012
164.	802.11b	Top Side	06	2437	16.26	16.5	1.057	0.021	0.022

9.3 Simultaneous Multi-band Transmission SAR Analysis

List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Head SAR	Body-worn SAR	Hotspot SAR
1	GSM(Voice) + WLAN(Data)	Yes	Yes	-
2	GPRS/ EDGE(Data) + WLAN(Data)	Yes	-	Yes
3	WCDMA (Voice)+ WLAN(Data)	Yes	Yes	-
4	HSDPA(Data) + WLAN(Data)	-	-	Yes
5	HSUPA(Data) + WLAN(Data)	-	-	Yes
6	LTE(Data) + WLAN(Data)	-	-	Yes
7	GSM(Voice) + Bluetooth(Data)	Yes	Yes	-
8	GPRS/ EDGE(Data) + Bluetooth(Data)	Yes	-	Yes
9	WCDMA(Voice) + Bluetooth(Data)	Yes	Yes	-
10	HSDPA(Data)+ Bluetooth(Data)	-	-	Yes
11	HSUPA(Data) + Bluetooth(Data)	-	-	Yes
12	LTE(Data) + Bluetooth(Data)	-	-	Yes

Remark:

1. GSM ,WCDMA and LTE share the same antenna, and cannot transmit simultaneously.
2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [$\sqrt{f(\text{GHz})/x}$] W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 v06 as below:

Bluetooth:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	X	SAR(1g) 5mm	SAR(1g) 10mm
6.0	3.98	5/10	2.441	7.5	0.166	0.083

4. The maximum SAR summation is calculated based on the same configuration and test position.

Head SAR

WWAN and WLAN

	WWAN		WLAN	Summed SAR (W/kg)
Position	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM850	0.360	0.159	0.519
Right Tilted	GSM850	0.203	0.026	0.229
Left Cheek	GSM850	0.352	0.046	0.398
Left Tilted	GSM850	0.155	0.016	0.171
Right Cheek	GSM1900	0.092	0.159	0.251
Right Tilted	GSM1900	0.038	0.026	0.064
Left Cheek	GSM1900	0.083	0.046	0.129
Left Tilted	GSM1900	0.043	0.016	0.059
Right Cheek	GPRS850	0.554	0.159	0.713
Right Tilted	GPRS850	0.252	0.026	0.278
Left Cheek	GPRS850	0.542	0.046	0.588
Left Tilted	GPRS850	0.243	0.016	0.259
Right Cheek	GPRS1900	0.231	0.159	0.39
Right Tilted	GPRS1900	0.128	0.026	0.154
Left Cheek	GPRS1900	0.198	0.046	0.244
Left Tilted	GPRS1900	0.121	0.016	0.137
Right Cheek	WCDMA Band 2	0.119	0.159	0.278
Right Tilted	WCDMA Band 2	0.078	0.026	0.104
Left Cheek	WCDMA Band 2	0.096	0.046	0.142
Left Tilted	WCDMA Band 2	0.047	0.016	0.063
Right Cheek	WCDMA Band 5	0.185	0.159	0.344
Right Tilted	WCDMA Band 5	0.103	0.026	0.129
Left Cheek	WCDMA Band 5	0.179	0.046	0.225
Left Tilted	WCDMA Band 5	0.088	0.016	0.104
Right Cheek	LTE Band 2	0.101	0.159	0.26
Right Tilted	LTE Band 2	0.072	0.026	0.098
Left Cheek	LTE Band 2	0.126	0.046	0.172
Left Tilted	LTE Band 2	0.082	0.016	0.098
Right Cheek	LTE Band 4	0.128	0.159	0.287
Right Tilted	LTE Band 4	0.040	0.026	0.066
Left Cheek	LTE Band 4	0.169	0.046	0.215
Left Tilted	LTE Band 4	0.053	0.016	0.069
Right Cheek	LTE Band 5	0.182	0.159	0.341
Right Tilted	LTE Band 5	0.023	0.026	0.049
Left Cheek	LTE Band 5	0.198	0.046	0.244
Left Tilted	LTE Band 5	0.027	0.016	0.043
Right Cheek	LTE Band 7	0.177	0.159	0.336

Right Tilted	LTE Band 7	0.041	0.026	0.067
Left Cheek	LTE Band 7	0.080	0.046	0.126
Left Tilted	LTE Band 7	0.023	0.016	0.039
Right Cheek	LTE Band 17	0.110	0.159	0.269
Right Tilted	LTE Band 17	0.044	0.026	0.07
Left Cheek	LTE Band 17	0.060	0.046	0.106
Left Tilted	LTE Band 17	0.033	0.016	0.049
Right Cheek	LTE Band 40	0.014	0.159	0.173
Right Tilted	LTE Band 40	0.012	0.026	0.038
Left Cheek	LTE Band 40	0.022	0.046	0.068
Left Tilted	LTE Band 40	0.011	0.016	0.027

WWAN and Bluetooth

	WWAN		Bluetooth	Summed SAR (W/kg)
Position	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM850	0.360	0.166	0.526
Right Tilted	GSM850	0.203	0.166	0.369
Left Cheek	GSM850	0.352	0.166	0.518
Left Tilted	GSM850	0.155	0.166	0.321
Right Cheek	GSM1900	0.092	0.166	0.258
Right Tilted	GSM1900	0.038	0.166	0.204
Left Cheek	GSM1900	0.083	0.166	0.249
Left Tilted	GSM1900	0.043	0.166	0.209
Right Cheek	GPRS850	0.554	0.166	0.720
Right Tilted	GPRS850	0.252	0.166	0.418
Left Cheek	GPRS850	0.542	0.166	0.708
Left Tilted	GPRS850	0.243	0.166	0.409
Right Cheek	GPRS1900	0.231	0.166	0.397
Right Tilted	GPRS1900	0.128	0.166	0.294
Left Cheek	GPRS1900	0.198	0.166	0.364
Left Tilted	GPRS1900	0.121	0.166	0.287
Right Cheek	WCDMA Band 2	0.119	0.166	0.285
Right Tilted	WCDMA Band 2	0.078	0.166	0.244
Left Cheek	WCDMA Band 2	0.096	0.166	0.262
Left Tilted	WCDMA Band 2	0.047	0.166	0.213
Right Cheek	WCDMA Band 5	0.185	0.166	0.351
Right Tilted	WCDMA Band 5	0.103	0.166	0.269
Left Cheek	WCDMA Band 5	0.179	0.166	0.345
Left Tilted	WCDMA Band 5	0.088	0.166	0.254
Right Cheek	LTE Band 2	0.101	0.166	0.267
Right Tilted	LTE Band 2	0.072	0.166	0.238
Left Cheek	LTE Band 2	0.126	0.166	0.292
Left Tilted	LTE Band 2	0.082	0.166	0.248
Right Cheek	LTE Band 4	0.128	0.166	0.294
Right Tilted	LTE Band 4	0.040	0.166	0.206
Left Cheek	LTE Band 4	0.169	0.166	0.335
Left Tilted	LTE Band 4	0.053	0.166	0.219
Right Cheek	LTE Band 5	0.182	0.166	0.348
Right Tilted	LTE Band 5	0.023	0.166	0.189
Left Cheek	LTE Band 5	0.198	0.166	0.364
Left Tilted	LTE Band 5	0.027	0.166	0.193
Right Cheek	LTE Band 7	0.177	0.166	0.343
Right Tilted	LTE Band 7	0.041	0.166	0.207

Left Cheek	LTE Band 7	0.080	0.166	0.246
Left Tilted	LTE Band 7	0.023	0.166	0.189
Right Cheek	LTE Band 17	0.110	0.166	0.276
Right Tilted	LTE Band 17	0.044	0.166	0.21
Left Cheek	LTE Band 17	0.060	0.166	0.226
Left Tilted	LTE Band 17	0.033	0.166	0.199
Right Cheek	LTE Band 40	0.014	0.166	0.18
Right Tilted	LTE Band 40	0.012	0.166	0.178
Left Cheek	LTE Band 40	0.022	0.166	0.188
Left Tilted	LTE Band 40	0.011	0.166	0.177

Body-worn SAR

WWAN and WLAN

	WWAN		WLAN	Summed SAR (W/kg)
Position	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.752	0.016	0.768
Front	GSM850	0.733	0.031	0.764
Back	GSM1900	0.277	0.016	0.293
Front	GSM1900	0.497	0.031	0.528
Back	WCDMA Band 2	0.136	0.016	0.152
Front	WCDMA Band 2	0.247	0.031	0.278
Back	WCDMA Band 5	0.263	0.016	0.279
Front	WCDMA Band 5	0.245	0.031	0.276
Back	LTE Band 2	0.193	0.016	0.209
Front	LTE Band 2	0.371	0.031	0.402
Back	LTE Band 4	0.275	0.016	0.291
Front	LTE Band 4	0.431	0.031	0.462
Back	LTE Band 5	0.201	0.016	0.217
Front	LTE Band 5	0.197	0.031	0.228
Back	LTE Band 7	0.289	0.016	0.305
Front	LTE Band 7	0.390	0.031	0.421
Back	LTE Band 17	0.182	0.016	0.198
Front	LTE Band 17	0.194	0.031	0.225
Back	LTE Band 40	0.317	0.016	0.333
Front	LTE Band 40	0.457	0.031	0.488

WWAN and Bluetooth

	WWAN		Bluetooth	Summed SAR (W/kg)
Position	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.752	0.083	0.835
Front	GSM850	0.733	0.083	0.816
Back	GSM1900	0.277	0.083	0.36
Front	GSM1900	0.497	0.083	0.58
Back	WCDMA Band 2	0.136	0.083	0.219
Front	WCDMA Band 2	0.247	0.083	0.33
Back	WCDMA Band 5	0.263	0.083	0.346
Front	WCDMA Band 5	0.245	0.083	0.328
Back	LTE Band 2	0.193	0.083	0.276
Front	LTE Band 2	0.371	0.083	0.454
Back	LTE Band 4	0.275	0.083	0.358
Front	LTE Band 4	0.431	0.083	0.514

Back	LTE Band 5	0.201	0.083	0.284
Front	LTE Band 5	0.197	0.083	0.28
Back	LTE Band 7	0.289	0.083	0.372
Front	LTE Band 7	0.390	0.083	0.473
Back	LTE Band 17	0.182	0.083	0.265
Front	LTE Band 17	0.194	0.083	0.277
Back	LTE Band 40	0.317	0.083	0.4
Front	LTE Band 40	0.457	0.083	0.54

Hotspot SAR

WWAN and WLAN

	WWAN		WLAN	Summed SAR (W/kg)
Position	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.752	0.016	0.768
Front	GSM850	0.733	0.031	0.764
Top side	GSM850	--	0.022	0.022
Bottom side	GSM850	0.104	--	0.104
Right side	GSM850	0.045	--	0.045
Left side	GSM850	--	0.012	0.012
Back	GSM1900	0.277	0.016	0.293
Front	GSM1900	0.497	0.031	0.528
Top side	GSM1900	--	0.022	0.022
Bottom side	GSM1900	0.554	--	0.554
Right side	GSM1900	0.142	--	0.142
Left side	GSM1900	--	0.012	0.012
Back	WCDMA Band 2	0.136	0.016	0.152
Front	WCDMA Band 2	0.247	0.031	0.278
Top side	WCDMA Band 2	--	0.022	0.022
Bottom side	WCDMA Band 2	0.118	--	0.118
Right side	WCDMA Band 2	0.024	--	0.024
Left side	WCDMA Band 2	--	0.012	0.012
Back	WCDMA Band 5	0.263	0.016	0.279
Front	WCDMA Band 5	0.245	0.031	0.276
Top side	WCDMA Band 5	--	0.022	0.022
Bottom side	WCDMA Band 5	0.061	--	0.061
Right side	WCDMA Band 5	0.034	--	0.034
Left side	WCDMA Band 5	--	0.012	0.012
Back	LTE Band 2	0.193	0.016	0.209
Front	LTE Band 2	0.371	0.031	0.402
Top side	LTE Band 2	--	0.022	0.022
Bottom side	LTE Band 2	0.347	--	0.347
Right side	LTE Band 2	0.148	--	0.148

Left side	LTE Band 2	--	0.012	0.012
Back	LTE Band 4	0.275	0.016	0.291
Front	LTE Band 4	0.431	0.031	0.462
Top side	LTE Band 4	--	0.022	0.022
Bottom side	LTE Band 4	0.238	--	0.238
Right side	LTE Band 4	0.039	--	0.039
Left side	LTE Band 4	--	0.012	0.012
Back	LTE Band 5	0.201	0.016	0.217
Front	LTE Band 5	0.197	0.031	0.228
Top side	LTE Band 5	--	0.022	0.022
Bottom side	LTE Band 5	0.052	--	0.052
Right side	LTE Band 5	0.039	--	0.039
Left side	LTE Band 5	--	0.012	0.012
Back	LTE Band 7	0.289	0.016	0.305
Front	LTE Band 7	0.390	0.031	0.421
Top side	LTE Band 7	--	0.022	0.022
Bottom side	LTE Band 7	0.592	--	0.592
Right side	LTE Band 7	0.143	--	0.143
Left side	LTE Band 7	--	0.012	0.012
Back	LTE Band 17	0.182	0.016	0.198
Front	LTE Band 17	0.194	0.031	0.225
Top side	LTE Band 17	--	0.022	0.022
Bottom side	LTE Band 17	0.034	--	0.034
Right side	LTE Band 17	0.022	--	0.022
Left side	LTE Band 17	--	0.012	0.012
Back	LTE Band 40	0.317	0.016	0.333
Front	LTE Band 40	0.457	0.031	0.488
Top side	LTE Band 40	--	0.022	0.022
Bottom side	LTE Band 40	0.350	--	0.350
Right side	LTE Band 40	0.016	--	0.016
Left side	LTE Band 40	--	0.012	0.012

WWAN and Bluetooth

	WWAN		Bluetooth	Summed SAR (W/kg)
Position	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.752	0.083	0.835
Front	GSM850	0.733	0.083	0.816
Top side	GSM850	--	0.083	0.083
Bottom side	GSM850	0.104	--	0.104
Right side	GSM850	0.045	--	0.045
Left side	GSM850	--	0.083	0.083

Back	GSM1900	0.277	0.083	0.36
Front	GSM1900	0.497	0.083	0.58
Top side	GSM1900	--	0.083	0.083
Bottom side	GSM1900	0.554	--	0.554
Right side	GSM1900	0.142	--	0.142
Left side	GSM1900	--	0.083	0.083
Back	WCDMA Band 2	0.136	0.083	0.219
Front	WCDMA Band 2	0.247	0.083	0.33
Top side	WCDMA Band 2	--	0.083	0.083
Bottom side	WCDMA Band 2	0.118	--	0.118
Right side	WCDMA Band 2	0.024	--	0.024
Left side	WCDMA Band 2	--	0.083	0.083
Back	WCDMA Band 5	0.263	0.083	0.346
Front	WCDMA Band 5	0.245	0.083	0.328
Top side	WCDMA Band 5	--	0.083	0.083
Bottom side	WCDMA Band 5	0.061	--	0.061
Right side	WCDMA Band 5	0.034	--	0.034
Left side	WCDMA Band 5	--	0.083	0.083
Back	LTE Band 2	0.193	0.083	0.276
Front	LTE Band 2	0.371	0.083	0.454
Top side	LTE Band 2	--	0.083	0.083
Bottom side	LTE Band 2	0.347	--	0.347
Right side	LTE Band 2	0.148	--	0.148
Left side	LTE Band 2	--	0.083	0.083
Back	LTE Band 4	0.275	0.083	0.358
Front	LTE Band 4	0.431	0.083	0.514
Top side	LTE Band 4	--	0.083	0.083
Bottom side	LTE Band 4	0.238	--	0.238
Right side	LTE Band 4	0.039	--	0.039
Left side	LTE Band 4	--	0.083	0.083
Back	LTE Band 5	0.201	0.083	0.284
Front	LTE Band 5	0.197	0.083	0.28
Top side	LTE Band 5	--	0.083	0.083
Bottom side	LTE Band 5	0.052	--	0.052
Right side	LTE Band 5	0.039	--	0.039
Left side	LTE Band 5	--	0.083	0.083
Back	LTE Band 7	0.289	0.083	0.372
Front	LTE Band 7	0.390	0.083	0.473
Top side	LTE Band 7	--	0.083	0.083
Bottom side	LTE Band 7	0.592	--	0.592
Right side	LTE Band 7	0.143	--	0.143
Left side	LTE Band 7	--	0.083	0.083
Back	LTE Band 17	0.182	0.083	0.265

Front	LTE Band 17	0.194	0.083	0.277
Top side	LTE Band 17	--	0.083	0.083
Bottom side	LTE Band 17	0.034	--	0.034
Right side	LTE Band 17	0.022	--	0.022
Left side	LTE Band 17	--	0.083	0.083
Back	LTE Band 40	0.317	0.083	0.4
Front	LTE Band 40	0.457	0.083	0.54
Top side	LTE Band 40	--	0.083	0.083
Bottom side	LTE Band 40	0.350	--	0.350
Right side	LTE Band 40	0.016	--	0.016
Left side	LTE Band 40	--	0.083	0.083

10. Measurement Uncertainty

10.1 Uncertainty for EUT SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+ - %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test Sample Related									
Test sample positioning	E.4.2	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	E.2.9	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
SAR scaling	E6.5	0.0	R	$\sqrt{3}$	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - deviation	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	∞

from target value										
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	∞	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	∞	
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	∞	
Combined Standard Uncertainty			RSS				12.98	12.53		
Expanded Uncertainty (95% Confidence interval)			K=2				25.32	24.43		

10.2 Uncertainty for System Performance Check

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+- %)	10g Ui (+- %)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_Cp)^{1/2}$	$(1_Cp)^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	0	R	$\sqrt{3}$	0	0	0.0	0.0	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max.	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞

SAR Evaluation									
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	N-1
Input power and SAR drift measurement	8,6.6.2	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
Deviation of experimental dipole from numerical dipole	E.6.4	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	2.0	R	$\sqrt{3}$	1	0.84	1.10	1.10	∞
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				12.00	11.50	
Expanded Uncertainty (95% Confidence interval)			K=2				23.39	22.43	

Annex A. Plots of System Performance Check

MEASUREMENT 1

For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/29/2018

Measurement duration: 7 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.99; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative Permittivity (real part)	41.320574
Conductivity (S/m)	0.862373
Power Variation (%)	0.038363
Ambient Temperature	21.1
Liquid Temperature	21.3

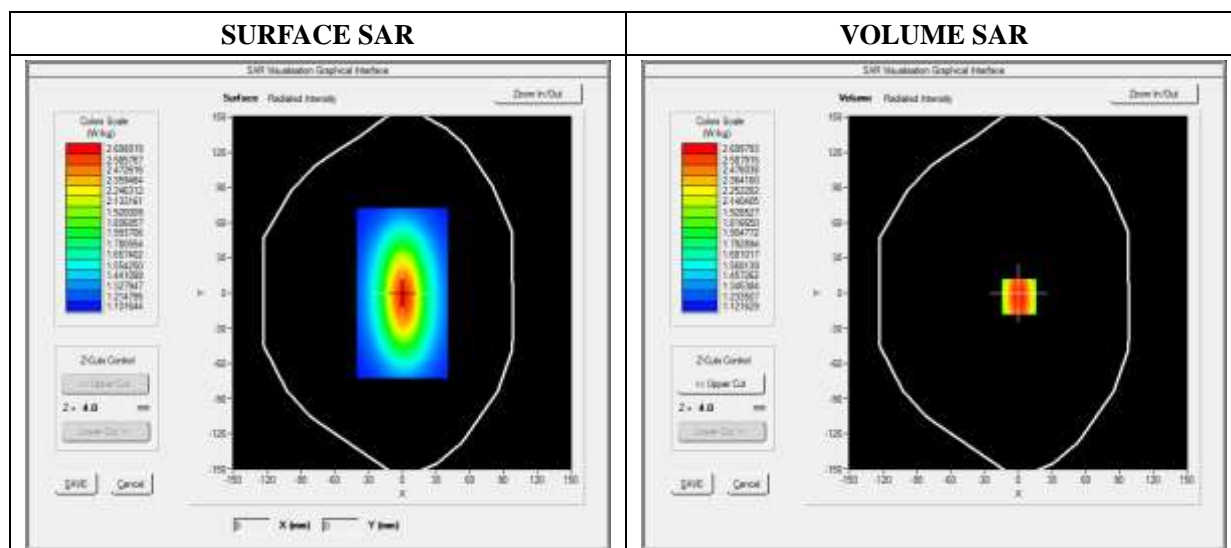




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.042744
SAR 1g (W/Kg)	2.164534

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.3634	1.8023	1.4523	1.2514	1.1005	1.0245

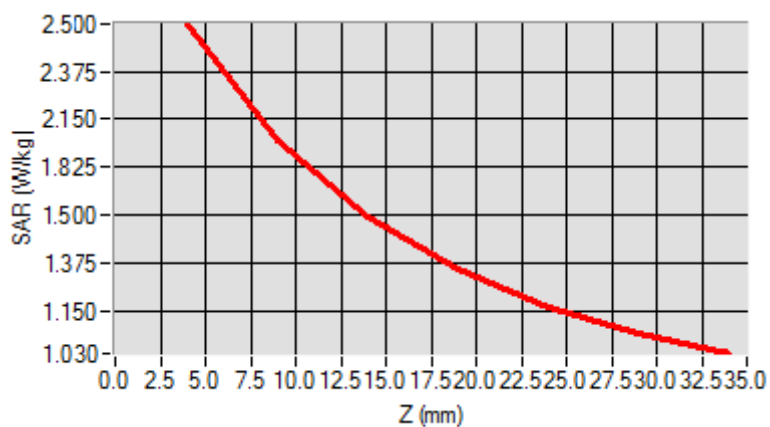

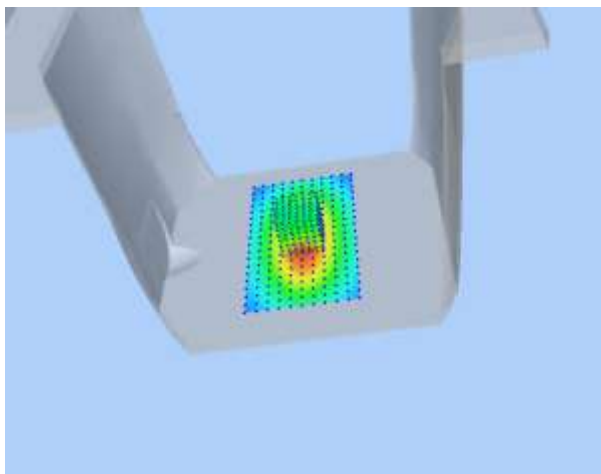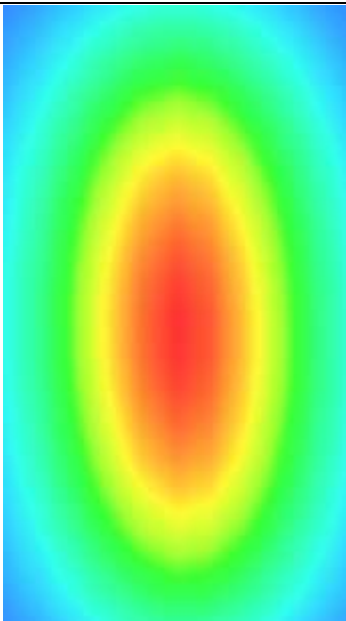3D screen shot	Hot spot position
	

MEASUREMENT 2

For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/29/2018

Measurement duration: 7 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	0.038437
Ambient Temperature	21.1
Liquid Temperature	21.3

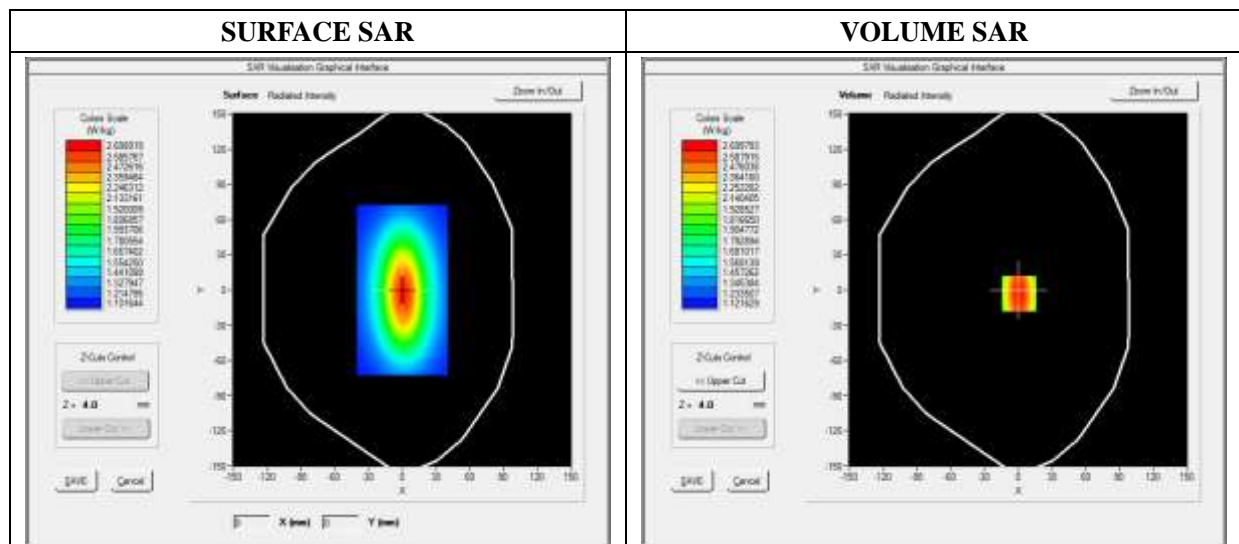




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.129489
SAR 1g (W/Kg)	2.411253

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.4900	1.8942	1.4811	1.3541	1.1123	1.0539

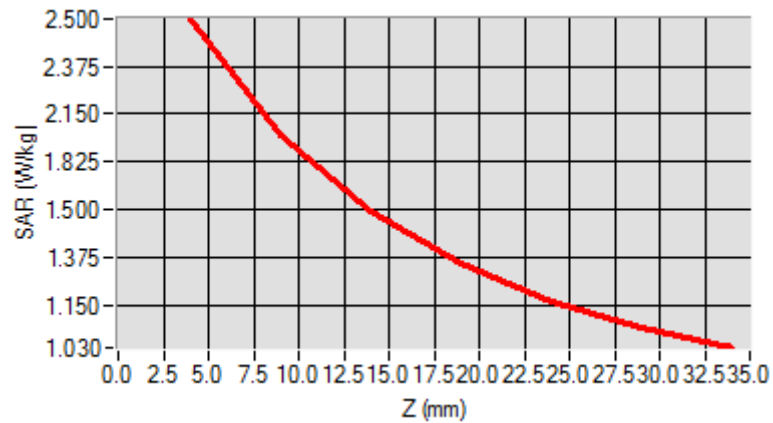

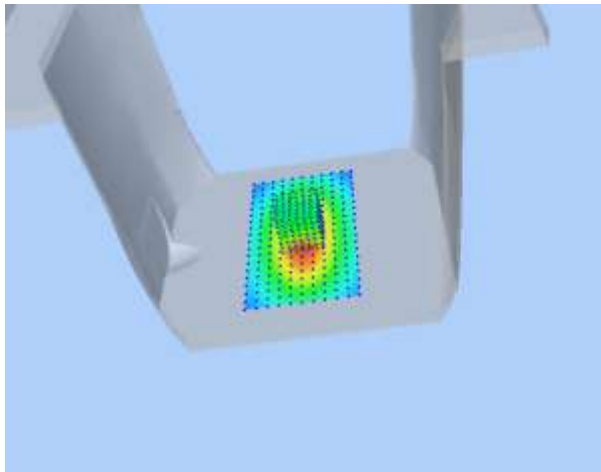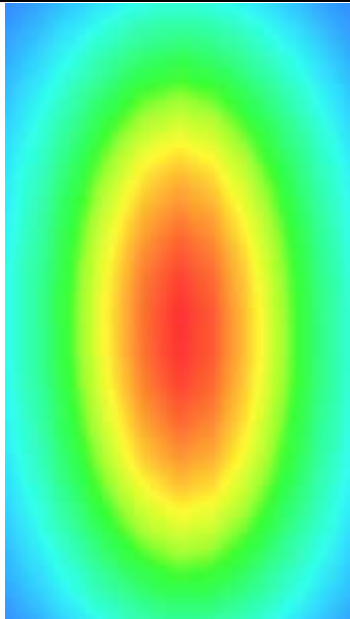3D screen shot	Hot spot position
	

MEASUREMENT 3

For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.84; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative Permittivity (real part)	39.024890
Conductivity (S/m)	1.371250
Power Variation (%)	1.401232
Ambient Temperature	21.1
Liquid Temperature	21.2

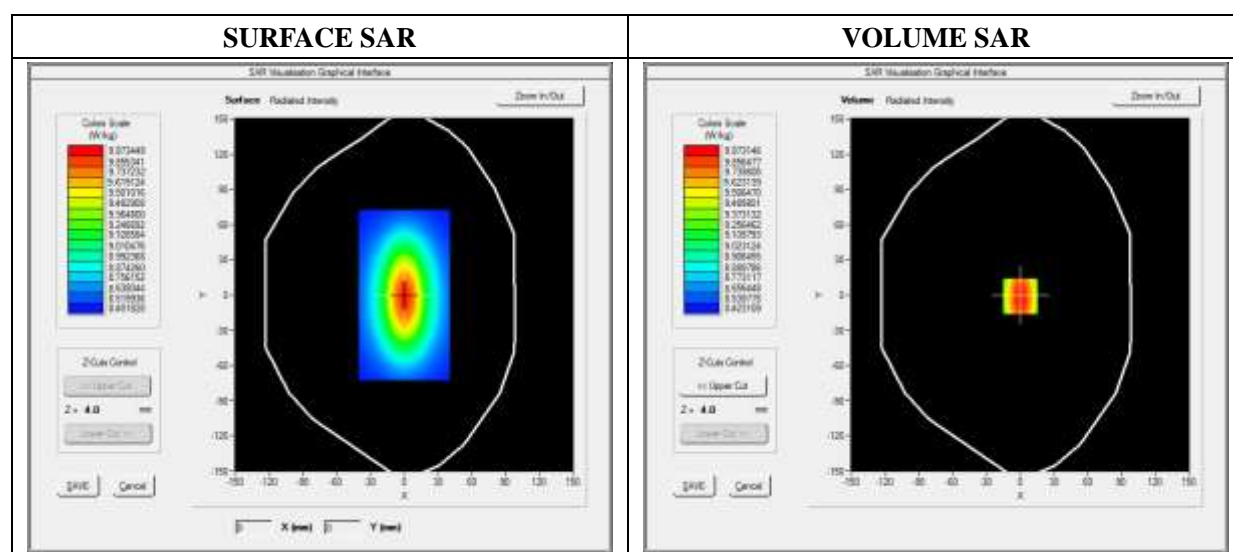




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.171252
SAR 1g (W/Kg)	9.611250

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.3455	7.1125	5.1026	3.425	3.0242	2.1125

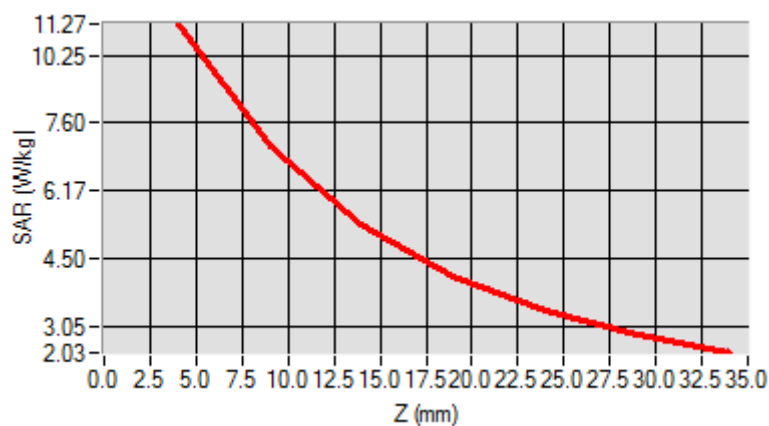

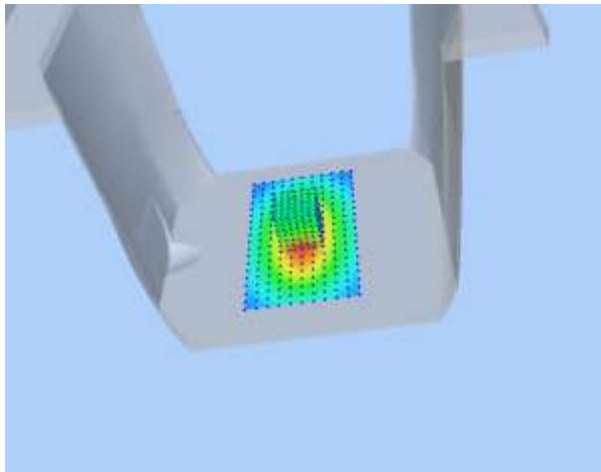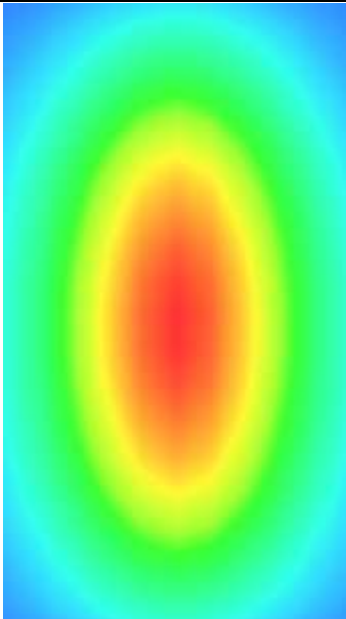3D screen shot	Hot spot position
	

MEASUREMENT 4

For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.022540
Ambient Temperature	21.1
Liquid Temperature	21.3

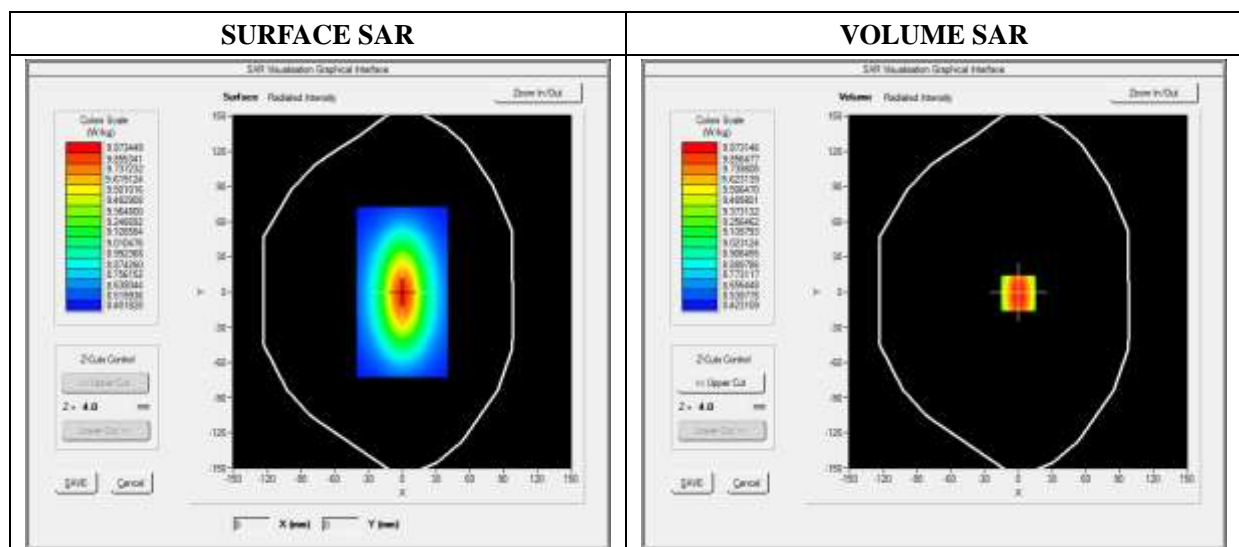




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	7.174526
SAR 1g (W/Kg)	9.913214

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2354	6.8400	5.0121	4.1189	3.0522	2.8424

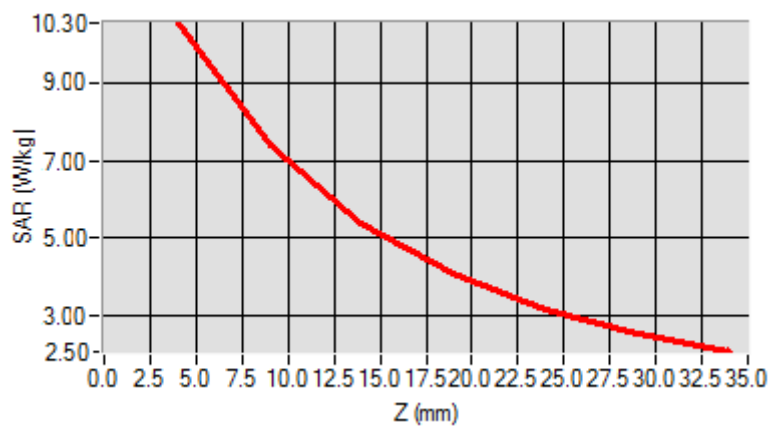

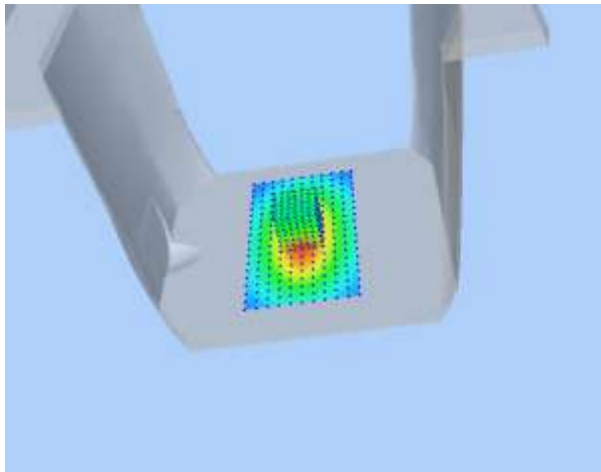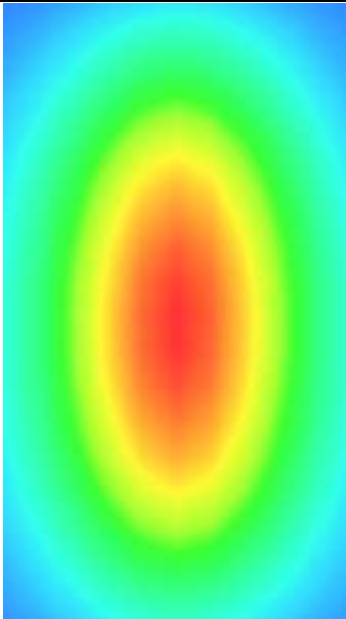3D screen shot	Hot spot position
	

MEASUREMENT 5

For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative Permittivity (real part)	38.153660
Conductivity (S/m)	1.740236
Power Variation (%)	1.141452
Ambient Temperature	21.1
Liquid Temperature	21.2

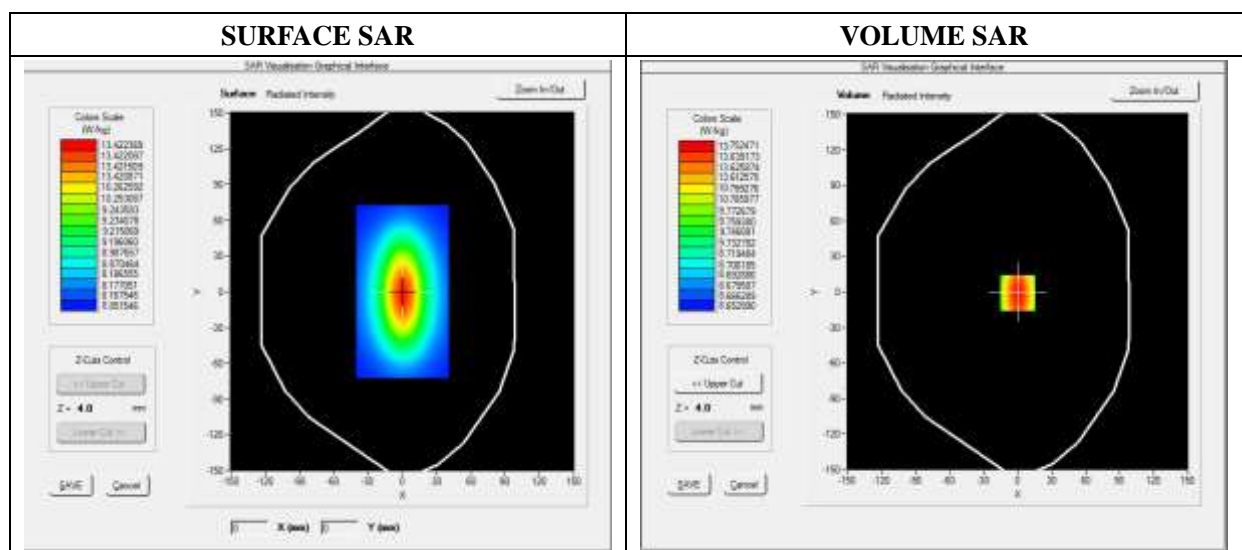




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	8.020427
SAR 1g (W/Kg)	13.452457

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	14.1034	12.0012	10.2624	7.4715	5.9022	4.5114

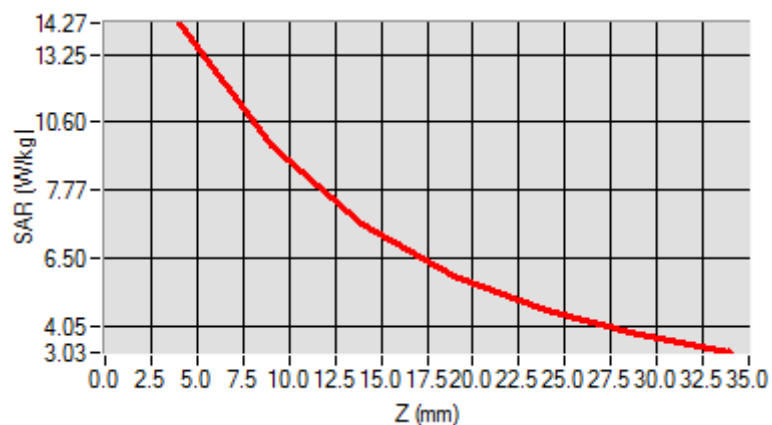

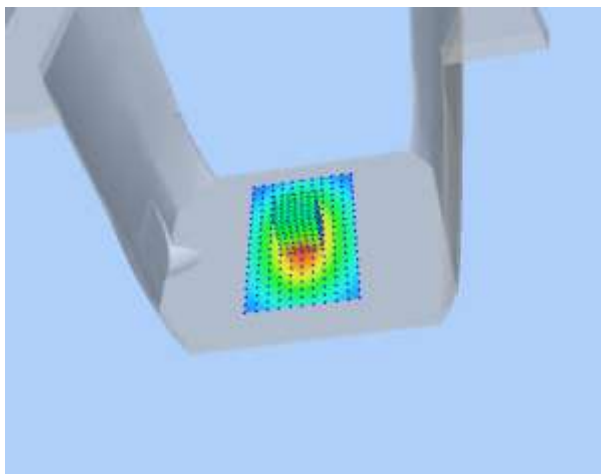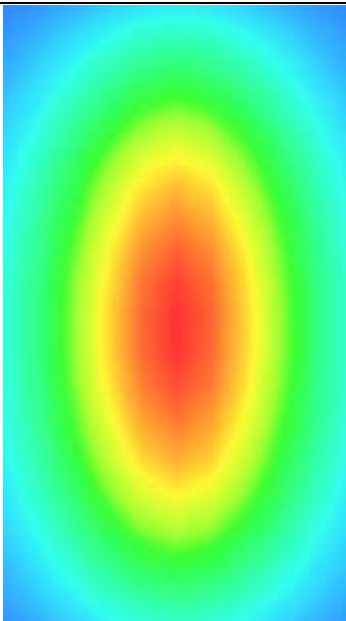3D screen shot	Hot spot position
	

MEASUREMENT 6

For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.37; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative Permittivity (real part)	38.631092
Conductivity (S/m)	1.930182
Power Variation (%)	1.028221
Ambient Temperature	21.1
Liquid Temperature	21.2

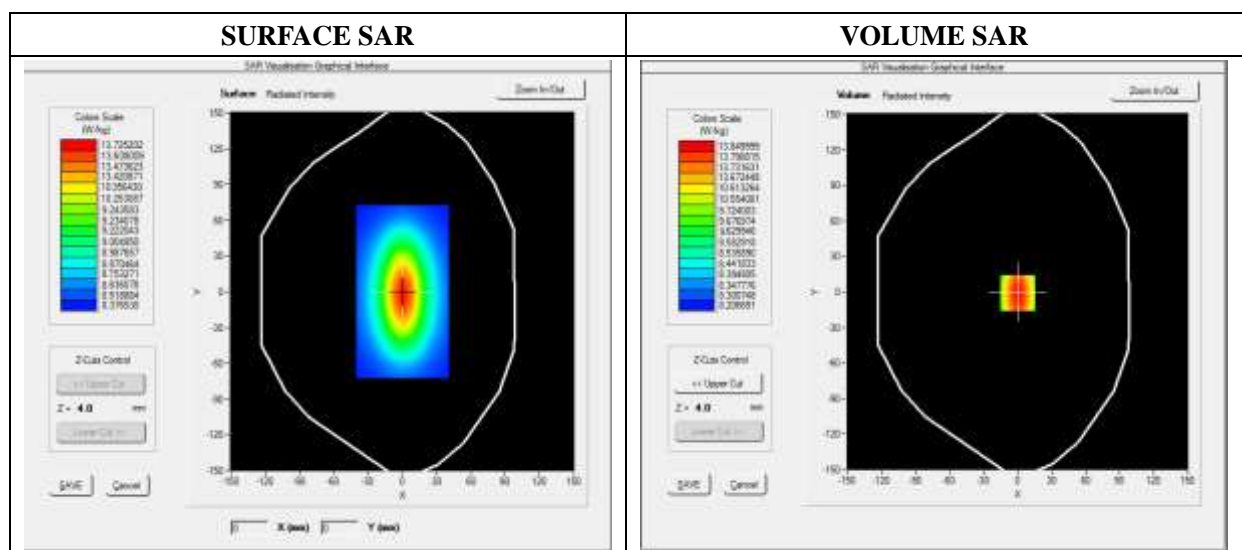




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	8.270822
SAR 1g (W/Kg)	13.670282

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	14.1034	12.1354	10.2965	7.4854	5.9354	4.5186

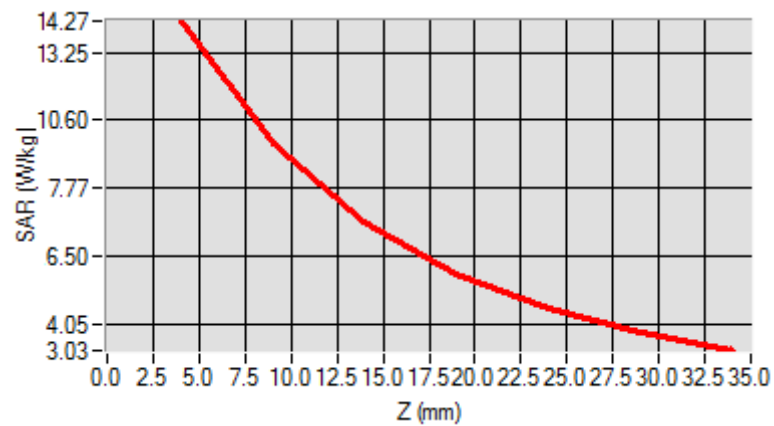

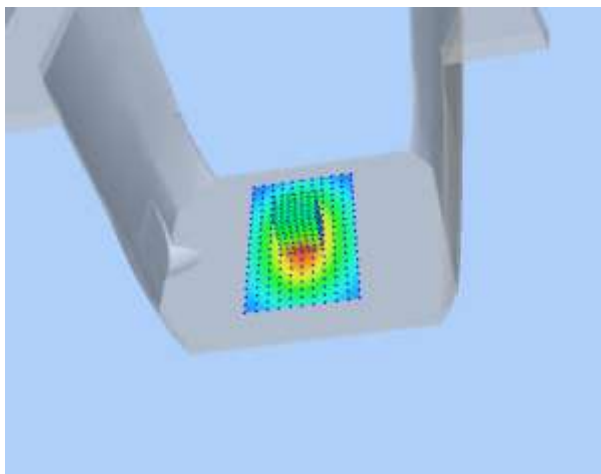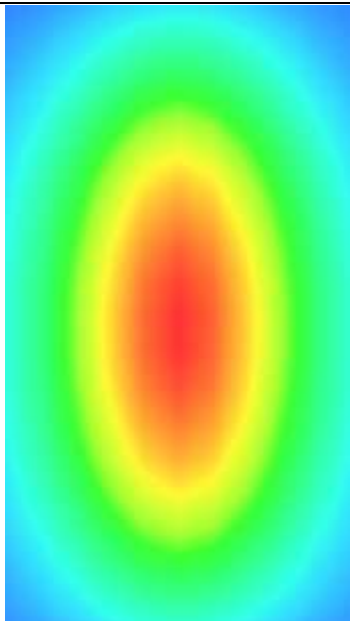3D screen shot	Hot spot position
	

MEASUREMENT 7

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/29/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.28; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative Permittivity (real part)	54.964739
Conductivity (S/m)	0.931048
Power Variation (%)	0.034745
Ambient Temperature	21.1
Liquid Temperature	21.3

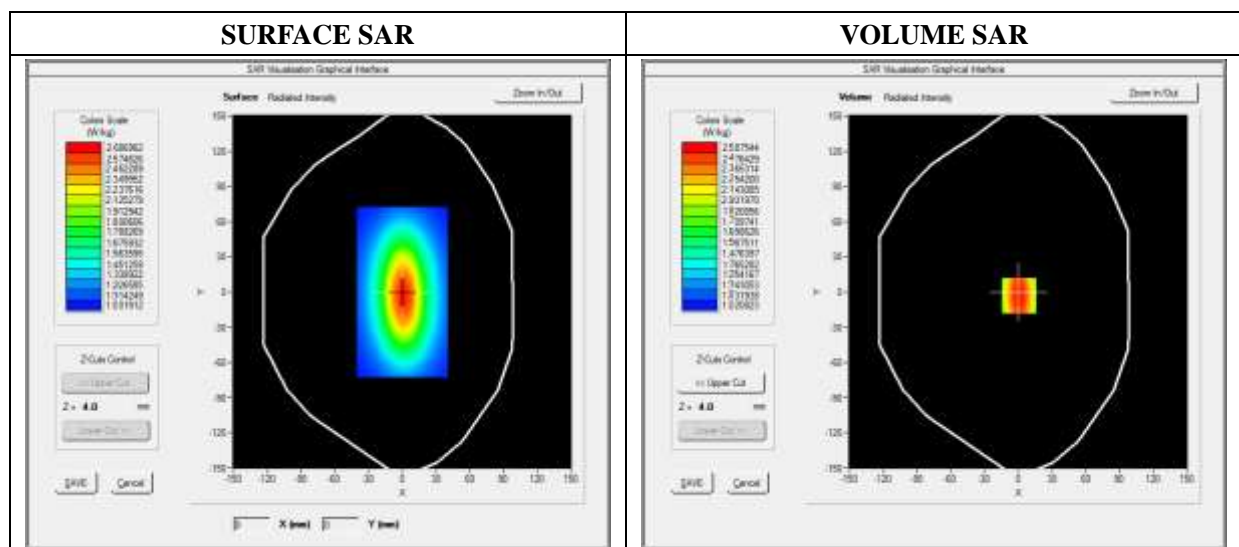




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.000865
SAR 1g (W/Kg)	2.124211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5132	1.1087	0.8214	0.5160	0.4875	0.4864

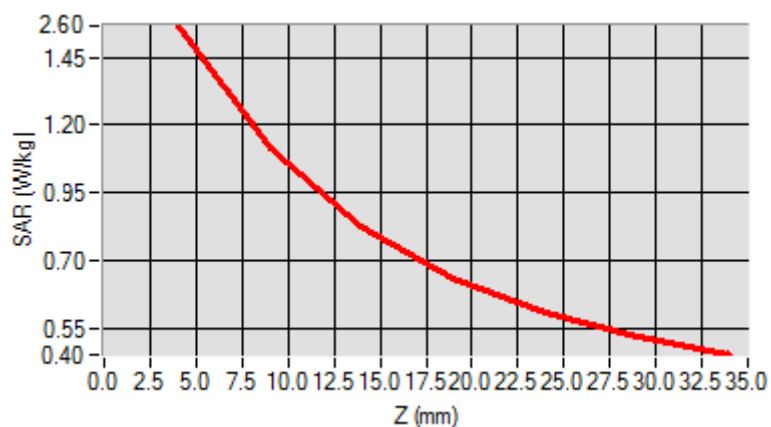

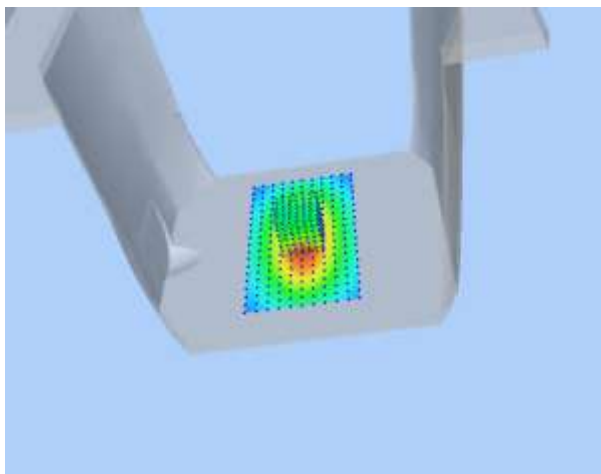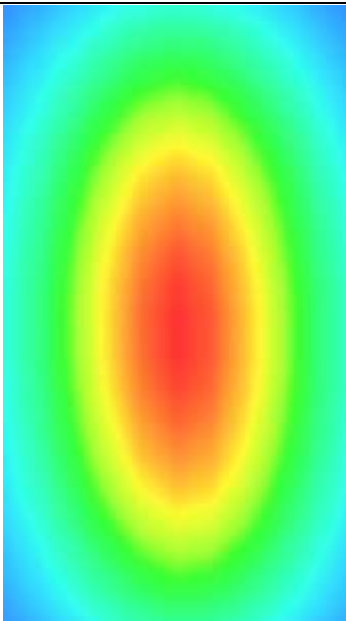3D screen shot	Hot spot position
	

MEASUREMENT 8

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/29/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

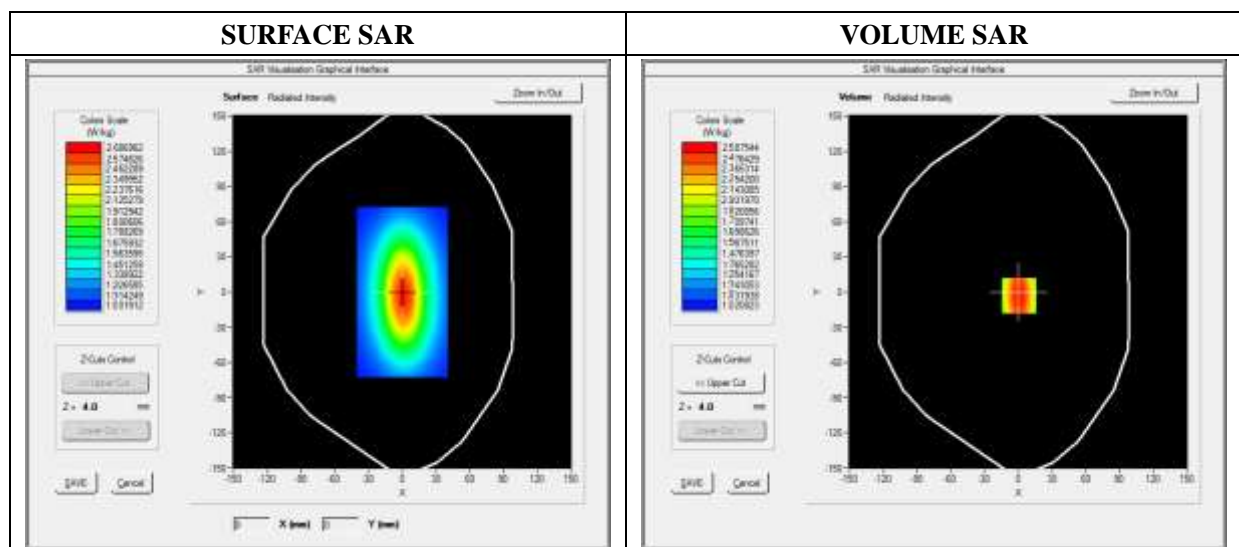




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.028956
SAR 1g (W/Kg)	2.354211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5789	1.1300	0.8795	0.5940	0.5011	0.5100

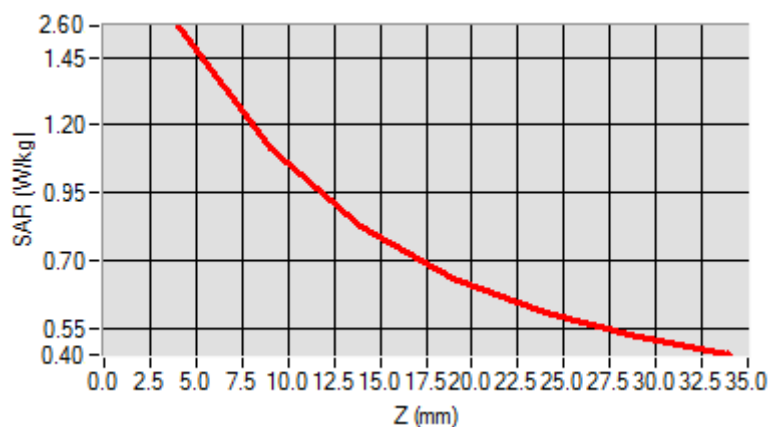

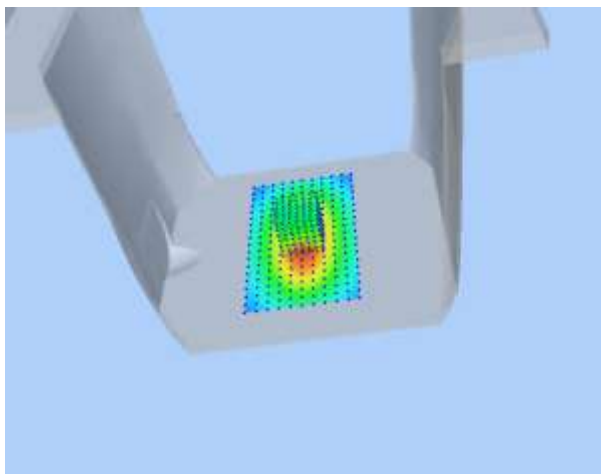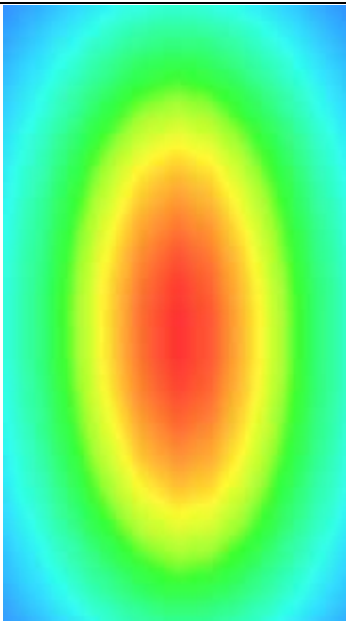3D screen shot	Hot spot position
	

MEASUREMENT 9

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.06; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.845690
Ambient Temperature	21.1
Liquid Temperature	21.2

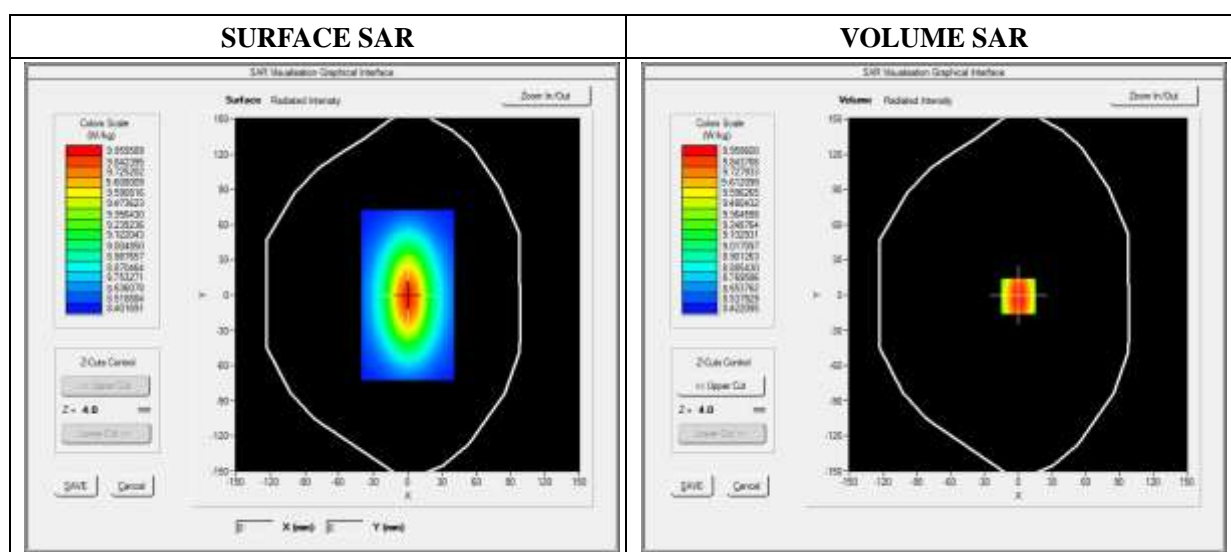




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.221202
SAR 1g (W/Kg)	9.582560

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	11.2425	9.4123	8.0345	6.9125	6.3092	3.9460

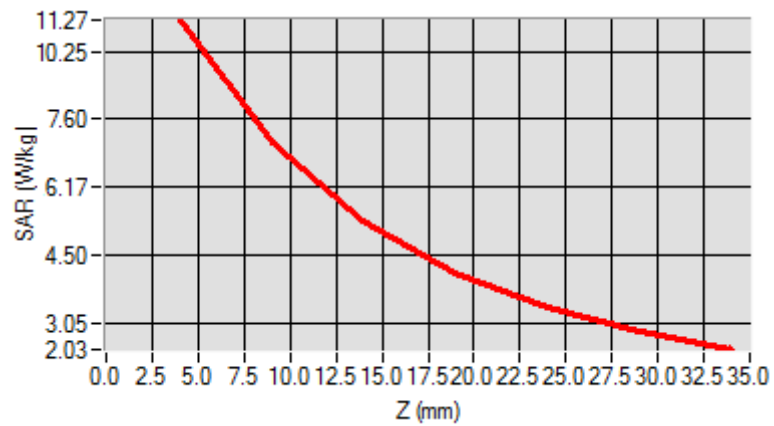

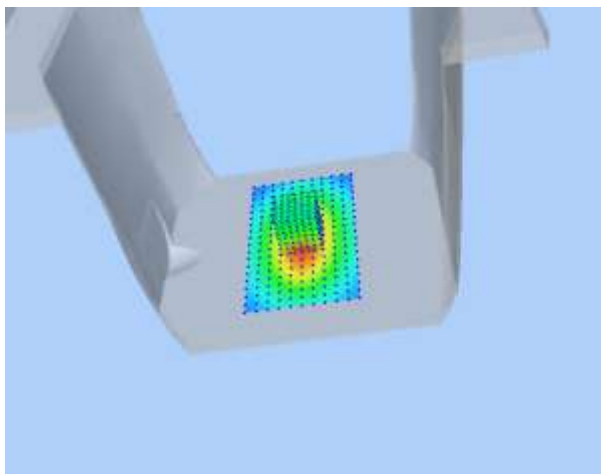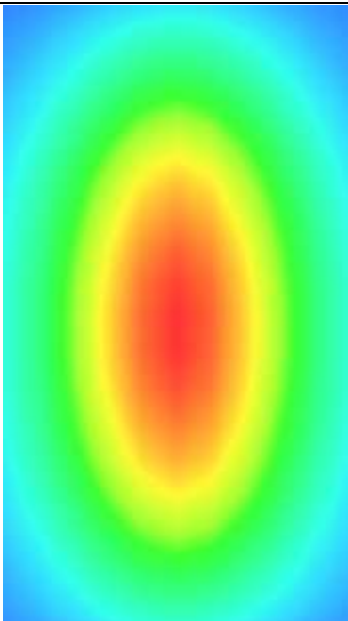3D screen shot	Hot spot position
	

MEASUREMENT 10

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.541872
Ambient Temperature	21.1
Liquid Temperature	21.3

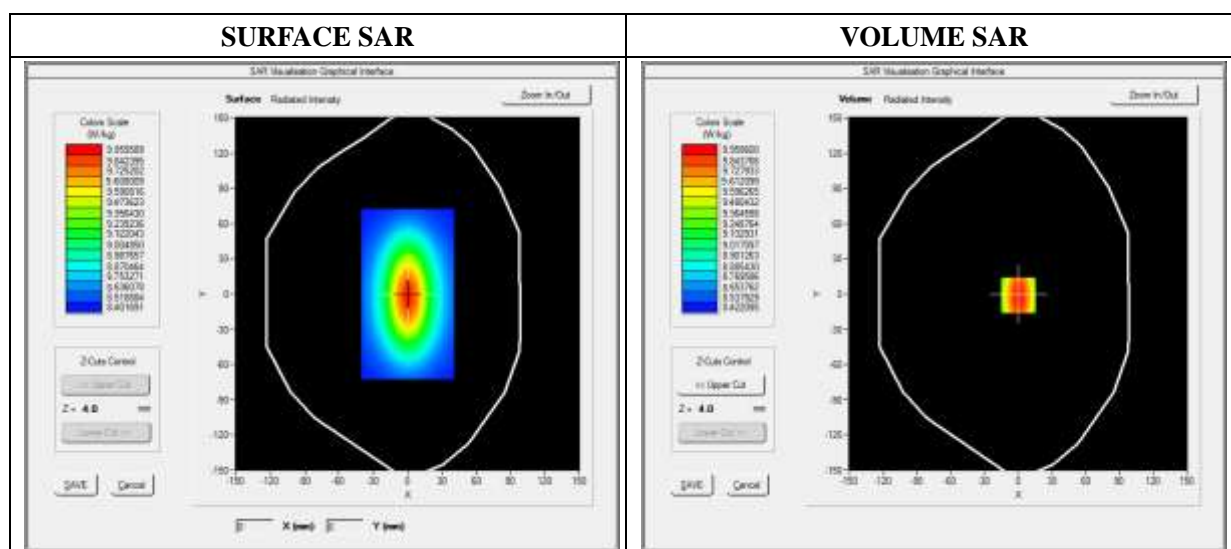




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.134651
SAR 1g (W/Kg)	9.781550

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2031	6.43001	4.9011	4.5325	3.1201	2.5024

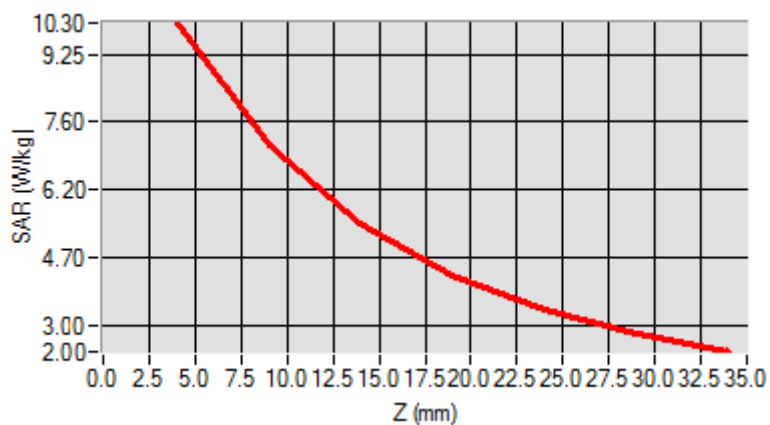

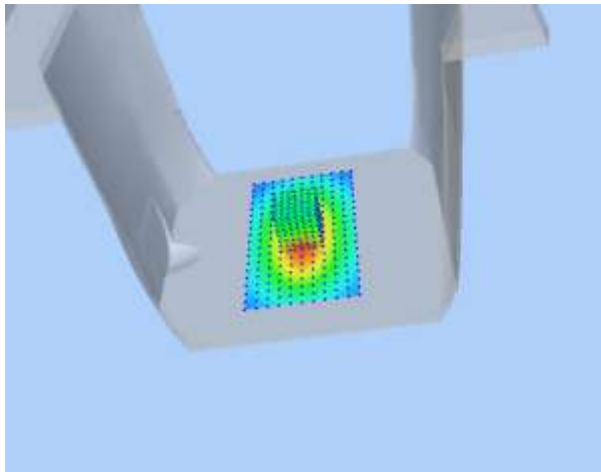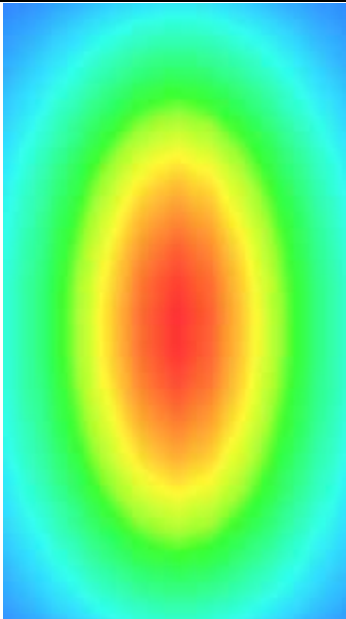3D screen shot	Hot spot position
	

MEASUREMENT 11

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	1.369745
Ambient Temperature	21.1
Liquid Temperature	21.2

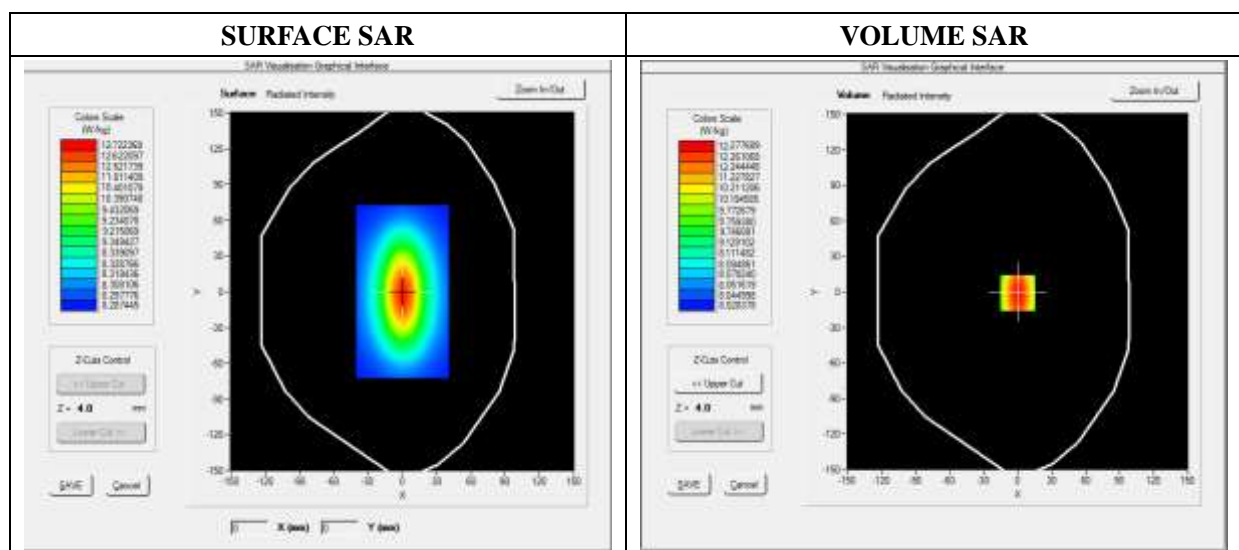




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	7.119522
SAR 1g (W/Kg)	12.592360

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	13.1911	11.7951	9.2945	8.5400	6.3712	4.6225

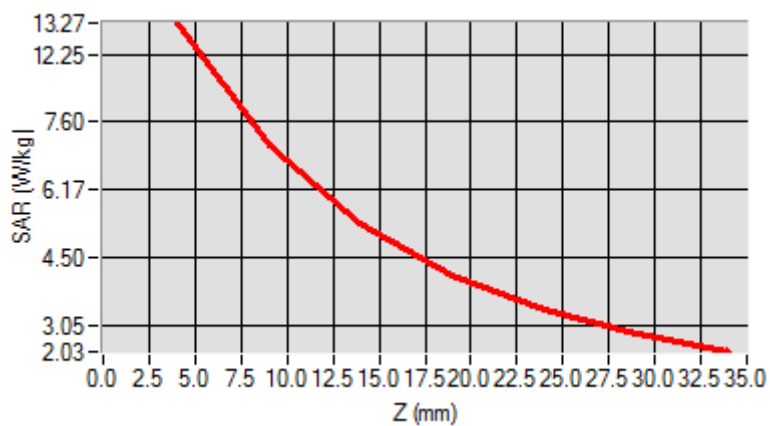

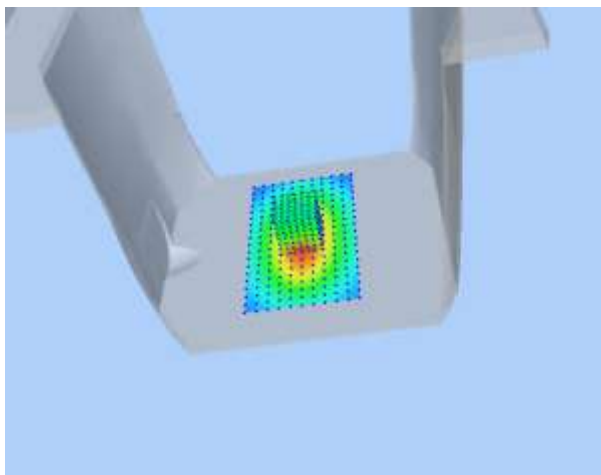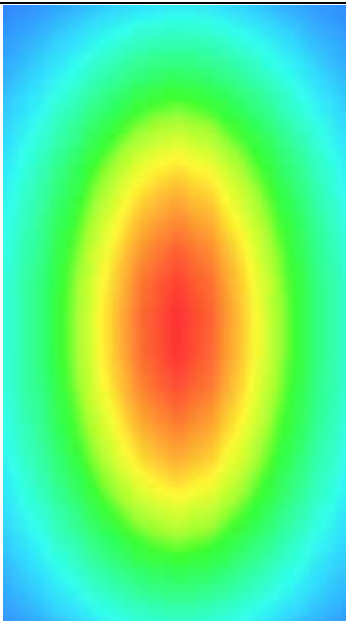3D screen shot	Hot spot position
	

MEASUREMENT 12

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.58; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	1.038832
Ambient Temperature	21.1
Liquid Temperature	21.2

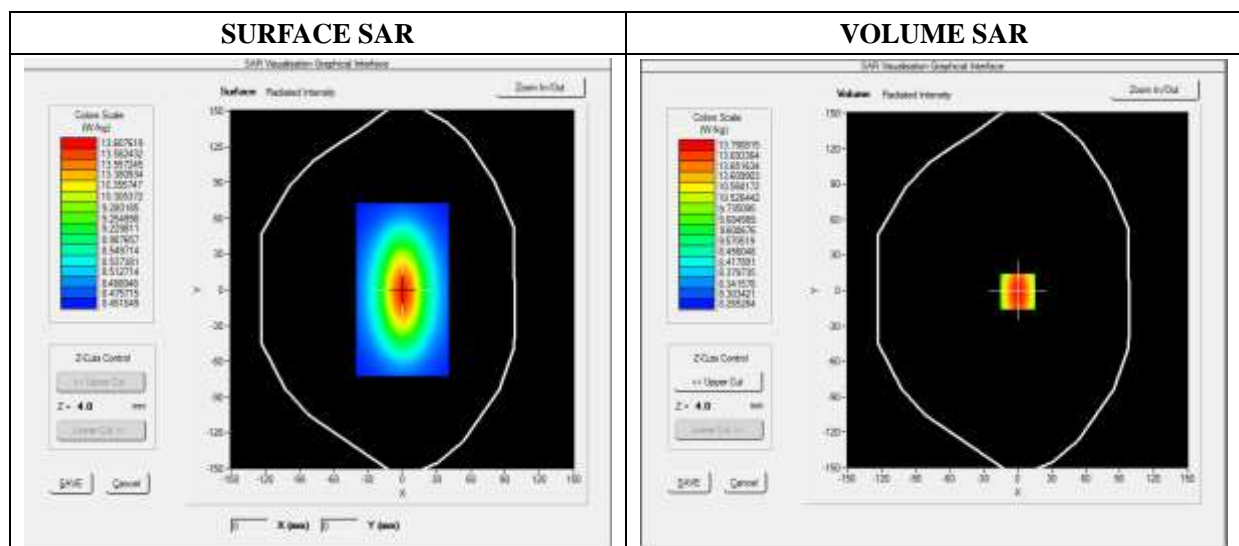




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	6.083781
SAR 1g (W/Kg)	13.430481

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	13.6473	11.8441	9.3627	8.5782	6.4357	4.6342

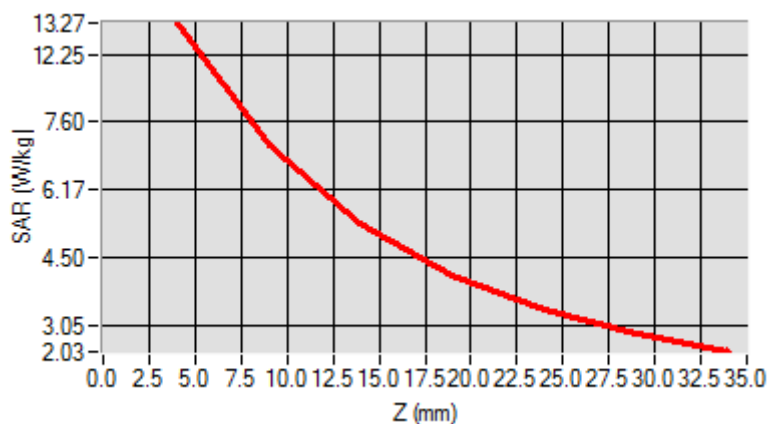

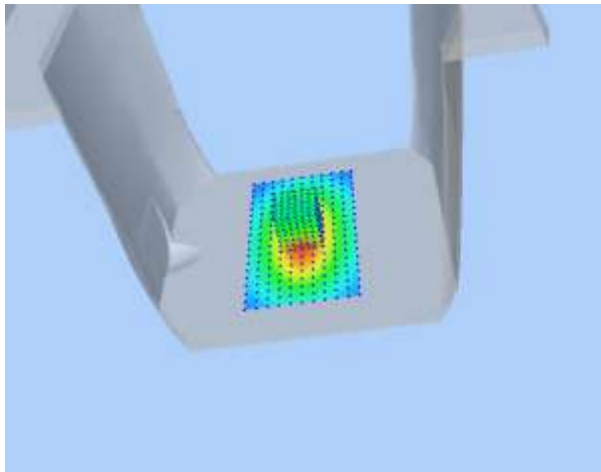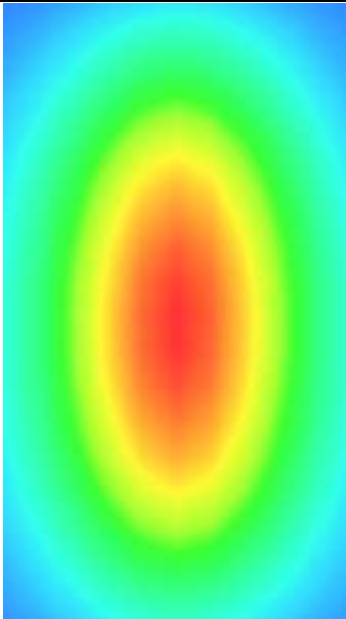3D screen shot	Hot spot position
	

Annex B. Plots of SAR Measurement

<u>TYPE</u>	<u>BAND</u>	<u>PARAMETERS</u>
Phone	GSM850	<u>Measurement 1:</u> Right Head with Cheek device position on Low Channel in GSM mode
Phone	GSM1900	<u>Measurement 5:</u> Right Head with Cheek device position on Low Channel in GSM mode
Phone	GPRS850_4TX	<u>Measurement 9:</u> Right Head with Cheek device position on Low Channel in GPRS mode
Phone	GPRS1900_4TX	<u>Measurement 13:</u> Right Head with Cheek device position on Low Channel in GPRS mode
Phone	WCDMA1900_RMC	<u>Measurement 17:</u> Right Head with Cheek device position on High Channel in WCDMA mode
Phone	WCDMA850_RMC	<u>Measurement 21:</u> Right Head with Cheek device position on Low Channel in WCDMA mode
Phone	LTE Band 2_RMC	<u>Measurement 27:</u> Left Head with Cheek device position on Middle Channel in LTE mode
Phone	LTE Band 4_RMC	<u>Measurement 35:</u> Left Head with Cheek device position on Low Channel in LTE mode
Phone	LTE Band 5_RMC	<u>Measurement 43:</u> Left Head with Cheek device position on Middle Channel in LTE mode
Phone	LTE Band 7_RMC	<u>Measurement 49:</u> Right Head with Cheek device position on Middle Channel in LTE mode
Phone	LTE Band 17_RMC	<u>Measurement 57:</u> Right Head with Cheek device position on High Channel in LTE mode
Phone	LTE Band 40_RMC 2305-2315MHz	<u>Measurement 67:</u> Left Head with Cheek device position on Middle Channel in LTE mode
Phone	LTE Band 40_RMC 2350-2360MHz	<u>Measurement 75:</u> Left Head with Cheek device position on Middle Channel in LTE mode
Phone	WiFi_802.11b	<u>Measurement 81:</u> Right Head with Cheek device position on Middle Channel in 802.11b mode
Phone	GSM850	<u>Measurement 85:</u> Flat Plane with Back(Body-worn) device position on Low Channel in GSM mode
Phone	GSM1900	<u>Measurement 88:</u> Flat Plane with Front(Body-worn) device position on Low Channel in GSM mode
Phone	GPRS850_4TX	<u>Measurement 89:</u> Flat Plane with Back device position on Low Channel in GPRS mode
Phone	GPRS1900_4TX	<u>Measurement 95:</u> Flat Plane with Bottom device position on Low Channel in GPRS mode
Phone	WCDMA1900_RMC	<u>Measurement 98:</u> Flat Plane with Front side device position on High Channel in WCDMA mode

Phone	WCDMA850_RMC	<u>Measurement 101:</u> Flat Plane with Back device position on Low Channel in WCDMA mode
Phone	LTE Band 2_RMC	<u>Measurement 106:</u> Flat Plane with Front device position on Middle Channel in LTE mode
Phone	LTE Band 4_RMC	<u>Measurement 114:</u> Flat Plane with Front device position on Low Channel in LTE mode
Phone	LTE Band 5_RMC	<u>Measurement 121:</u> Flat Plane with Back device position on Middle Channel in LTE mode
Phone	LTE Band 7_RMC	<u>Measurement 130:</u> Flat Plane with Front device position on Middle Channel in LTE mode
Phone	LTE Band 7_RMC	<u>Measurement 131:</u> Flat Plane with Bottom device position on Middle Channel in LTE mode
Phone	LTE Band 17_RMC	<u>Measurement 138:</u> Flat Plane with Front device position on High Channel in LTE mode
Phone	LTE Band 40_RMC 2305-2315MHz	<u>Measurement 146:</u> Flat Plane with Front device position on Middle Channel in LTE mode
Phone	LTE Band 40_RMC 2350-2360MHz	<u>Measurement 154:</u> Flat Plane with Front device position on Middle Channel in LTE mode
Phone	WiFi_802.11b	<u>Measurement 162:</u> Flat Plane with Front side device position on Middle Channel in 802.11b mode
<i>Remark: SAR plot is showed the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.</i>		

MEASUREMENT 1

Type: Phone measurement (Complete)

Date of measurement: 01/29/2018

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results


Frequency (MHz)	824.200000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.144536
Ambient Temperature	21.1
Liquid Temperature	21.3

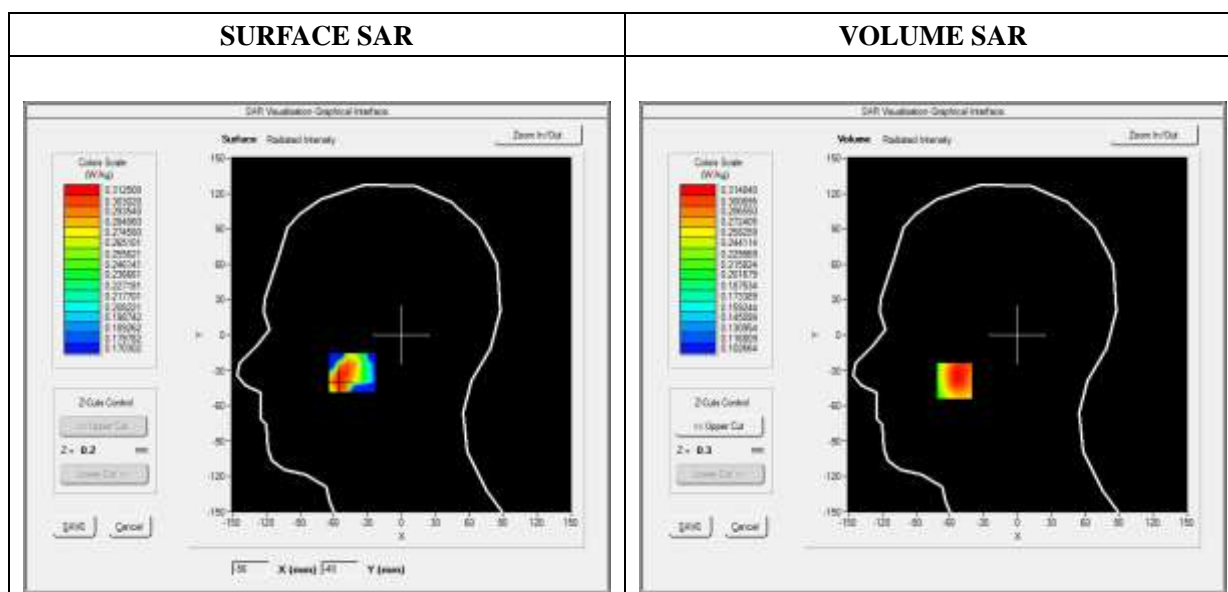



Maximum location: X=-56.00, Y=-39.00

SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.275695
SAR 1g (W/Kg)	0.315557

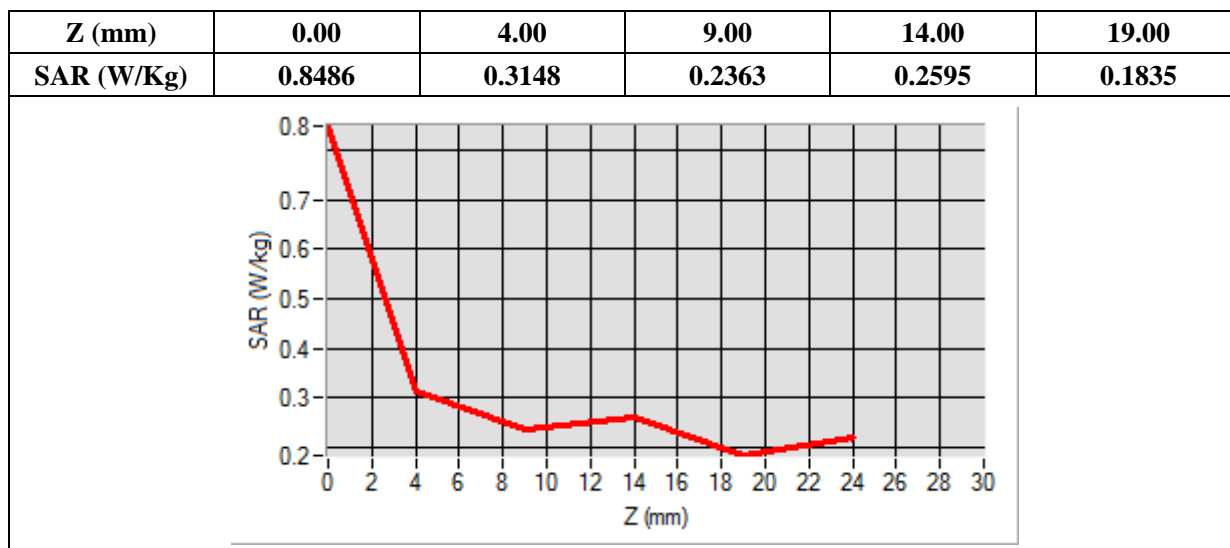

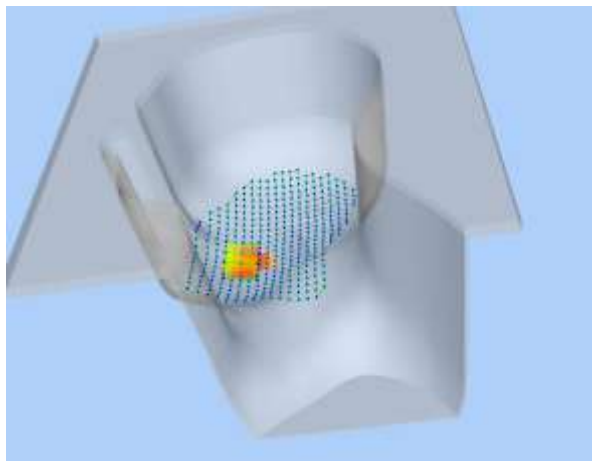3D screen shot	Hot spot position
	

MEASUREMENT 5

Type: Phone measurement (Complete)

Date of measurement: 01/30/2018

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.442440
Ambient Temperature	21.1
Liquid Temperature	21.3


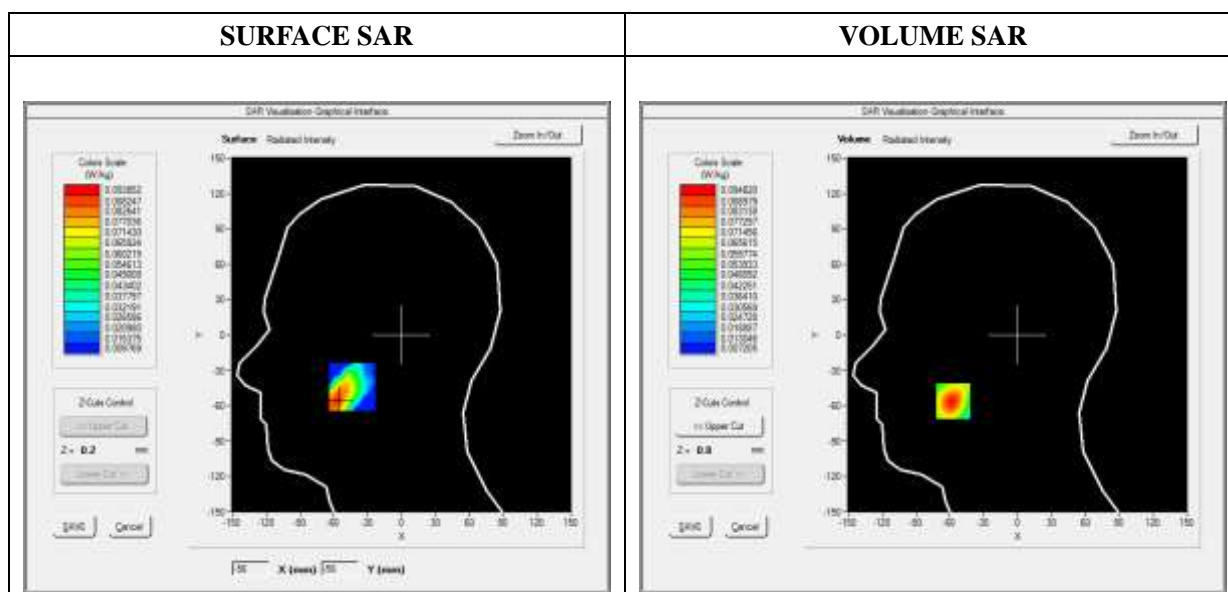


Maximum location: X=-57.00, Y=-56.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.052729
SAR 1g (W/Kg)	0.088303

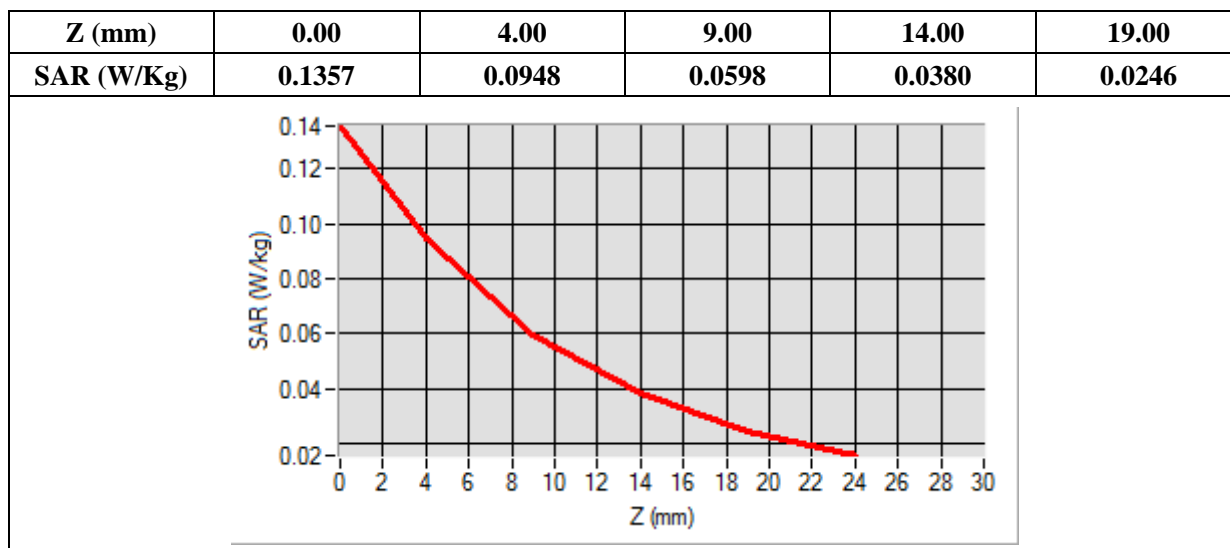

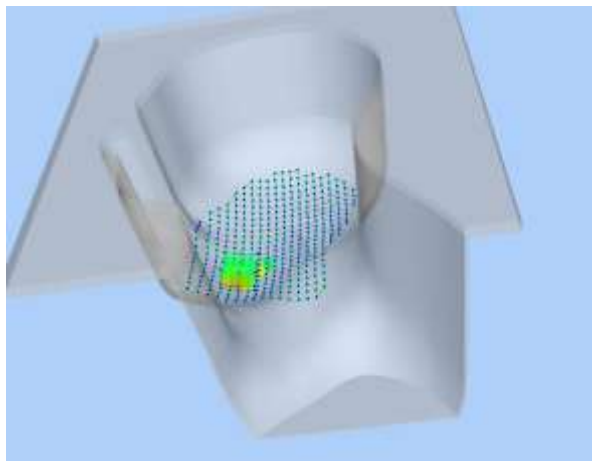3D screen shot	Hot spot position
	

MEASUREMENT 9

Type: Phone measurement (Complete)

Date of measurement: 01/29/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GPRS850_4TX
Channels	Low
Signal	Duty Cycle: 1:2

B. SAR Measurement Results


Frequency (MHz)	824.200000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.536272
Ambient Temperature	21.1
Liquid Temperature	21.3

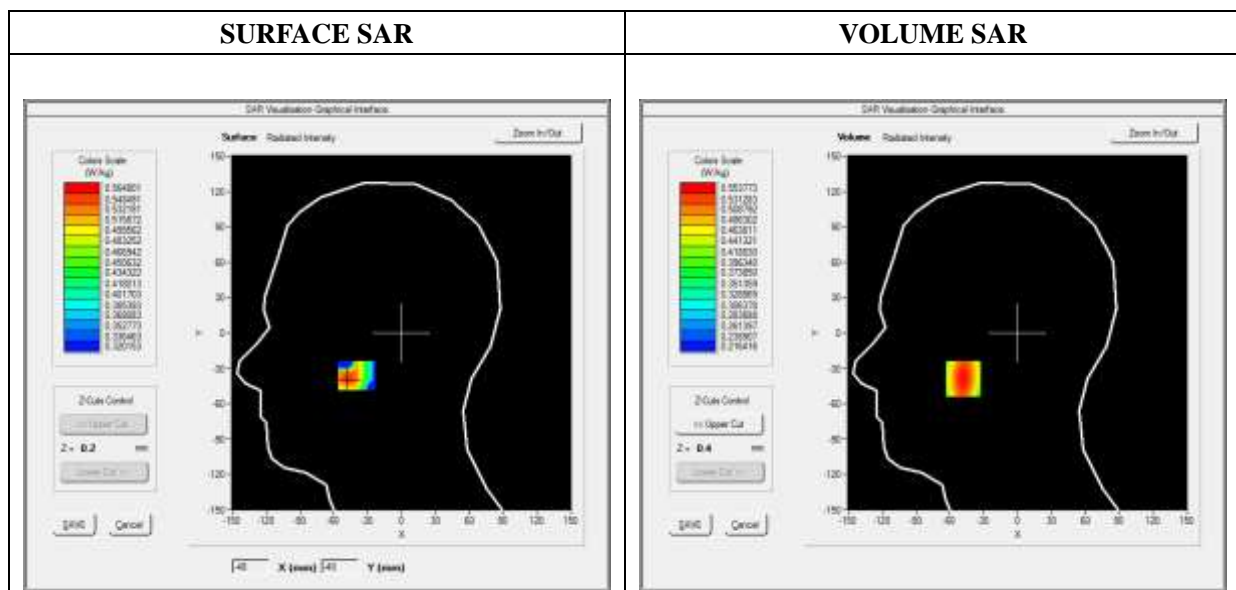



Maximum location: X=-48.00, Y=-39.00

SAR Peak: 0.59 W/kg

SAR 10g (W/Kg)	0.474236
SAR 1g (W/Kg)	0.542996

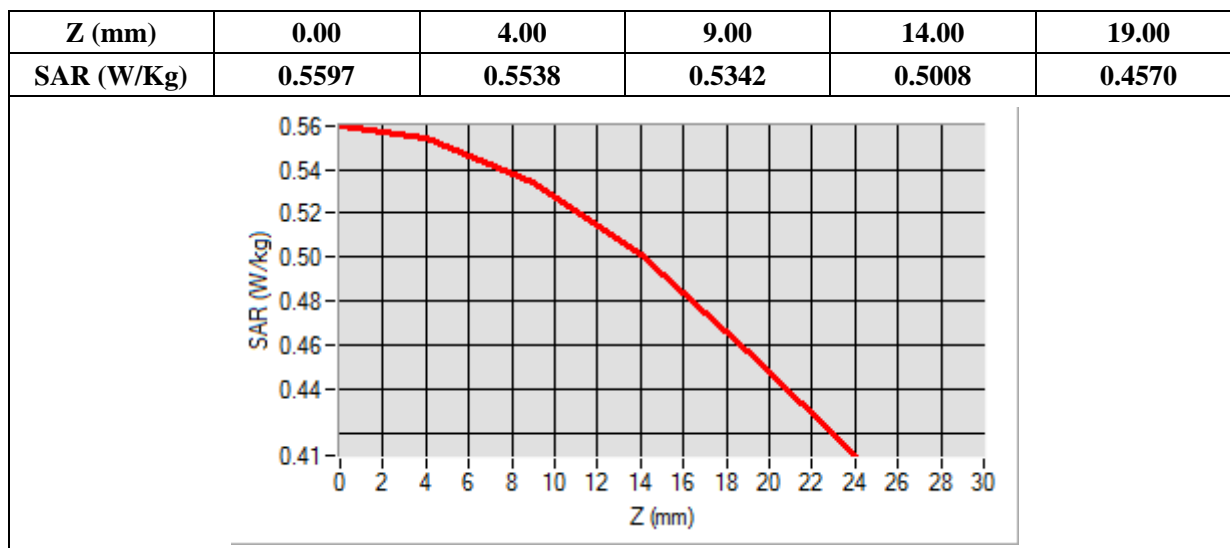

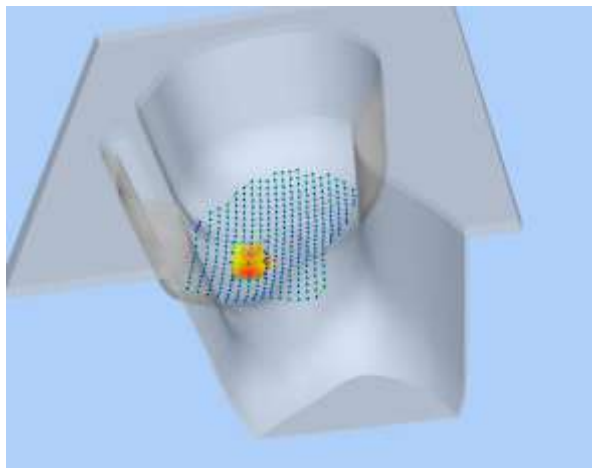3D screen shot	Hot spot position
	

MEASUREMENT 13

Type: Phone measurement (Complete)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GPRS1900_4TX
Channels	Low
Signal	Duty Cycle: 1:2

B. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.536272
Ambient Temperature	21.1
Liquid Temperature	21.3


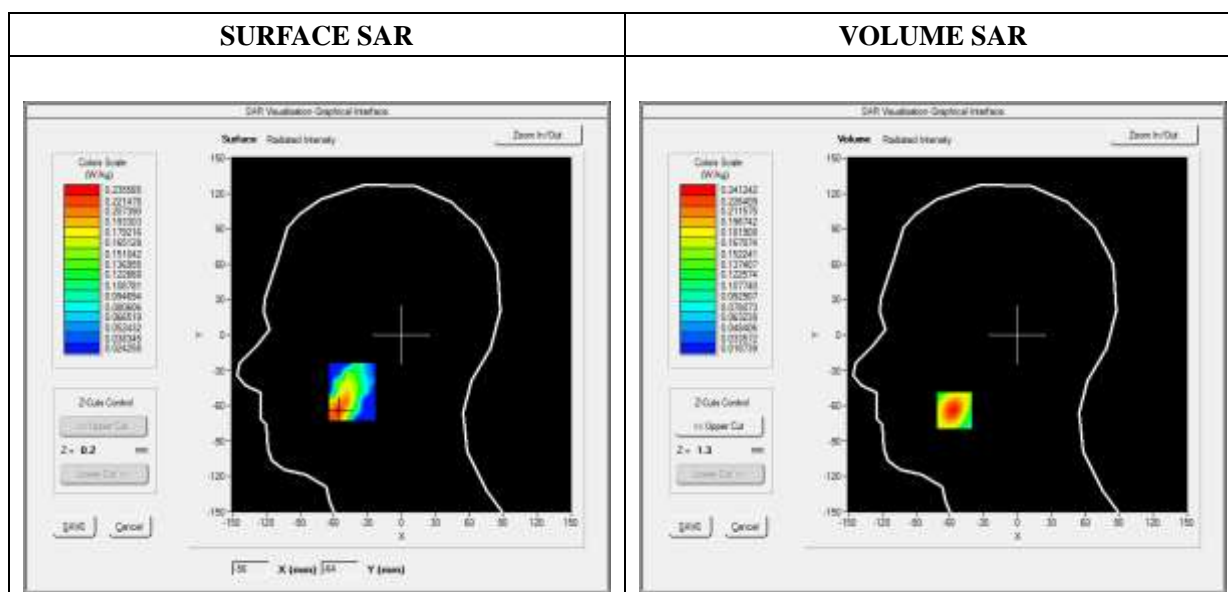


Maximum location: X=-56.00, Y=-64.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.131244
SAR 1g (W/Kg)	0.224809

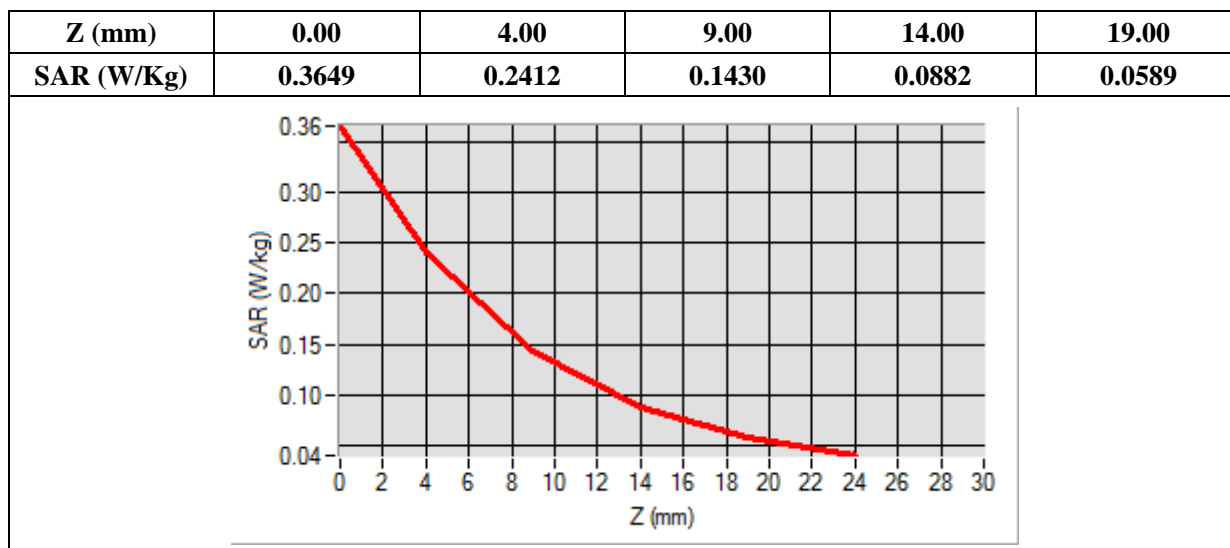

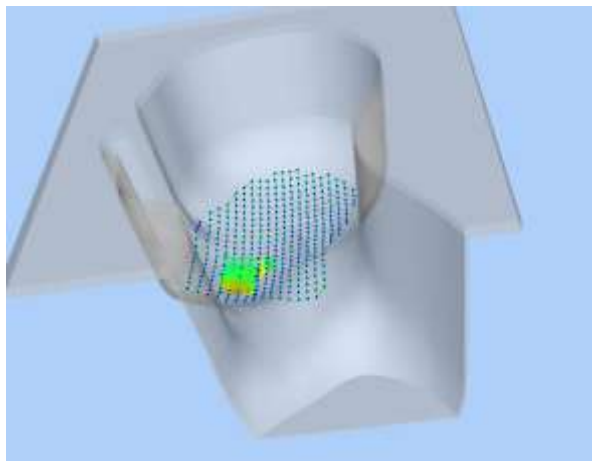3D screen shot	Hot spot position
	

MEASUREMENT 17

Type: Phone measurement (Complete)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1907.600000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.524540
Ambient Temperature	21.1
Liquid Temperature	21.3

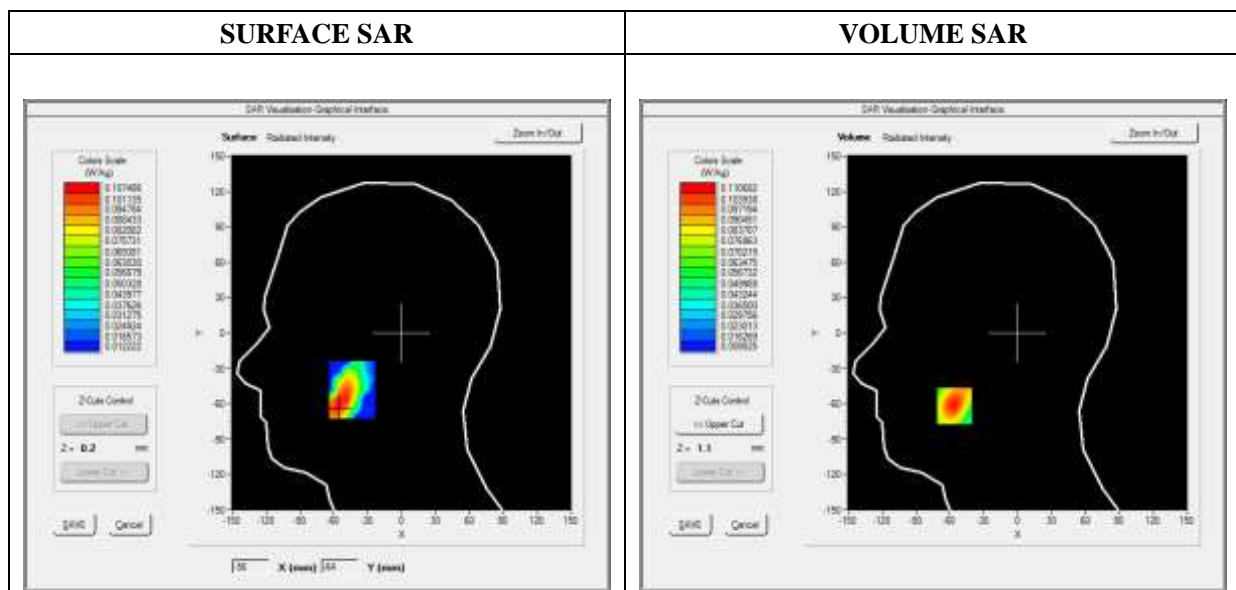

Maximum location: X=-56.00, Y=-62.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.063013
SAR 1g (W/Kg)	0.103613

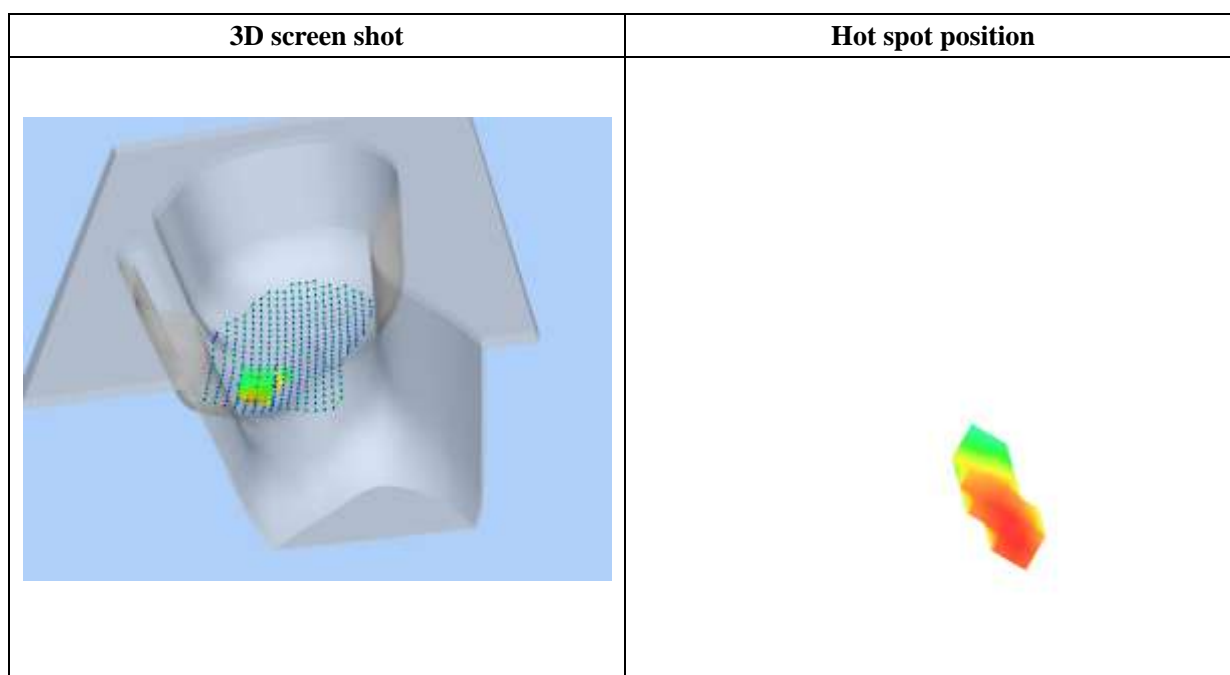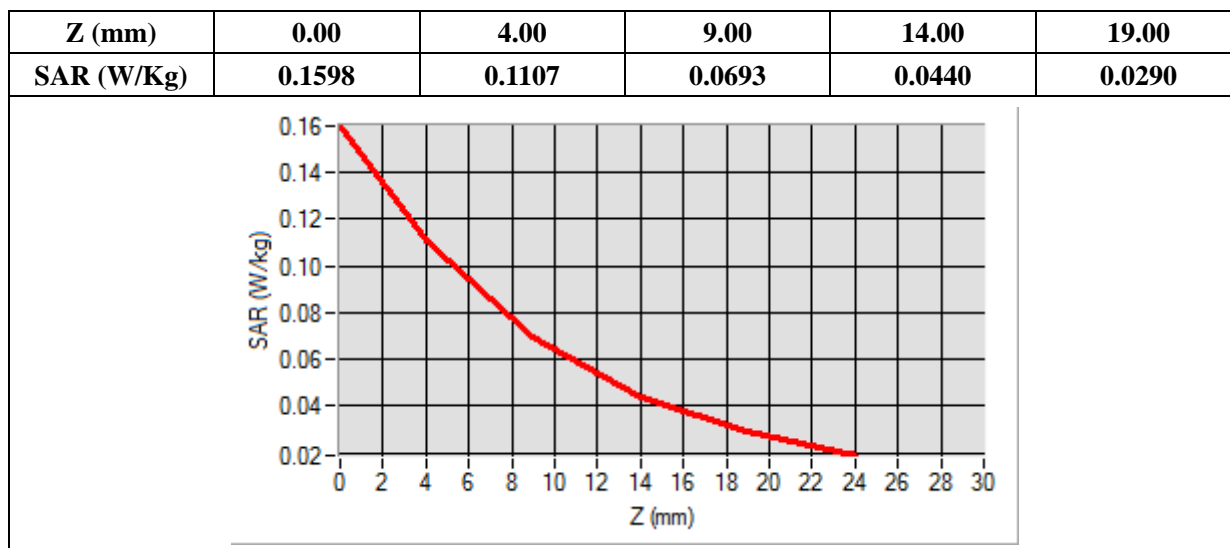

MEASUREMENT 21

Type: Phone measurement (Complete)

Date of measurement: 01/29/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	826.400000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.342427
Ambient Temperature	21.1
Liquid Temperature	21.3

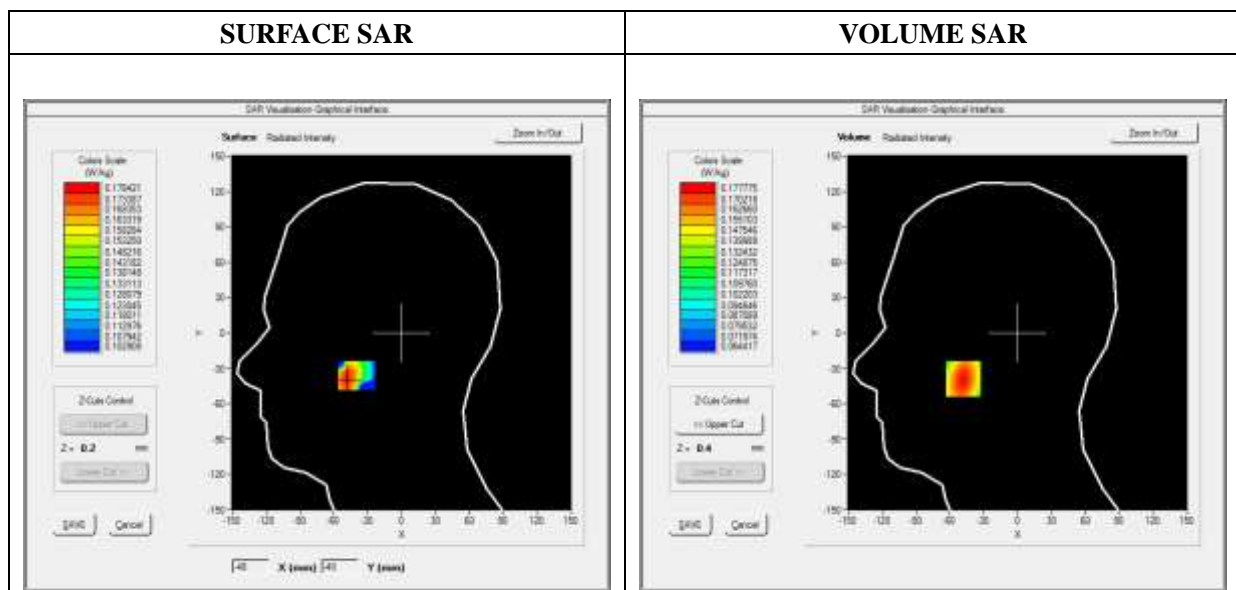



Maximum location: X=-48.00, Y=-39.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.145718
SAR 1g (W/Kg)	0.172363

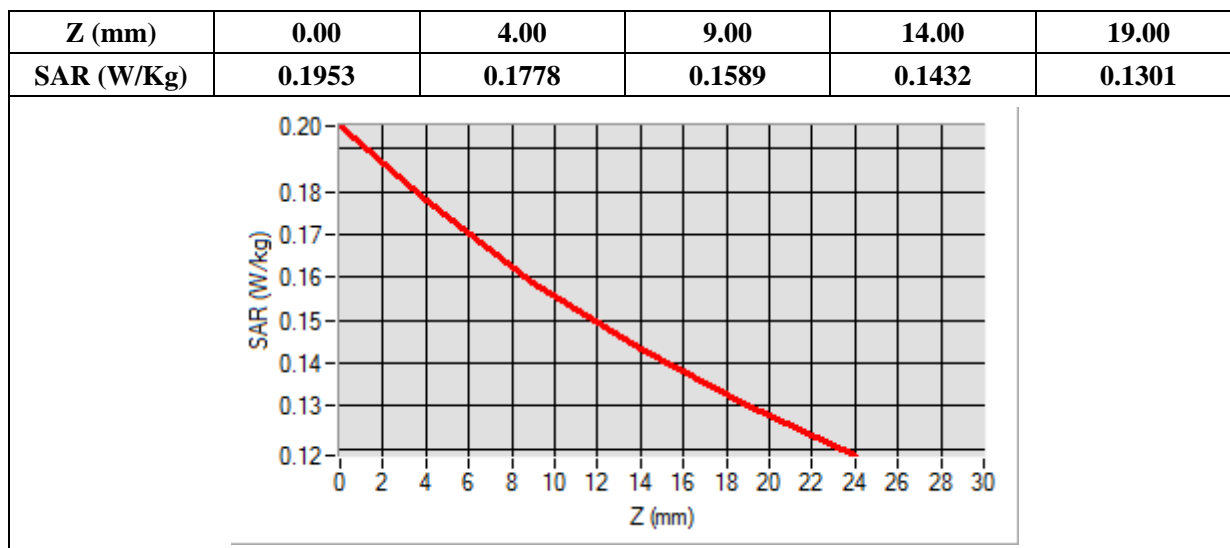

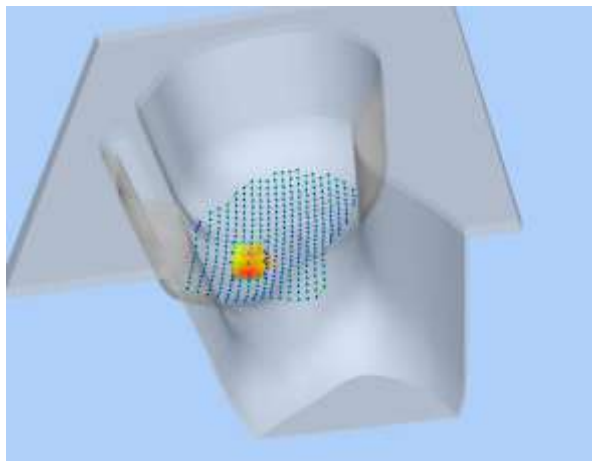3D screen shot	Hot spot position
	

MEASUREMENT 27

Type: Phone measurement (Complete)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	LTE Band 2_RMC
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.743564
Ambient Temperature	21.1
Liquid Temperature	21.3

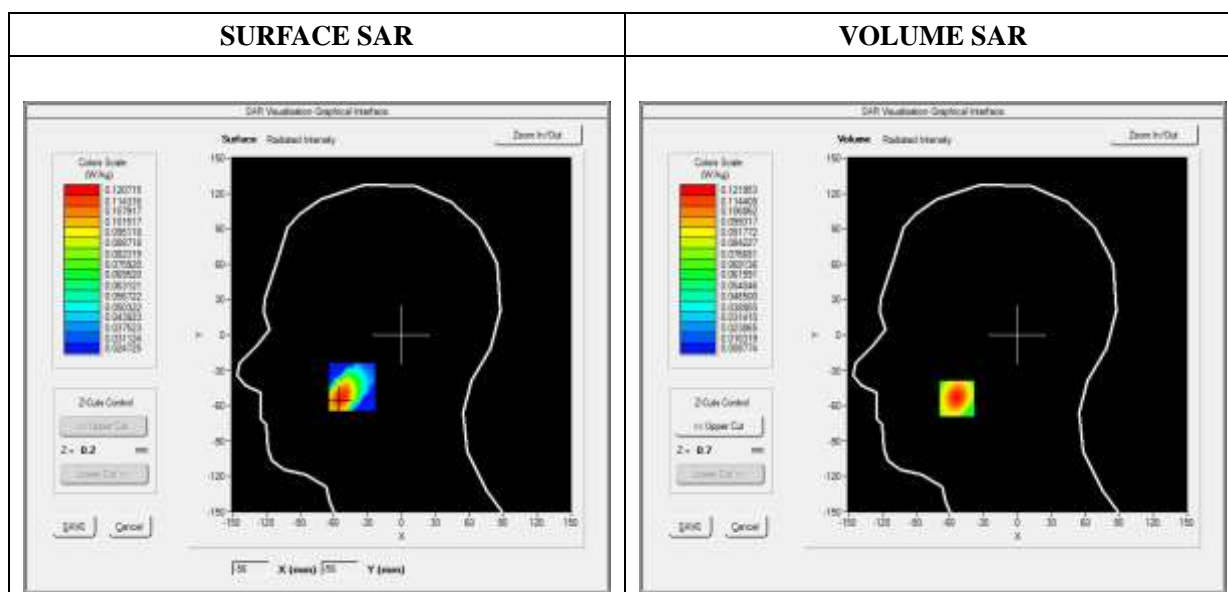

Maximum location: X=-54.00, Y=-54.00

SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.068646
SAR 1g (W/Kg)	0.113740

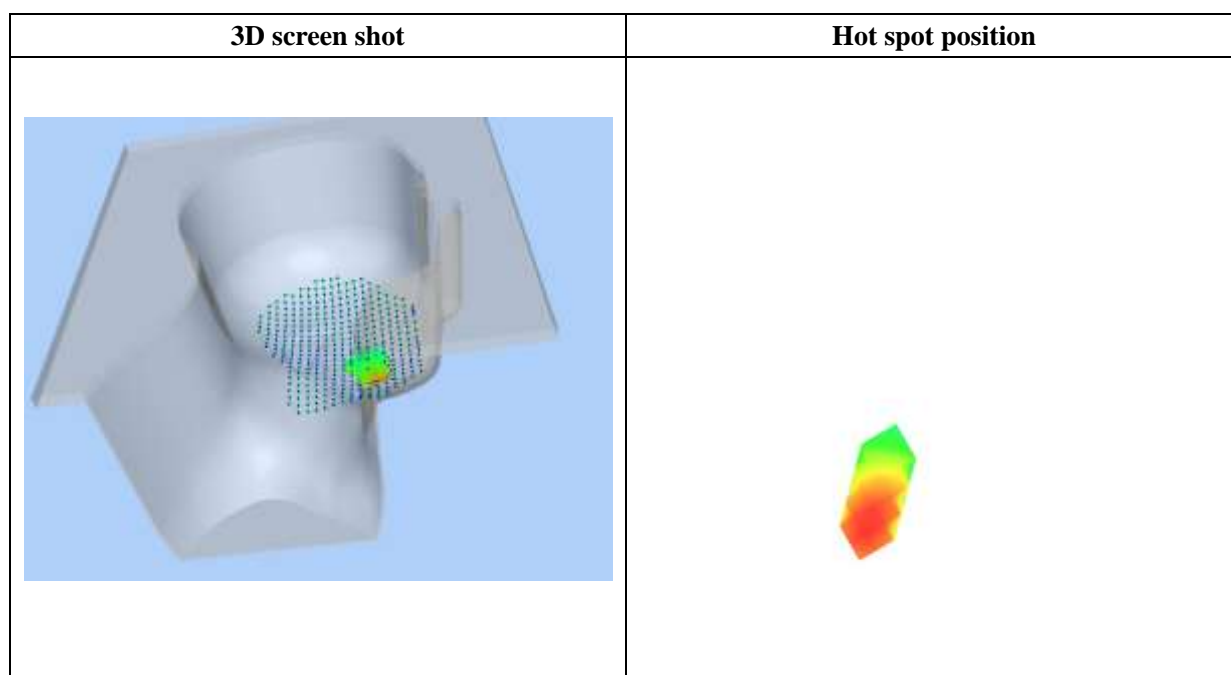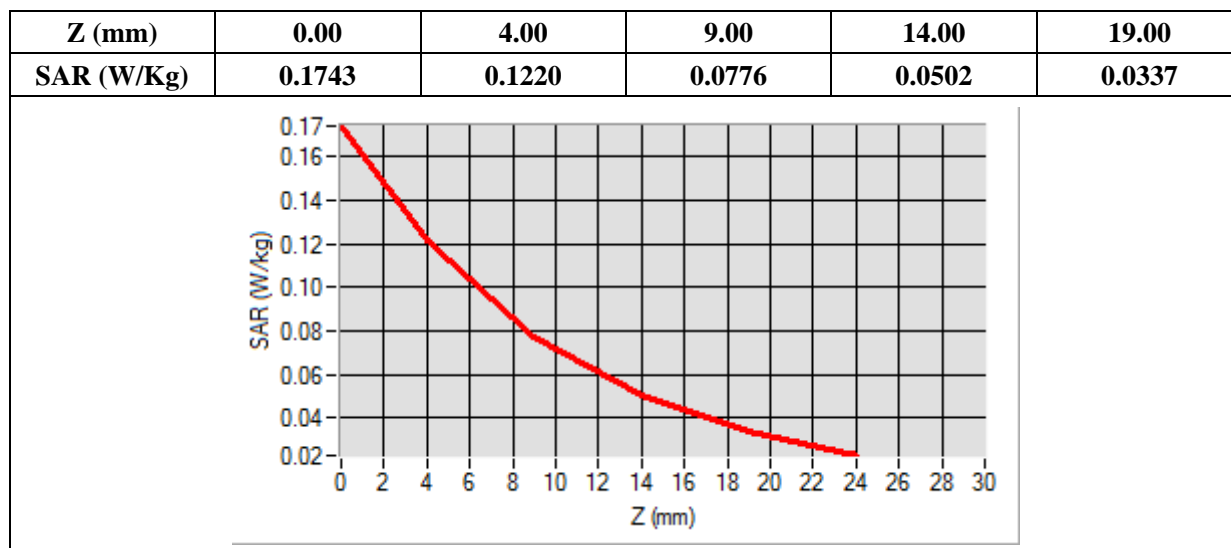

MEASUREMENT 35

Type: Phone measurement (Complete)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.84; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	LTE Band 4_RMC
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.024890
Conductivity (S/m)	1.371250
Power Variation (%)	1.374628
Ambient Temperature	21.1
Liquid Temperature	21.2

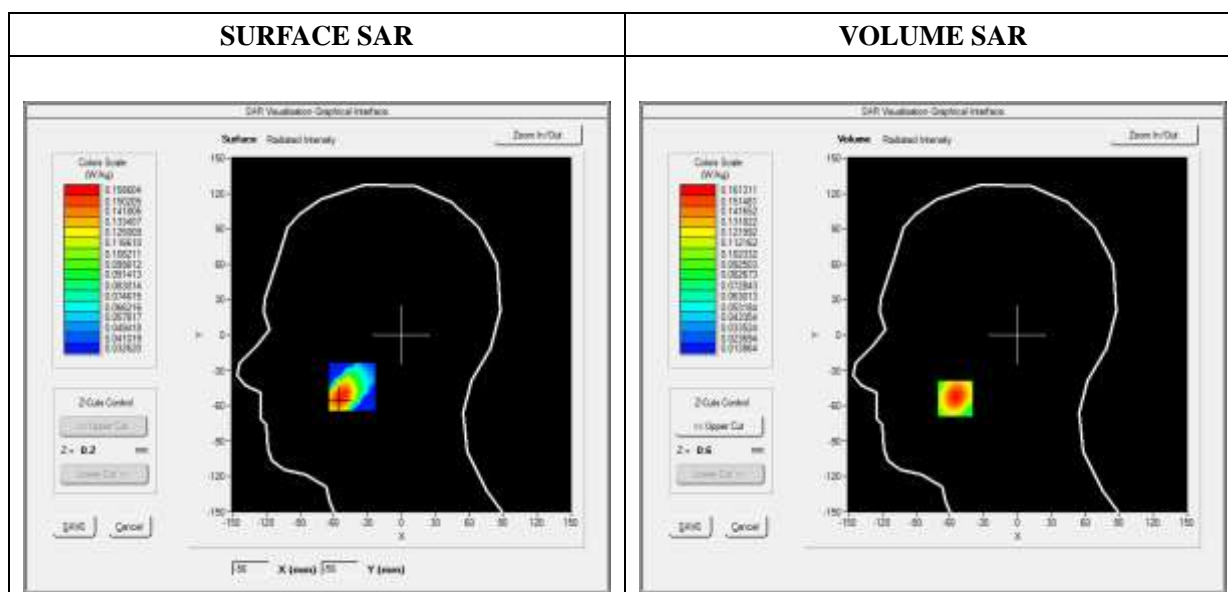



Maximum location: X=-55.00, Y=-54.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.096548
SAR 1g (W/Kg)	0.151533

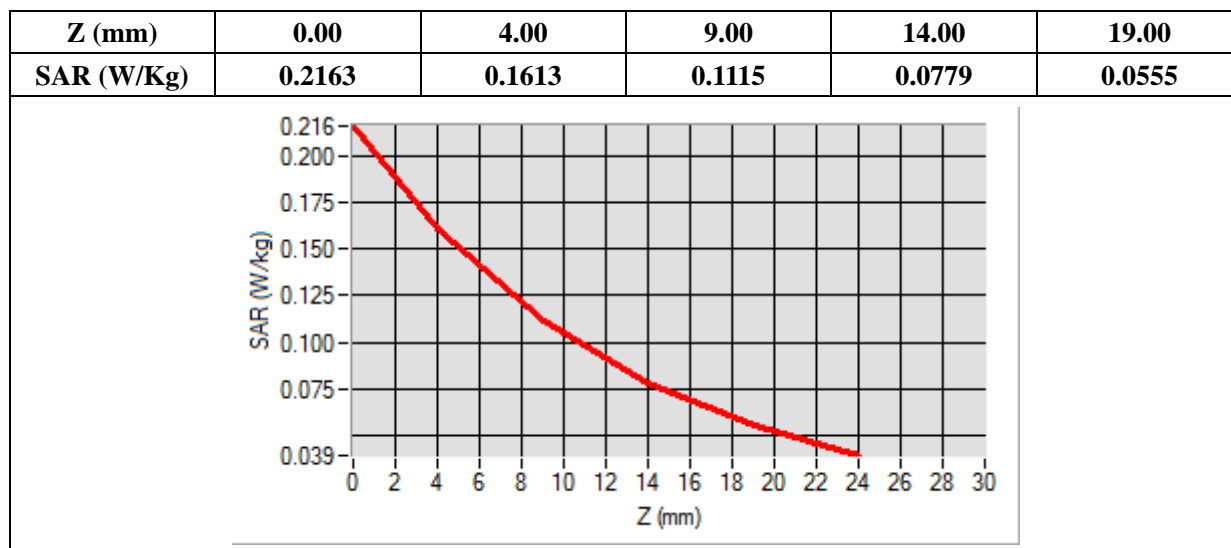

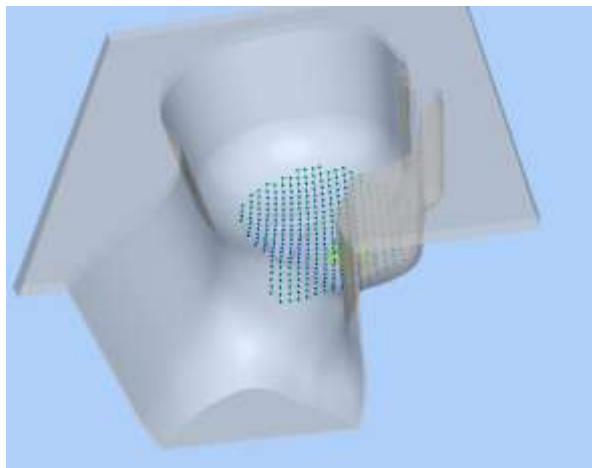3D screen shot	Hot spot position
	

MEASUREMENT 43

Type: Phone measurement (Complete)

Date of measurement: 01/29/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	LTE Band 5_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	836.500000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2

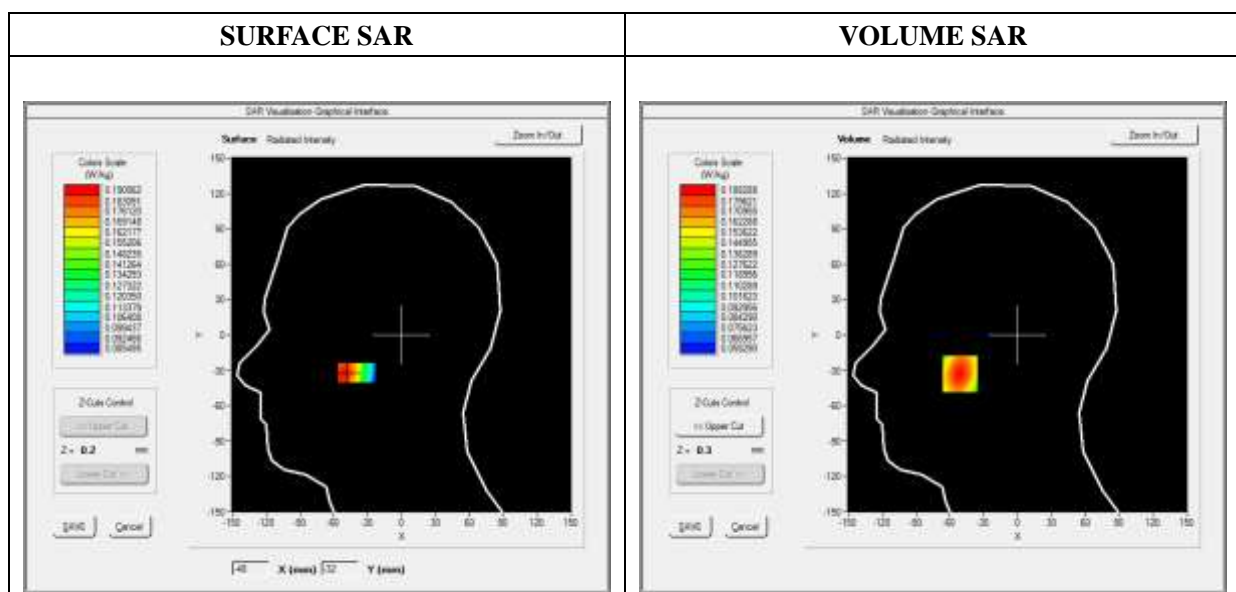



Maximum location: X=-51.00, Y=-33.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.154835
SAR 1g (W/Kg)	0.182856

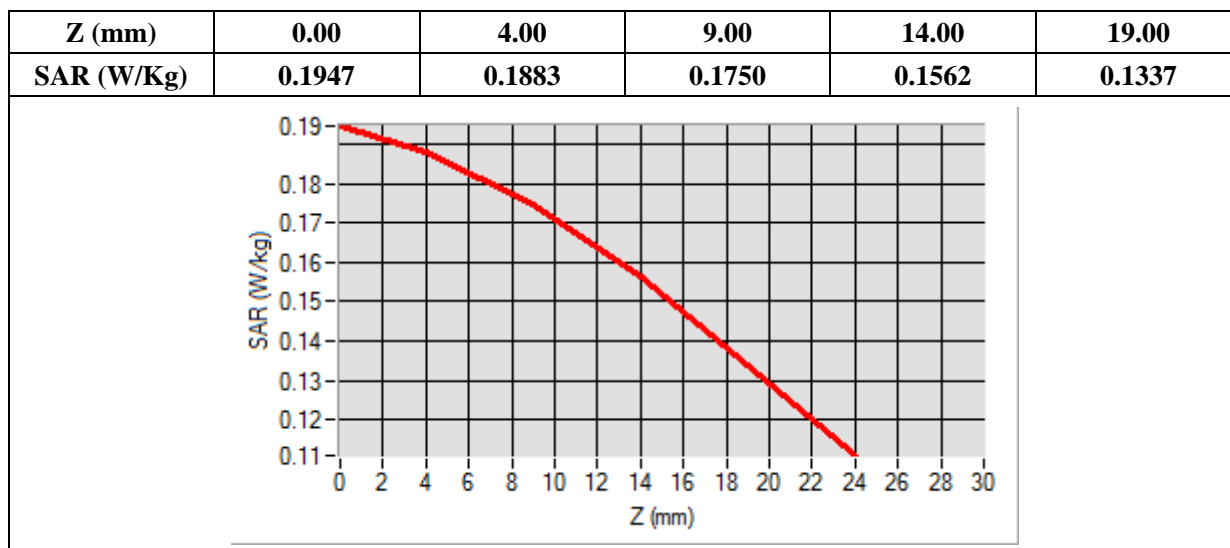

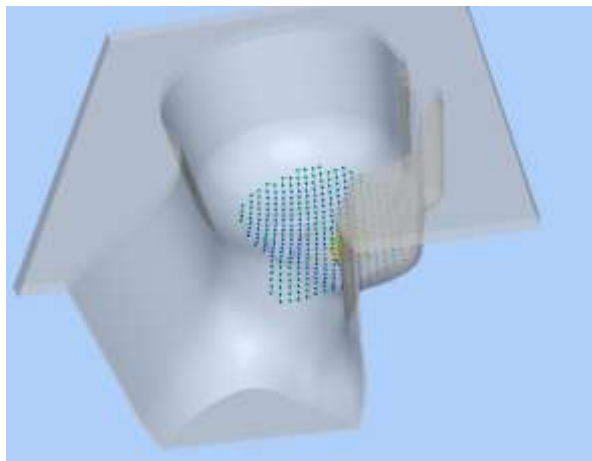3D screen shot	Hot spot position
	

MEASUREMENT 49

Type: Phone measurement (Complete)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.37; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE Band 7_RMC
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	2535.000000
Relative Permittivity (real part)	38.631092
Conductivity (S/m)	1.930182
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2


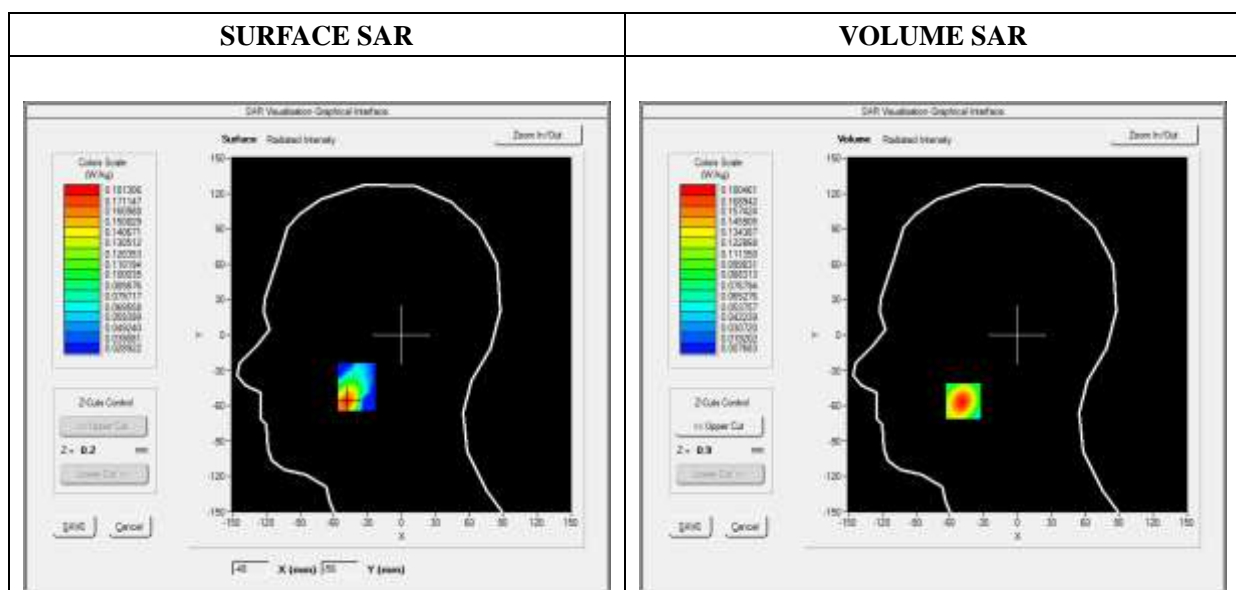


Maximum location: X=-48.00, Y=-56.00

SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.085737
SAR 1g (W/Kg)	0.166613

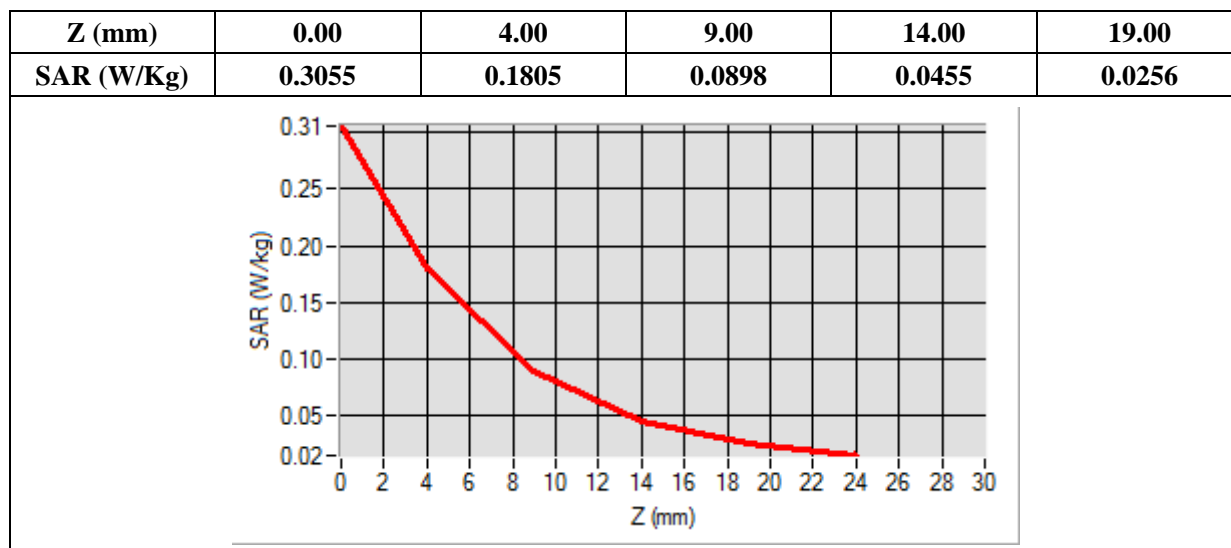

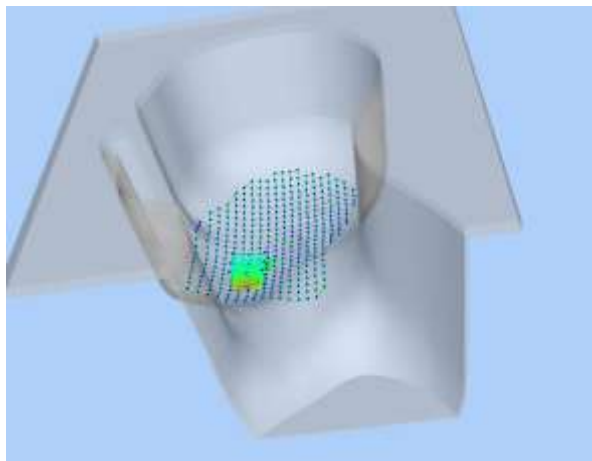3D screen shot	Hot spot position
	

MEASUREMENT 57

Type: Phone measurement (Complete)

Date of measurement: 01/29/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.99; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE Band 17_RMC
Channels	QPSK, 10MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	711.000000
Relative Permittivity (real part)	41.320574
Conductivity (S/m)	0.862373
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2

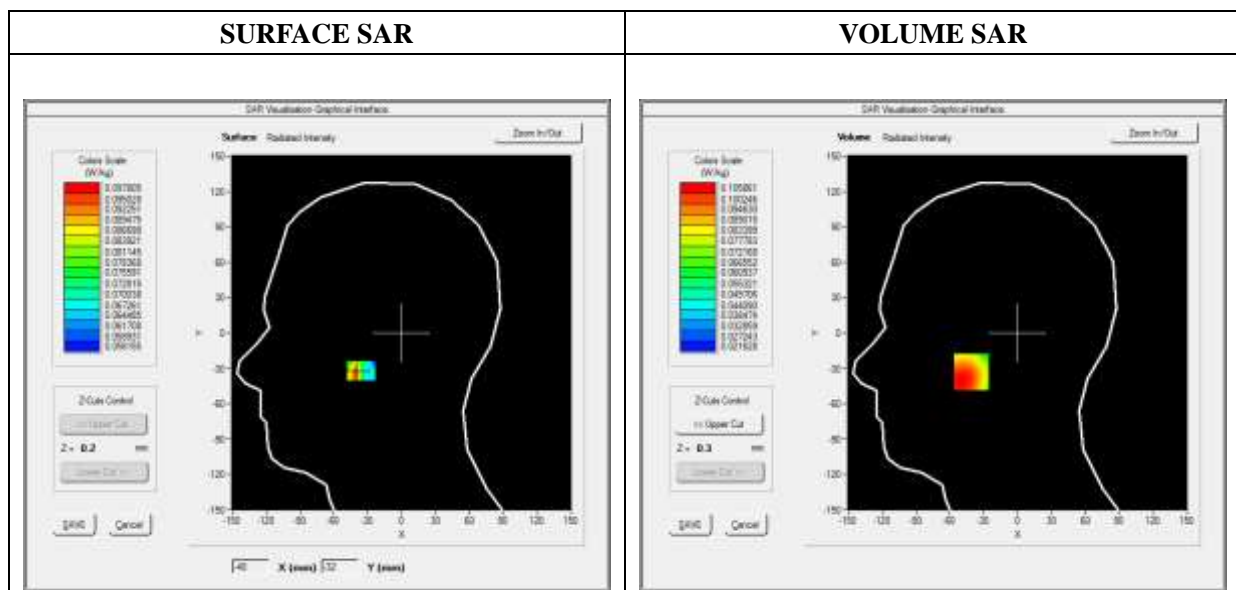




Maximum location: X=-41.00, Y=-33.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.085012
SAR 1g (W/Kg)	0.105794

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3173	0.1059	0.0706	0.0787	0.0488

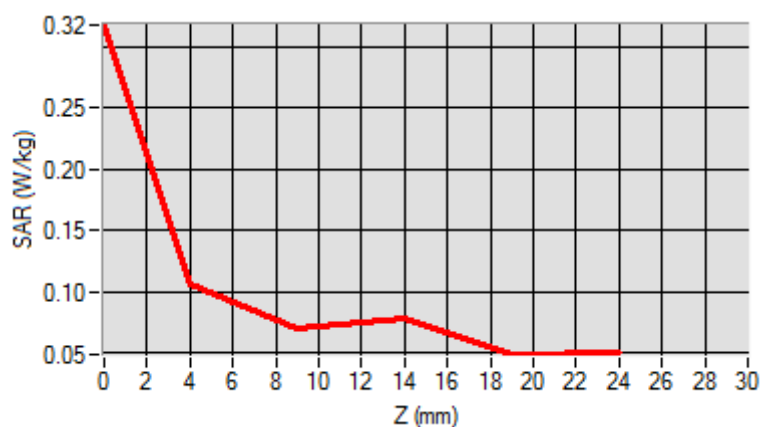

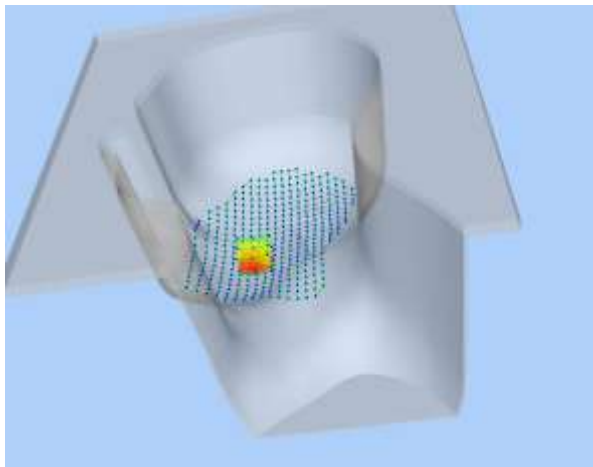3D screen shot	Hot spot position
	

MEASUREMENT 67

Type: Phone measurement (Complete)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	LTE Band 40_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	2310.000000
Relative Permittivity (real part)	38.153660
Conductivity (S/m)	1.740236
Power Variation (%)	3.010112
Ambient Temperature	21.1
Liquid Temperature	21.2

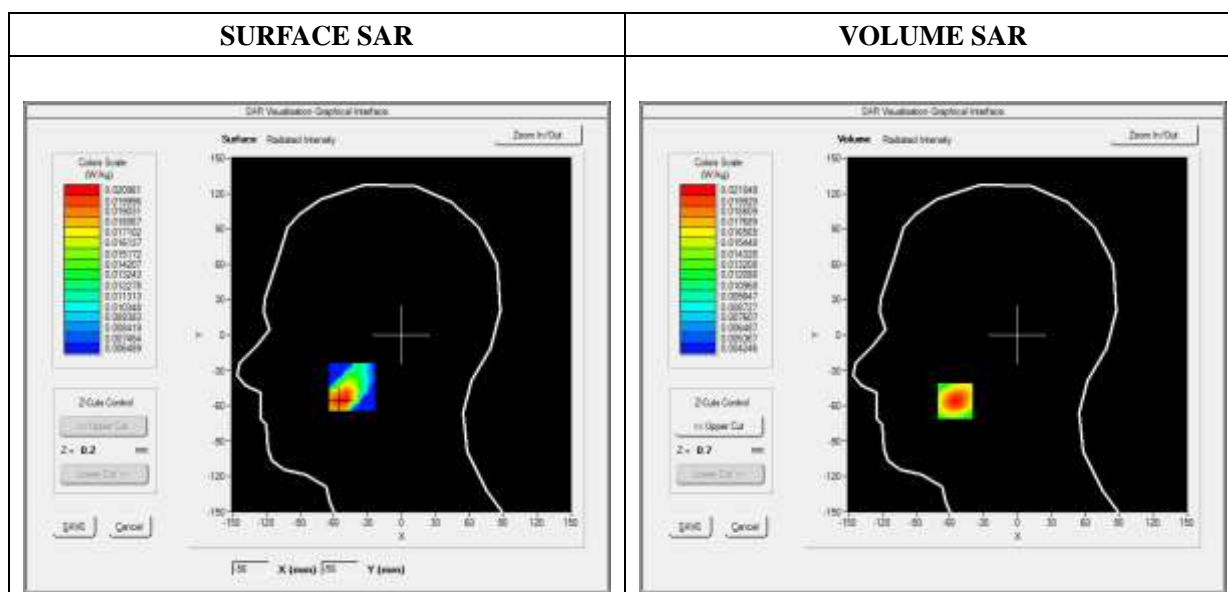



Maximum location: X=-55.00, Y=-56.00

SAR Peak: 0.03 W/kg

SAR 10g (W/Kg)	0.012301
SAR 1g (W/Kg)	0.019817

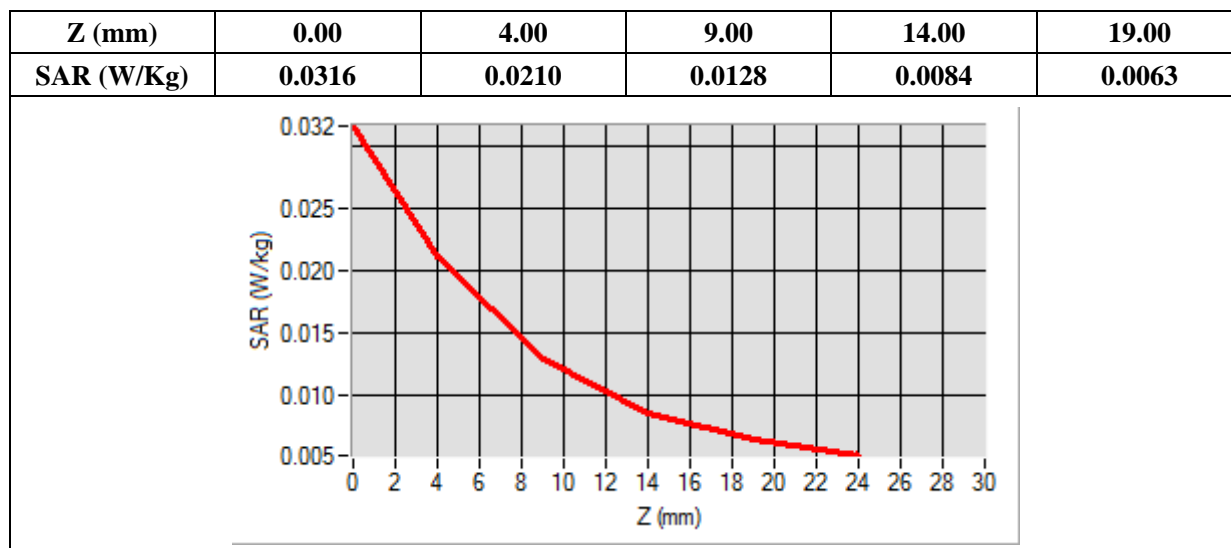

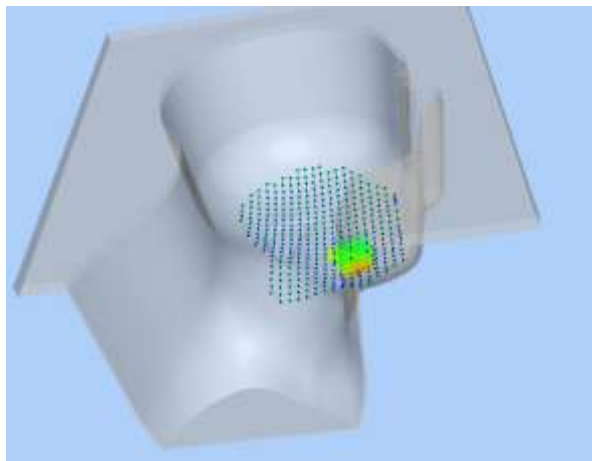3D screen shot	Hot spot position
	

MEASUREMENT 75

Type: Phone measurement (Complete)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	LTE Band 40_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2355.000000
Relative Permittivity (real part)	38.153660
Conductivity (S/m)	1.740236
Power Variation (%)	3.027673
Ambient Temperature	21.1
Liquid Temperature	21.2

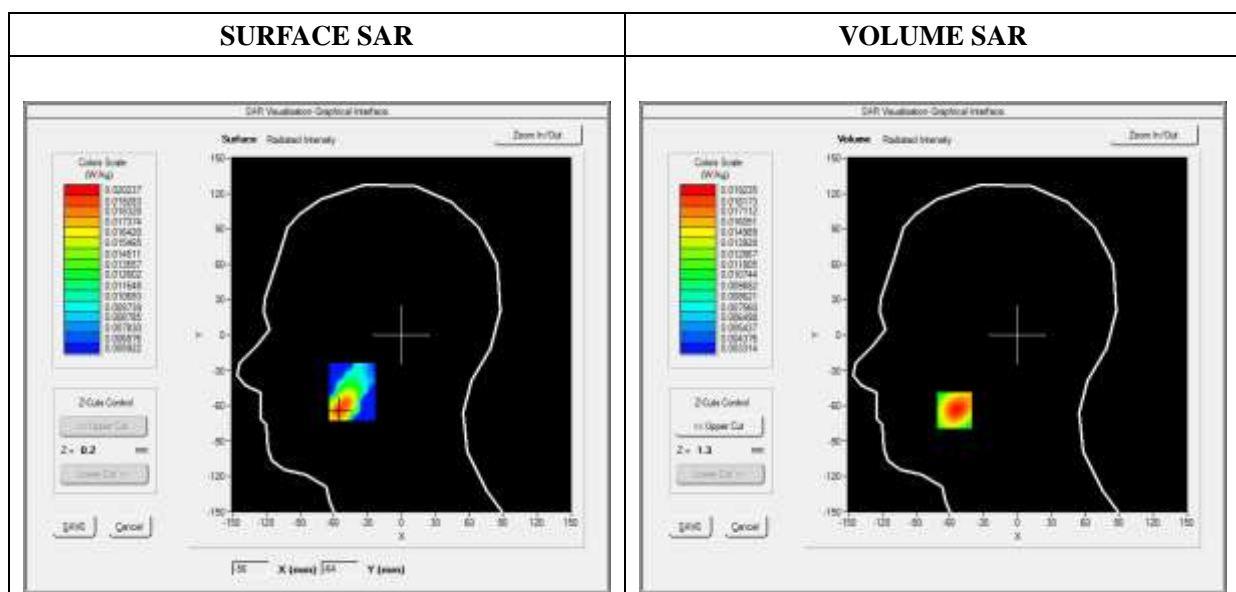




Maximum location: X=-56.00, Y=-64.00

SAR Peak: 0.03 W/kg

SAR 10g (W/Kg)	0.011297
SAR 1g (W/Kg)	0.018275

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0299	0.0192	0.0113	0.0073	0.0057

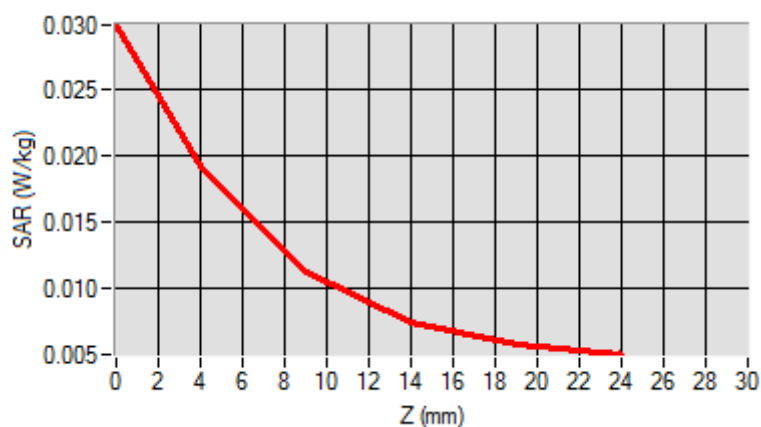

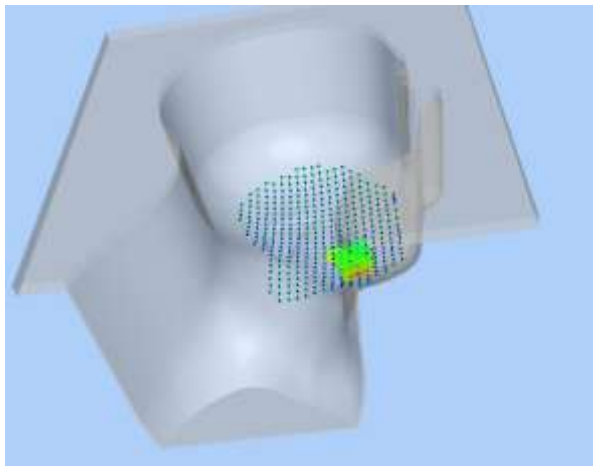3D screen shot	Hot spot position
	

MEASUREMENT 81

Type: Phone measurement (Complete)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative Permittivity (real part)	38.153660
Conductivity (S/m)	1.740236
Power Variation (%)	3.234772
Ambient Temperature	21.1
Liquid Temperature	21.2

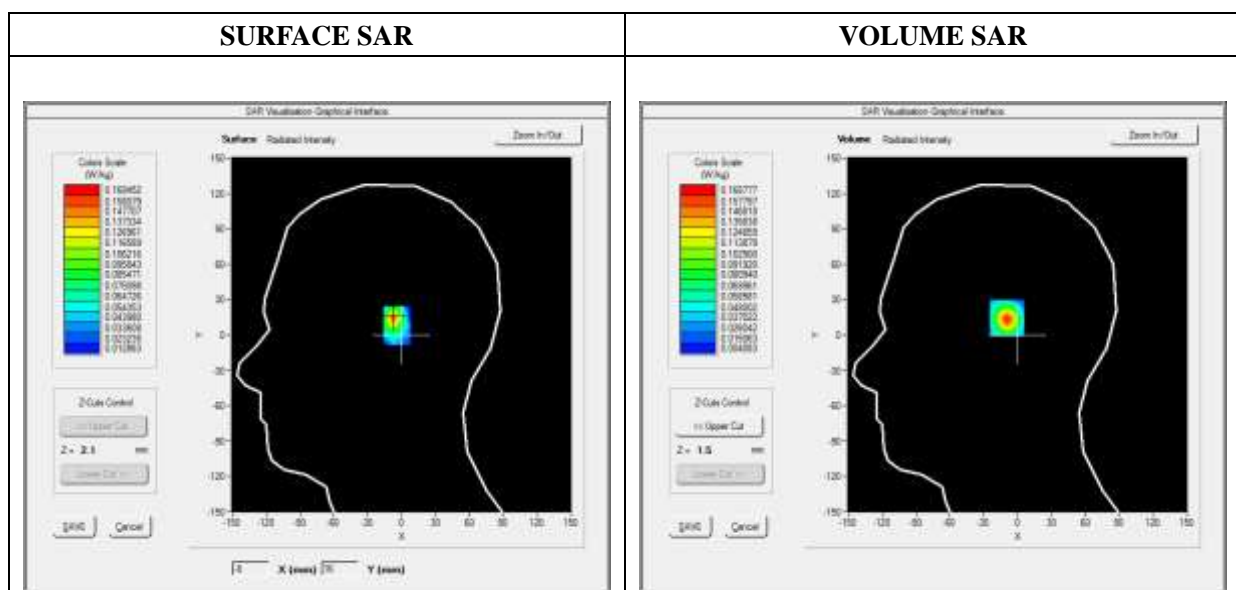




Maximum location: X=-8.00, Y=15.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.061536
SAR 1g (W/Kg)	0.150384

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3349	0.1688	0.0640	0.0237	0.0111

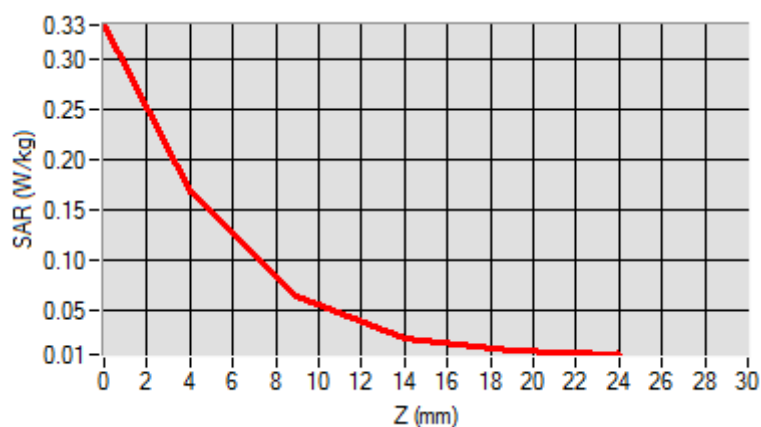

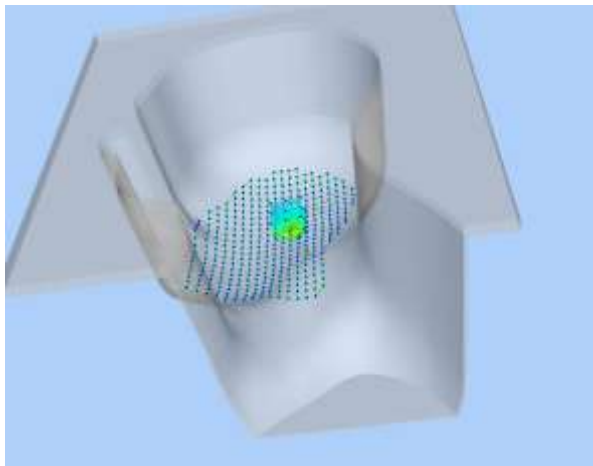3D screen shot	Hot spot position
	

MEASUREMENT 85

Type: Phone measurement (Complete)

Date of measurement: 01/29/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back(Body-worn)
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results



Frequency (MHz)	824.200000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

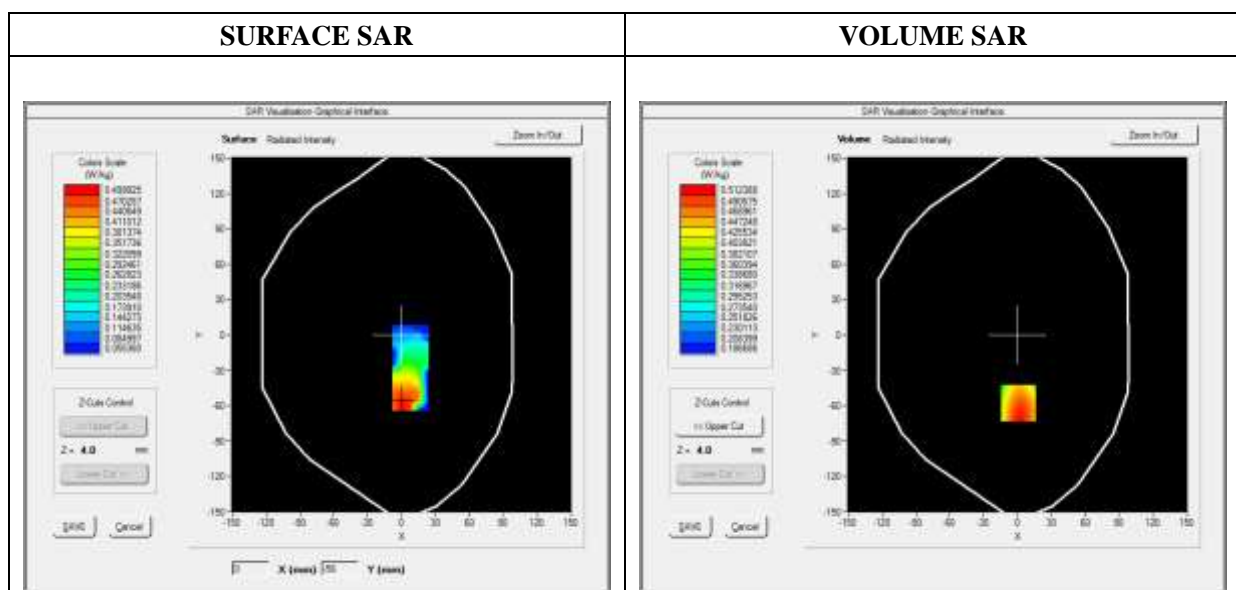

Maximum location: X=1.00, Y=-58.00

SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.400481
SAR 1g (W/Kg)	0.500001

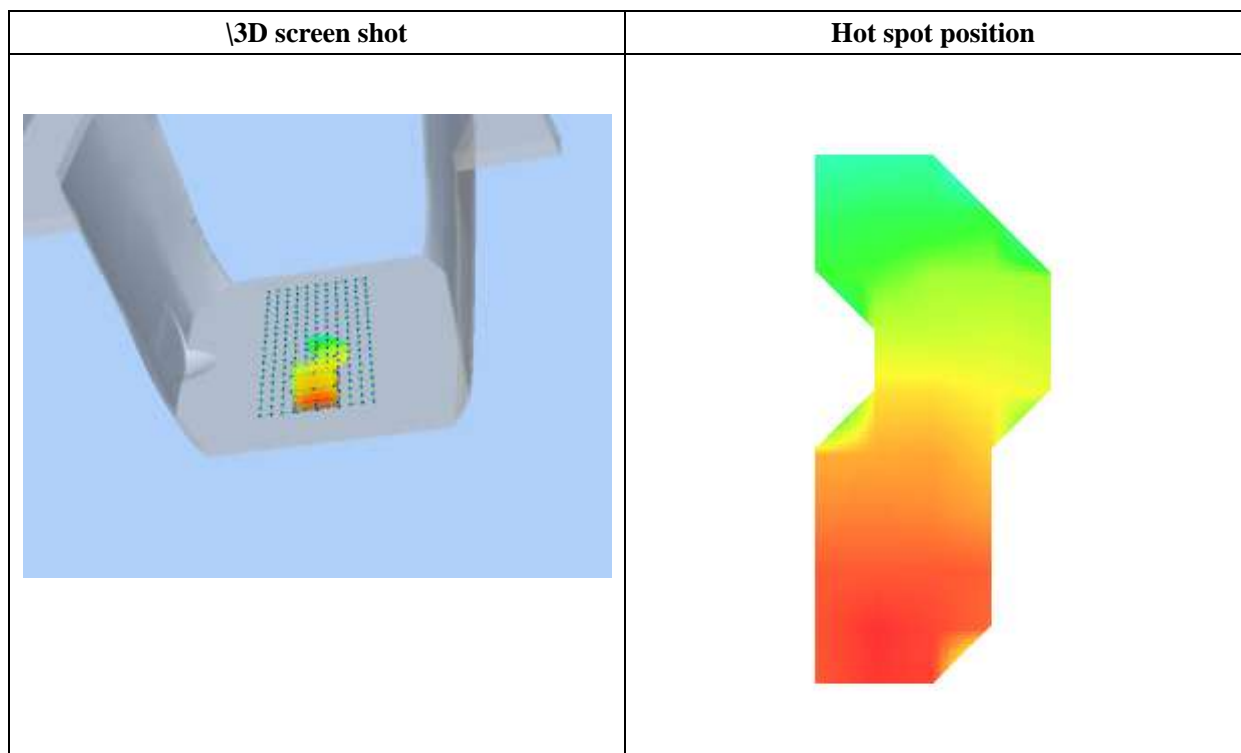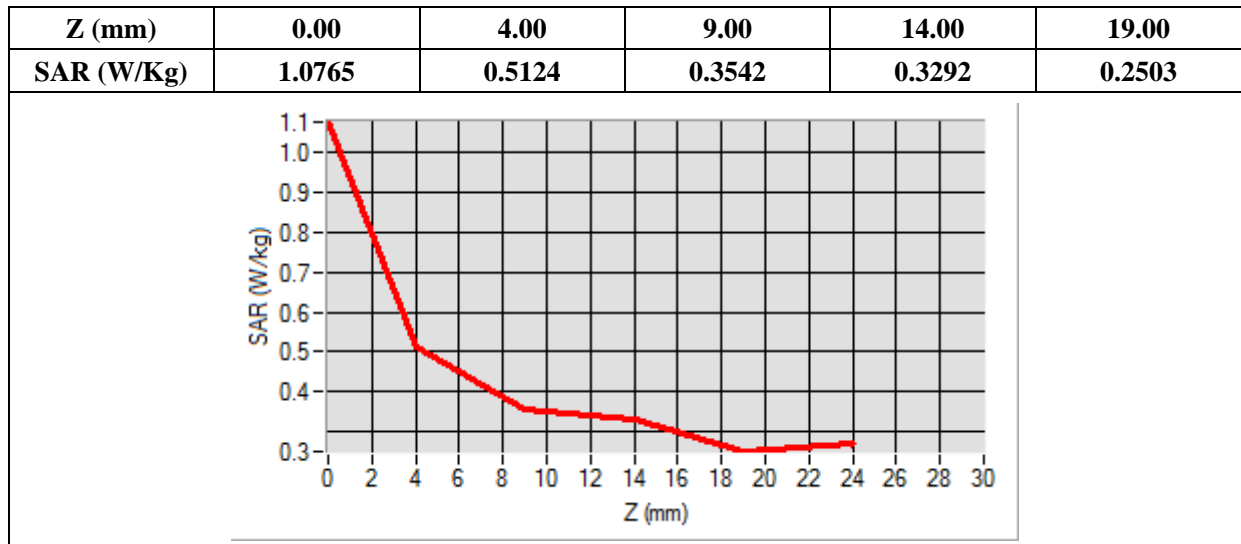

MEASUREMENT 88

Type: Phone measurement (Complete)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front(Body-worn)
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.474622
Ambient Temperature	21.1
Liquid Temperature	21.3

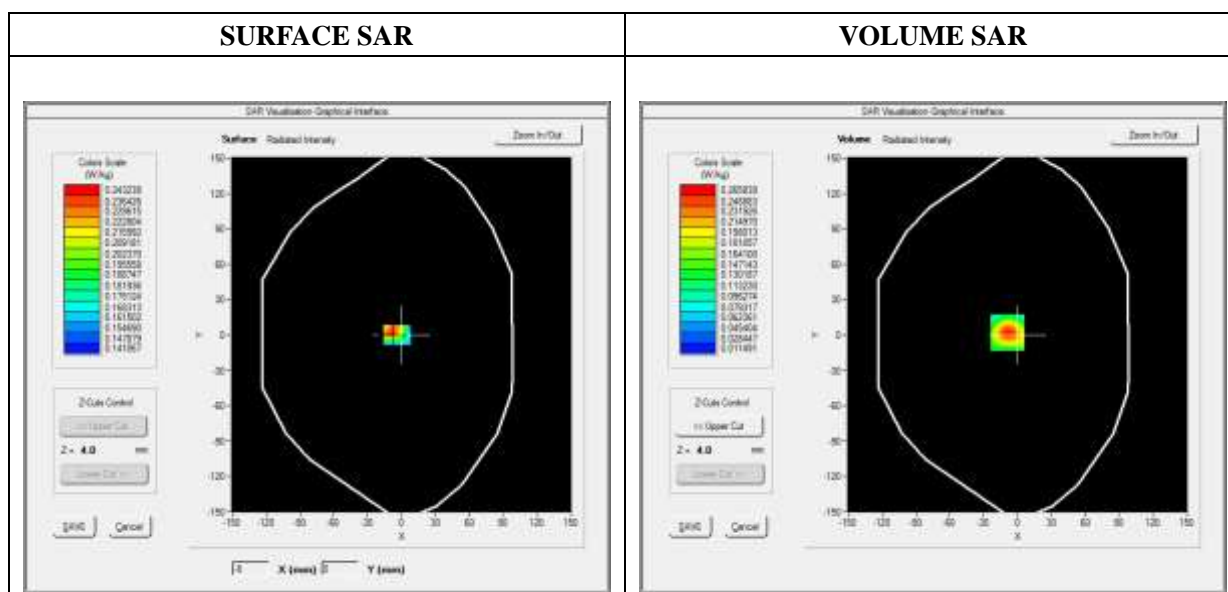



Maximum location: X=-9.00, Y=2.00

SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)	0.129915
SAR 1g (W/Kg)	0.242418

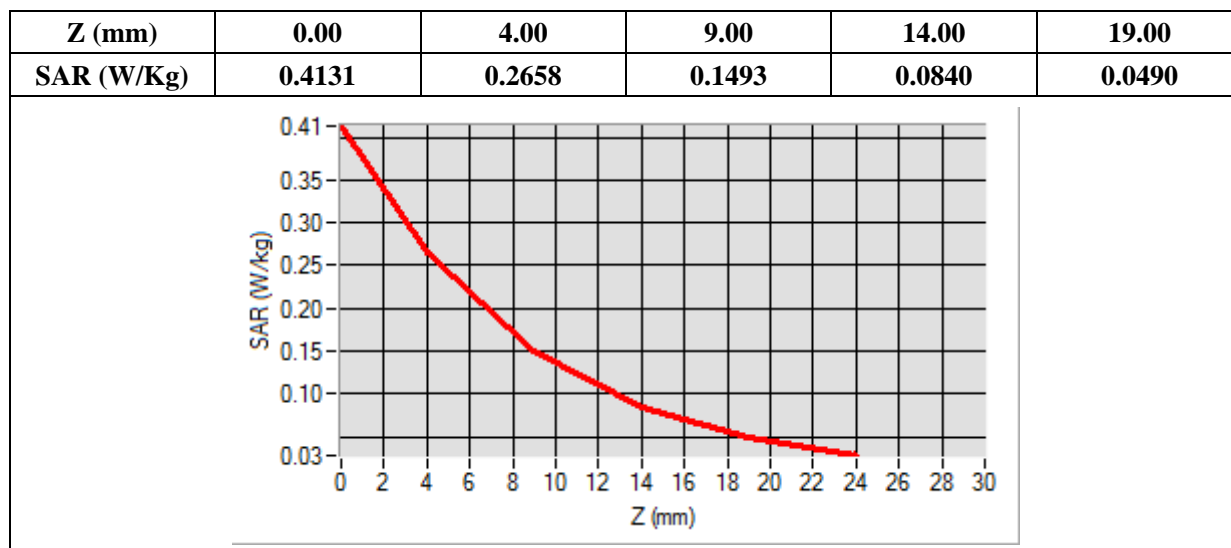

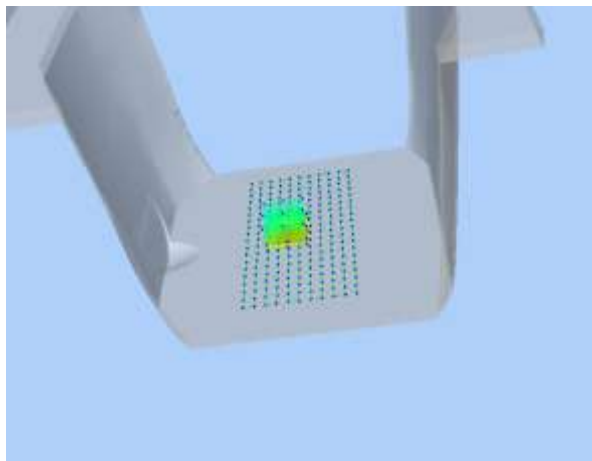3D screen shot	Hot spot position
	

MEASUREMENT 89

Type: Phone measurement (Complete)

Date of measurement: 01/29/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Back
Band	GPRS850_4TX
Channels	Low
Signal	Duty Cycle: 1:2

B. SAR Measurement Results



Frequency (MHz)	824.200000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

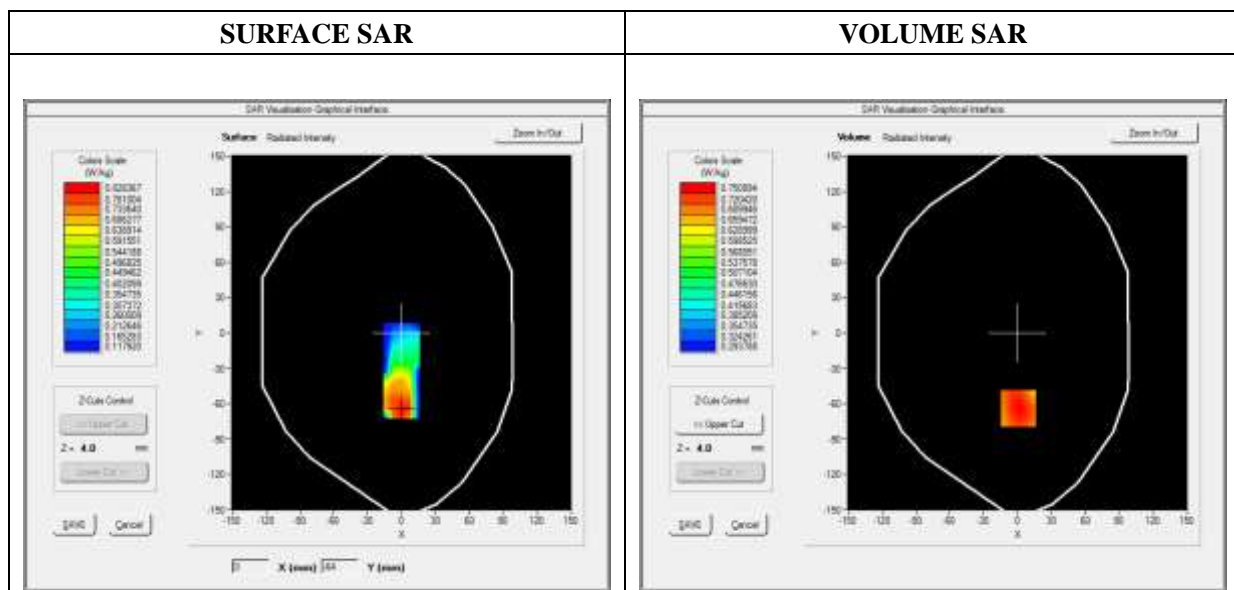

Maximum location: X=1.00, Y=-64.00

SAR Peak: 0.85 W/kg

SAR 10g (W/Kg)	0.608651
SAR 1g (W/Kg)	0.737479

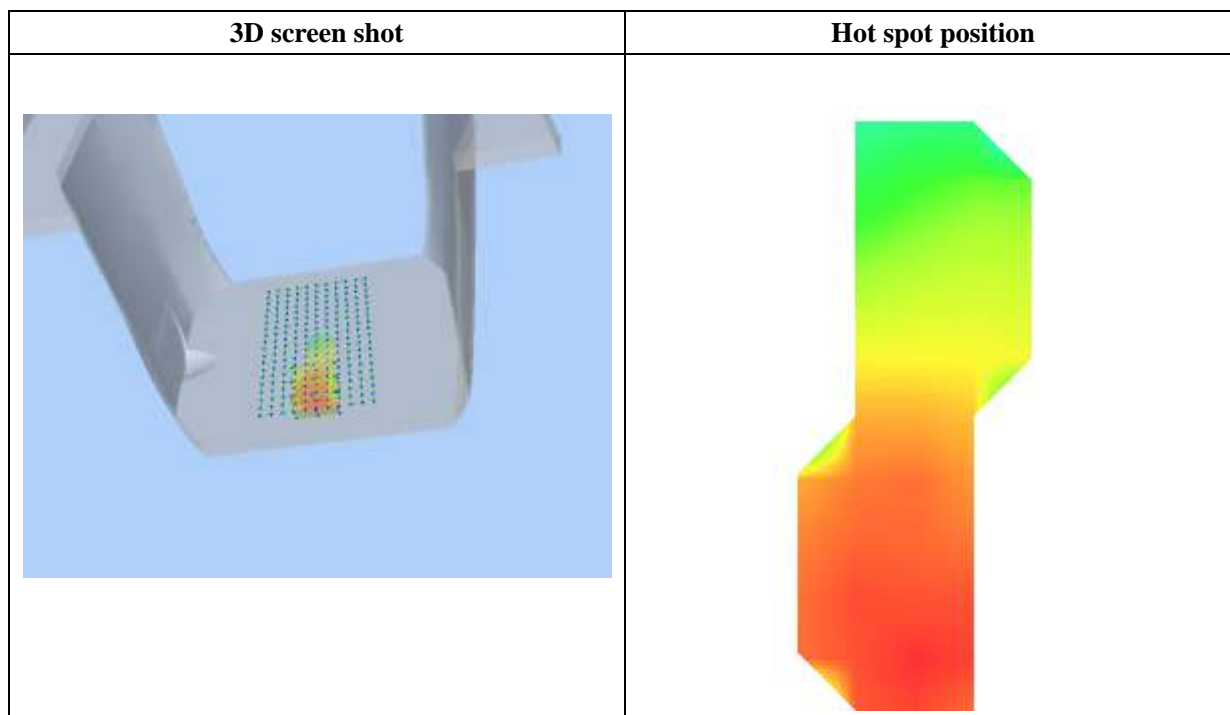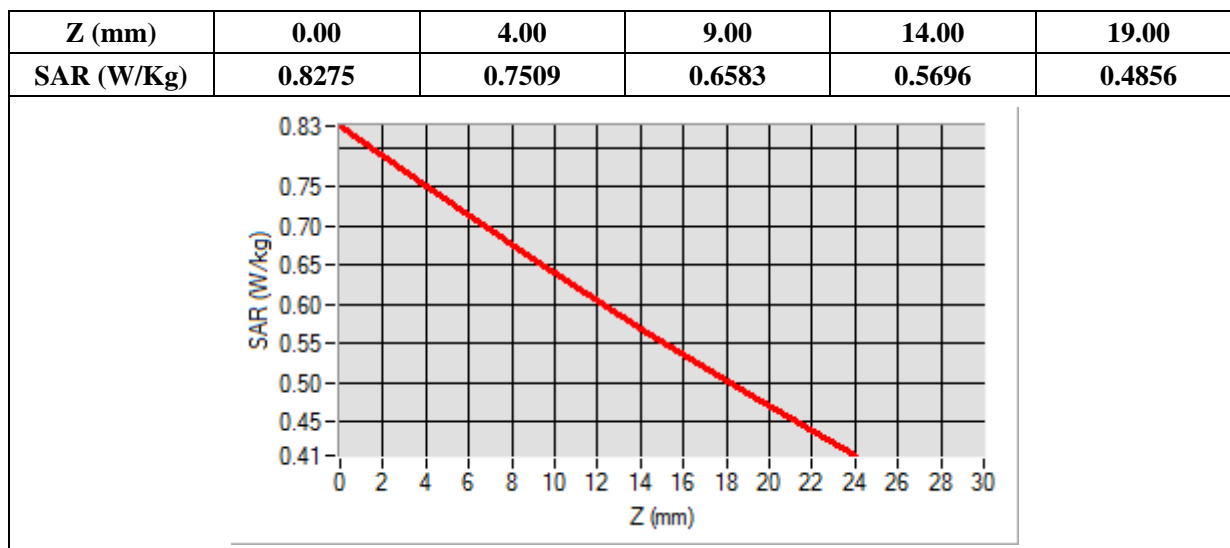

MEASUREMENT 95

Type: Phone measurement (Complete)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Bottom
Band	GPRS1900_4TX
Channels	Low
Signal	Duty Cycle: 1:2

B. SAR Measurement Results



Frequency (MHz)	1850.200000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

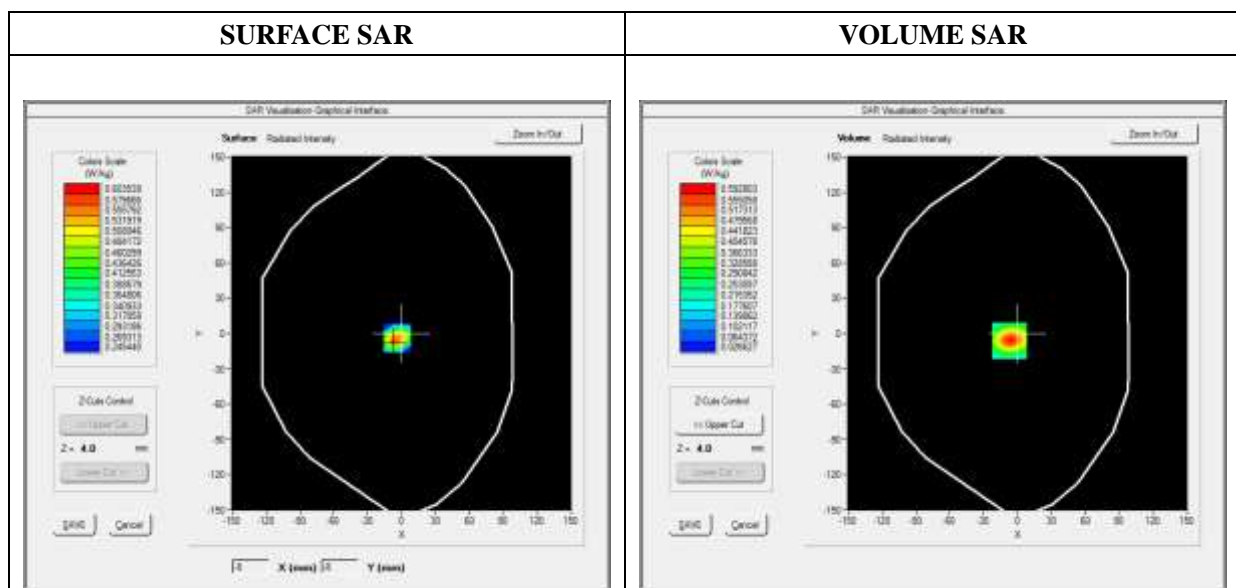

Maximum location: X=-7.00, Y=-6.00

SAR Peak: 0.94 W/kg

SAR 10g (W/Kg)	0.282020
SAR 1g (W/Kg)	0.539899

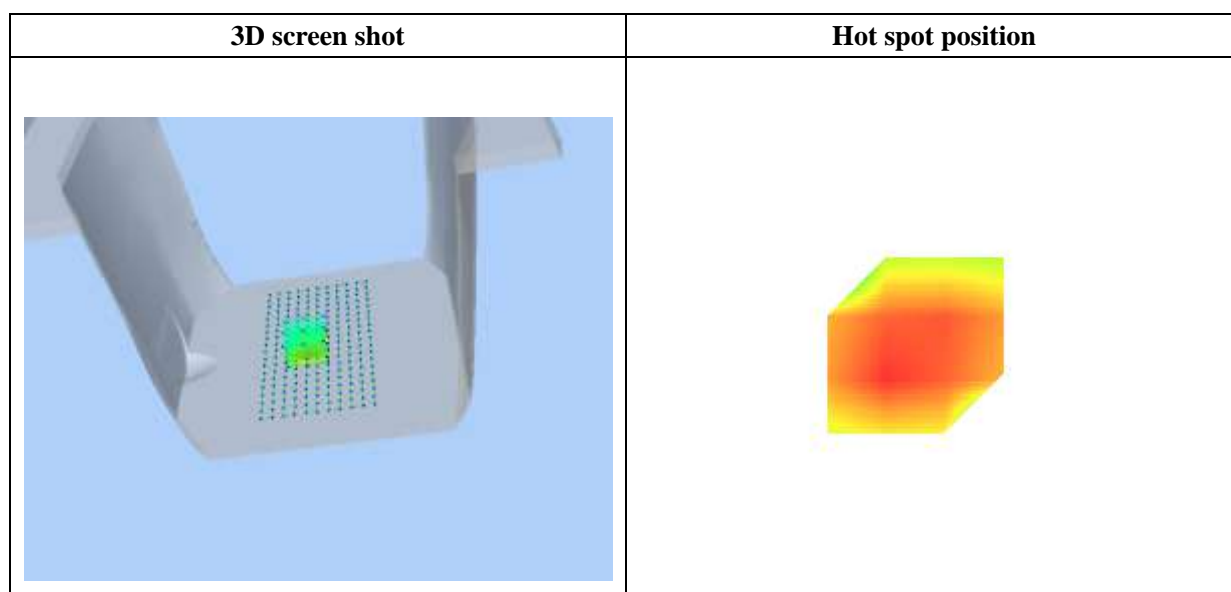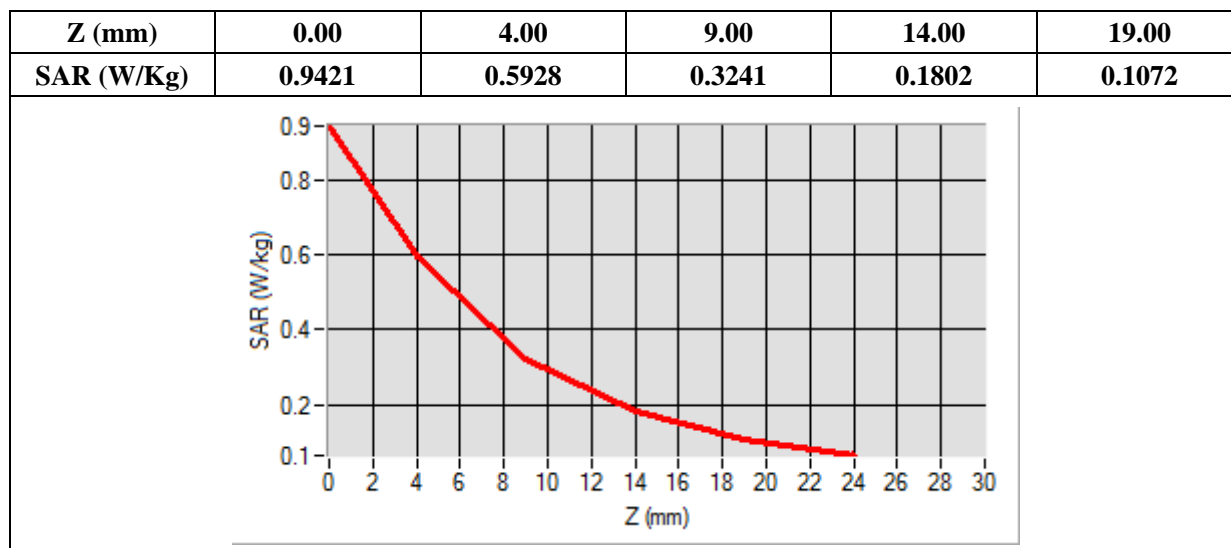

MEASUREMENT 98

Type: Phone measurement (Complete)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	1907.600000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.847552
Ambient Temperature	21.1
Liquid Temperature	21.3

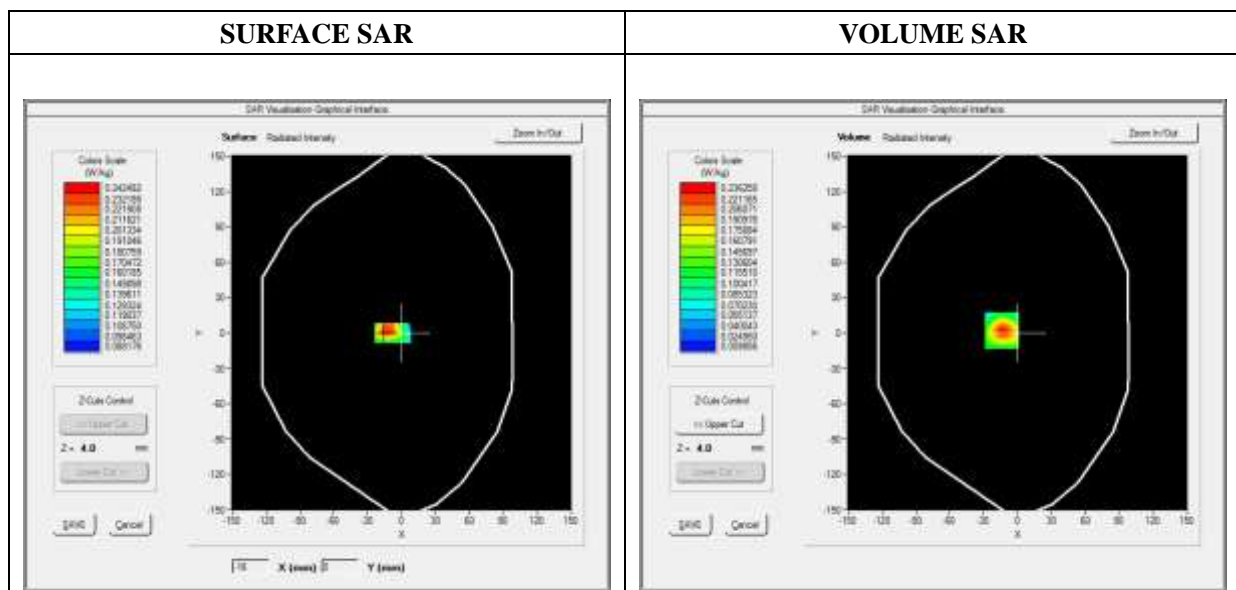



Maximum location: X=-14.00, Y=2.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.115114
SAR 1g (W/Kg)	0.215845

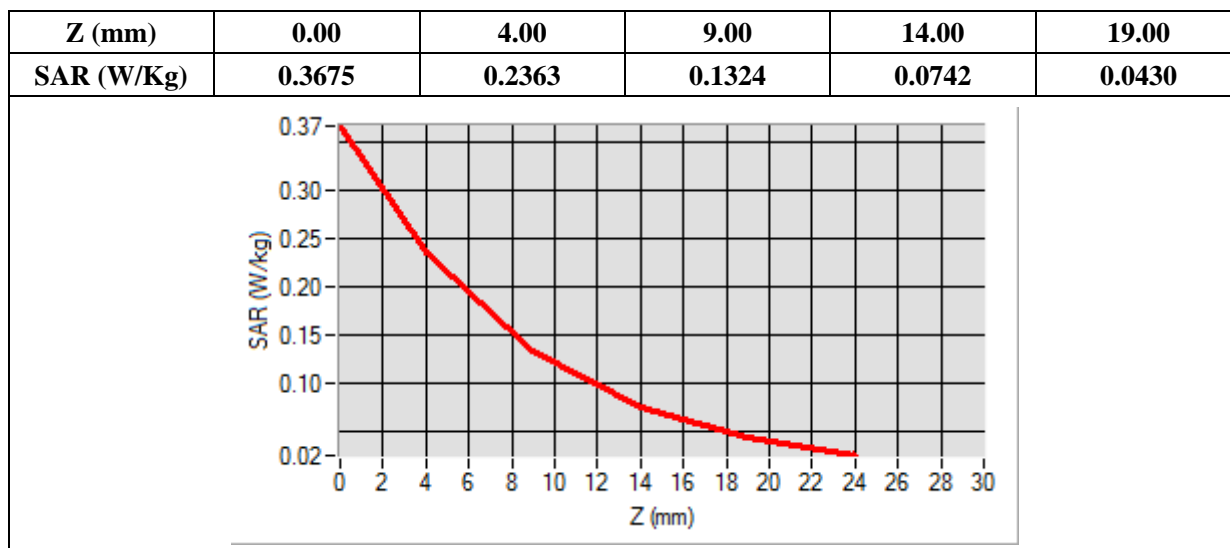

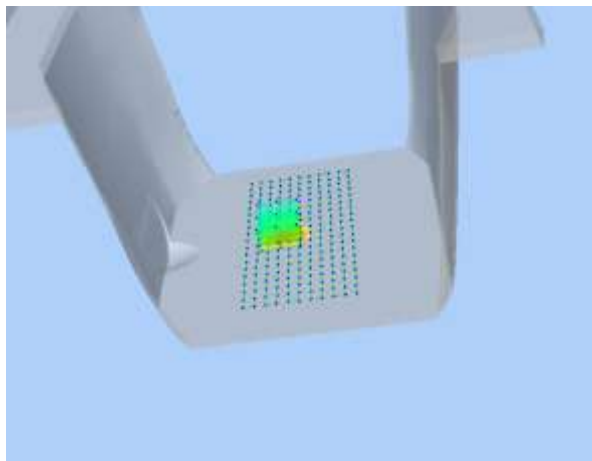3D screen shot	Hot spot position
	

MEASUREMENT 101

Type: Phone measurement (Complete)

Date of measurement: 01/29/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	826.400000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	2.341234
Ambient Temperature	21.1
Liquid Temperature	21.3

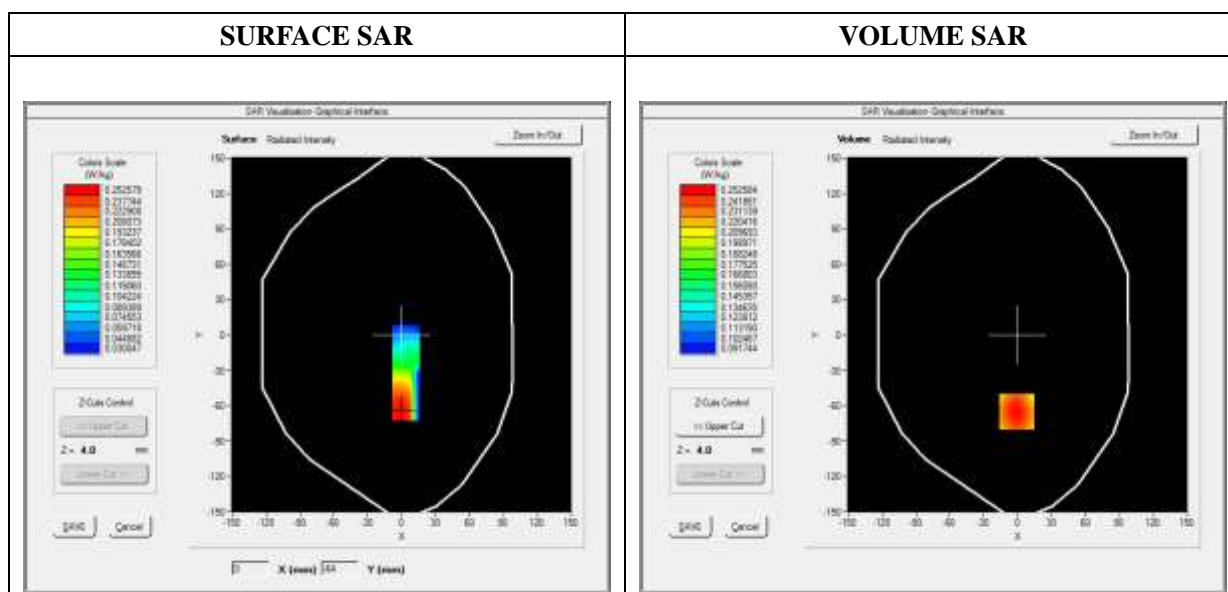

Maximum location: X=-1.00, Y=-65.00

SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.197441
SAR 1g (W/Kg)	0.244769

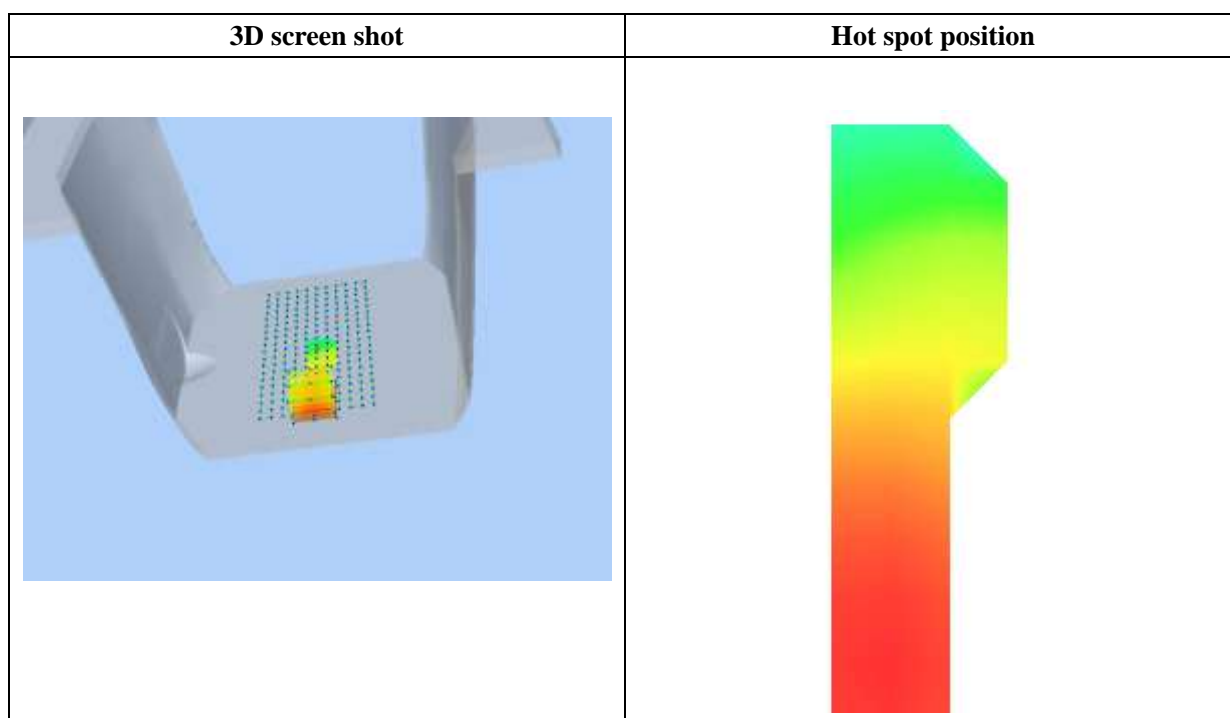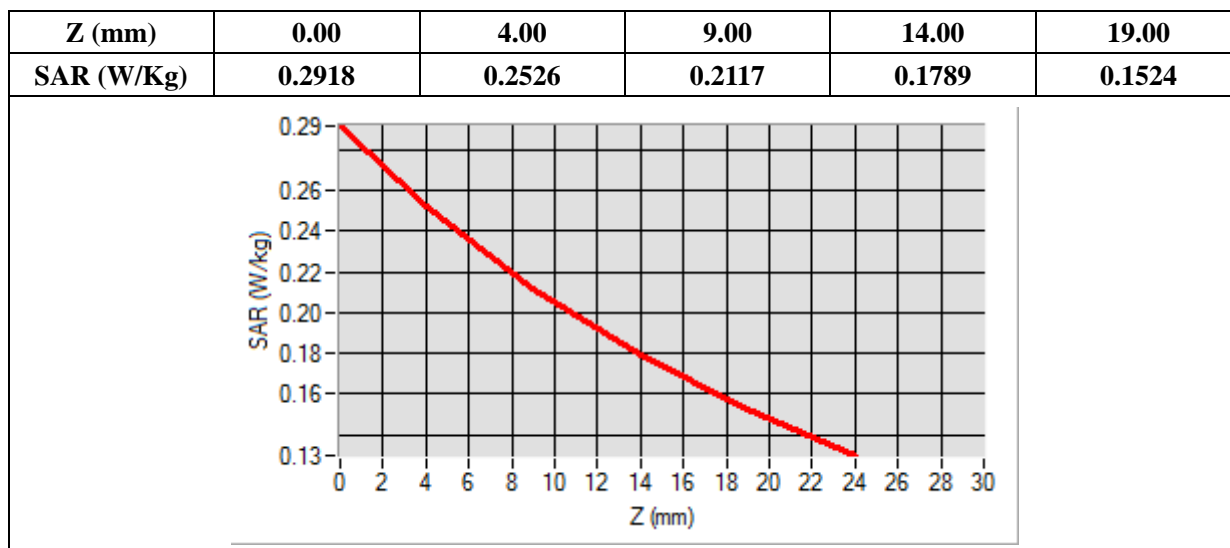

MEASUREMENT 106

Type: Phone measurement (Complete)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 2_RMC
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.523573
Ambient Temperature	21.1
Liquid Temperature	21.3

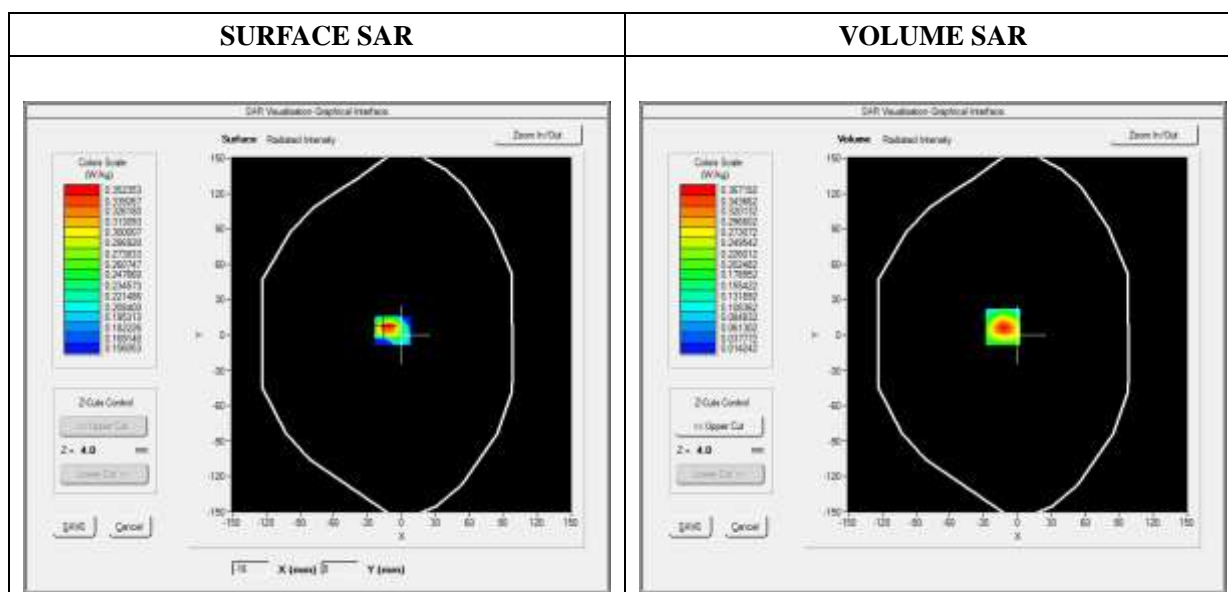




Maximum location: X=-13.00, Y=7.00

SAR Peak: 0.58 W/kg

SAR 10g (W/Kg)	0.175778
SAR 1g (W/Kg)	0.334909

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5781	0.3672	0.2026	0.1122	0.0650

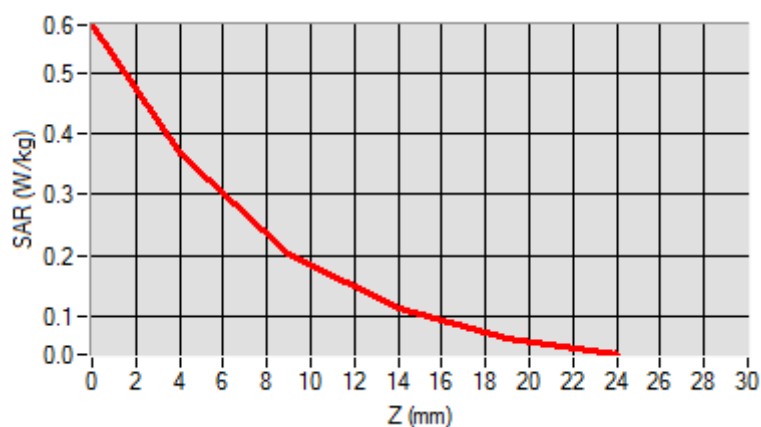

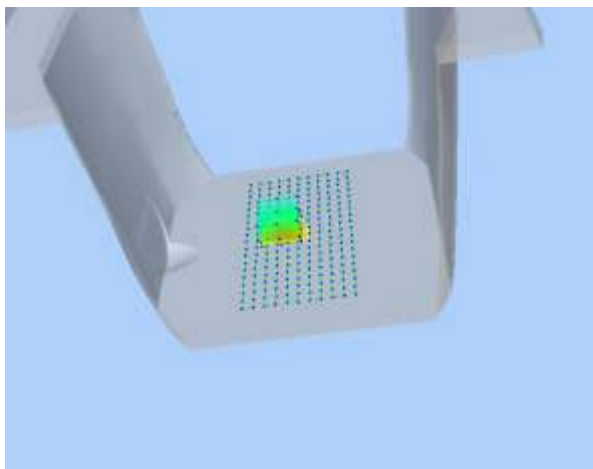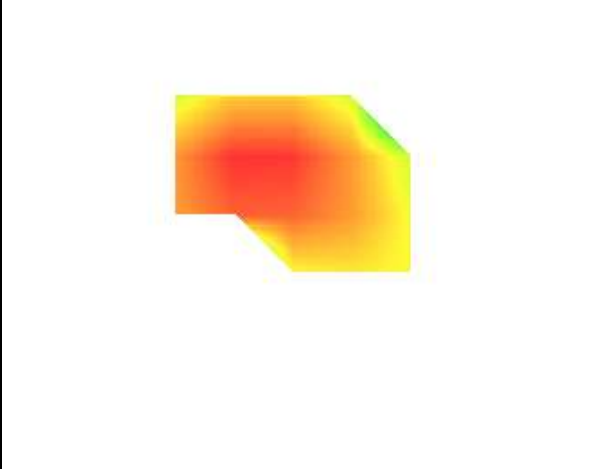3D screen shot	Hot spot position
	

MEASUREMENT 114

Type: Phone measurement (Complete)

Date of measurement: 01/30/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.06; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 4_RMC
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1720.000000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

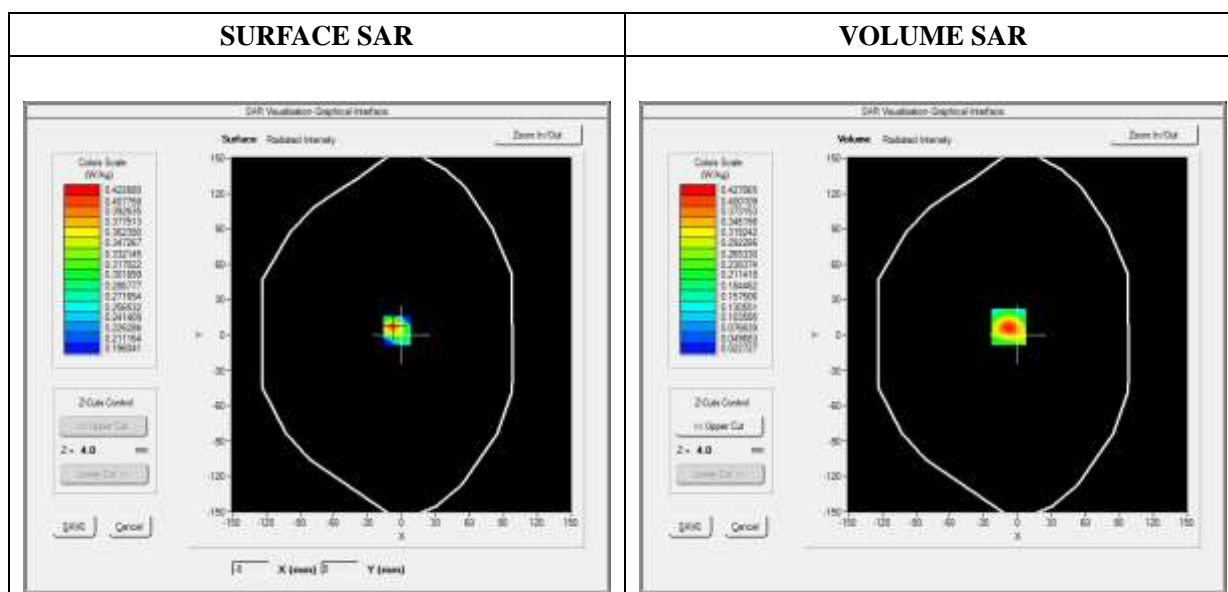

Maximum location: X=-8.00, Y=7.00

SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.211107
SAR 1g (W/Kg)	0.388305

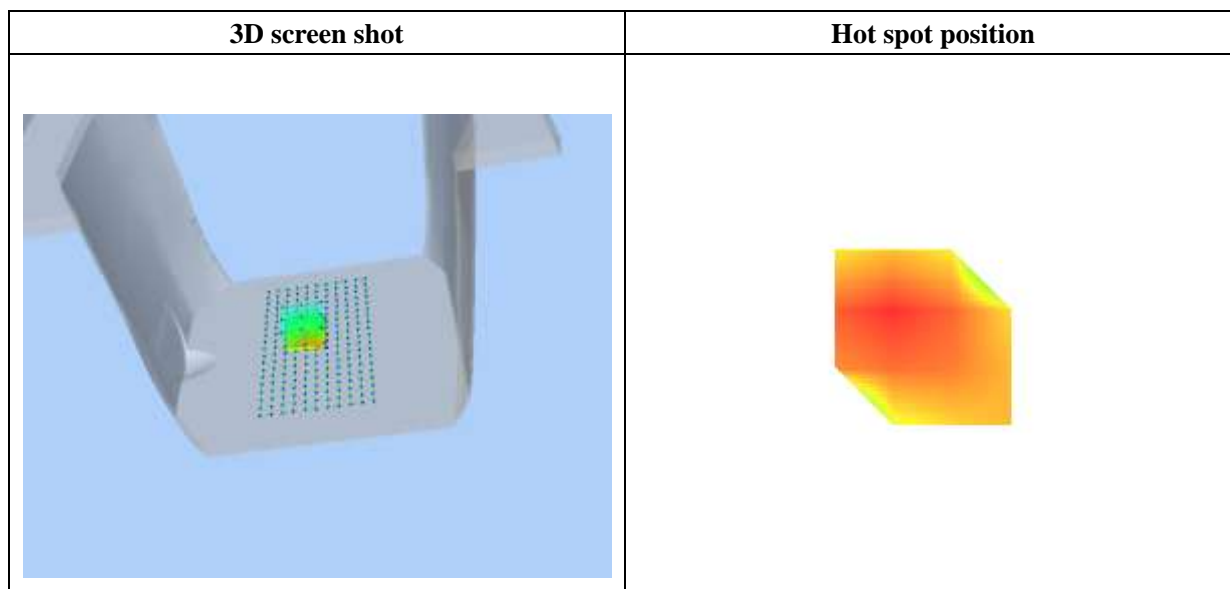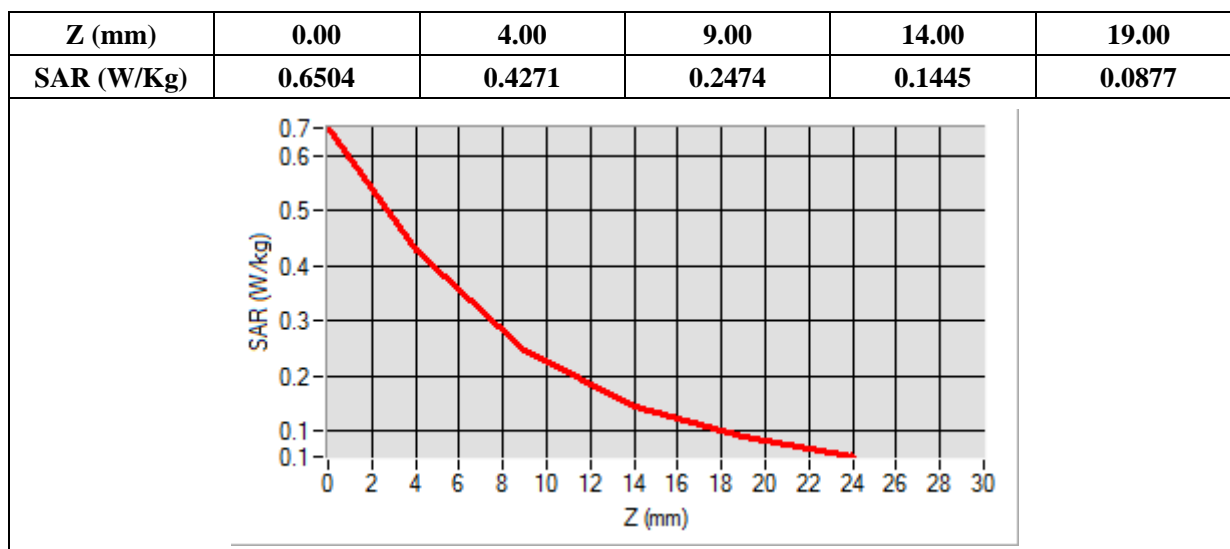

MEASUREMENT 121

Type: Phone measurement (Complete)

Date of measurement: 01/29/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 5_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	836.500000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	1.037332
Ambient Temperature	21.1
Liquid Temperature	21.2

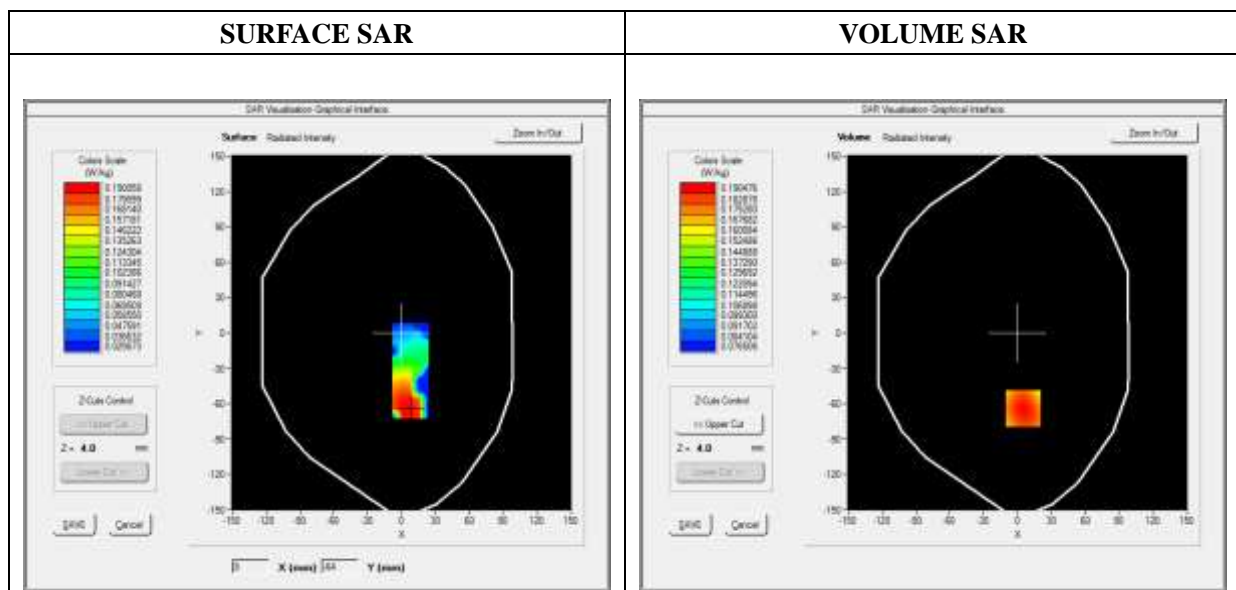

Maximum location: X=5.00, Y=-64.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.150966
SAR 1g (W/Kg)	0.185121

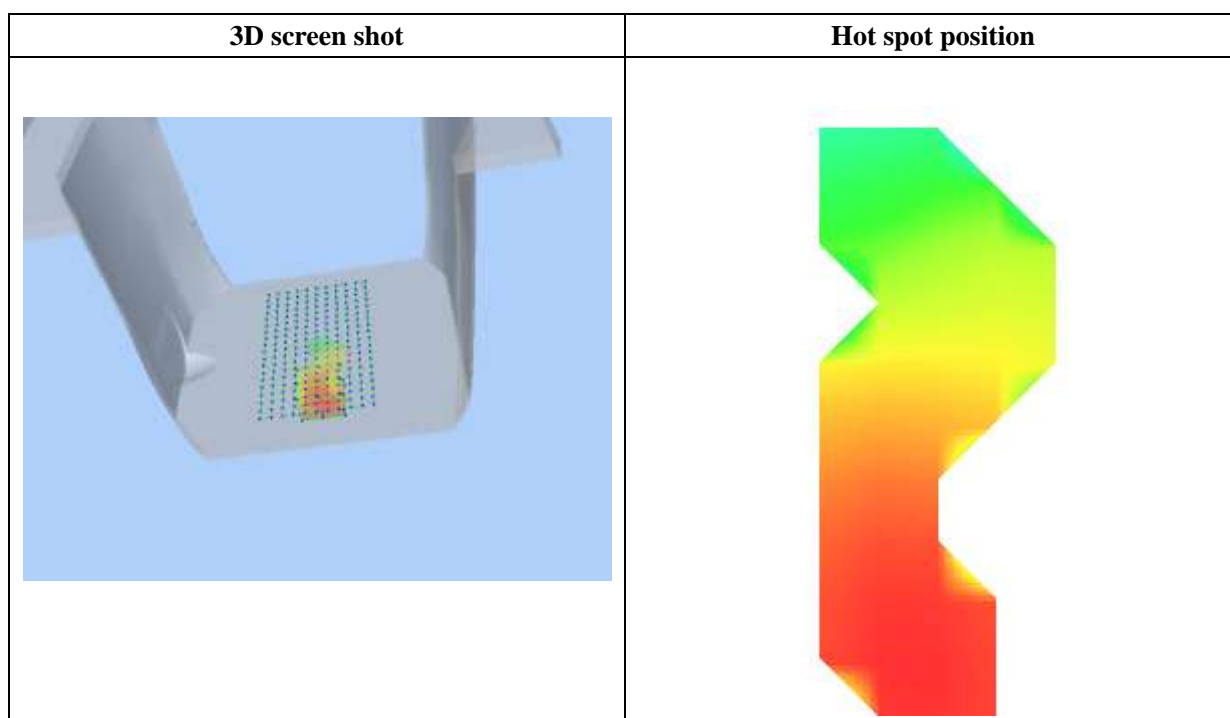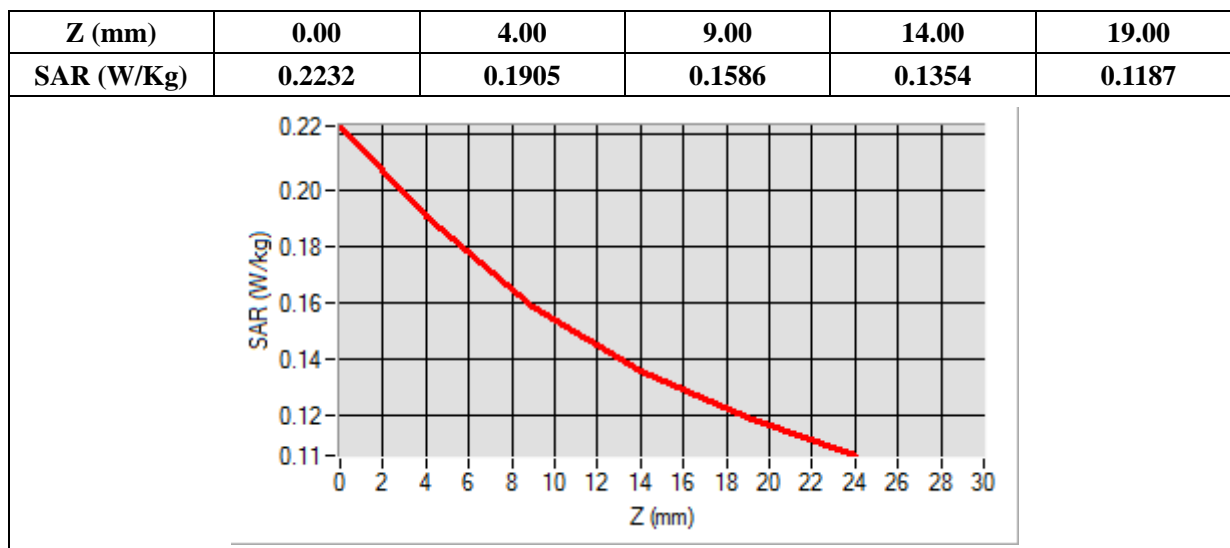

MEASUREMENT 130

Type: Phone measurement (Complete)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.58; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 7_RMC
Channels	QPSK, 20MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

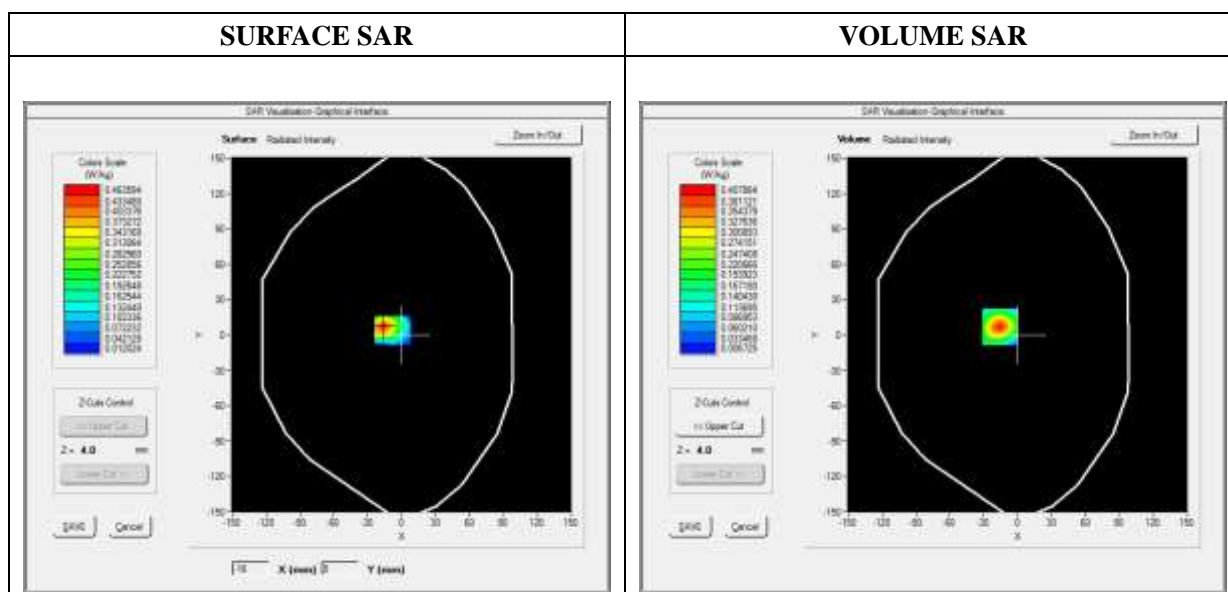




Maximum location: X=-16.00, Y=7.00

SAR Peak: 0.74 W/kg

SAR 10g (W/Kg)	0.165766
SAR 1g (W/Kg)	0.367434

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7390	0.4079	0.1795	0.0764	0.0350

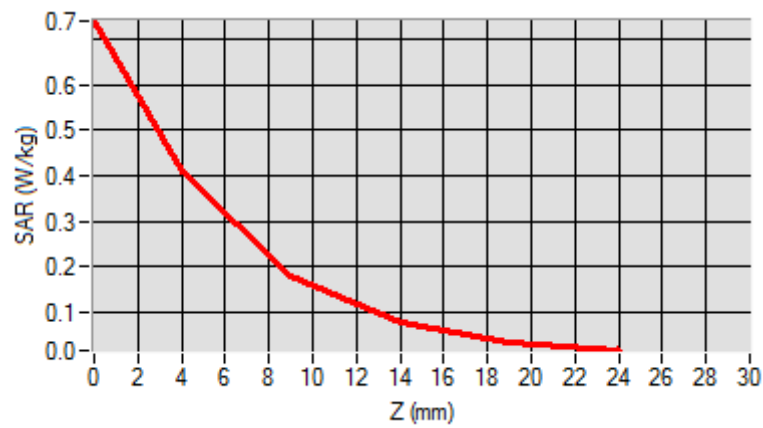

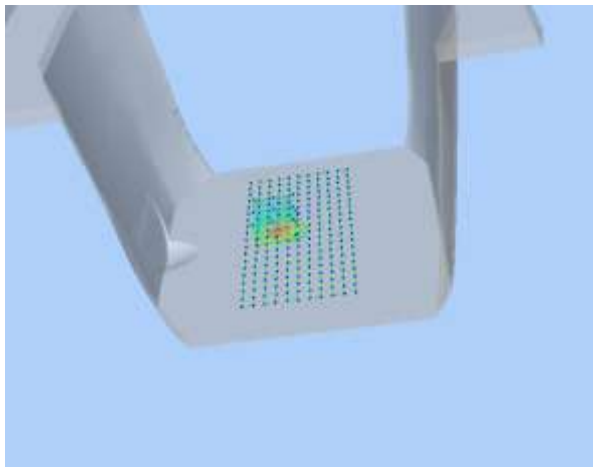3D screen shot	Hot spot position
	

MEASUREMENT 131

Type: Phone measurement (Complete)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.58; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 7_RMC
Channels	QPSK, 20MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2535.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	3.027633
Ambient Temperature	21.1
Liquid Temperature	21.2

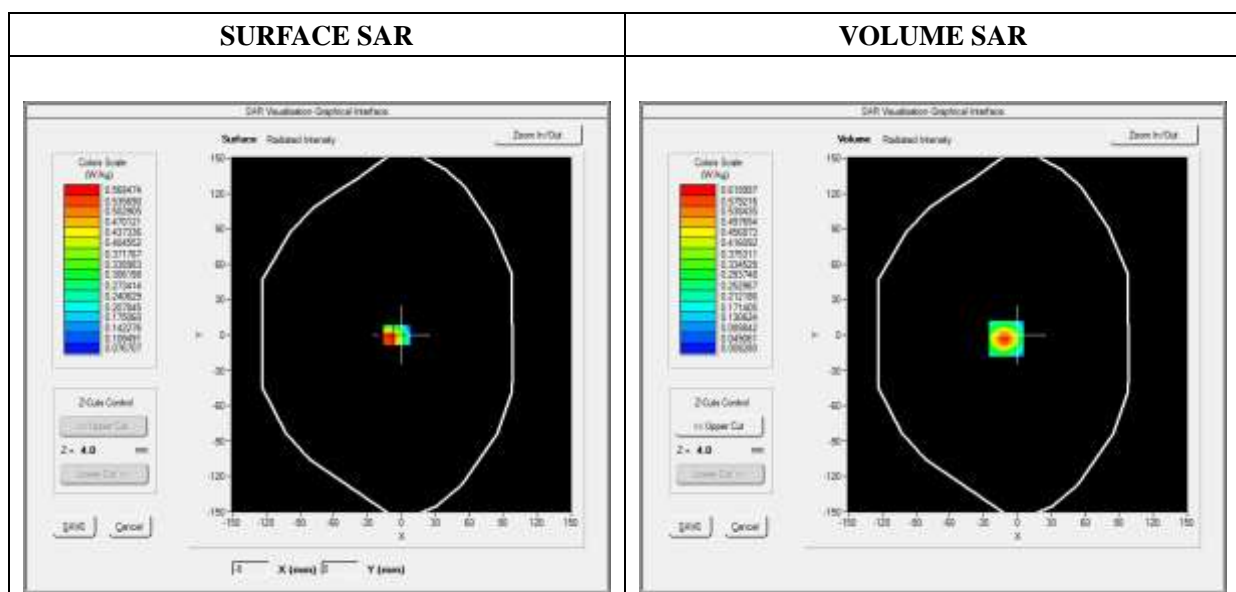

Maximum location: X=-10.00, Y=-3.00

SAR Peak: 1.11 W/kg

SAR 10g (W/Kg)	0.251187
SAR 1g (W/Kg)	0.557959

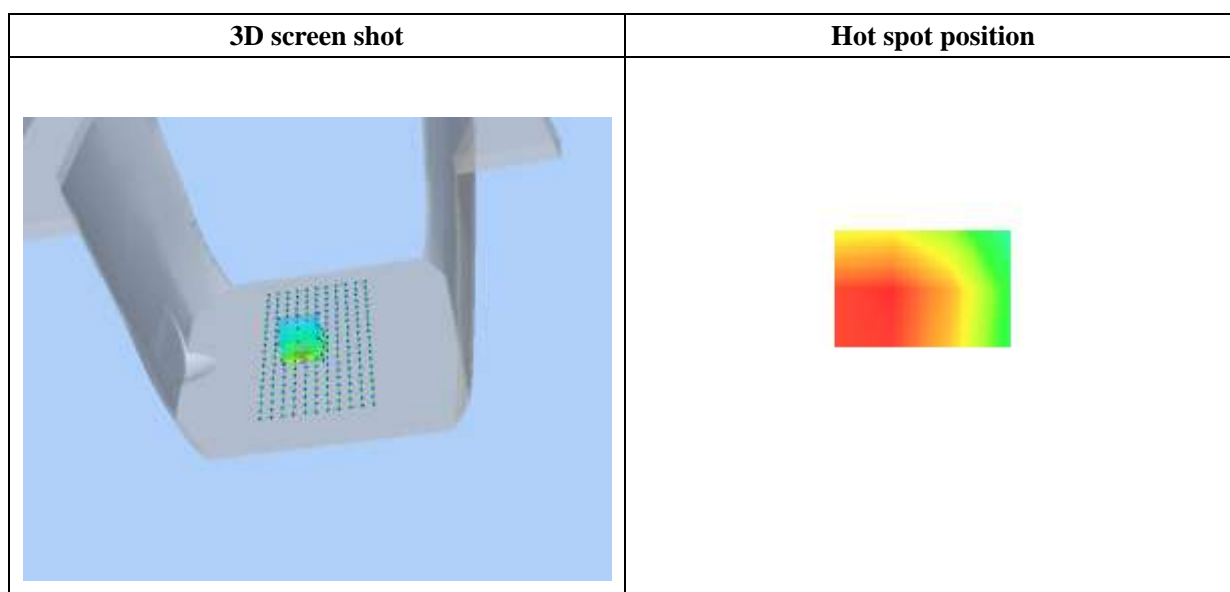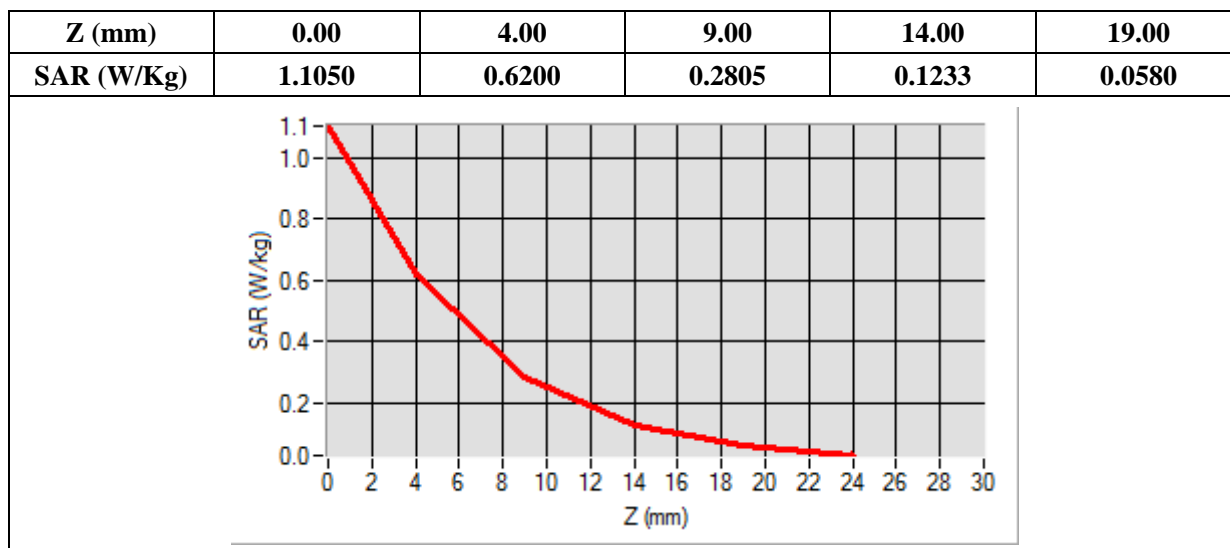

MEASUREMENT 138

Type: Phone measurement (Complete)

Date of measurement: 01/29/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.28; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 17_RMC
Channels	QPSK, 10MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	711.000000
Relative Permittivity (real part)	54.964739
Conductivity (S/m)	0.931048
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

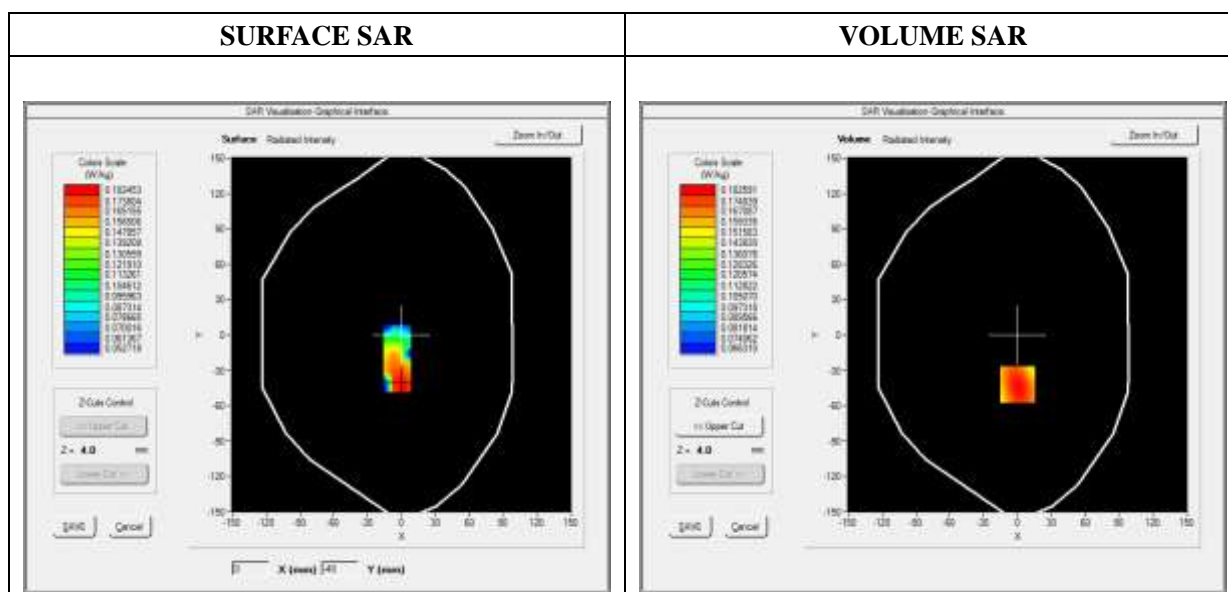

Maximum location: X=0.00, Y=-42.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.151032
SAR 1g (W/Kg)	0.187476

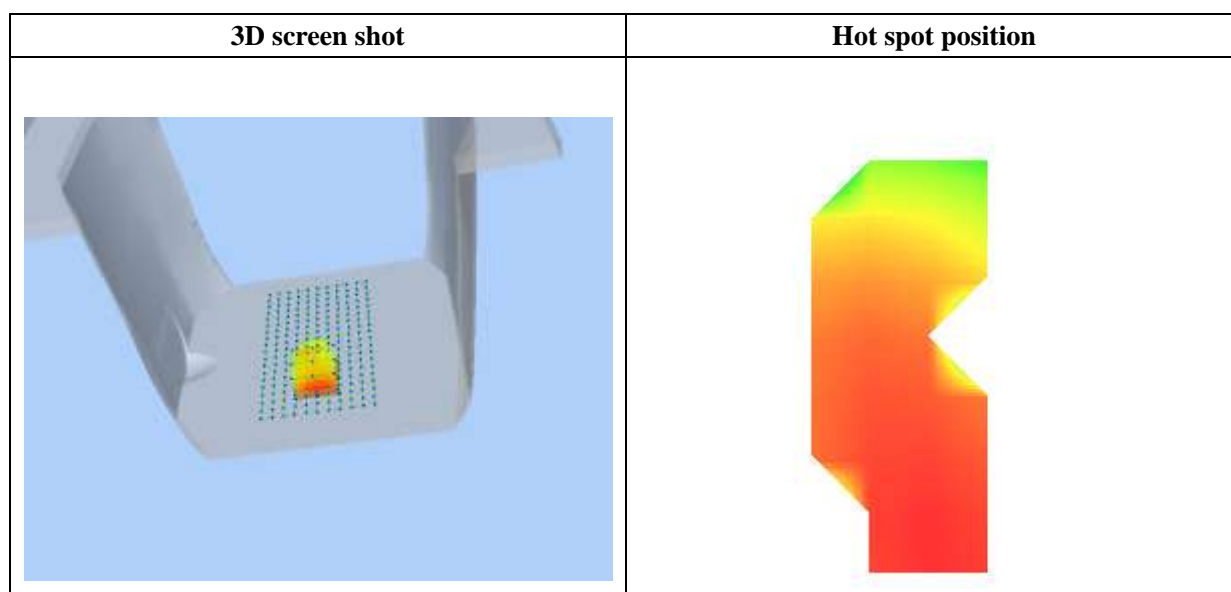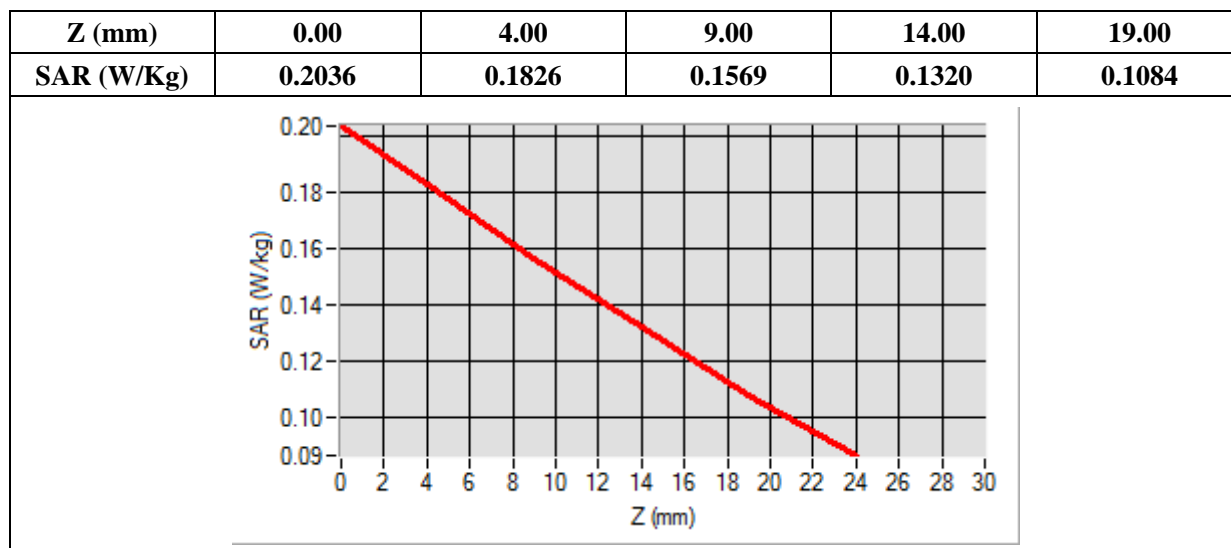

MEASUREMENT 146

Type: Phone measurement (Complete)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 40_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2310.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

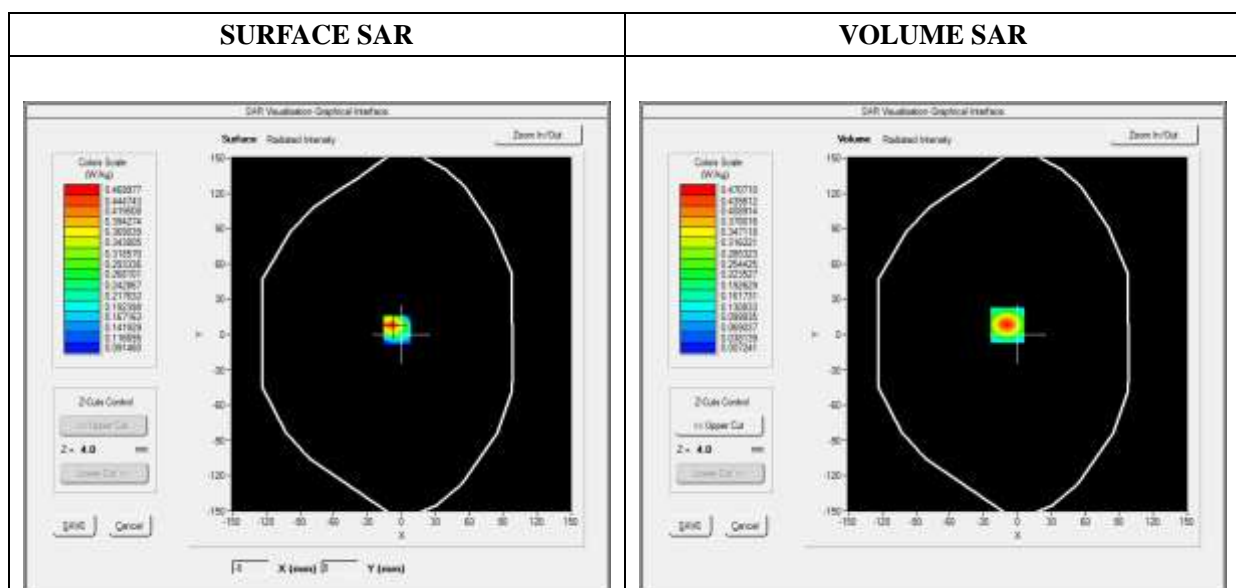

Maximum location: X=-9.00, Y=8.00

SAR Peak: 0.80 W/kg

SAR 10g (W/Kg)	0.197805
SAR 1g (W/Kg)	0.421996

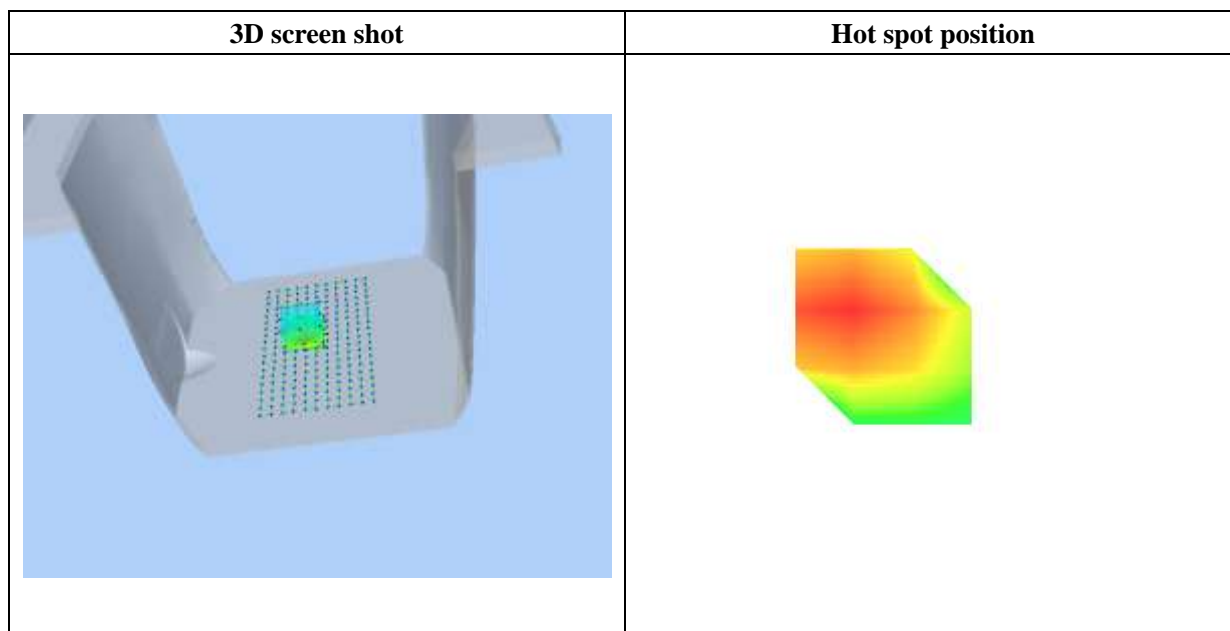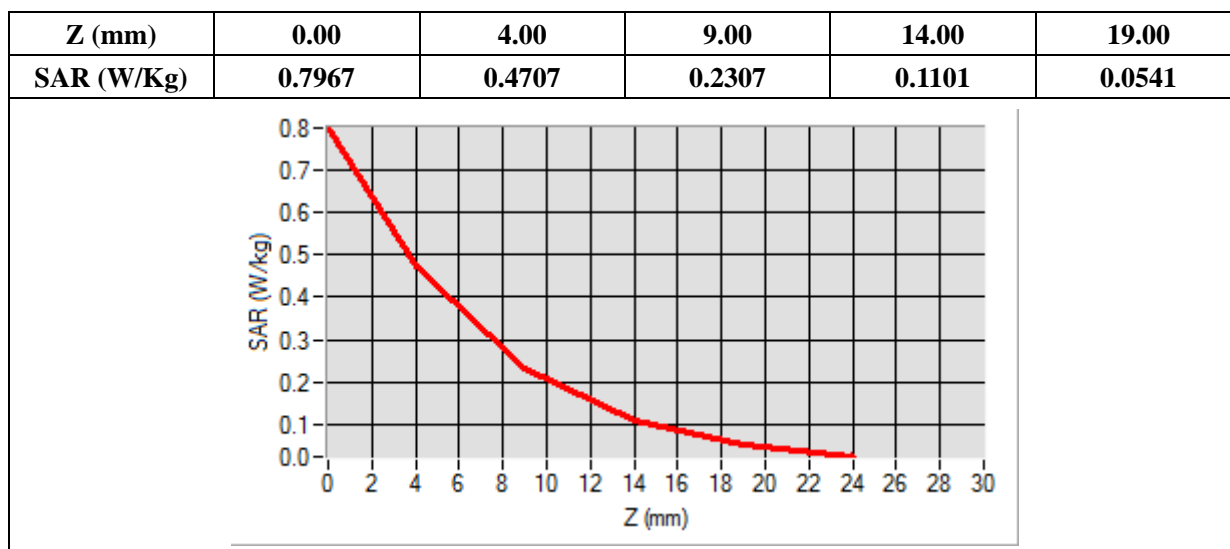

MEASUREMENT 154

Type: Phone measurement (Complete)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 40_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2355.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	2.017811
Ambient Temperature	21.1
Liquid Temperature	21.2

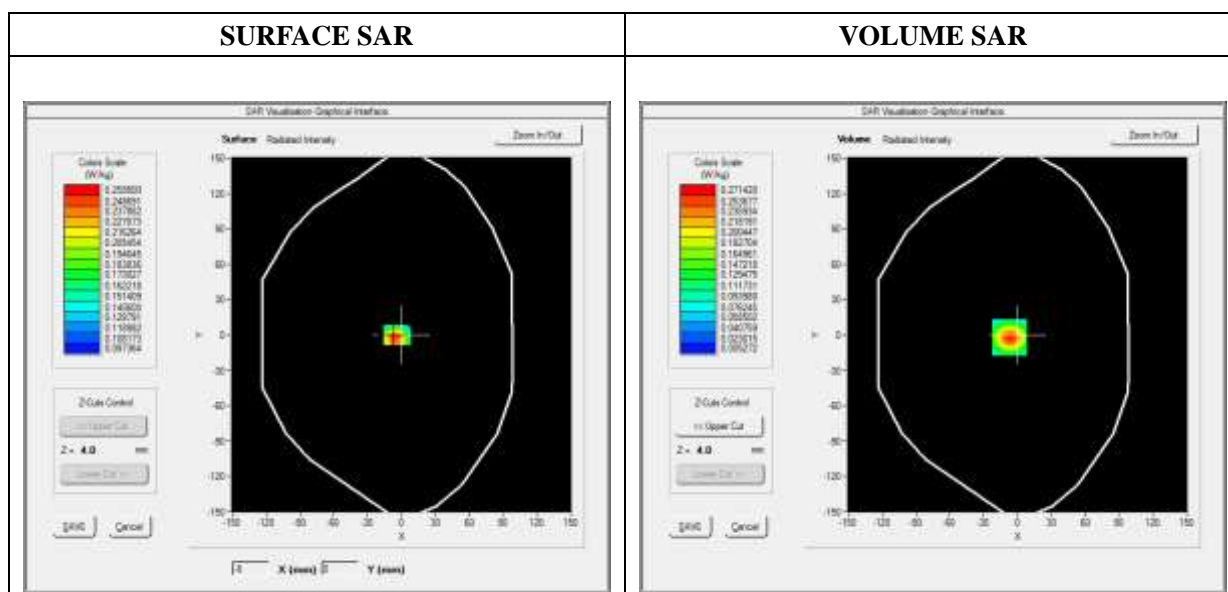




Maximum location: X=-7.00, Y=-2.00

SAR Peak: 0.47 W/kg

SAR 10g (W/Kg)	0.116938
SAR 1g (W/Kg)	0.245451

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4666	0.2714	0.1298	0.0604	0.0291

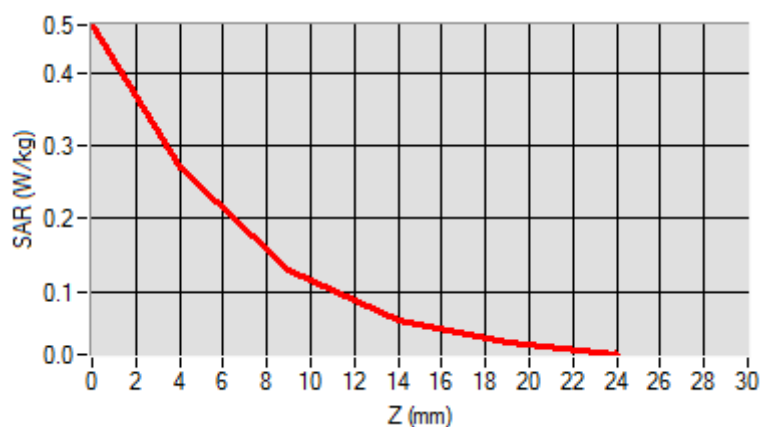

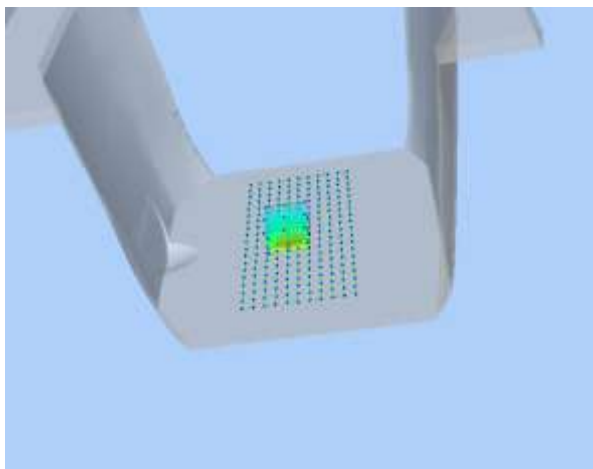3D screen shot	Hot spot position
	

MEASUREMENT 162

Type: Phone measurement (Complete)

Date of measurement: 01/31/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WiFi_802.11b
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2437.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

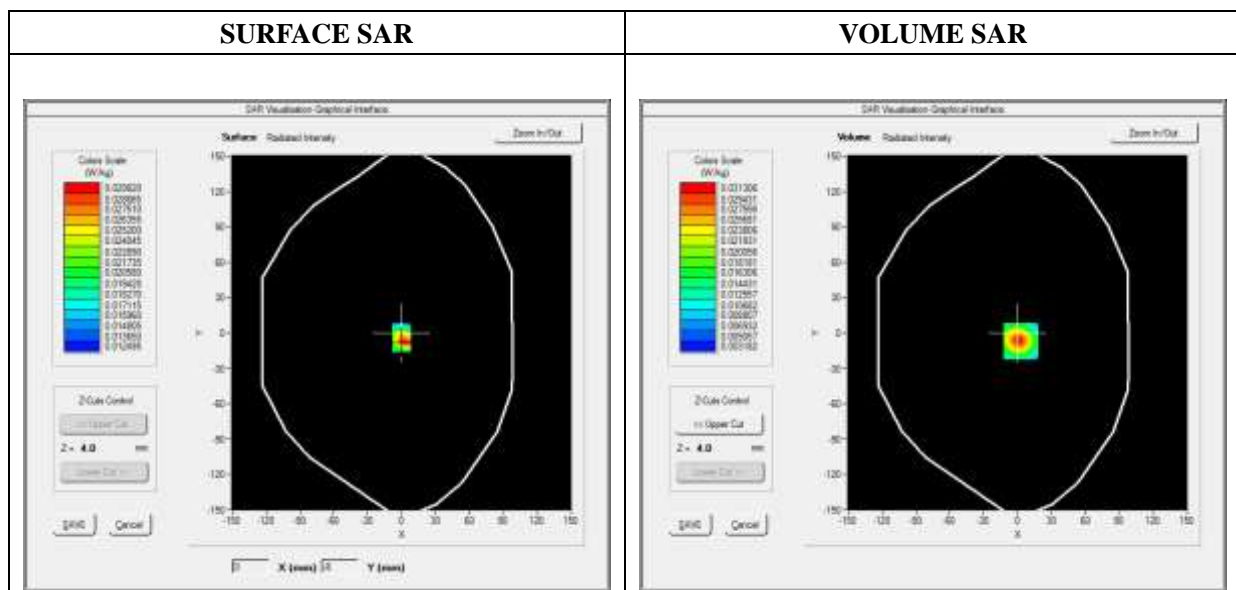

Maximum location: X=3.00, Y=-7.00

SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)	0.014610
SAR 1g (W/Kg)	0.028986

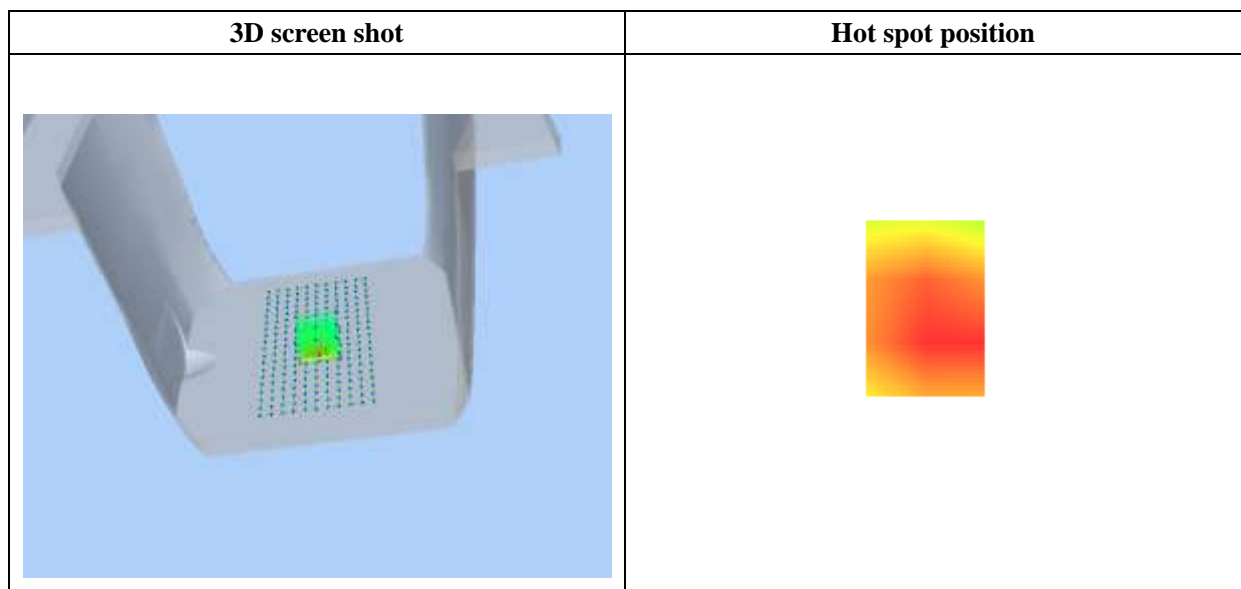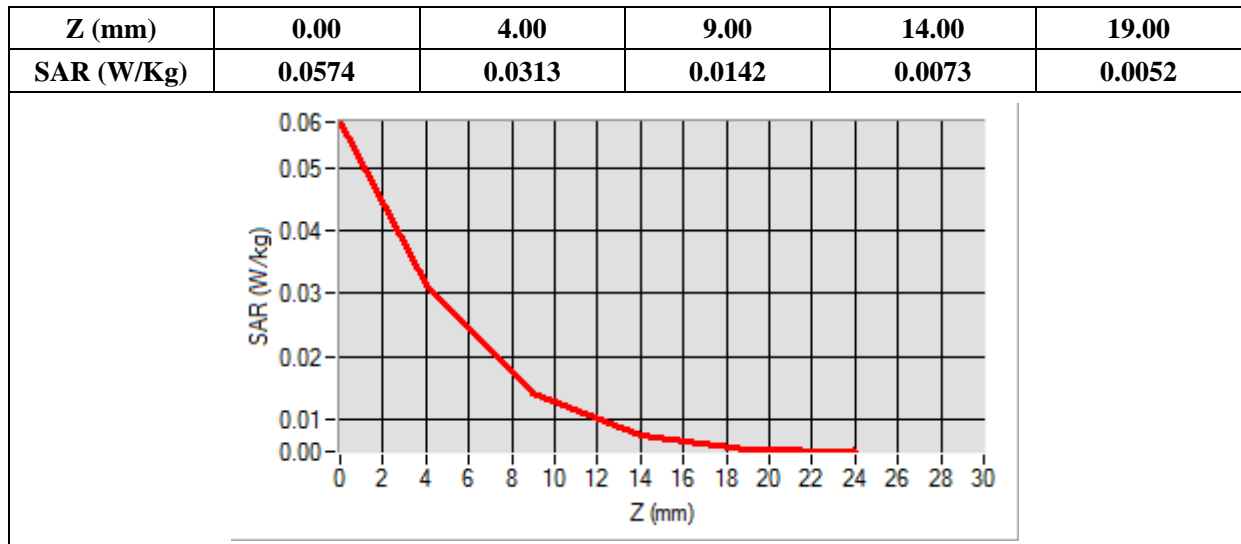

Annex C. EUT Photos


EUT View Front



EUT View Back



Antenna View

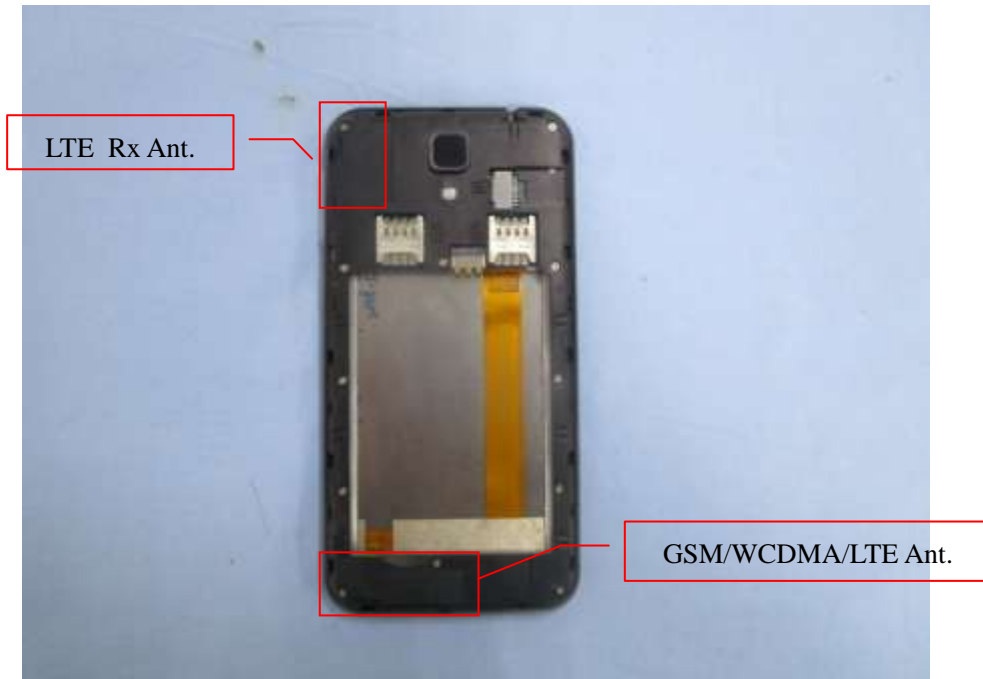


Annex D. Test Setup Photos

Head Exposure Conditions

Cheek



Tilt

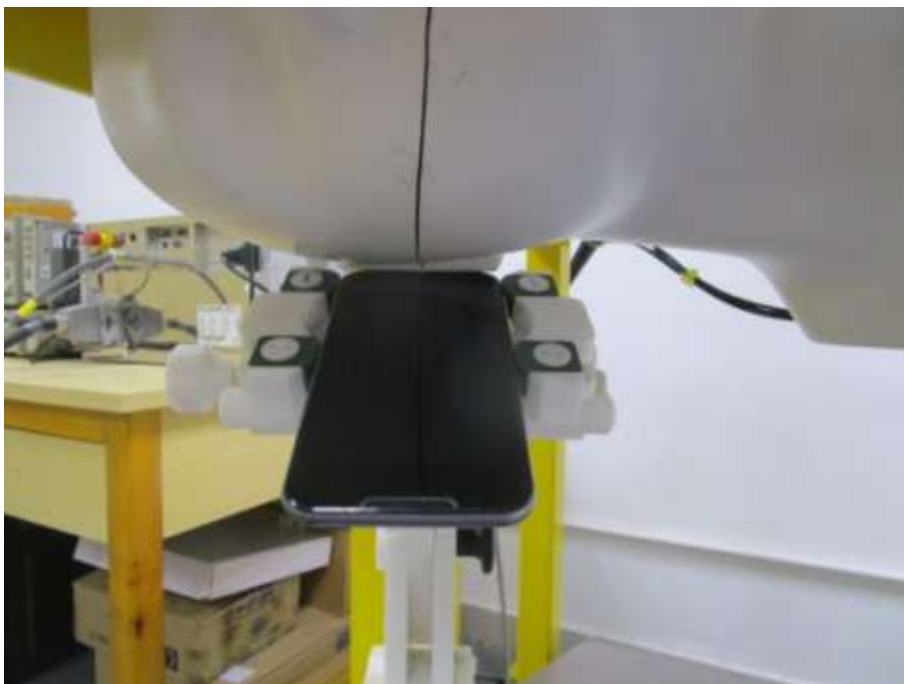

Cheek**Tilt**

Body-worn & Hotspot mode Exposure Conditions

Body Front



Body Back





Hotspot Exposure Conditions

Body Right



Body Left

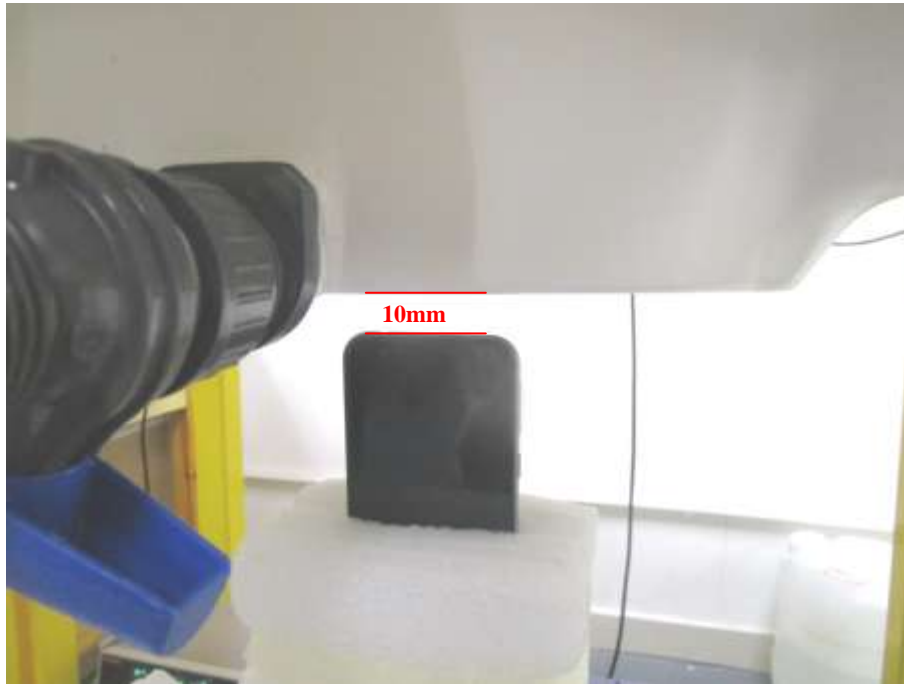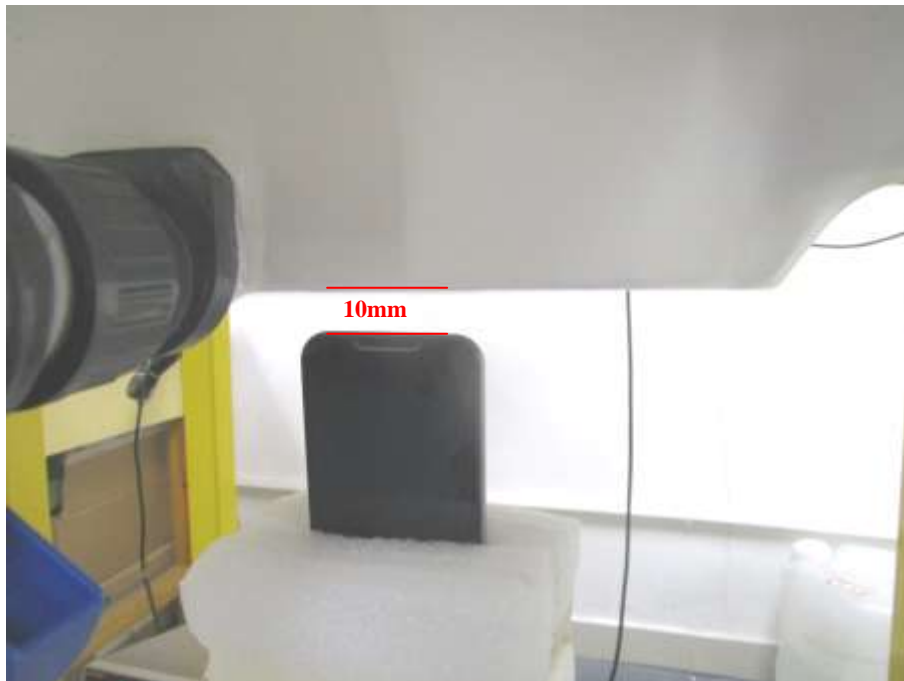

Body Top**Body Bottom**

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******