Report No.: NTC1309289F FCC ID: 2AA4V0001



## FCC PART 15 SUBPART C MEASURMENT AND TEST REPORT

For

Shenzhen Longxin Industry Co., Ltd.

Longxin Industry Park, Chuangye Road, the 3 rd Industry Estate Fenghuang, Fuyong Town, Bao'an District, Shenzhen City, Guangdong Province, China

E.U.T.: Bluetooth Speaker

Model Name: LX-841, TM-839, NE-618, V9, BTS-20

**Brand Name: N/A** 

FCC ID: 2AA4V0001

Report Number: NTC1309289F

Test Date(s): September 24, 2013 to October 14, 2013

Report Date(s): October 15, 2013

Prepared by

Dongguan Nore Testing Center Co., Ltd.
Building D, Gaosheng Science & Technology Park, Zhouxi Longxi Road,
Nancheng District, Dongguan City, Guangdong, China

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer

Chris Pan / Engineer

Sunmar La A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1309289F FCC ID: 2AA4V0001



# **Table of Contents**

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	5
1.4 EQUIPMENT MODIFICATIONS	
1.5 SUPPORT DEVICE	
1.6 TEST FACILITY AND LOCATION	
1.7 SUMMARY OF TEST RESULTS	
2. SYSTEM TEST CONFIGURATION	
2.1 EUT CONFIGURATION	
2.2 SPECIAL ACCESSORIES	
2.3 DESCRIPTION OF TEST MODES	
2.4 EUT EXERCISE	
3. CONDUCTED EMISSIONS TEST	8
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	8
3.2 TEST CONDITION	
3.3 MEASUREMENT RESULTS	
4. RADIATED EMISSION TEST	11
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
4.2 MEASUREMENT PROCEDURE	12
4.3 LIMIT	
4.4 MEASUREMENT RESULTS	
5. CHANNEL SEPARATION TEST	18
5.1 MEASUREMENT PROCEDURE	18
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
5.3 MEASUREMENT RESULTS	18
6. 20DB BANDWIDTH	24
6.1 MEASUREMENT PROCEDURE	24
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
6.3 MEASUREMENT RESULTS	24
7. HOPPING CHANNEL NUMBER	30
7.1 MEASUREMENT PROCEDURE	30
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30
7.3 MEASUREMENT RESULTS	30



8. TIME OF OCCUPANCY (DWELL TIME)	32
8.1 MEASUREMENT PROCEDURE	32
8.2 MEASUREMENT RESULTS	32
9. MAXIMUM PEAK OUTPUT POWER	32
9.1 MEASUREMENT PROCEDURE	38
9.2 MEASUREMENT RESULTS	38
10. BAND EDGE	38
10.1 MEASUREMENT PROCEDURE	44
10.2 LIMIT	
10.3 MEASUREMENT RESULTS	44
11. ANTENNA APPLICATION	44
11.1 ANTENNA REQUIREMENT	51
11.2 MEASUREMENT RESULTS	51
12. CONDUCTED SPURIOUS EMISSIONS	52
12.1 MEASUREMENT PROCEDURE	52
12.2. MEASUREMENT RESULTS	52
13. TEST EQUIPMENT LIST	56

Report No.: NTC1309289F FCC ID: 2AA4V0001



#### 1. GENERAL INFORMATION

#### 1.1 Product Description for Equipment under Test

This device is a BT speaker with AUX IN, Charging and BT functions. It's powered by DC 3.7V come from internal li-ion battery or DC 5V come from mini USB port. For more details features, please refer to User's Manual.

Manufacturer : Shenzhen Longxin Industry Co., Ltd.

Address : Longxin Industry Park, Chuangye Road, the 3 rd

Industry Estate Fenghuang, Fuyong Town, Bao'an District, Shenzhen City, Guangdong Province, China

Frequency: : 2402-2480MHz

Modulation : GFSK,  $\pi/4$ -DQPSK, 8DPSK

Number of Channel : 79

Channel space : 1MHz

Max RF Output Power : 1.05mW (0.22 dBm )

Antenna Type : PCB

Antenna Gain : 0dBi (Declaration by applicant)

Power Supply : DC 5V come from mini USB port

DC 3.7V come from internal li-ion battery

Model name : LX-841, TM-839, NE-618, V9, BTS-20

Note: : All of them have the same circuit schematic,

construction and critical components. Their difference in model name and color of enclosure.

Report No.: NTC1309289F FCC ID: 2AA4V0001



#### 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AA4V0001. filing to comply with Section 15.247 of the FCC Part 15 (2012), Subpart C Rule.

## 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003) and DA 00-705. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

#### 1.4 Equipment Modifications

Not available for this EUT intended for grant.

#### 1.5 Support Device

Notebook PC : Manufacturer: IBM Corporation

M/N: R50e S/N: L3-HZNGO P/N: 1834KDC

Adapter : Manufacturer: IBM Corporation

M/N: 08K8210

Input: AC100-240V 50/60Hz 0.5-1.0A

Output: DC 16V 4.5A

# 1.6 Test Facility and Location

Listed by FCC, August 02, 2011 The Certificate Registration Number is 665078.

Listed by Industry Canada, July 01, 2011 The Certificate Registration Number is 9743A-1.

Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)

Building D, Gaosheng Science & Technology Park, Zhouxi Longxi Road, Nancheng District, Dongguan City, Guangdong, China Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1309289F FCC ID: 2AA4V0001



# 1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Hopping Channel Number	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.207 (a)	AC Power Conducted Emission	Compliant
§15.247(d),§15.209, §15.205	Radiated Emission	Compliant
§15.203	Antenna Requirement	Compliant
§15.247(d)	Conducted Spurious Emission	Compliant

Report No.: NTC1309289F FCC ID: 2AA4V0001



# 2. System Test Configuration

#### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 Special Accessories

Not available for this EUT intended for grant.

#### 2.3 Description of test modes

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3 and DH5 mode in all modulation type GFSK,  $\pi/4$ -DQPSK, 8DPSK were tested.

#### 2.4 EUT Exercise


The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

Report No.: NTC1309289F FCC ID: 2AA4V0001



# 3. Conducted Emissions Test

# 3.1 Test SET-UP (Block Diagram of Configuration)

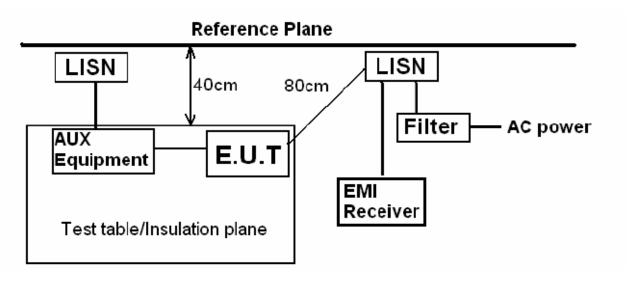

#### 3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

**Detector: RBW 9KHz, VBW 30KHz** 

**Operation Mode: Charging+BT Mode** 

#### 3.3 Measurement Results

Please refer to following plots.


Report No.: NTC1309289F FCC ID: 2AA4V0001





Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799

ting Center Web: Http://www.ntc-c.com

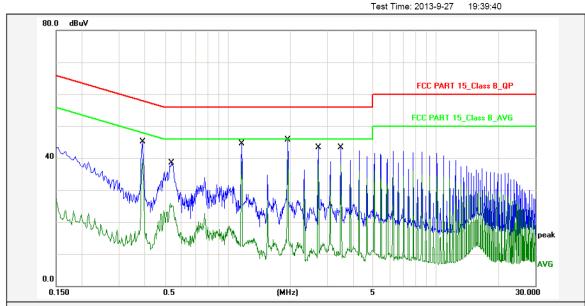

Report No.: LX-841

Test Standard: FCC PART 15\_Class B\_QP

Test item: Conducted Emission

Applicant: 26(C) / 47 % Longxin Temp.( )/Hum.(%): Product: Bluetooth Speaker Power Rating: AC 120V/60Hz Model No.: Test Engineer: LX-841 Sance

Phase:

Test Mode: Charging + BT Mode

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3899	10.80	33.40	44.20	58.06	-13.86	QP	Р	
2	0.3899	10.80	27.90	38.70	48.06	-9.36	AVG	Р	
3	0.5380	10.80	26.80	37.60	56.00	-18.40	QP	Р	
4	0.5380	10.80	14.10	24.90	46.00	-21.10	AVG	Р	
5	1.1660	10.80	32.00	42.80	56.00	-13.20	QP	Р	
6	1.1660	10.80	27.90	38.70	46.00	-7.30	AVG	Р	
7	1.9460	10.80	32.60	43.40	56.00	-12.60	QP	Р	
8	1.9460	10.80	28.60	39.40	46.00	-6.60	AVG	Р	
9	2.7220	10.80	31.50	42.30	56.00	-13.70	QP	Р	
10	2.7220	10.80	26.30	37.10	46.00	-8.90	AVG	Р	
11	3.5020	10.80	31.90	42.70	56.00	-13.30	QP	Р	
12	3.5020	10.80	26.00	36.80	46.00	-9.20	AVG	Р	

Note: Level=Reading+Factor. Margin=Limit-Level.


Report No.: NTC1309289F FCC ID: 2AA4V0001





Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <u>Http://www.ntc-c.com</u>

Test Time: 2013-9-27 19:41:36

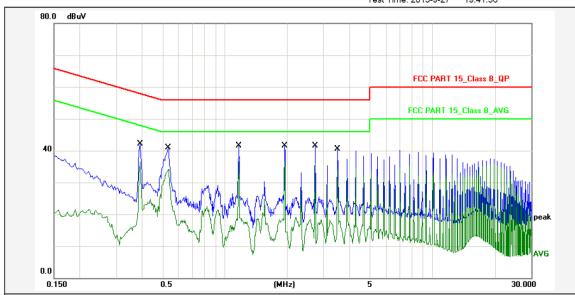

Report No.:

Test Standard: FCC PART 15\_Class B\_QP

Test item: Conducted Emission

Applicant: Longxin 26(C) / 47 % Temp.( )/Hum.(%): Product: Bluetooth Speaker Power Rating: AC 120V/60Hz Model No.: LX-841 Test Engineer: Sance

Phase:

Test Mode: Charging + BT Mode

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3899	10.80	30.40	41.20	58.06	-16.86	QP	Р	
2	0.3899	10.80	24.80	35.60	48.06	-12.46	AVG	Р	
3	0.5340	10.80	29.00	39.80	56.00	-16.20	QP	Ъ	
4	0.5340	10.80	22.40	33.20	46.00	-12.80	AVG	Р	
5	1.1700	10.80	29.80	40.60	56.00	-15.40	QP	Р	
6	1.1700	10.80	24.80	35.60	46.00	-10.40	AVG	Р	
7	1.9460	10.80	29.70	40.50	56.00	-15.50	QP	Л	
8	1.9460	10.80	24.80	35.60	46.00	-10.40	AVG	Р	
9	2.7260	10.80	29.80	40.60	56.00	-15.40	QP	Р	
10	2.7260	10.80	24.50	35.30	46.00	-10.70	AVG	Р	
11	3.5060	10.80	29.00	39.80	56.00	-16.20	QP	Ъ	
12	3.5060	10.80	22.10	32.90	46.00	-13.10	AVG	Р	


FCC ID: 2AA4V0001




# 4. Radiated Emission Test

# **4.1 Test SET-UP (Block Diagram of Configuration)**

# 4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

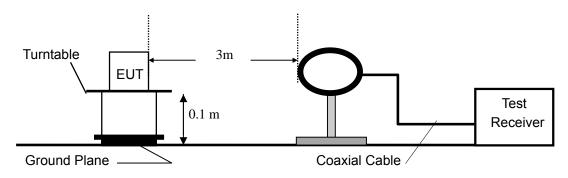


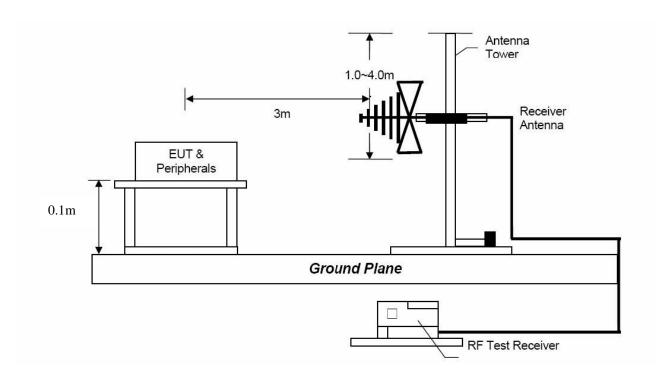

Report No.: NTC1309289F FCC ID: 2AA4V0001



#### 4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

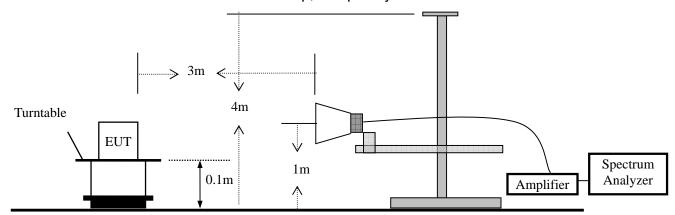

#### **4.2 Measurement Procedure**

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi- anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.

Report No.: NTC1309289F FCC ID: 2AA4V0001



#### 4.3 Limit

Frequency range	Distance Meters	Field Strengths Limit (15.209)
MHz		μV/m
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

Remark : (1) Emission level (dB) $\mu$ V = 20 log Emission level  $\mu$ V/m

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
- (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Report No.: NTC1309289F FCC ID: 2AA4V0001



# 4.4 Measurement Results

Operation Mode: TX

Frequency Range: 9KHz~1GHz Temperature: 25 °C Test Result: PASS Humidity: 50 % Measured Distance: 3m Test By: Sance

Test Date: September 27, 2013

Freq.	Ant.Pol.	Emission Level	Limit 3m	Margin	Note
(MHz)	H/V	(dBuV)	(dBuV/m)	(dB)	
101.7800	Н	14.60	43.50	-28.90	QP
146.4000	Н	13.50	43.50	-30.00	QP
245.3400	Н	15.60	46.00	-30.40	QP
286.0800	Н	16.00	46.00	-30.00	QP
332.6400	Н	16.30	46.00	-29.70	QP
368.5300	Н	16.90	46.00	-29.10	QP
30.0000	V	14.40	40.00	-25.60	QP
50.3700	V	13.50	40.00	-26.50	QP
98.8700	V	11.80	43.50	-31.70	QP
110.5100	V	15.90	43.50	-27.60	QP
124.0900	V	15.30	43.50	-28.20	QP
237.5800	V	13.10	46.00	-32.90	QP

Other emissions are lower than 10dB below the allowable limit.

**Note:** (1) Quasi-Peak detector is used except for others stated.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss

(3) Measurement uncertainty: ±3.7dB.

Report No.: NTC1309289F FCC ID: 2AA4V0001



Modulation: 8DPSK (the worst case)

(Low Frequency: 2402MHz)

Operation Mode: TX Mode (Low) Test Date: September 27, 2013

Frequency Range: 1-25GHz Temperature: 25  $^{\circ}$ C Test Result: PASS Humidity: 50  $^{\circ}$ Measured Distance: 3m Test By: Sance

Freq.	Ant.Pol.	Emission I	Emission Level(dBuV)		(dBuV/m)	Margin(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4804	Н	61.73	50.76	74.00	54.00	-12.27	-3.24
7206	Н	62.57	49.64	74.00	54.00	-11.43	-4.36
9608	Н	62.80	50.50	74.00	54.00	-11.20	-3.50
12010	Н	61.73	49.72	74.00	54.00	-12.27	-4.28
4804	V	60.16	50.22	74.00	54.00	-13.84	-3.78
7206	V	60.45	50.48	74.00	54.00	-13.55	-3.52
9608	V	61.47	50.24	74.00	54.00	-12.53	-3.76
12010	V	61.12	49.04	74.00	54.00	-12.88	-4.96

Note: (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss

(3) Measurement uncertainty: ±3.7dB

Report No.: NTC1309289F FCC ID: 2AA4V0001



Modulation: 8DPSK (the worst case)

(Mid Frequency: 2441MHz)

Operation Mode: TX Mode (Mid) Test Date: September 27, 2013

Frequency Range: 1-25GHz Temperature : 25  $^{\circ}$ C Test Result: PASS Humidity : 50  $^{\circ}$ Measured Distance: 3m Test By: Sance

Freq.	Ant.Pol.	Emission L	Emission Level(dBuV)		(dBuV/m)	Margin(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4882	V	63.32	50.37	74.00	54.00	-10.68	-3.63
7323	V	61.55	49.21	74.00	54.00	-12.45	-4.79
9764	V	64.45	50.47	74.00	54.00	-9.55	-3.53
12205	V	63.78	49.12	74.00	54.00	-10.22	-4.88
4882	Н	63.71	50.54	74.00	54.00	-10.29	-3.46
7323	Н	63.63	49.21	74.00	54.00	-10.37	-4.79
9764	Н	61.79	50.15	74.00	54.00	-12.21	-3.85
12205	Н	61.40	50.57	74.00	54.00	-12.60	-3.43

#### Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss

(3) Measurement uncertainty: ±3.7dB

Report No.: NTC1309289F FCC ID: 2AA4V0001



Modulation: 8DPSK (the worst case)

(High Frequency: 2480MHz)

Operation Mode: TX Mode (High) Test Date: September 27, 2013

Frequency Range: 1-25GHz Temperature : 25  $^{\circ}$ C Test Result: PASS Humidity : 50  $^{\circ}$ Measured Distance: 3m Test By: Sance

Freq.	Ant.Pol.	Emission I	_evel(dBuV)	Limit 3m(	(dBuV/m)	Margi	in(dB)
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4960	V	63.12	48.29	74.00	54.00	-10.88	-5.71
7440	V	63.60	48.97	74.00	54.00	-10.40	-5.03
9920	V	64.82	49.58	74.00	54.00	-9.18	-4.42
12400	V	61.80	48.07	74.00	54.00	-12.20	-5.93
4960	Н	63.64	50.47	74.00	54.00	-10.36	-3.53
7440	Н	62.76	48.53	74.00	54.00	-11.24	-5.47
9920	Н	61.47	50.78	74.00	54.00	-12.53	-3.22
12400	Н	62.70	48.40	74.00	54.00	-11.30	-5.60

#### Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss

(3) Measurement uncertainty: ±3.7dB

Report No.: NTC1309289F FCC ID: 2AA4V0001




# 5. Channel Separation test

#### **5.1 Measurement Procedure**

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the MARKER and Max-Hold function to record the separation of two adjacent channels.

# 5.2 Test SET-UP (Block Diagram of Configuration)



#### 5.3 Measurement Results

Modulation: GFSK,  $\pi/4$ -DQPSK, 8DPSK

RBW: 100KHz VBW: 300KHz Packet: DH5 Spectrum Detector: PK

Test By: Sance Test Date: October 11, 2013

Temperature : 25  $^{\circ}$  Humidity : 50  $^{\circ}$ 


Test Result: PASS

Channel number	Channel	Separation Read	Separation Limit					
	frequency (MHz)	Value (KHz)	(KHz)					
GFSK								
Lowest	2402	1000	>766.7					
Middle	2441	1005	>766.7					
Highest	2480	1000	>766.7					
	π/4-DQPSK							
Lowest	2402	1010	>920					
Middle	2441	1000	>920					
Highest	2480	1000	>920					
		8DPSK						
Lowest	2402	1000	>920					
Middle	2441	1000	>920					
Highest	2480	1010	>920					

Report No.: NTC1309289F FCC ID: 2AA4V0001




# **GFSK Lowest Channel**

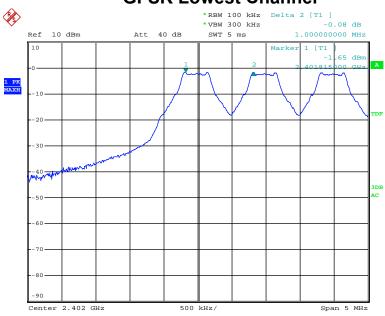

Date: 11.0CT.2013 17:03:55

# **GFSK Middle Channel**

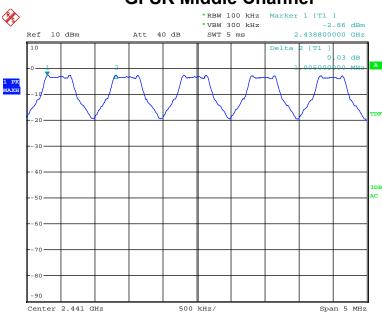


Date: 11.OCT.2013 17:14:17

Report No.: NTC1309289F

FCC ID: 2AA4V0001




# **GFSK Highest Channel**

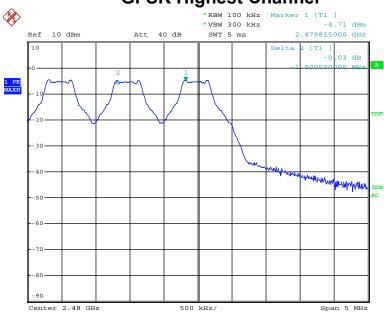

Date: 11.0CT.2013 17:19:59

# π/4-DQPSK Lowest Channel

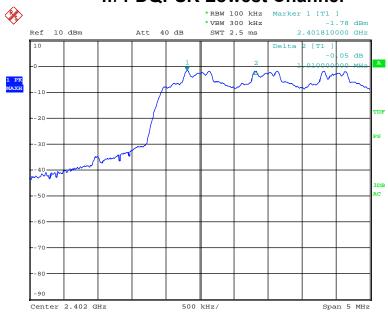


Date: 11.0CT.2013 18:05:29

Report No.: NTC1309289F FCC ID: 2AA4V0001




# π/4-DQPSK Middle Channel

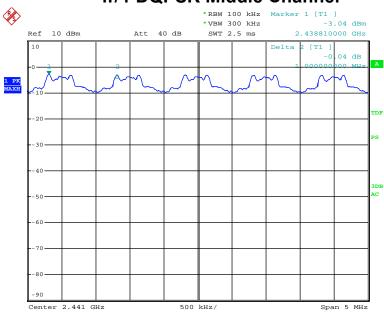

Date: 11.0CT.2013 18:11:42

# $\pi/4\text{-DQPSK}$ Highest Channel

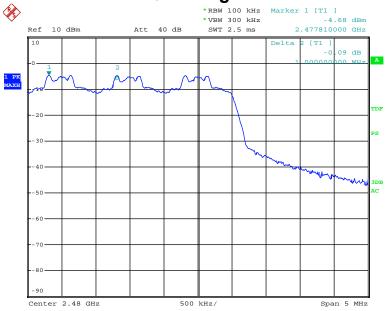


Date: 11.OCT.2013 18:16:06

Report No.: NTC1309289F FCC ID: 2AA4V0001




# **8DPSK Lowest Channel**

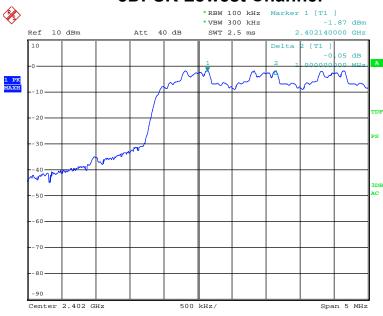

Date: 11.0CT.2013 18:20:31

# **8DPSK Middle Channel**

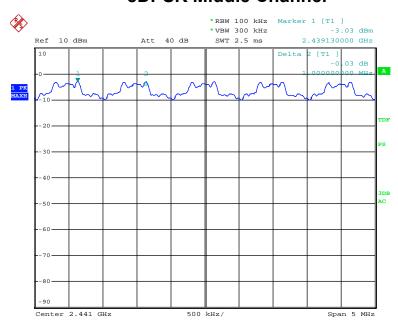


Date: 11.OCT.2013 18:26:21

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1309289F

FCC ID: 2AA4V0001



# **8DPSK Highest Channel**

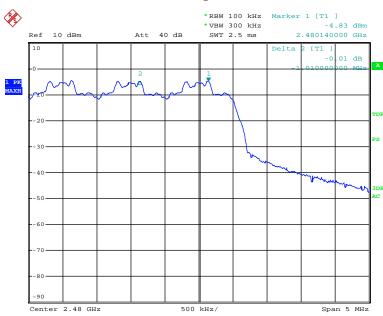

Date: 11.0CT.2013 18:31:07

Report No.: NTC1309289F FCC ID: 2AA4V0001




#### 6. 20dB Bandwidth

#### **6.1 Measurement Procedure**

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

## **6.2 Test SET-UP (Block Diagram of Configuration)**



#### 6.3 Measurement Results

Refer to attached data chart.

Modulation: GFSK,  $\pi/4$ -DQPSK, 8DPSK

RBW: 100KHz VBW: 300KHz Packet: DH5 Spectrum Detector: PK

Test By: Sance Test Date: October 11, 2013

Temperature :  $25 ^{\circ}$  Humidity : 50 %


Test Result: PASS

Channel frequency (MHz)	20dB Down BW(kHz)		
GF	SK		
2402	1120		
2441	1120		
2480	1115		
π/4-D	QPSK		
2402	1370		
2441	1360		
2480	1370		
8DI	PSK		
2402	1370		
2441	1380		
2480	1380		

Report No.: NTC1309289F FCC ID: 2AA4V0001




# **GFSK Lowest Channel**

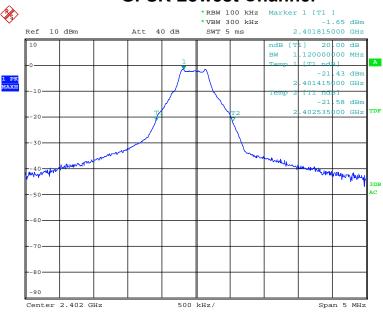

Date: 11.0CT.2013 17:01:15

# **GFSK Middle Channel**

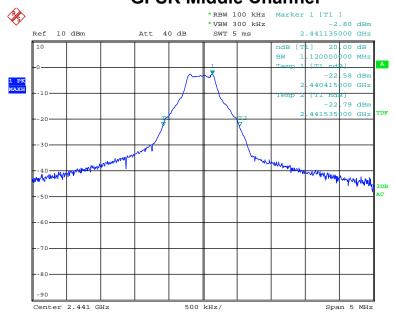


Date: 11.OCT.2013 17:09:48

Report No.: NTC1309289F FCC ID: 2AA4V0001



# **GFSK Highest Channel**

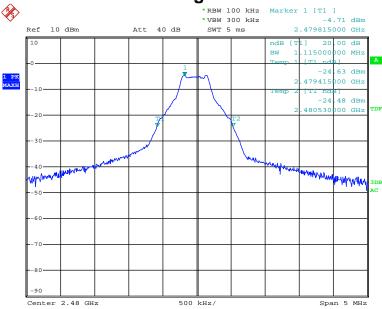

Date: 11.0CT.2013 17:17:57

# π/4-DQPSK Lowest Channel




Date: 11.0CT.2013 17:23:51

Report No.: NTC1309289F FCC ID: 2AA4V0001




# π/4-DQPSK Middle Channel

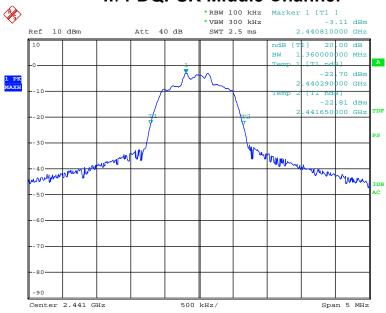

Date: 11.0CT.2013 18:06:43

# $\pi/4\text{-DQPSK}$ Highest Channel

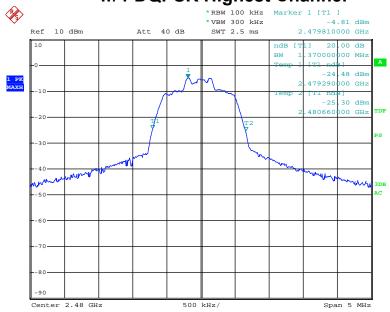


Date: 11.0CT.2013 18:14:19

Report No.: NTC1309289F FCC ID: 2AA4V0001




# **8DPSK Lowest Channel**

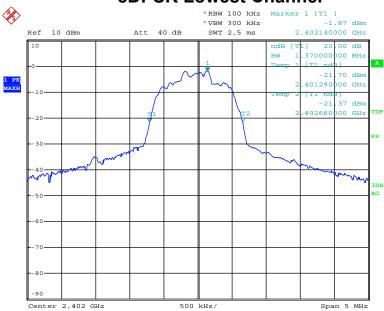

Date: 11.0CT.2013 18:18:36

# **8DPSK Middle Channel**

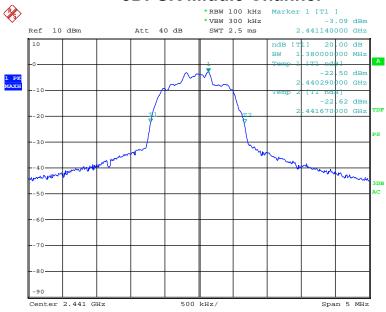


Date: 11.0CT.2013 18:21:49

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1309289F

FCC ID: 2AA4V0001



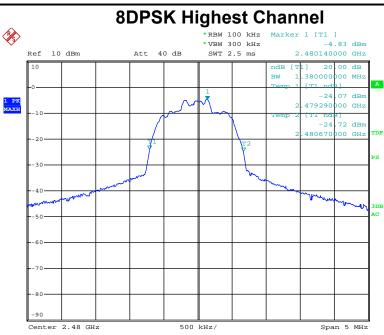

Date: 11.OCT.2013 18:28:44

Report No.: NTC1309289F FCC ID: 2AA4V0001



# 7. Hopping Channel Number

#### 7.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

#### 7.2 Test SET-UP (Block Diagram of Configuration)



# 7.3 Measurement Results

Modulation GFSK, π/4-DQPSK, 8DPSK

RBW: 100KHz VBW: 300KHz

Packet: DH5 Spectrum Detector: PK

Test By: Sance Test Date: October 12, 2013

Temperature :  $25 \degree$  Humidity : 50%

Test Result: PASS


Hopping Channel Frequency Range	Number of Hopping Channels	Limit
2402-2480	79	≥15

The worst case: 8DPSK

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1309289F

FCC ID: 2AA4V0001



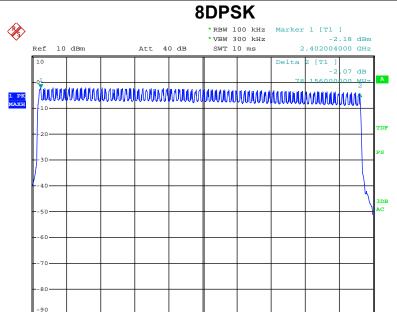

8.35 MHz/

Stop 2.4835 GHz

Date: 12.OCT.2013 13:54:37

Start 2.4 GHz

Report No.: NTC1309289F FCC ID: 2AA4V0001



# 8. Time of Occupancy (Dwell Time)

#### 8.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable. The spectrum analyzer center frequency was set to one of the known hopping channels. The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

#### 8.2 Measurement Results

The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)

Refer to attached data chart.

Modulation : GFSK,  $\pi/4$ -DQPSK, 8DPSK

RBW: 1MHz VBW: 3MHz Spectrum Detector: PK Test By: Sance Temperature: 25  $^{\circ}$ C Humidity: 50% Test Date: October 11, 2013 Test Result: PASS


Packet	Frequency	Result	Limit
	(MHz)	(msec)	(msec)
GFSK			
DH1	2402	0.405(ms)*(1600/(2*79))*31.6=129.6	400
DH3	2402	1.655(ms)*(1600/(4*79))*31.6=264.8	400
DH5	2402	2.915(ms)*(1600/(6*79))*31.6=310.9	400
π/4-DQPSK			
2-DH1	2402	0.395(ms)*(1600/(2*79))*31.6=126.4	400
2-DH3	2402	1.655(ms)*(1600/(4*79))*31.6=264.8	400
2-DH5	2402	2.885(ms)*(1600/(6*79))*31.6=307.7	400
8DPSK			
3-DH1	2402	0.400(ms)*(1600/(2*79))*31.6=128.0	400
3-DH3	2402	1.660(ms)*(1600/(4*79))*31.6=265.8	400
3-DH5	2402	2.905(ms)*(1600/(6*79))*31.6=309.8	400

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1309289F

FCC ID: 2AA4V0001






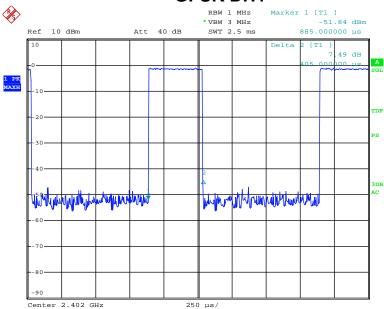

Date: 11.0CT.2013 19:10:57

# **GFSK DH3**

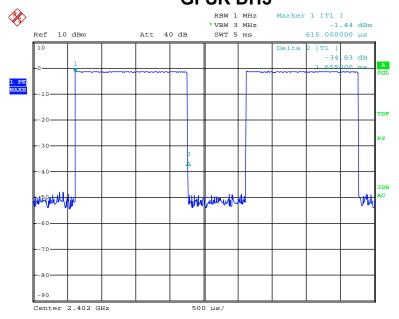


Date: 11.0CT.2013 19:11:41

Report No.: NTC1309289F FCC ID: 2AA4V0001






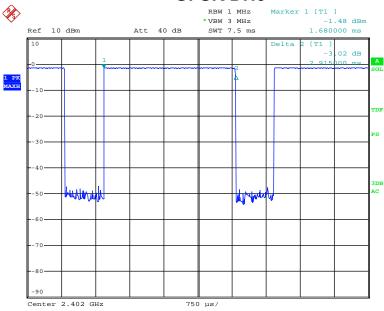

Date: 11.0CT.2013 19:12:20

# π/4-DQPSK 2-DH1

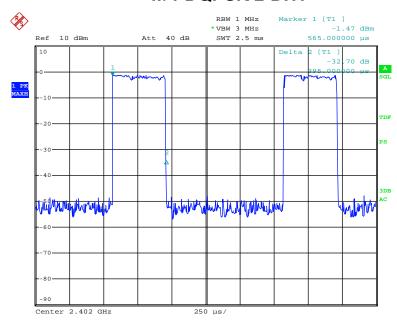


Date: 11.0CT.2013 19:13:05

Report No.: NTC1309289F FCC ID: 2AA4V0001




# π/4-DQPSK 2-DH3

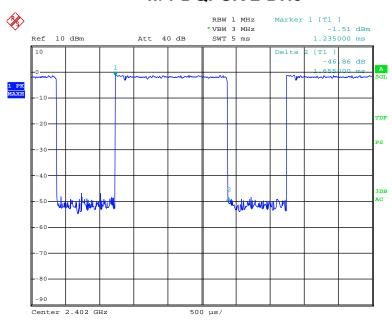

Date: 11.0CT.2013 19:13:38

# π/4-DQPSK 2-DH5

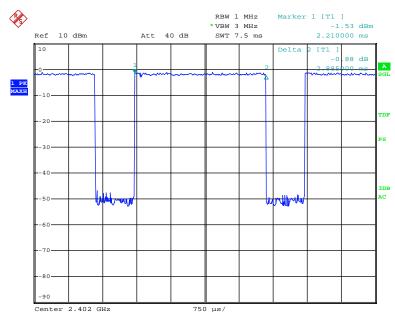


Date: 11.0CT.2013 19:14:19

Report No.: NTC1309289F FCC ID: 2AA4V0001



# **8DPSK 3-DH1**

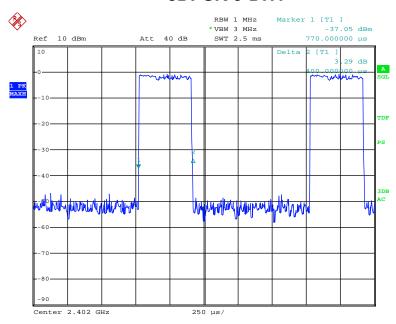

Date: 11.OCT.2013 19:14:48

# RBW 1 MHz Marker 1 [T1 ] \*VBW 3 MHz -48.66 dBm 1.430000 ms 10 Delta 2 [T1 ] 15 27 dB 1.660 D00 ms SGL \*\*TDF \*\*TD

500 µs/

**8DPSK 3-DH3** 

Date: 11.0CT.2013 19:15:21


Center 2.402 GHz

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1309289F

FCC ID: 2AA4V0001



# 8DPSK 3-DH5

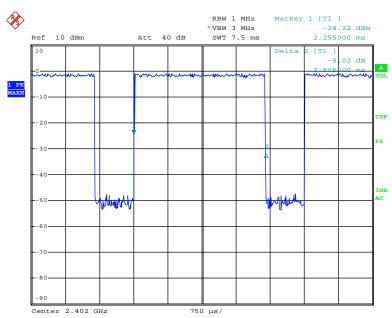

Date: 11.0CT.2013 19:16:01

Report No.: NTC1309289F FCC ID: 2AA4V0001



### 9. MAXIMUM PEAK OUTPUT POWER

### 9.1 Measurement Procedure

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.

### 9.2 Measurement Results

Refer to attached data chart.

Modulation : GFSK,  $\pi/4$ -DQPSK, 8DPSK

RBW: 3MHz VBW: 3MHz

Spectrum Detector: PK Test Date: October 11, 2013


Test By: Sance Test Result: PASS Temperature: 25℃ Humidity: 50%

Channel	Cable	Peak Power	Peak Power	Peak Power	Pass/Fail			
Frequency	Loss	output(mW)	output(dBm)	Limit(dBm)				
(MHz)	dB							
GFSK								
2402.00	1.5	0.92	-0.34	21	PASS			
2441.00	1.5	0.69	-1.59	21	PASS			
2480.00	1.5	0.46	-3.41	21	PASS			
π/4-DQPSK								
2402.00	1.5	1.05	0.20	21	PASS			
2441.00	1.5	0.81	-0.92	21	PASS			
2480.00	1.5	0.53	-2.79	21	PASS			
8DPSK								
2402.00	1.5	1.05	0.22	21	PASS			
2441.00	1.5	0.82	-0.87	21	PASS			
2480.00	1.5	0.55	-2.63	21	PASS			

Report No.: NTC1309289F FCC ID: 2AA4V0001






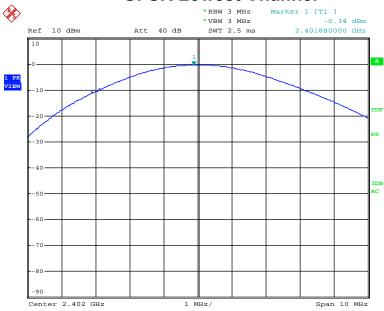

Date: 11.0CT.2013 19:17:13

## **GFSK Middle Channel**

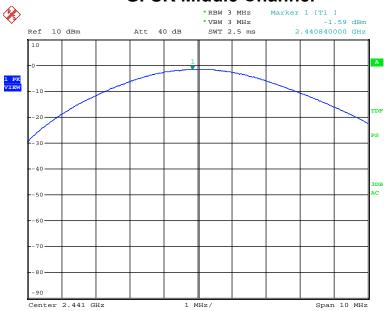


Date: 11.0CT.2013 19:17:40

Report No.: NTC1309289F FCC ID: 2AA4V0001




# **GFSK Highest Channel**

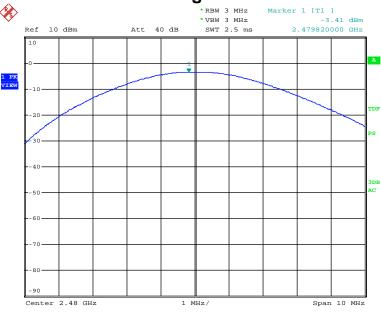

Date: 11.OCT.2013 19:18:23

## π/4-DQPSK Lowest Channel

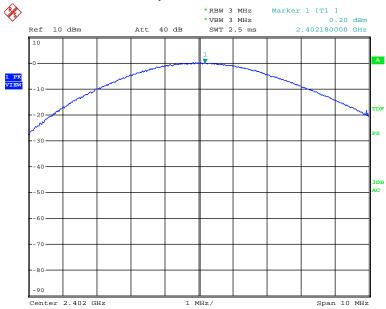

Date: 11.OCT.2013 19:18:47

Report No.: NTC1309289F FCC ID: 2AA4V0001




## π/4-DQPSK Middle Channel



Date: 11.0CT.2013 19:19:09

# $\pi/4\text{-DQPSK}$ Highest Channel

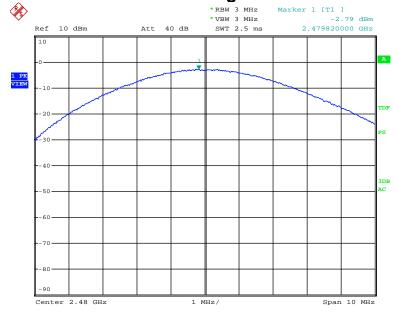

Date: 11.OCT.2013 19:20:23

Report No.: NTC1309289F FCC ID: 2AA4V0001




## **8DPSK Lowest Channel**



Date: 11.OCT.2013 19:20:50

## **8DPSK Middle Channel**

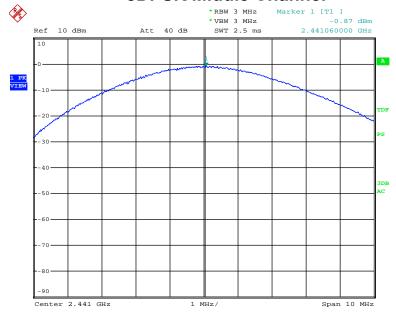


Date: 11.OCT.2013 19:21:14

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1309289F

FCC ID: 2AA4V0001



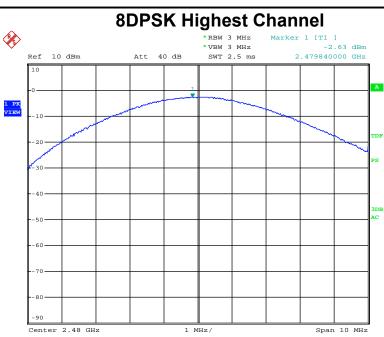

Date: 11.OCT.2013 19:21:49

Report No.: NTC1309289F FCC ID: 2AA4V0001



## 10. Band Edge

### **10.1 Measurement Procedure**

Out of Band Conducted Emissions, FCC Rule 15.247(d):

- (1) For RF Conducted: The transmitter output is connected to spectrum analyzer. The resolution bandwith is set to100KHz, and the video bandwith set to 300KHz.
- (2) For Radiated Emission: Same as 4.2 Radiated Emission Measurement procedure.

### **10.2 Limit**

15.247(d)In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 10.3 Measurement Results

Please see below test table and plots. For Radiated Emission

8DPSK: (the worst case)


Frequency	Polarity	Level		Limited		Margin		Result
(MHz)		PK	AV	PK	AV	PK	AV	Result
8DPSK								
2399.940	Н	67.24	48.57	74.00	54.00	-6.76	-5.43	PASS
2398.270	V	67.44	49.65	74.00	54.00	-6.56	-4.35	PASS
2484.430	Н	67.98	50.23	74.00	54.00	-6.02	-3.77	PASS
2486.240	V	63.54	49.93	74.00	54.00	-10.46	-4.07	PASS

Report No.: NTC1309289F FCC ID: 2AA4V0001




### For RF Conducted

## **GFSK Lowest Channel**

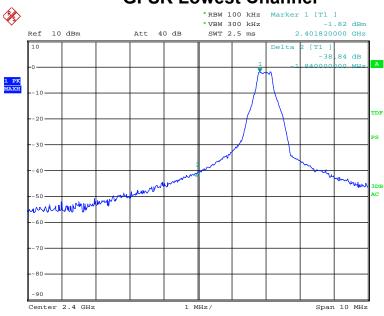


Date: 11.0CT.2013 18:33:31

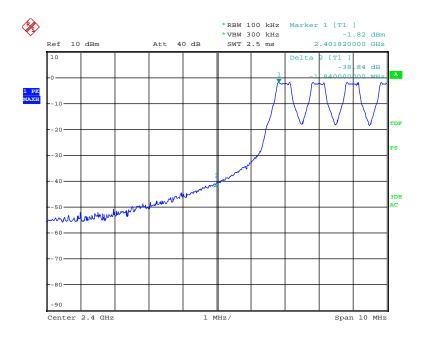


Date: 11.OCT.2013 18:36:26

FCC ID: 2AA4V0001



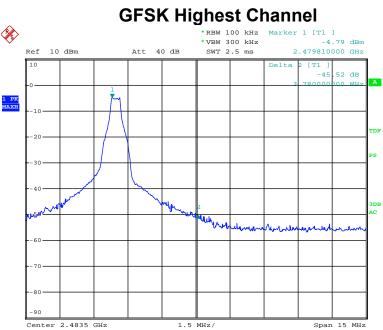

Date: 11.0CT.2013 18:51:47

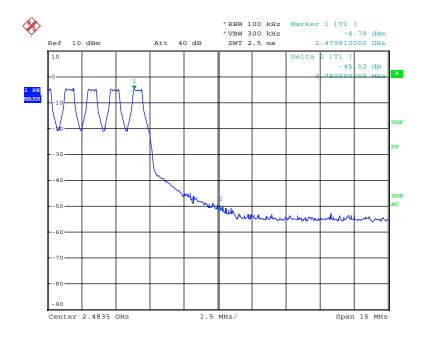


Date: 11.0CT.2013 18:56:18


Report No.: NTC1309289F FCC ID: 2AA4V0001



## π/4-DQPSK Lowest Channel

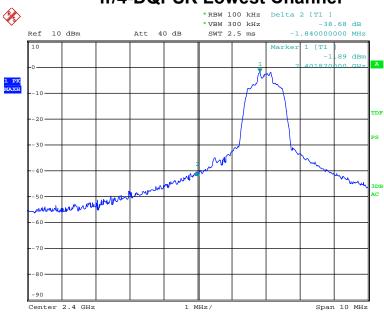

Date: 11.0CT.2013 18:38:36

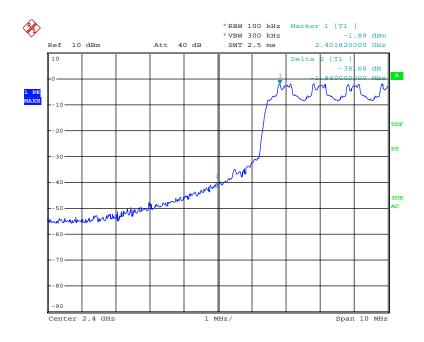


Date: 11.0CT.2013 18:41:41


Report No.: NTC1309289F

FCC ID: 2AA4V0001



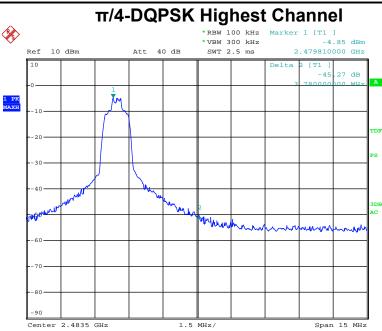

Date: 11.0CT.2013 18:57:52

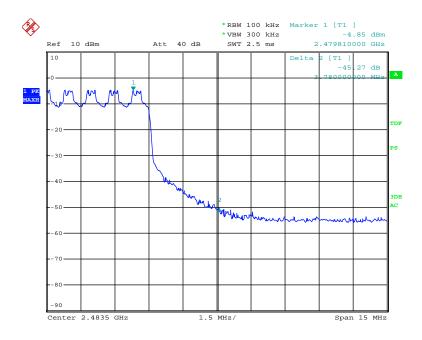


Date: 11.OCT.2013 19:02:14


Report No.: NTC1309289F FCC ID: 2AA4V0001



## **8DPSK Lowest Channel**

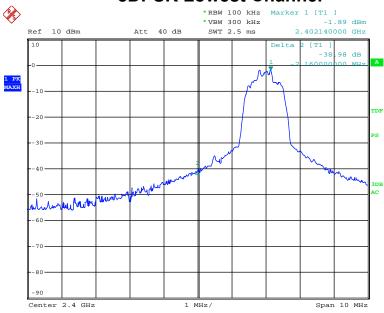

Date: 11.OCT.2013 18:43:41

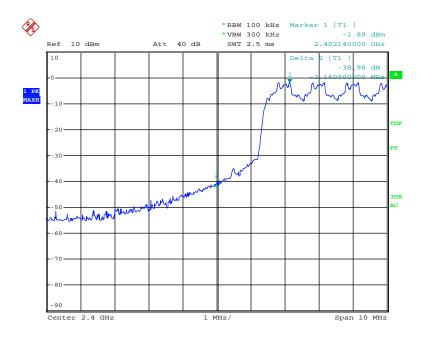


Date: 11.0CT.2013 18:50:11

Report No.: NTC1309289F


FCC ID: 2AA4V0001



# **8DPSK Highest Channel**

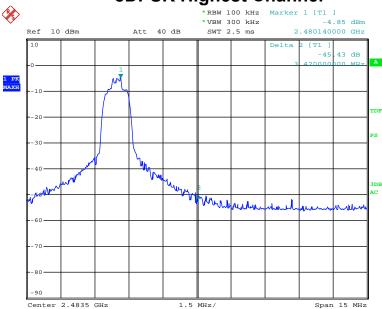

Date: 11.OCT.2013 19:04:46

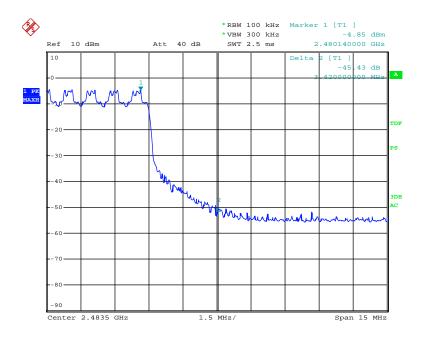

Date: 11.OCT.2013 19:09:05

Report No.: NTC1309289F FCC ID: 2AA4V0001



## 11. Antenna Application

### 11.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 11.2 Measurement Results

The antenna is integrated on the main PCB and no consideration of replacement, and the best case gain of the antenna is 0dBi. So, the antenna is consider meet the requirement.

Report No.: NTC1309289F FCC ID: 2AA4V0001



## 12. Conducted Spurious Emissions

### 12.1 Measurement Procedure

Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.


### 12.2 Measurement Results

Please refer to following plots, the worst case (8DPSK) was shown.


Report No.: NTC1309289F FCC ID: 2AA4V0001



## **8DPSK Lowest Channel**

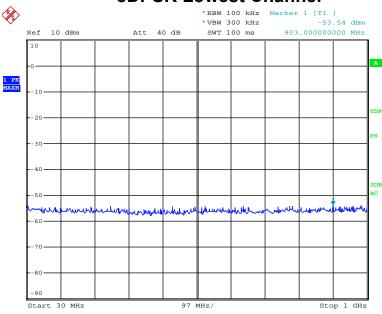


Date: 11.OCT.2013 19:24:29

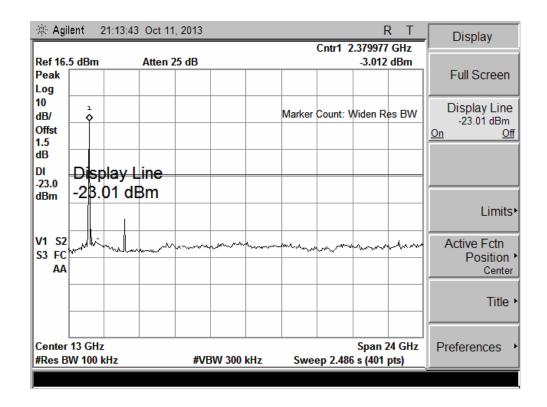


Report No.: NTC1309289F FCC ID: 2AA4V0001



# **8DPSK Middle Channel**

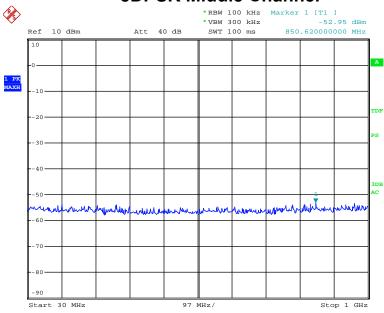


Date: 11.0CT.2013 19:24:42

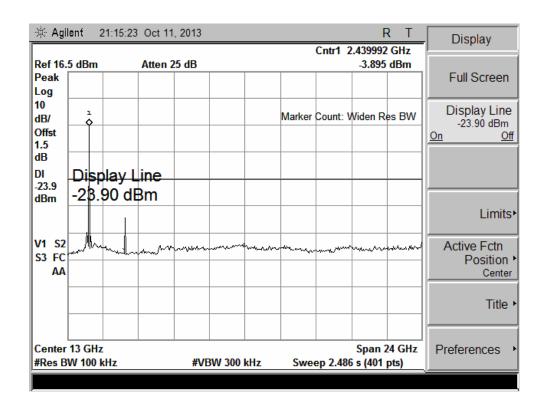


Report No.: NTC1309289F FCC ID: 2AA4V0001



# **8DPSK Highest Channel**

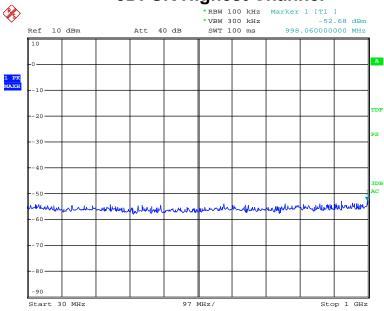

Date: 11.OCT.2013 19:24:58

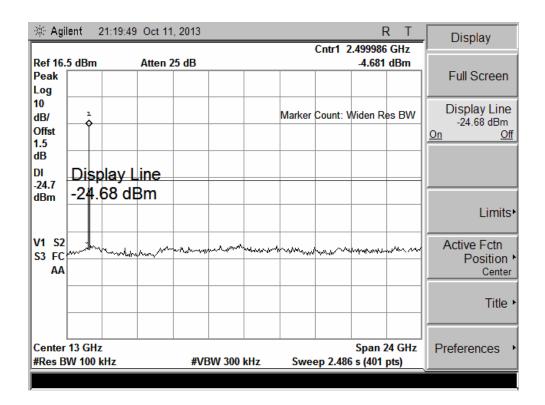

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1309289F FCC ID: 2AA4V0001



# 13. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	Nov. 25, 2012	Nov. 24, 2013
Antenna	Schwarzbeck	VULB9162	9162-010	Nov. 28, 2012	Nov. 27, 2013
Positioning Controller	UC	UC 3000	N/A	N/A	N/A
Color Monitor	SUNSPO	SP-140A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	Nov. 09, 2012	Nov. 08, 2013
Cable	Huber+Suhner	CIL02	N/A	Nov. 09, 2012	Nov. 08, 2013
Power Amplifier	HP	HP 8447D	1145A00203	Nov. 09, 2012	Nov. 08, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	Oct.24, 2012	Oct.23, 2013
Horn Antenna	EMCO	3117	00062558	Oct. 19, 2012	Oct. 18, 2013
Loop antenna	Daze	ZA30900A	0708	Oct.11, 2013	Oct.10, 2014
Spectrum Analyzer	Agilent	E4408B	MY414407D	Apr. 29, 2013	Apr. 28, 2014
Pre-Amplifier	Agilent	8449B	3008A02964	Apr. 19, 2013	Apr. 18, 2014
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	Nov. 09, 2012	Nov. 08, 2013