

# Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of

**MioStar Corp.**

**FCC ID:** 2AA6PMH-100  
**Product Description:** Bluetooth headsets  
**Model No.:** MH-100  
**Supplementary Model:** MH-150, MH-160, MH-180, MH-200  
**Brand Name:** N/A

**Prepared for:** MioStar Corp.  
8F., No.145, Lane 5, Tzu-Chiang Str., Pei-Tou District, Taipei,  
11289 Taiwan(TW), ROC

**Prepared by:** Bontek Compliance Testing Laboratory Co., Ltd  
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East  
Road, Nanshan, Shenzhen, China  
Tel: 86-755-86337020  
Fax: 86-755-86337028

**Report No.:** BCT13IR311E


**Issue Date:** October10, 2013

**Test Date:** September 24- October10, 2013


**Tested by:**

  
Lion Cai

**Reviewed by:**

  
Owen Yang

**Approved by:**

  
Kendy Wang

## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>1. GENERAL INFORMATION.....</b>                          | <b>4</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4         |
| 1.2 TEST STANDARDS .....                                    | 5         |
| 1.3 TEST FACILITY .....                                     | 5         |
| <b>2. SYSTEM TEST CONFIGURATION .....</b>                   | <b>6</b>  |
| 2.1 EUT CONFIGURATION .....                                 | 6         |
| 2.2 SUPPORT EQUIPMENT .....                                 | 6         |
| 2.3 GENERAL TEST PROCEDURES .....                           | 6         |
| 2.4 MEASUREMENT UNCERTAINTY .....                           | 6         |
| 2.5 LIST OF MEASURING EQUIPMENTS USED .....                 | 7         |
| <b>3. SUMMARY OF TEST RESULTS .....</b>                     | <b>9</b>  |
| <b>4. TEST OF AC POWER LINE CONDUCTED EMISSION .....</b>    | <b>10</b> |
| 4.1 APPLICABLE STANDARD.....                                | 10        |
| 4.2 TEST SETUP DIAGRAM .....                                | 10        |
| 4.3 TEST RESULT .....                                       | 10        |
| <b>5. TEST OF HOPPING CHANNEL BANDWIDTH.....</b>            | <b>11</b> |
| 5.1 APPLICABLE STANDARD.....                                | 11        |
| 5.2 EUT SETUP .....   | 11        |
| 5.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 11        |
| 5.4 TEST PROCEDURE .....                                    | 11        |
| 5.5 TEST RESULT .....                                       | 11        |
| <b>6. TEST OF HOPPING CHANNEL SEPARATION .....</b>          | <b>17</b> |
| 6.1 APPLICABLE STANDARD.....                                | 17        |
| 6.2 EUT SETUP .....   | 17        |
| 6.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 17        |
| 6.4 TEST PROCEDURE .....                                    | 17        |
| 6.5 TEST RESULT .....                                       | 17        |
| <b>7. TEST OF NUMBER OF HOPPING FREQUENCY .....</b>         | <b>18</b> |
| 7.1 APPLICABLE STANDARD.....                                | 23        |
| 7.2 EUT SETUP .....   | 23        |
| 7.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 23        |
| 7.4 TEST PROCEDURE .....                                    | 23        |
| 7.5 TEST RESULT .....                                       | 23        |
| <b>8. TEST OF DWELL TIME OF EACH FREQUENCY.....</b>         | <b>24</b> |
| 8.1 APPLICABLE STANDARD.....                                | 26        |
| 8.2 EUT SETUP .....   | 26        |
| 8.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 26        |
| 8.4 TEST PROCEDURE .....                                    | 26        |
| 8.5 TEST RESULT .....                                       | 26        |
| <b>9. TEST OF MAXIMUM PEAK OUTPUT POWER .....</b>           | <b>29</b> |
| 9.1 APPLICABLE STANDARD.....                                | 43        |
| 9.2 EUT SETUP .....   | 43        |
| 9.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 43        |
| 9.4 TEST PROCEDURE .....                                    | 43        |
| 9.5 TEST RESULT .....                                       | 44        |
| <b>10. TEST OF BAND EDGES EMISSION.....</b>                 | <b>50</b> |
| 10.1 APPLICABLE STANDARD.....                               | 50        |
| 10.2 EUT SETUP .....  | 50        |
| 10.3 TEST EQUIPMENT LIST AND DETAILS .....                  | 50        |
| 10.4 TEST PROCEDURE .....                                   | 50        |
| 10.5 TEST RESULT .....                                      | 51        |

|   |           |
|---|-----------|
| <b>11. TEST OF SPURIOUS RADIATED EMISSION .....</b> | <b>55</b> |
| 11.1 APPLICABLE STANDARD.....                       | 55        |
| 11.2 EUT SETUP .....                                | 55        |
| 11.3 TEST EQUIPMENT LIST AND DETAILS .....          | 56        |
| 11.4 TEST PROCEDURE .....                           | 56        |
| 11.5 TEST RESULT .....                              | 57        |
| <b>12. ANTENNA REQUIREMENT .....</b>                | <b>67</b> |
| 12.1 STANDARD APPLICABLE.....                       | 67        |
| 12.2 ANTENNA CONNECTED CONSTRUCTION .....           | 67        |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

|                          |   |
|--------------------------|---|
| Applicant:               | <b>MioStar Corp.</b>  |
| Address of Applicant:    | 8F., No.145, Lane 5, Tzu-Chiang Str., Pei-Tou District,Taipei, 11289<br>Taiwan(TW), ROC                               |
| Manufacturer:            | <b>MioStar Corp.</b>  |
| Address of Manufacturer: | 3F., No. 19, Hai Bin Rd. 6th Industrial Area, Wu Sha, Chang An<br>Town, Dong Guan, Guang Dong Province, China, 523859 |

#### General Description of E.U.T

| Items                 | Description                    |
|-----------------------|--------------------------------|
| EUT Description:      | Bluetooth headsets             |
| Model No.:            | MH-100                         |
| Supplementary Model:  | MH-150, MH-160, MH-180, MH-200 |
| Trade Name:           | N/A                            |
| Frequency Band:       | 2402 MHz ~ 2480 MHz            |
| Channel Spacing:      | 1 MHz                          |
| Number of Channels:   | 79                             |
| Modulation Technique: | FHSS                           |
| Type of Modulation:   | GFSK, Pi/4 DQPSK, 8-DPSK       |
| Antenna Type:         | Built-in Antenna               |
| Antenna Gain:         | 0dBi                           |
| Power Supply:         | DC3.7V 320mA from Battery      |
| Adapter Information:  | N/A                            |

Remark: \* The test data gathered are from the production sample provided by the manufacturer.

\* Supplementary models have the same circuit, but with different appearance

## **1.2 Test Standards**

The tests were performed based on the Electromagnetic Interference (EMI) tests performed on the EUT. Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, 15.209 and 15.247 rules. Test was carried out according to the above mentioned FCC rules and the FCC publication notice DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

## **1.3 Test Facility**

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China.

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC – Registration No.: 338263**

BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

### **IC Registration No.: 7631A**

The 3m alternate test site of BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25, 2011.

### **CNAS - Registration No.: L3923**

BONTEK COMPLIANCE TESTING LABORATORY LTD. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March 22, 2012.

### **TUV - Registration No.: UA 50242657-0001**

BONTEK COMPLIANCE TESTING LABORATORY LTD. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-002.

## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 Support Equipment

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

Support equipments or special accessories in test configuration:

| AUX Description: | Manufacturer | Model No.   | Certificate | CABLE  |
|------------------|--------------|-------------|-------------|--|
| Host Computer    | Dell         | 78MD82X     | CE, FCC     | 1.5m Unshielded Power Cord                                       |
| Monitor          | Dell         | E178Pc      | CE, FCC     | 1.5m Unshielded Power Cord<br>1.8m shielded data Cable with core |
| Keyboard         | Dell         | L100        | CE, FCC     | 1.8m shielded data Cable with core                               |
| LCD Colour TV    | SHARP        | LCD-32Z330A | CE, FCC     | 1.2m Unshielded Power Cord<br>1.5m shielded data Cable with core |

### 2.3 General Test Procedures

**Conducted Emissions:** The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

**Radiated Emissions:** The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003 .

### 2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter                     | Uncertainty |
|-------------------------------|-------------|
| Power Line Conducted Emission | +/- 2.3 dB  |
| Radiated Emission             | +/- 3.4 dB  |

Uncertainty figures are valid to a confidence level of 95%.

## 2.5 List of Measuring Equipments Used

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd.

| No. | Instrument no. | Equipment                                | Manufacturer    | Model No.   | S/N        | Last Calculator | Due Calculator |
|-----|----------------|--|-----------------|-------------|------------|-----------------|----------------|
| 1   | BCT-EMC001     | EMI Test Receiver                        | R&S             | ESCI        | 100687     | 2013-4-25       | 2014-4-25      |
| 2   | BCT-EMC002     | EMI Test Receiver                        | R&S             | ESPI        | 100097     | 2012-11-1       | 2013-10-31     |
| 3   | BCT-EMC003     | Amplifier                                | HP              | 8447D       | 1937A02492 | 2013-4-25       | 2014-4-25      |
| 4   | BCT-EMC004     | Single Power Conductor Module            | R&S             | NNBM 8124   | 242        | 2013-4-25       | 2014-4-25      |
| 5   | BCT-EMC005     | Single Power Conductor Module            | R&S             | NNBM 8124   | 243        | 2013-4-25       | 2014-4-25      |
| 6   | BCT-EMC006     | Power Clamp                              | SCHWARZBECK     | MDS-21      | 3812       | 2012-11-5       | 2013-11-4      |
| 7   | BCT-EMC007     | Positioning Controller                   | C&C             | CC-C-1F     | MF7802113  | N/A             | N/A            |
| 8   | BCT-EMC008     | Electrostatic DisCharging Simulator      | TESEQ           | NSG437      | 125        | 2012-11-2       | 2013-11-1      |
| 9   | BCT-EMC009     | Fast Transient Burst Generator           | SCHAFFNER       | MODULA6150  | 34572      | 2013-4-25       | 2014-4-25      |
| 10  | BCT-EMC010     | Fast Transient Noise Simulator           | Noiseken        | FNS-105AX   | 10501      | 2013-6-26       | 2014-6-25      |
| 11  | BCT-EMC011     | Color TV Pattern Genenator               | PHILIPS         | PM5418      | TM209947   | N/A             | N/A            |
| 12  | BCT-EMC012     | Power Frequency Magnetic Field Generator | EVERFINE        | EMS61000-8K | 608002     | 2013-4-25       | 2014-4-25      |
| 14  | BCT-EMC014     | Capacitive Coupling Clamp                | TESEQ           | CDN8014     | 25096      | 2013-4-25       | 2014-4-25      |
| 15  | BCT-EMC015     | High Field Biconical Antenna             | ELECTRO-METRICS | EM-6913     | 166        | 2012-11-28      | 2013-11-27     |
| 16  | BCT-EMC016     | Log Periodic Antenna                     | ELECTRO-METRICS | EM-6950     | 811        | 2012-11-28      | 2013-11-27     |
| 17  | BCT-EMC017     | Remote Active Vertical Antenna           | ELECTRO-METRICS | EM-6892     | 304        | 2012-11-28      | 2013-11-27     |
| 18  | BCT-EMC018     | TRILOG Broadband Test-Antenna            | SCHWARZBECK     | VULB9163    | 9163-324   | 2013-4-25       | 2014-4-25      |
| 19  | BCT-EMC019     | Horn Antenna                             | SCHWARZBECK     | BBHA9120A   | 0499       | 2012-11-28      | 2013-11-27     |
| 20  | BCT-EMC020     | Teo Line Single Phase Module             | SCHWARZBECK     | NSLK8128    | 8128247    | 2012-11-1       | 2013-10-31     |
| 21  | BCT-EMC021     | Triple-Loop Antenna                      | EVERFINE        | LLA-2       | 711002     | 2012-11-15      | 2013-11-14     |
| 22  | BCT-EMC022     | Electric bridge                          | Jhai            | JK2812C     | 803024     | N/A             | N/A            |
| 23  | BCT-EMC026     | RF POWER AMPLIFIER                       | FRANKONIA       | FLL-75      | 1020A1109  | 2013-4-25       | 2014-4-25      |
| 24  | BCT-EMC027     | CDN                                      | FRANKONIA       | CDN M2+M3   | A3027019   | 2013-4-25       | 2014-4-25      |

|    |            |                                   |                 |                      |               |            |            |
|----|------------|-----------------------------------|-----------------|----------------------|---------------|------------|------------|
| 25 | BCT-EMC029 | 6DB Attenuator                    | FRANKONIA       | N/A                  | 1001698       | 2013-4-25  | 2014-4-25  |
| 26 | BCT-EMC030 | EM Injection clamp                | FCC             | F-203I-23mm          | 091536        | 2013-4-25  | 2014-4-25  |
| 27 | BCT-EMC031 | 9kHz-2.4GHz signal generator 2024 | MARCONI         | 10S/6625-99-457-8730 | 112260/042    | 2013-4-25  | 2014-4-25  |
| 28 | BCT-EMC032 | 10dB attenuator                   | ELECTRO-METRICS | EM-7600              | 836           | 2013-4-25  | 2014-4-25  |
| 29 | BCT-EMC033 | ISN                               | TESEQ           | ISN-T800             | 30301         | 2012-11-15 | 2013-11-14 |
| 30 | BCT-EMC034 | 10KV surge generator              | SANKI           | SKS-0510M            | 048110003E321 | 2012-11-01 | 2013-10-31 |
| 31 | BCT-EMC035 | HRMONICS&FLICKRE ANALYSER         | VOLTECH         | PM6000               | 200006700433  | 2012-11-20 | 2013-11-19 |
| 32 | BCT-EMC036 | Spectrum Analyzer                 | R&S             | FSP                  | 100397        | 2012-11-1  | 2013-10-31 |
| 33 | BCT-EMC037 | Broadband preamplifier            | SCHWARZBECK     | BBV9718              | 9718-182      | 2013-4-25  | 2014-4-25  |



### 3. SUMMARY OF TEST RESULTS

| FCC Rules                 | Description of Test              | Result |
|---------------------------|----------------------------------|--------|
| FCC §15.207               | AC Power Line Conducted Emission | Pass   |
| FCC §15.247(a)(1)         | Hopping Channel Bandwidth        | Pass   |
| FCC §15.247(a)(1)         | Hopping Channel Separation       | Pass   |
| FCC §15.247(a)(1)         | Number of Hopping Frequency Used | Pass   |
| FCC §15.247(a)(1)(iii)    | Dwell Time of Each Frequency     | Pass   |
| FCC §15.247(b)(1)         | Maximum Peak Output Power        | Pass   |
| FCC §15.247(d)            | Band Edges Emission              | Pass   |
| FCC §15.247(d)            | Spurious Radiated Emission       | Pass   |
| FCC §15.203/15.247(b)/(c) | Antenna Requirement              | Pass   |

## 4. TEST OF AC POWER LINE CONDUCTED EMISSION


### 4.1 Applicable Standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency Range (MHz) | Limits ( dBuV) |         |
|-----------------------|----------------|---------|
|                       | Quasi-Peak     | Average |
| 0.150~0.500           | 66~56          | 56~46   |
| 0.500~5.000           | 56             | 46      |
| 5.000~30.00           | 60             | 50      |

### 4.2 Test Setup Diagram

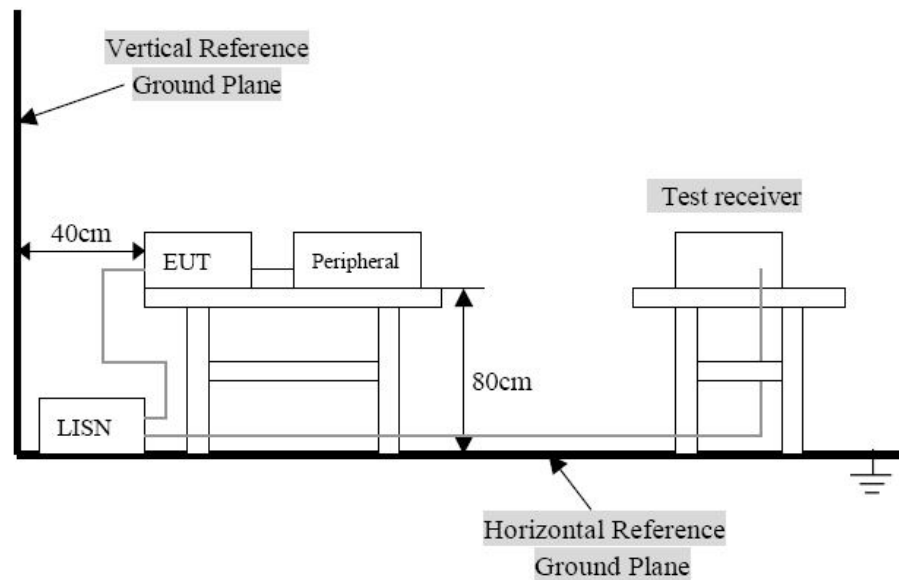

Remark: The EUT was connected to a 120 VAC/ 60Hz power source.

### 4.3 Test Result

|   |                                       |
|---|---------------------------------------|
| Temperature ( °C ) : 23~25              | EUT: Bluetooth headsets               |
| Humidity (%RH) : 45~58                  | M/N: MH-100                           |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Normal operation |


No require test, battery power supply.

## 5. Test of Hopping Channel Bandwidth

### 5.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 5.2 EUT Setup

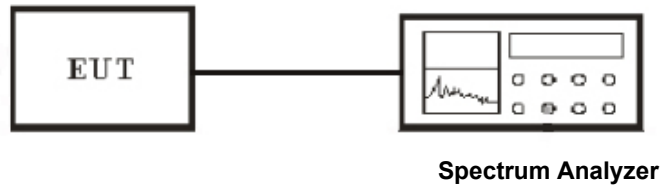

### 5.3 Test Equipment List and Details

See section 2.5.

### 5.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold
3. The spectrum width with level higher than 20dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 5.5 Test Result

|   |                              |
|---|------------------------------|
| Temperature ( °C ) : 22~23              | EUT: Bluetooth headsets      |
| Humidity (%RH ) : 50~54                 | M/N: MH-100                  |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Tx Mode |

### BDR 1M

| Modulation Type | Channel No. | Frequency (MHz) | 20dB Bandwidth (kHz) | Min. Limit (kHz) |
|-----------------|-------------|-----------------|----------------------|------------------|
| GFSK            | Low         | 2402.00         | 996                  | >25              |
| GFSK            | Middle      | 2441.00         | 990                  | >25              |
| GFSK            | High        | 2480.00         | 990                  | >25              |


### EDR 2M

| Modulation Type | Channel No. | Frequency (MHz) | 20dB Bandwidth (kHz) | Min. Limit (kHz) |
|-----------------|-------------|-----------------|----------------------|------------------|
| Pi/4 DQPSK      | Low         | 2402.00         | 1284                 | >25              |
| Pi/4 DQPSK      | Middle      | 2441.00         | 1284                 | >25              |
| Pi/4 DQPSK      | High        | 2480.00         | 1284                 | >25              |


### EDR 3M

| Modulation Type | Channel No. | Frequency (MHz) | 20dB Bandwidth (kHz) | Min. Limit (kHz) |
|-----------------|-------------|-----------------|----------------------|------------------|
| 8-DPSK          | Low         | 2402.00         | 1308                 | >25              |
| 8-DPSK          | Middle      | 2441.00         | 1308                 | >25              |
| 8-DPSK          | High        | 2480.00         | 1314                 | >25              |


### BDR 1M Channel Low

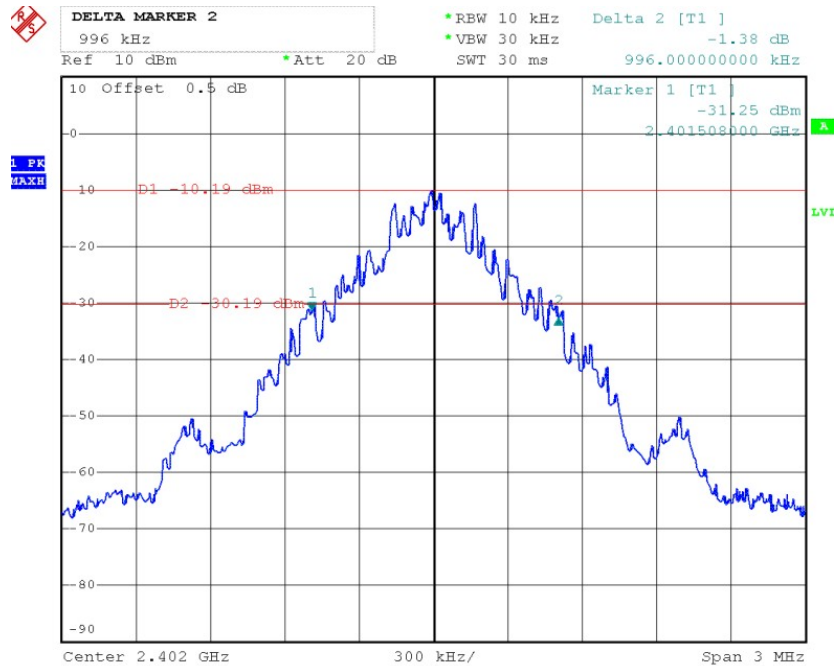


## Channel Middle

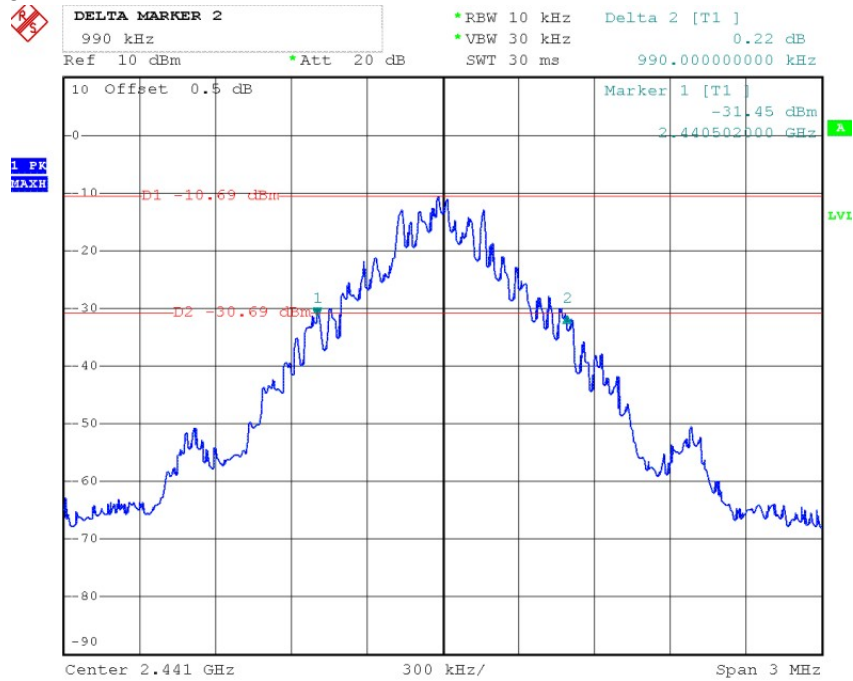


## Channel High

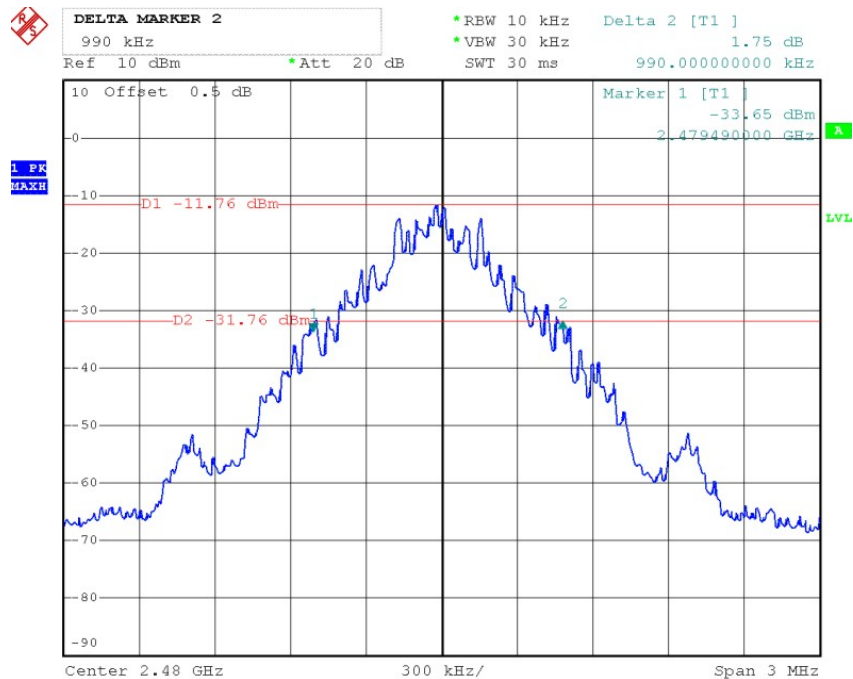


## EDR 2M Channel Low

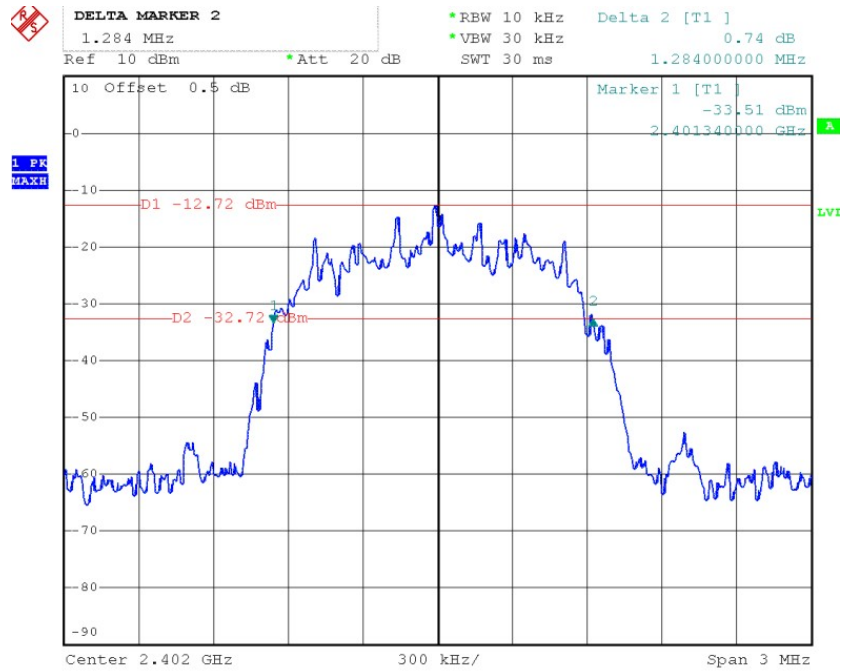


## Channel Middle

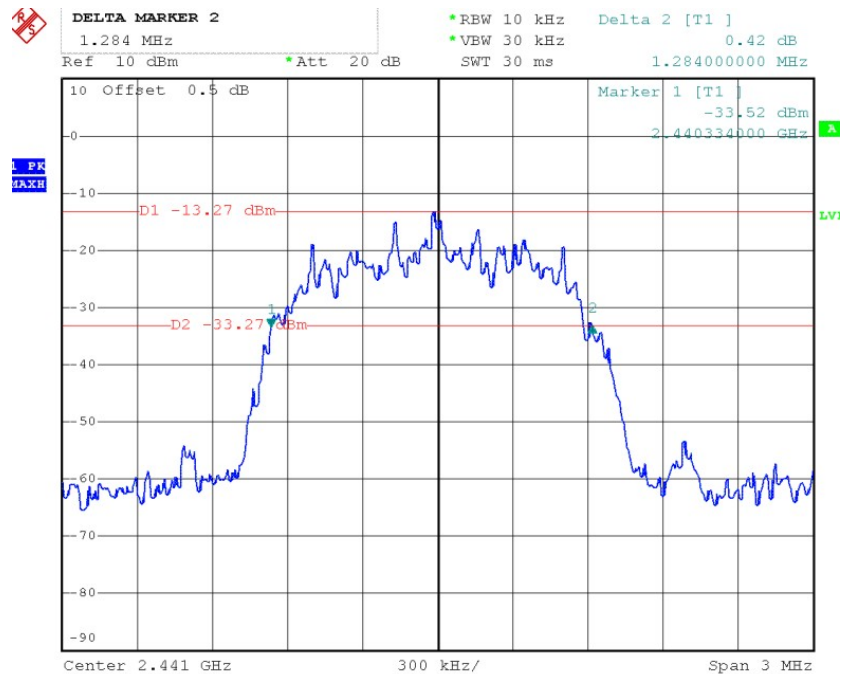


## Channel High

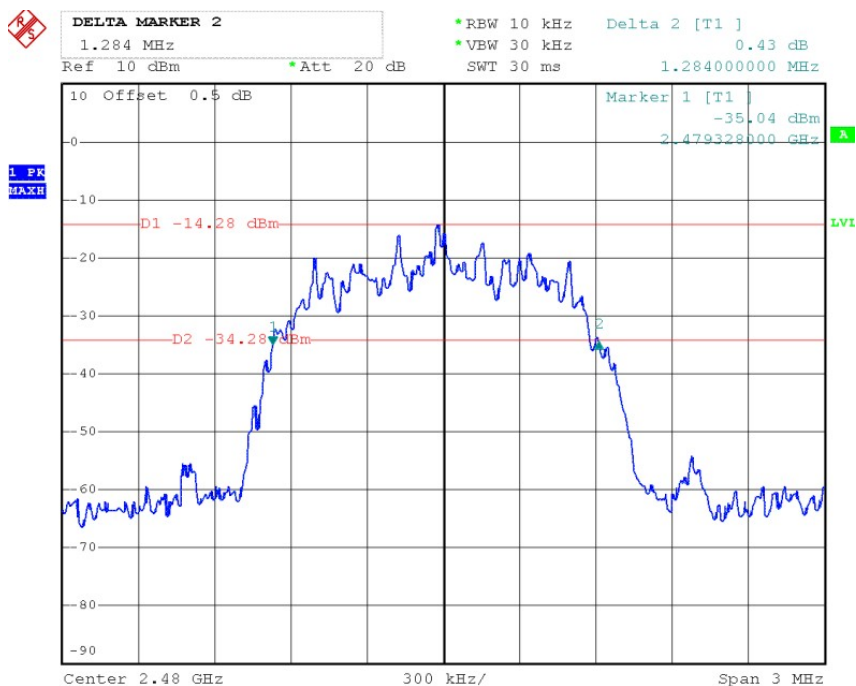


## EDR 3M Channel Low

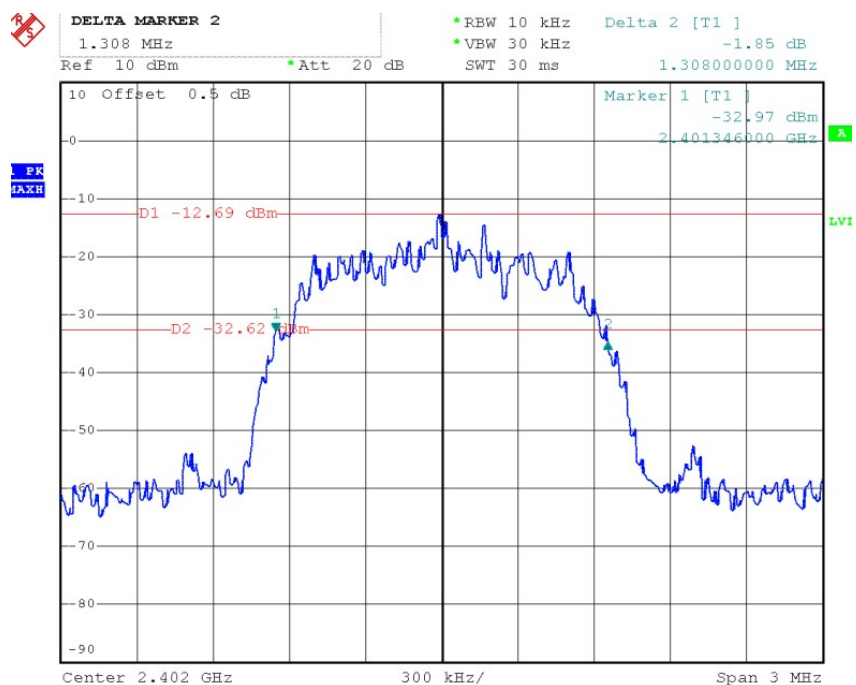

## Channel Middle

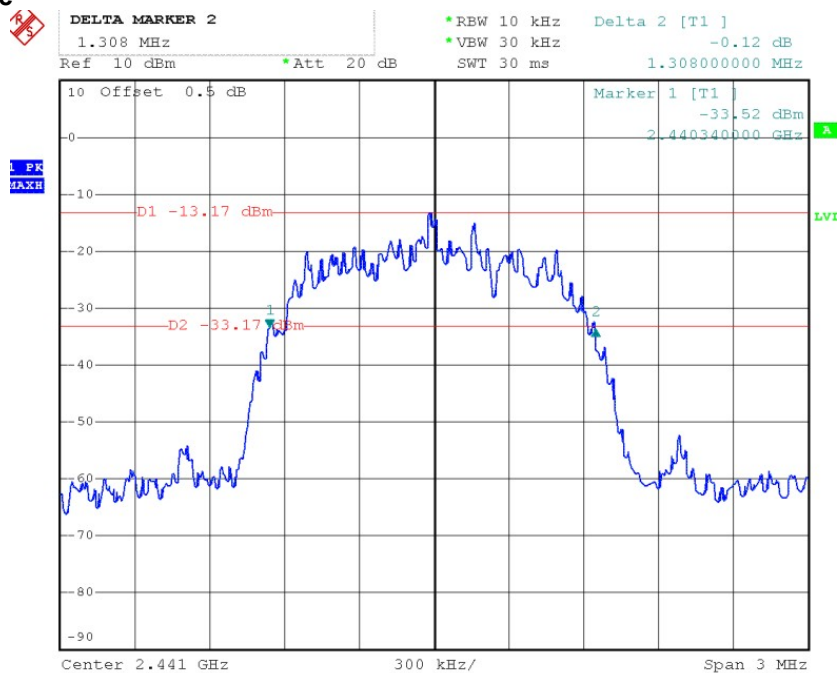

## Channel High

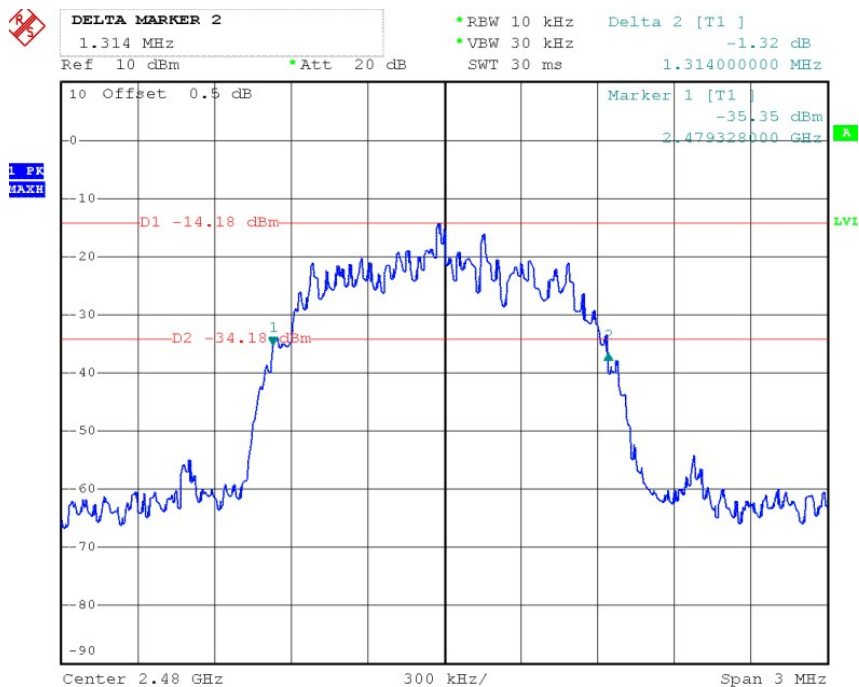




## 6. Test of Hopping Channel Separation

### 6.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 6.2 EUT Setup

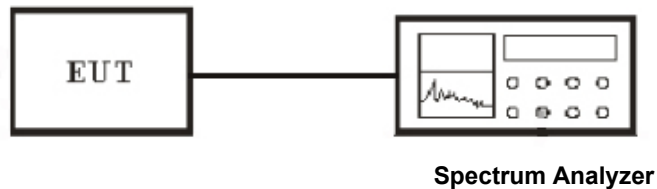

### 6.3 Test Equipment List and Details

See section 2.5.

### 6.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:
  - Span = wide enough to capture the peaks of two adjacent channels
  - $RBW \geq 1\%$  of the span,  $VBW \geq RBW$
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
3. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 6.5 Test Result

|   |                              |
|---|------------------------------|
| Temperature ( °C ) : 22~23              | EUT: Bluetooth headsets      |
| Humidity (%RH ) : 50~54                 | M/N: MH-100                  |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Tx Mode |

# BDR 1M

| Modulation Type | Frequency (MHz) | Channel Separation (MHz) | Min. Limit (kHz) |
|-----------------|-----------------|--------------------------|------------------|
| GFSK            | 2402~2403       | 1.023                    | >25              |
| GFSK            | 2441~2442       | 1.004                    | >25              |
| GFSK            | 2479~2480       | 1.008                    | >25              |

# EDR 2M

| Modulation Type | Frequency (MHz) | Channel Separation (MHz) | Min. Limit (kHz) |
|-----------------|-----------------|--------------------------|------------------|
| Pi/4 DQPSK      | 2402~2403       | 1.004                    | >25              |
| Pi/4 DQPSK      | 2441~2442       | 1.004                    | >25              |
| Pi/4 DQPSK      | 2479~2480       | 1.012                    | >25              |


# EDR 3M

| Modulation Type | Frequency (MHz) | Channel Separation (MHz) | Min. Limit (kHz) |
|-----------------|-----------------|--------------------------|------------------|
| 8-DPSK          | 2402~2403       | 1.016                    | >25              |
| 8-DPSK          | 2441~2442       | 1.004                    | >25              |
| 8-DPSK          | 2479~2480       | 1.012                    | >25              |


# BDR 1M Channel Low




Channel Middle

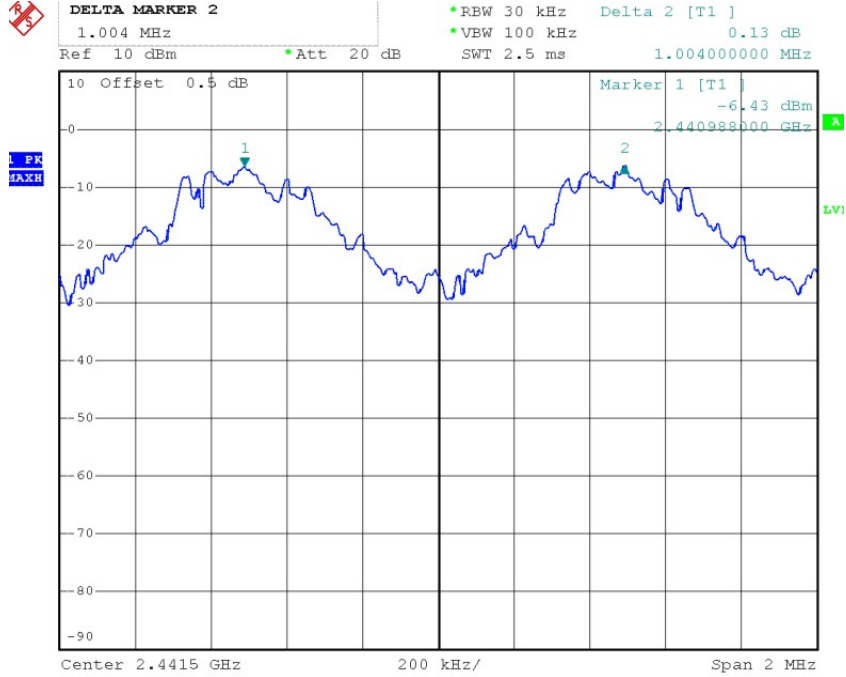


Channel High

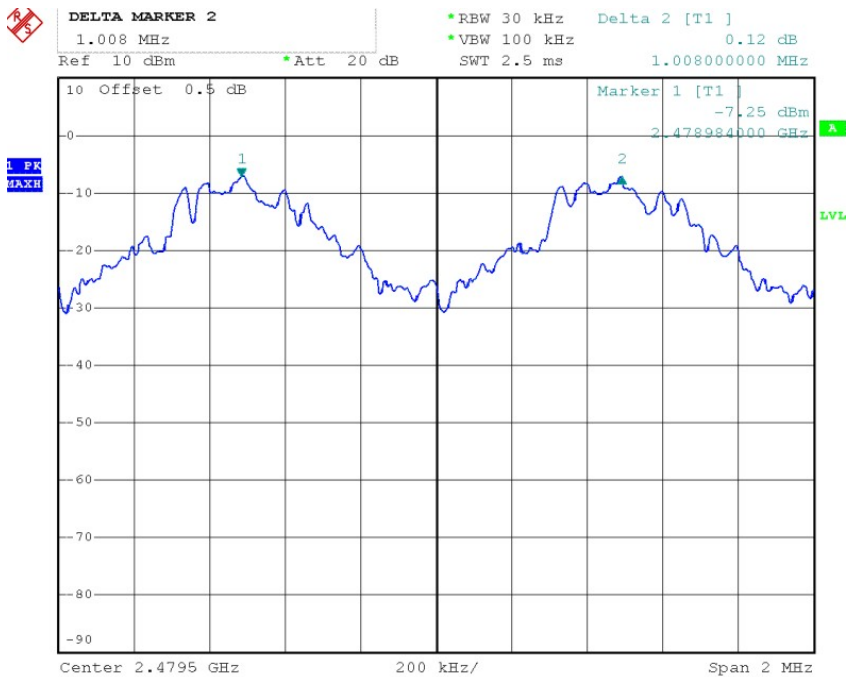


# EDR 2M Channel Low

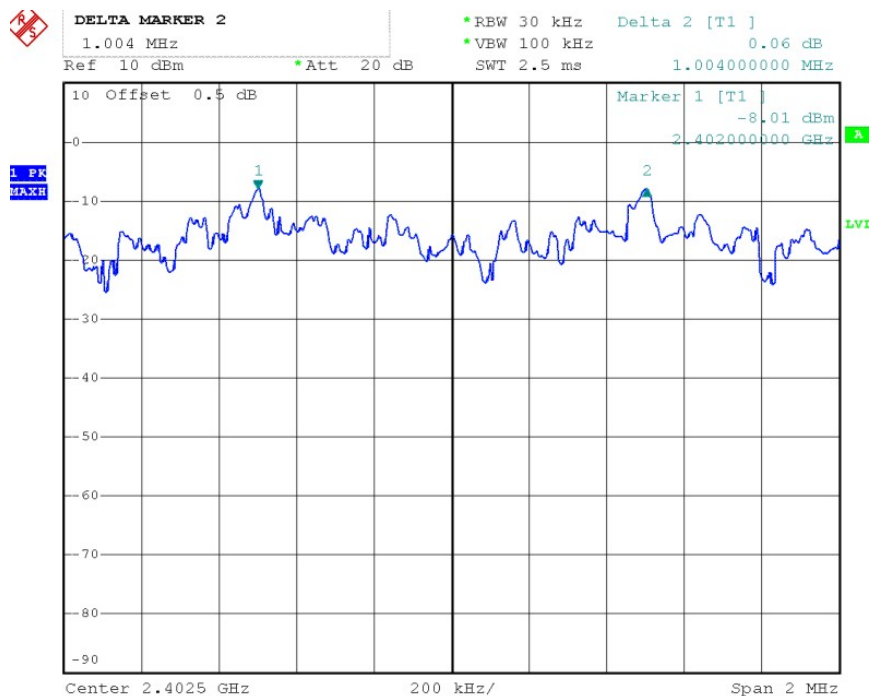


# Channel Middle

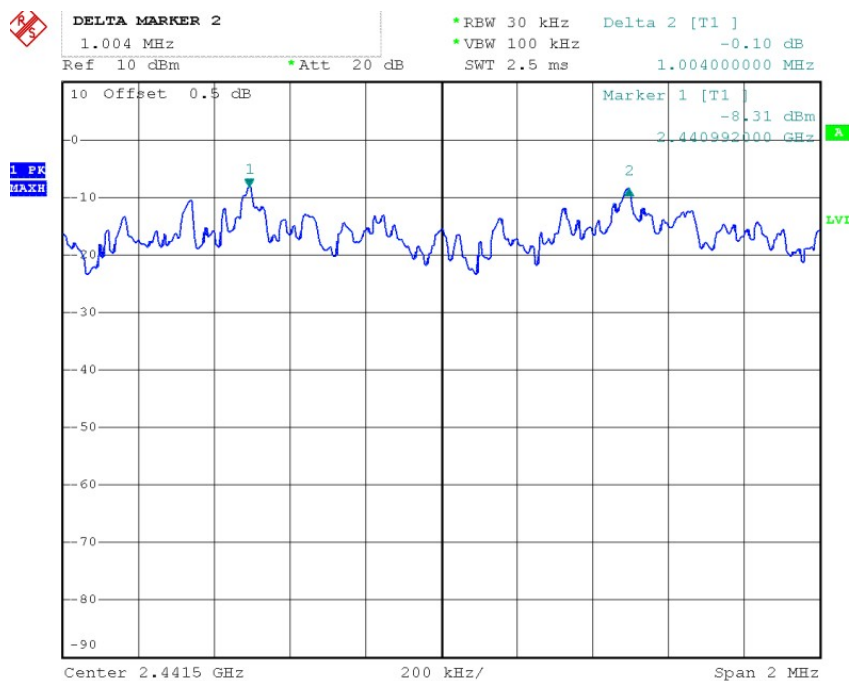


## Channel High

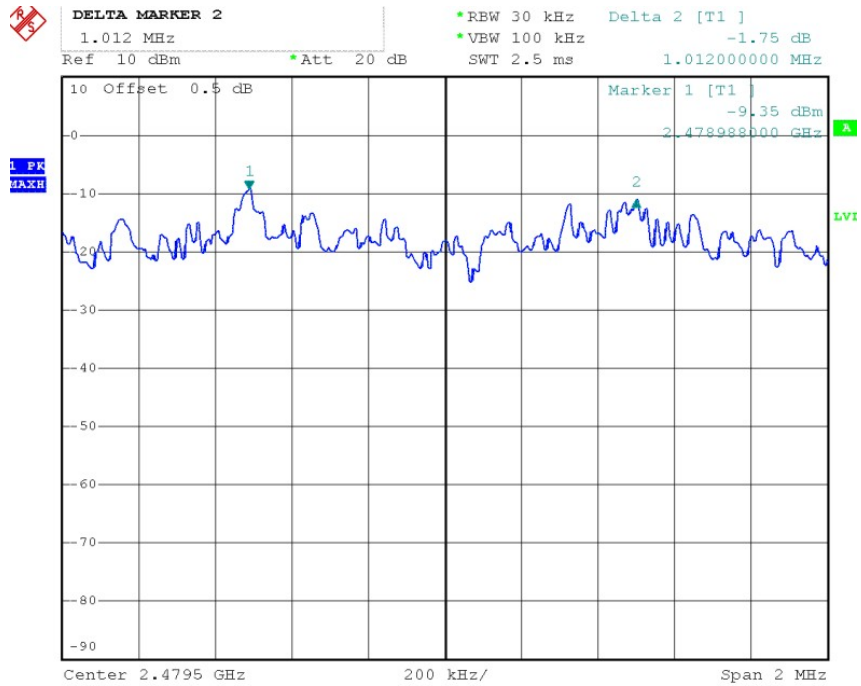


## EDR 3M Channel Low

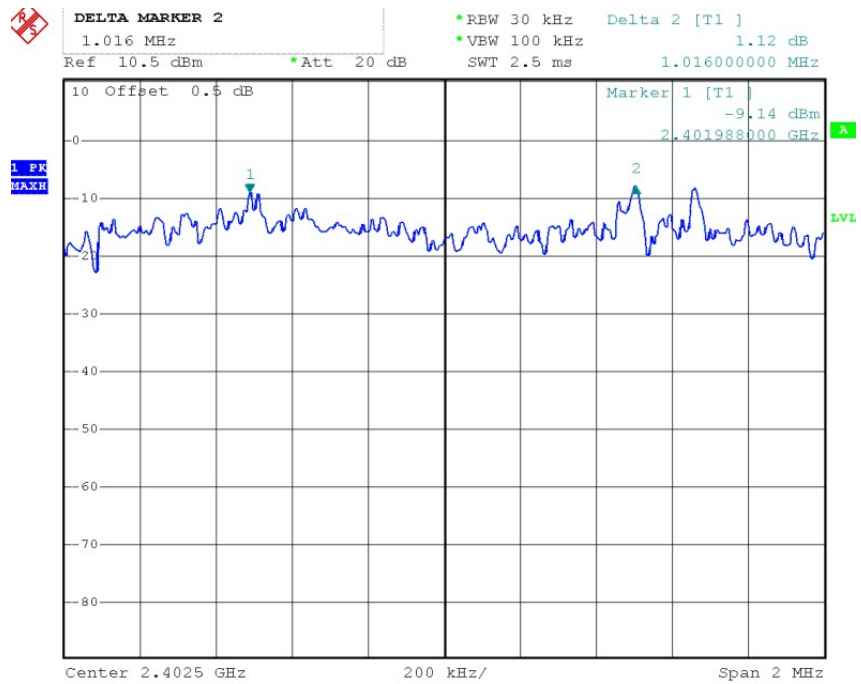

## Channel Middle

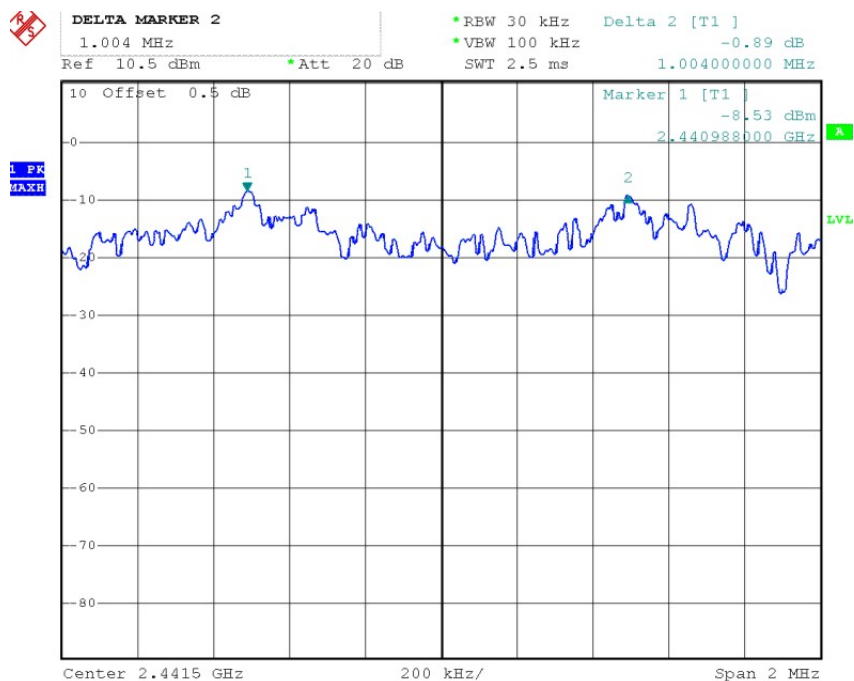

## Channel High

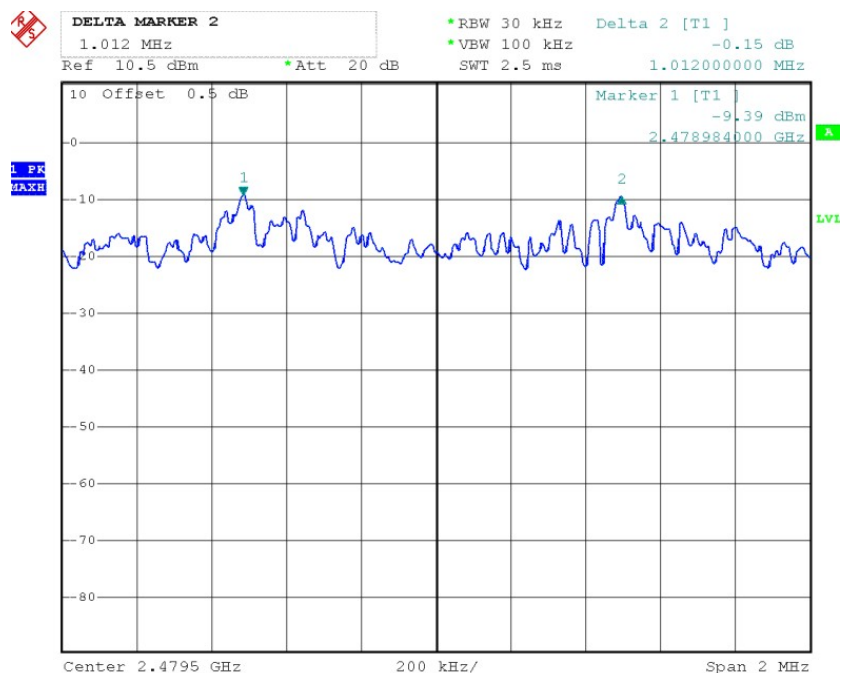


## 7. Test of Number of Hopping Frequency

### 7.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

### 7.2 EUT Setup

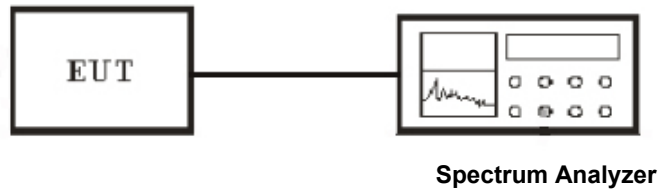

### 7.3 Test Equipment List and Details

See section 2.5.

### 7.4 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:  
Span = the frequency band of operation  
RBW  $\geq$  1% of the span, VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 7.5 Test Result


|   |                              |
|---|------------------------------|
| Temperature ( °C ) : 22~23              | EUT: Bluetooth headsets      |
| Humidity (%RH ) : 50~54                 | M/N: MH-100                  |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Tx Mode |

| Modulation Type | Frequency (MHz) | Number of Hopping Channels | Min. Limit (kHz) |
|-----------------|-----------------|----------------------------|------------------|
| GFSK            | 2402.0~2480.0   | 79                         | >15              |
| Pi/4 DQPSK      | 2402.0~2480.0   | 79                         | >15              |
| 8-DPSK          | 2402.0~2480.0   | 79                         | >15              |

## BDR-1M

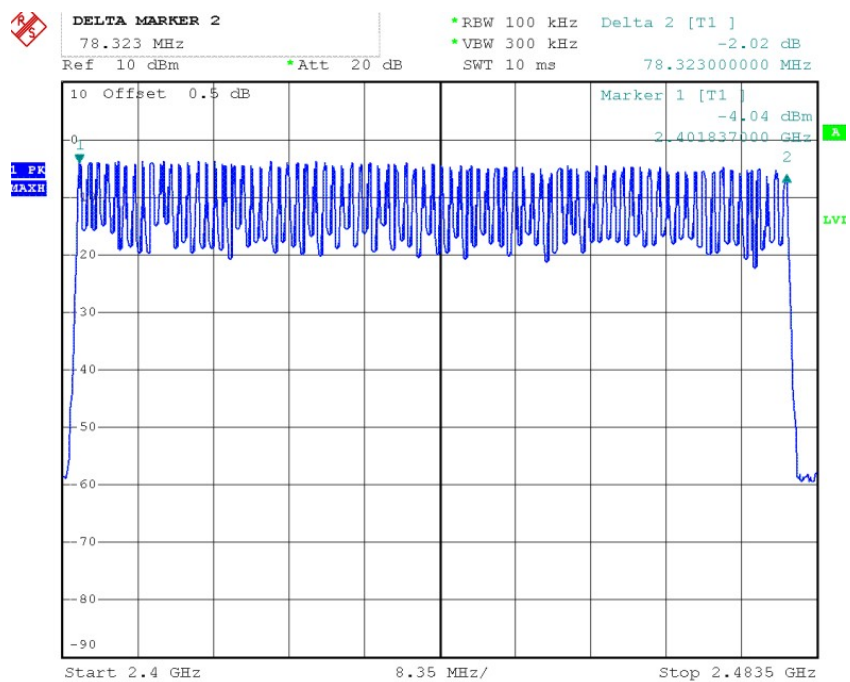


## EDR-2M

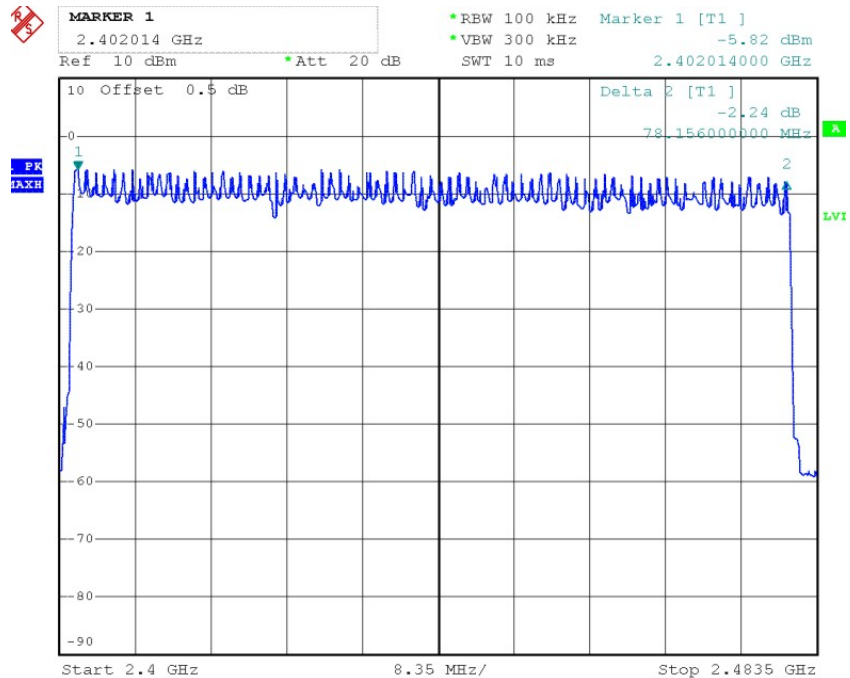



# EDR-3M

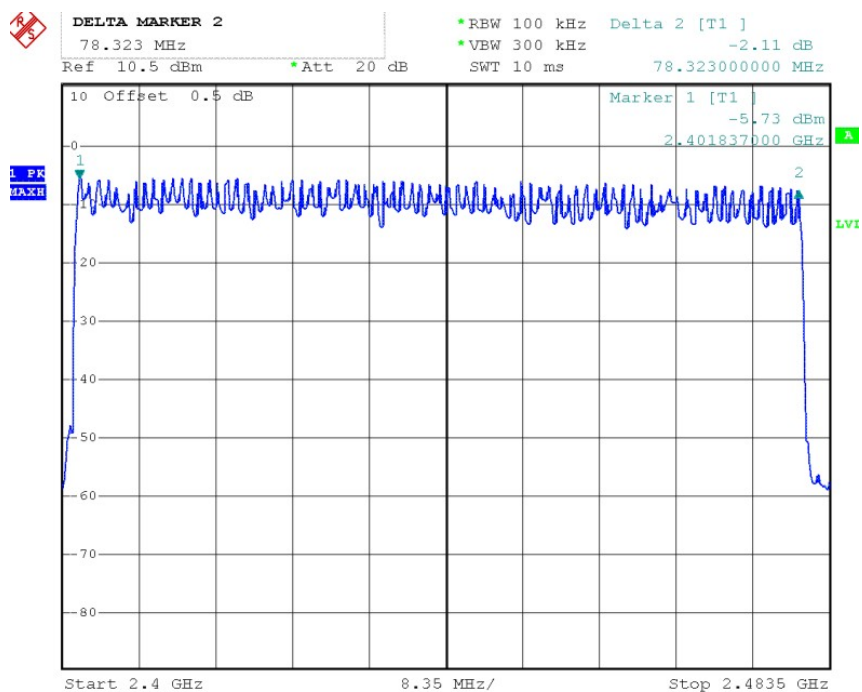


## 8. Test of Dwell Time of Each Frequency

### 8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

### 8.2 EUT Setup

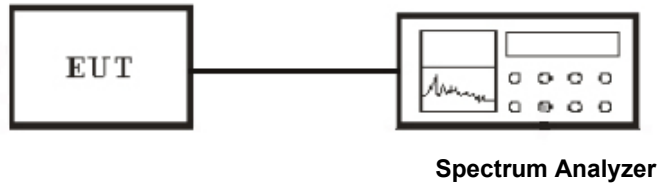

### 8.3 Test Equipment List and Details

See **section 2.5**.

### 8.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:
  - Span = zero span, centered on a hopping channel
  - RBW = 1 MHz, VBW  $\geq$  RBW
  - Sweep = as necessary to capture the entire dwell time per hopping channel
  - Detector function = peak
  - Trace = max hold
3. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
4. Measure the maximum time duration of one single pulse.

### 8.5 Test Result

|   |                              |
|---|------------------------------|
| Temperature ( °C ) : 22~23              | EUT: Bluetooth headsets      |
| Humidity (%RH ) : 50~54                 | M/N: MH-100                  |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Tx Mode |

DH1

Dwell time=  $t^*(1.6/2/79)*31.6$

DH3

Dwell time=  $t^*(1.6/4/79)*31.6$

DH5

Dwell time=  $t^*(1.6/6/79)*31.6$

**BDR 1M**  
**Low Channel**

| Modulation Type |     | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|-----|--------------|-----------------|------------|
| GFSK            | DH1 | 0.384        | 122.88          | 400        |
| GFSK            | DH3 | 1.640        | 262.40          | 400        |
| GFSK            | DH5 | 2.896        | 308.91          | 400        |

**Middle Channel**

| Modulation Type |     | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|-----|--------------|-----------------|------------|
| GFSK            | DH1 | 0.388        | 124.16          | 400        |
| GFSK            | DH3 | 1.640        | 262.40          | 400        |
| GFSK            | DH5 | 2.896        | 308.91          | 400        |

**High Channel**

| Modulation Type |     | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|-----|--------------|-----------------|------------|
| GFSK            | DH1 | 0.388        | 124.16          | 400        |
| GFSK            | DH3 | 1.640        | 262.40          | 400        |
| GFSK            | DH5 | 2.896        | 308.91          | 400        |

**EDR 2M**  
**Low Channel**

| Modulation Type |      | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|------|--------------|-----------------|------------|
| Pi/4 DQPSK      | 2DH1 | 0.388        | 124.16          | 400        |
| Pi/4 DQPSK      | 2DH3 | 1.652        | 264.32          | 400        |
| Pi/4 DQPSK      | 2DH5 | 2.896        | 308.91          | 400        |

**Middle Channel**

| Modulation Type |      | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|------|--------------|-----------------|------------|
| Pi/4 DQPSK      | 2DH1 | 0.388        | 124.16          | 400        |
| Pi/4 DQPSK      | 2DH3 | 1.652        | 264.32          | 400        |
| Pi/4 DQPSK      | 2DH5 | 2.896        | 308.91          | 400        |

### High Channel

| Modulation Type |      | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|------|--------------|-----------------|------------|
| Pi/4 DQPSK      | 2DH1 | 0.388        | 124.16          | 400        |
| Pi/4 DQPSK      | 2DH3 | 1.642        | 262.72          | 400        |
| Pi/4 DQPSK      | 2DH5 | 2.896        | 308.91          | 400        |

### EDR 3M Low Channel

| Modulation Type |      | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|------|--------------|-----------------|------------|
| 8-DPSK          | 3DH1 | 0.392        | 125.44          | 400        |
| 8-DPSK          | 3DH3 | 1.638        | 262.08          | 400        |
| 8-DPSK          | 3DH5 | 2.848        | 303.79          | 400        |


### Middle Channel

| Modulation Type |      | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|------|--------------|-----------------|------------|
| 8-DPSK          | 3DH1 | 0.388        | 124.16          | 400        |
| 8-DPSK          | 3DH3 | 1.648        | 263.68          | 400        |
| 8-DPSK          | 3DH5 | 2.848        | 303.79          | 400        |


### High Channel

| Modulation Type |      | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|------|--------------|-----------------|------------|
| 8-DPSK          | 3DH1 | 0.392        | 125.44          | 400        |
| 8-DPSK          | 3DH3 | 1.638        | 262.08          | 400        |
| 8-DPSK          | 3DH5 | 2.832        | 302.08          | 400        |


# BDR 1M DH1 Channel Low

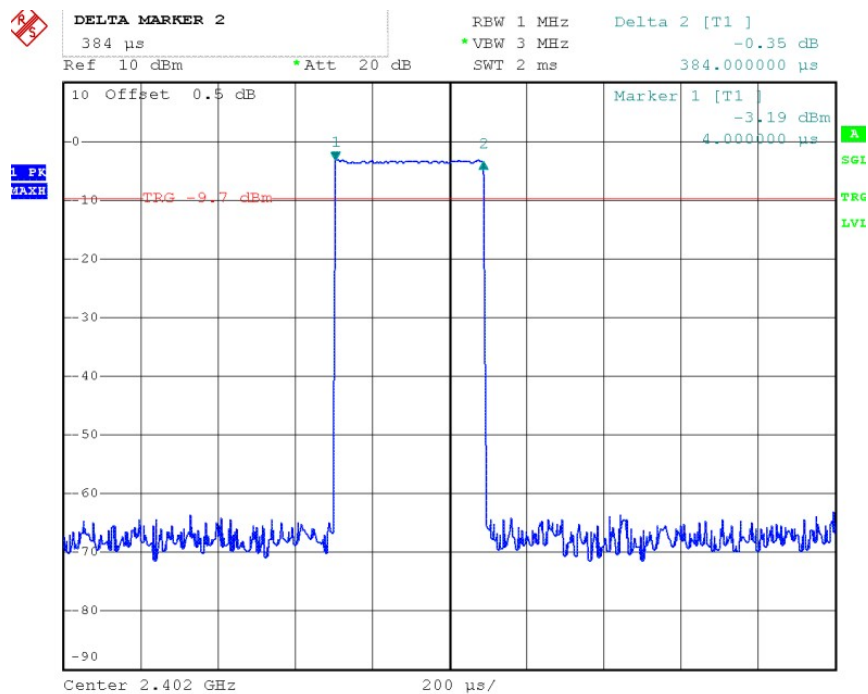


## Channel Middle

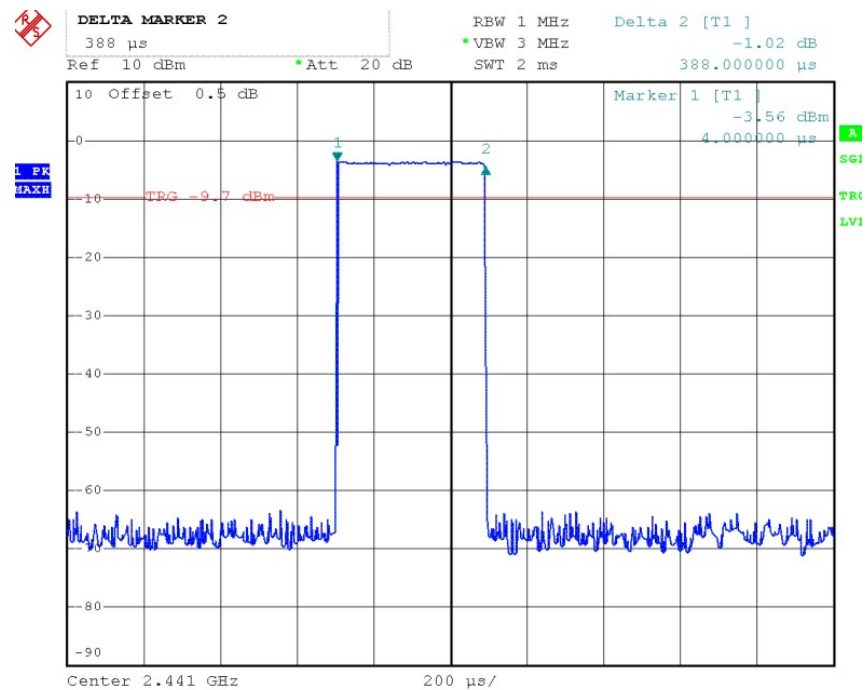


## Channel High

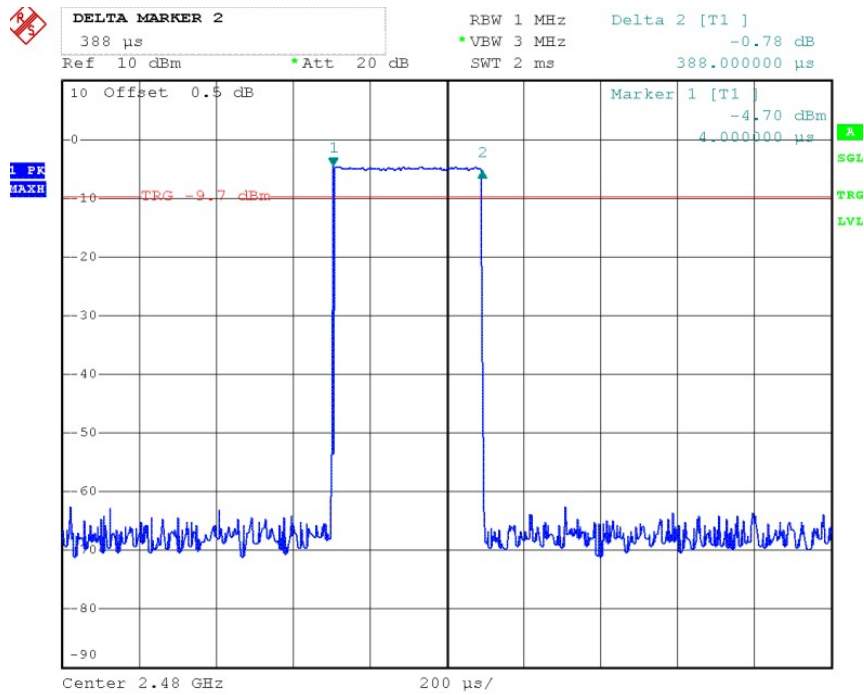


## BDR 1M DH3 Channel Low

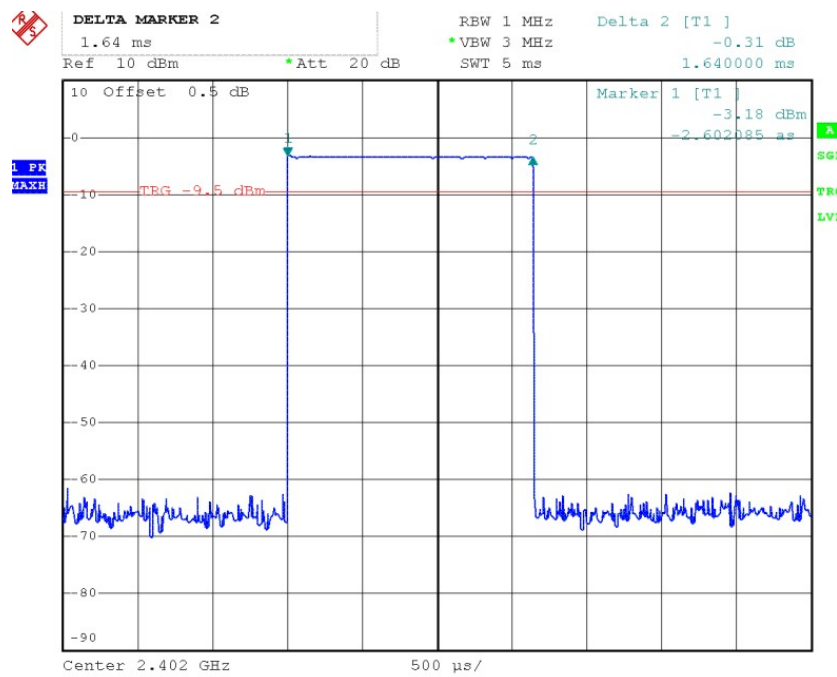


## Channel Middle

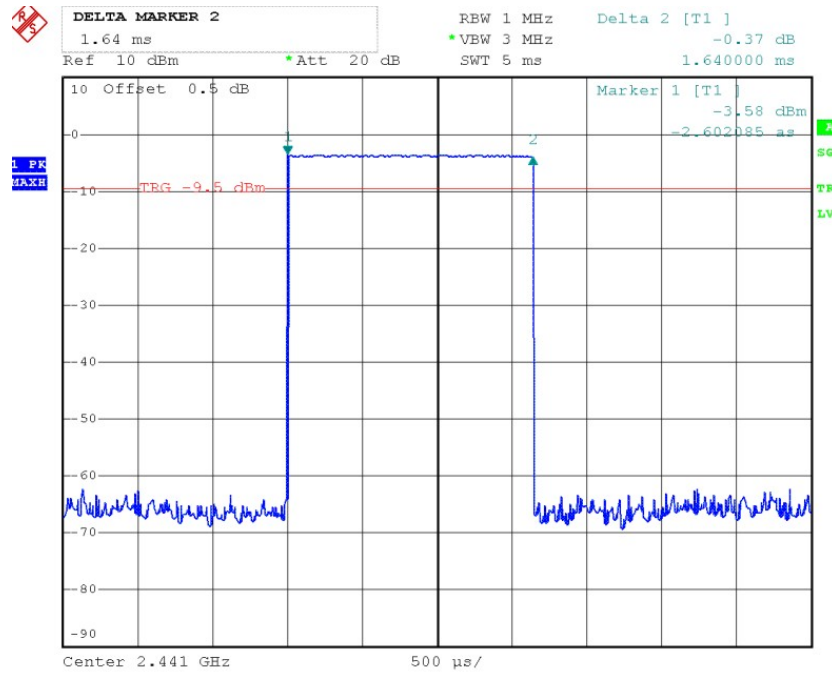


## Channel High

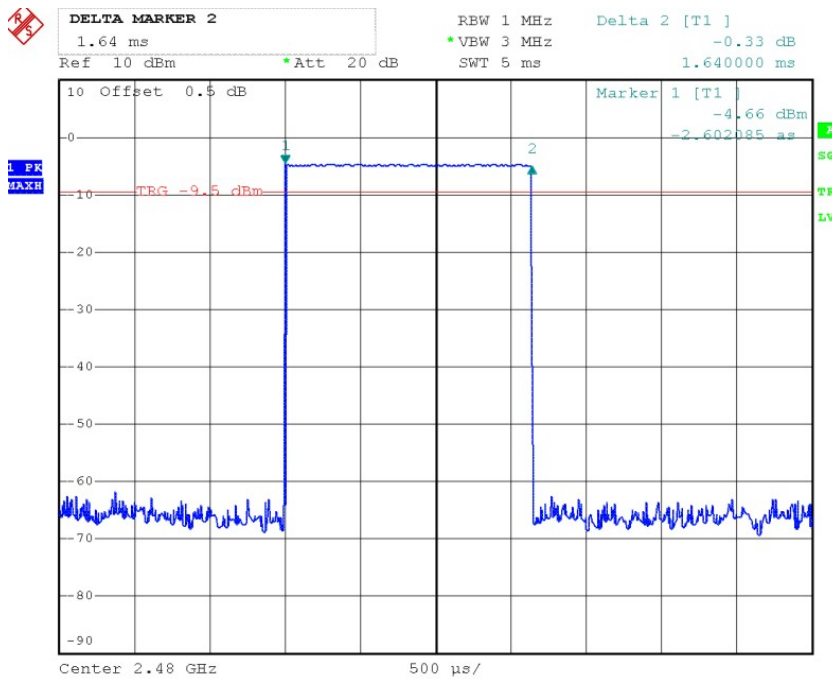

# **BDR 1M DH5** **Channel Low**

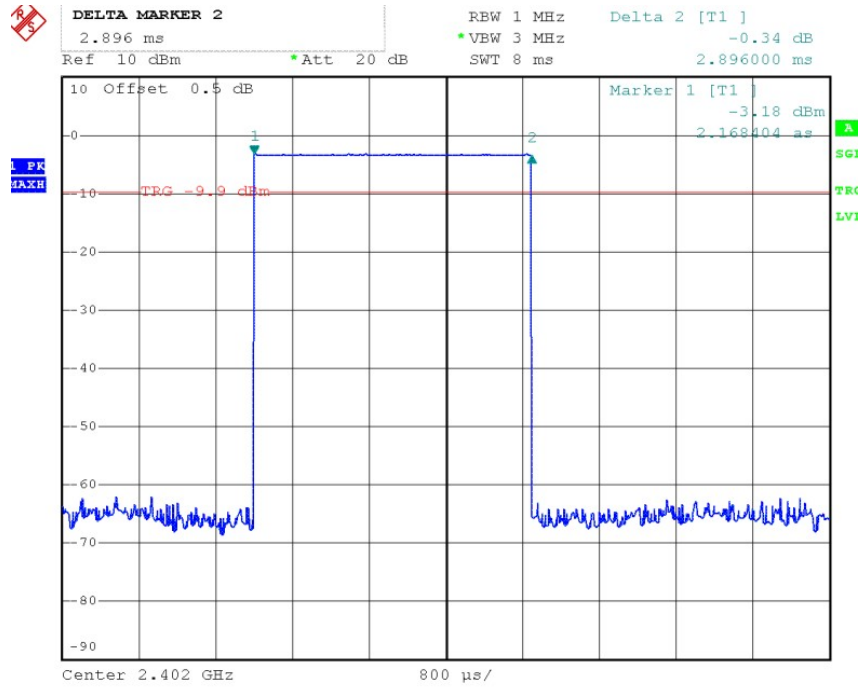


## **Channel Middle**

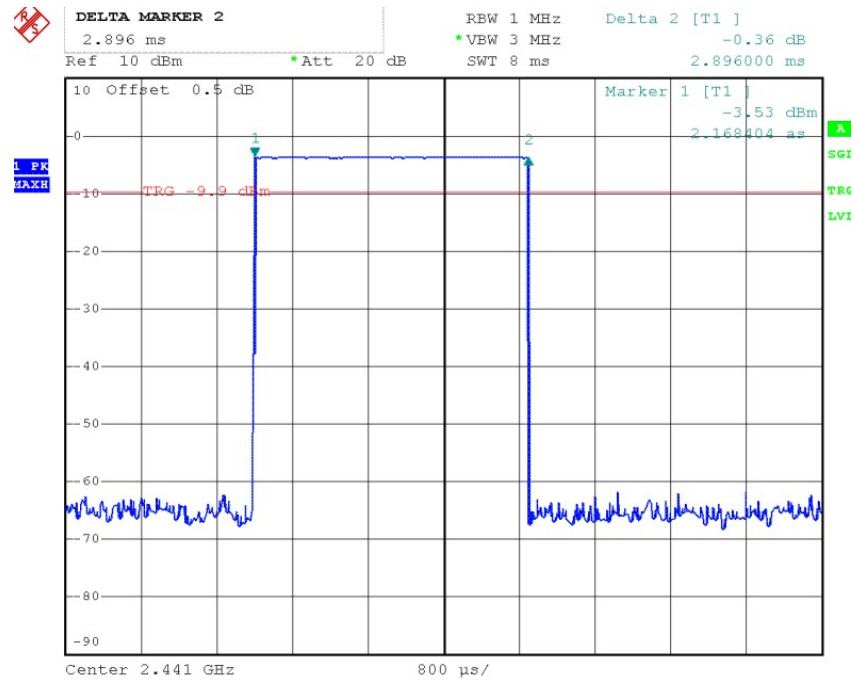





## Channel High

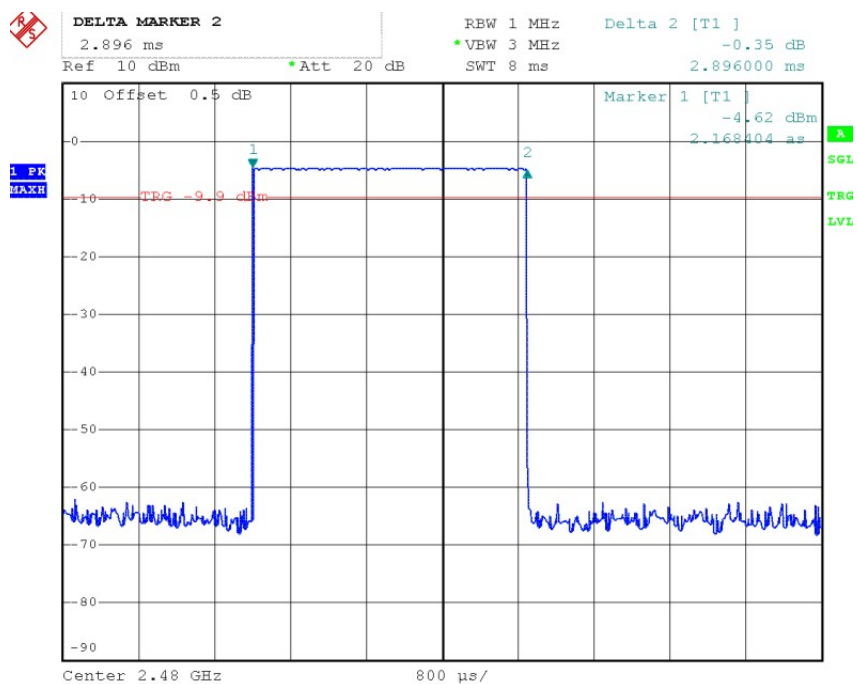


## EDR 2M 2DH1 Channel Low

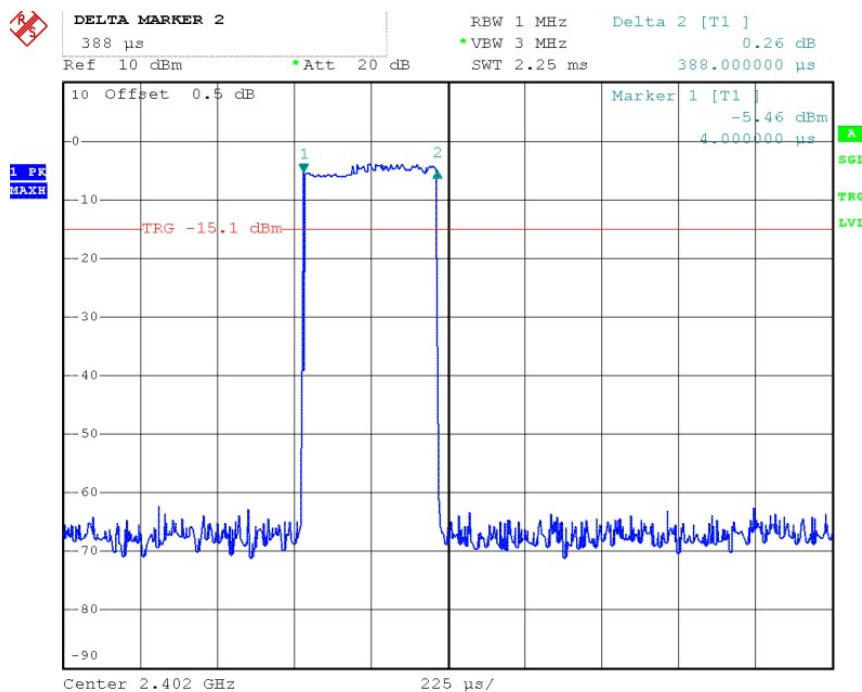


Channel Middle

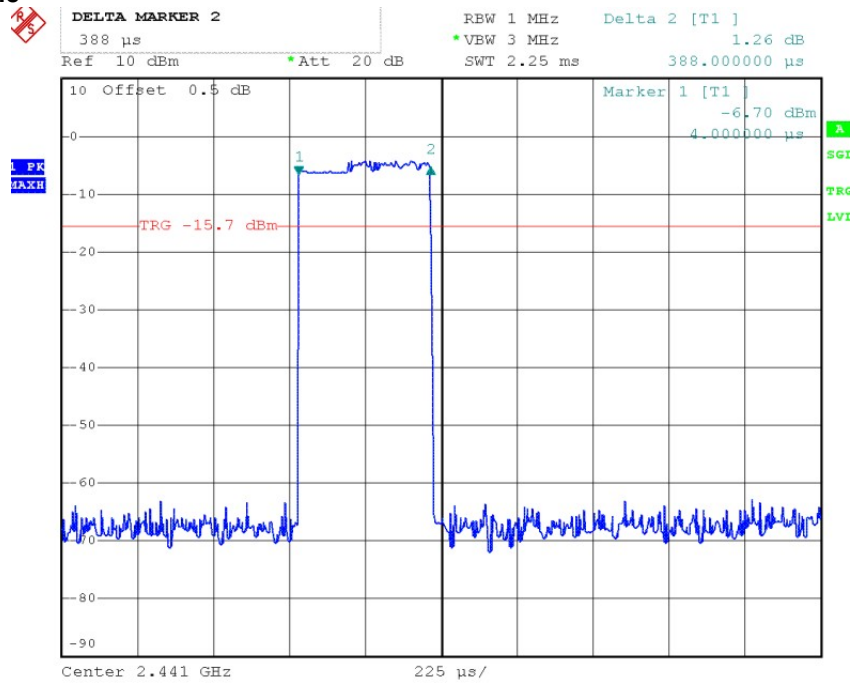


Channel High

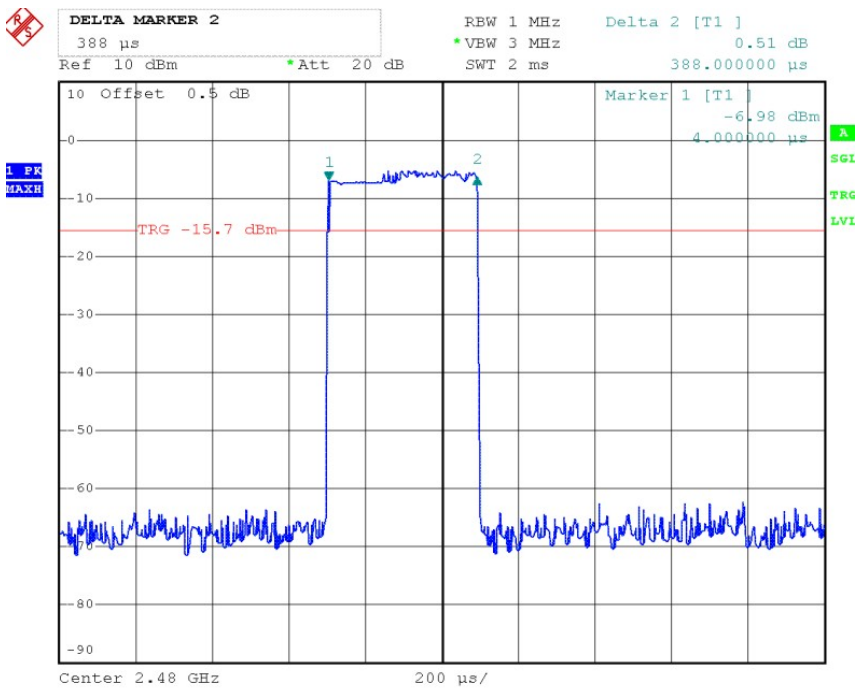


# EDR 2M 2DH3 Channel Low

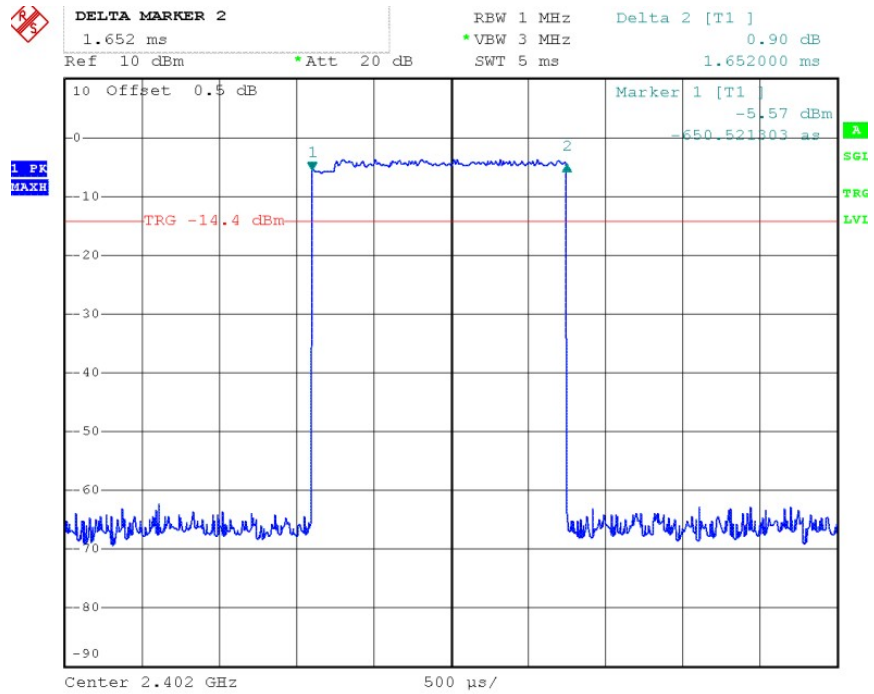


## Channel Middle

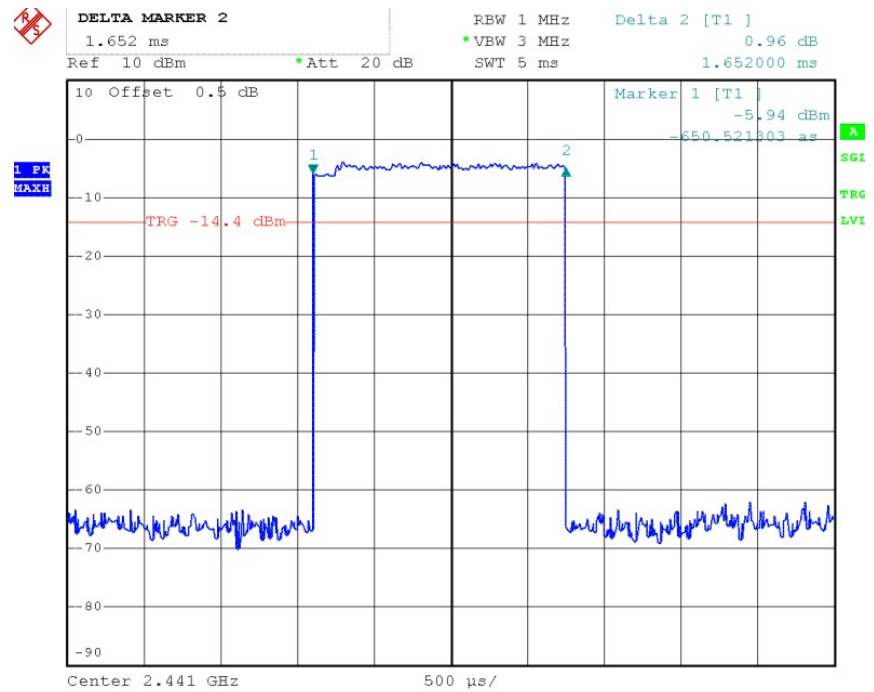


## Channel High

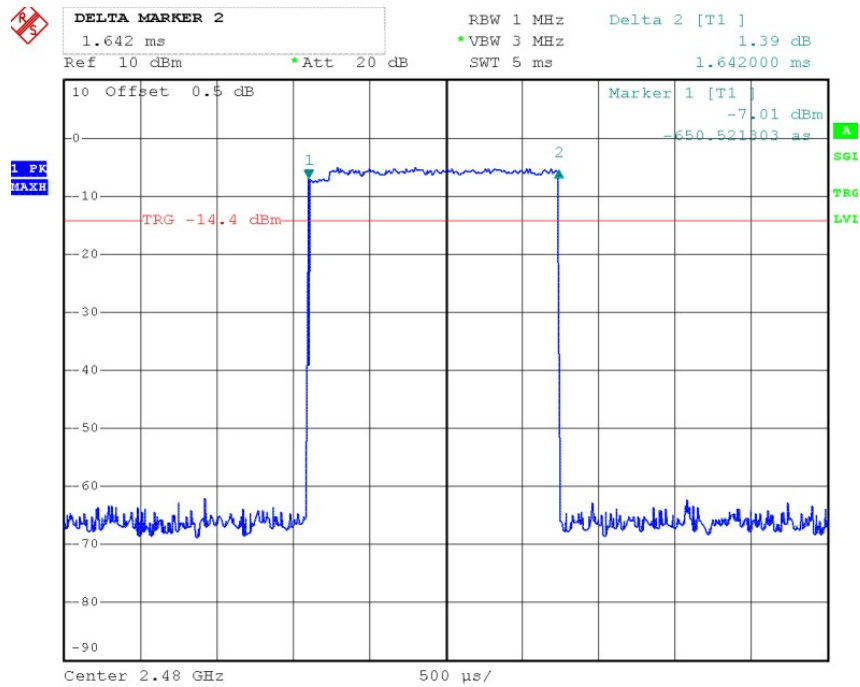


## EDR 2M 2DH5 Channel Low

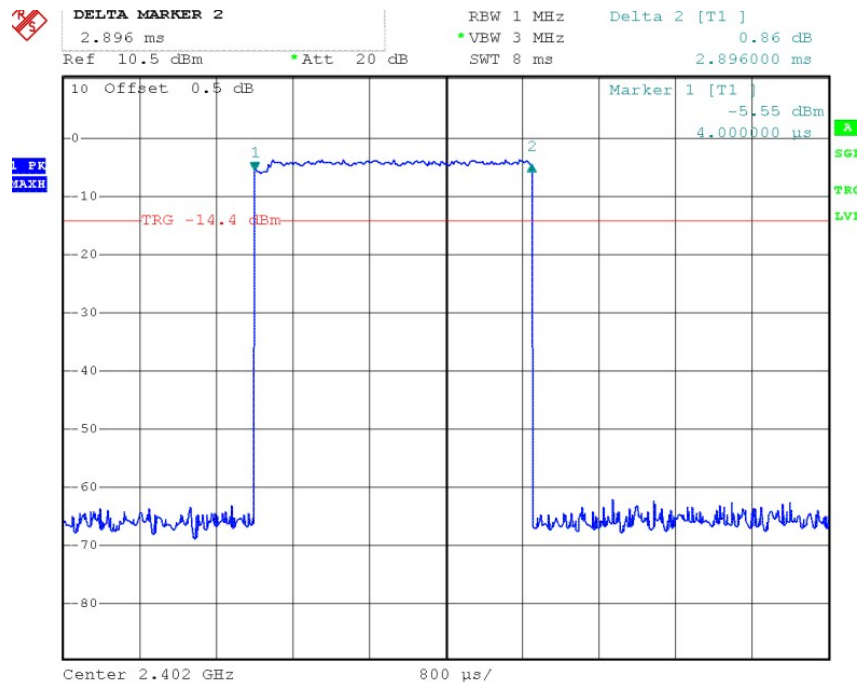


Channel Middle

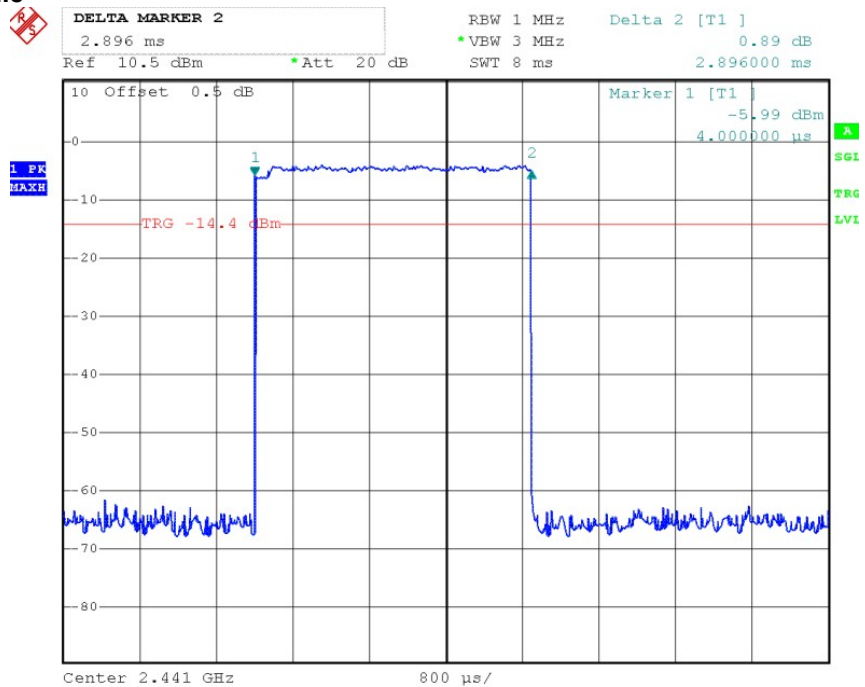


Channel High

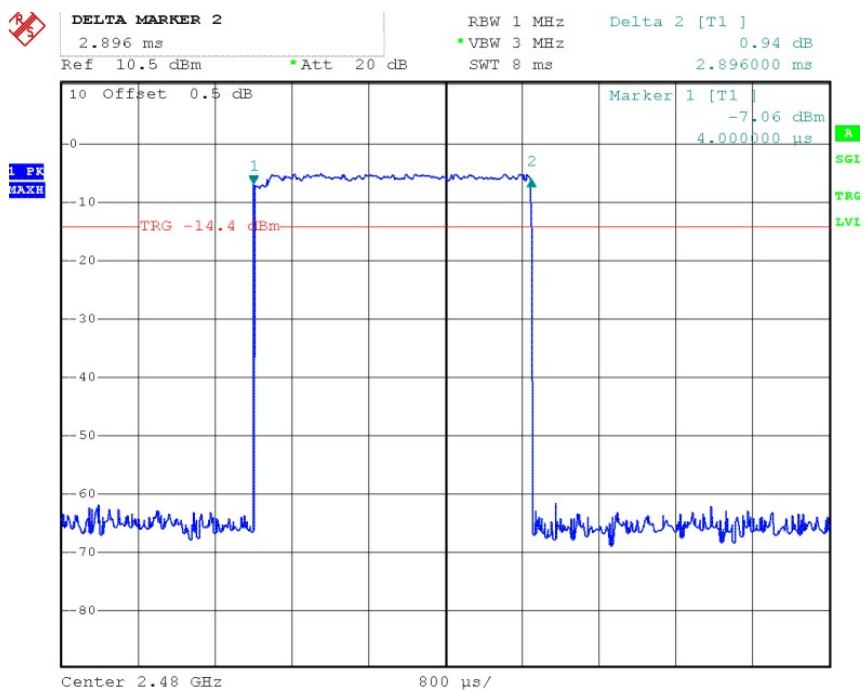


# EDR 3M 3DH1 Channel Low

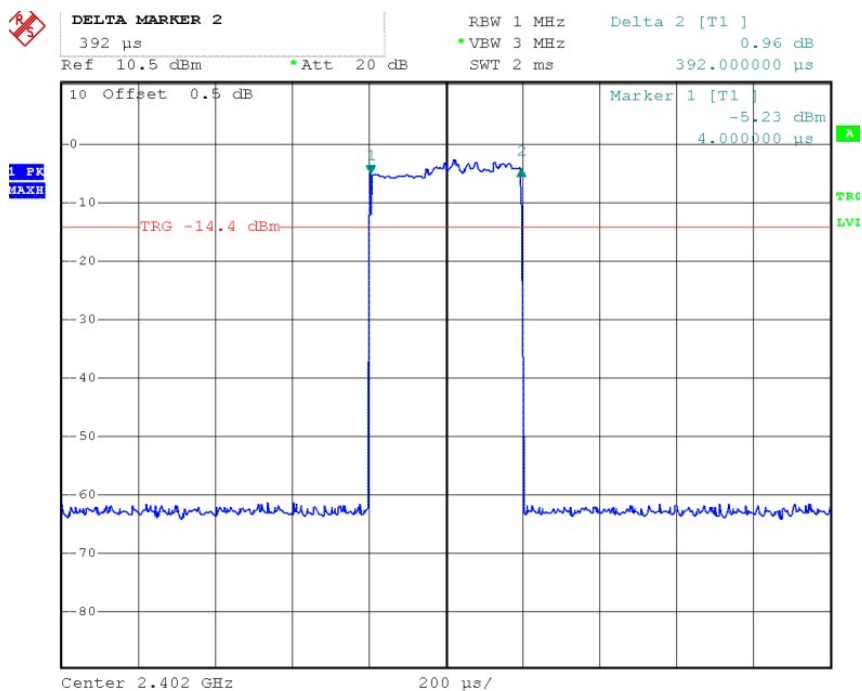


# Channel Middle

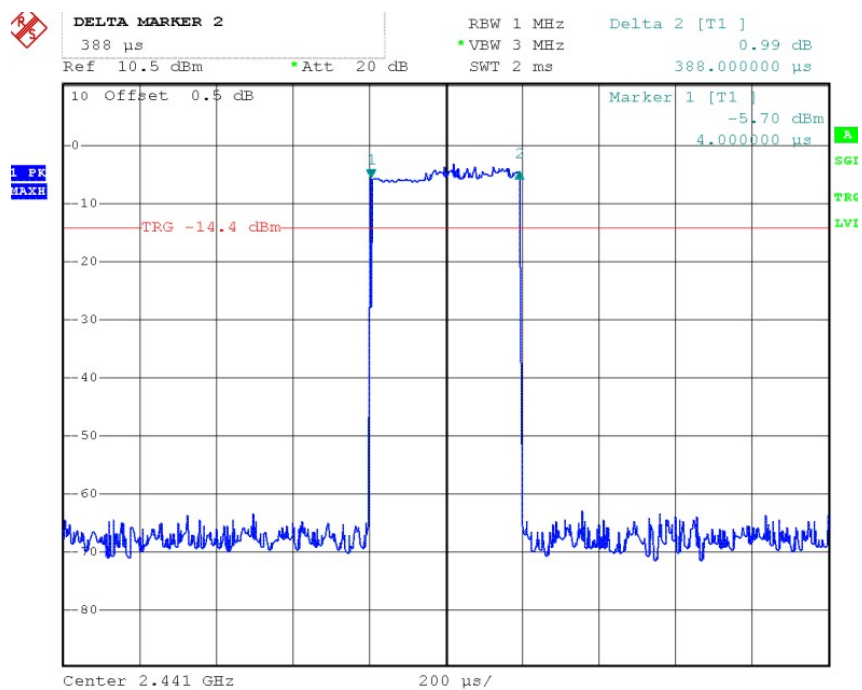


## Channel High

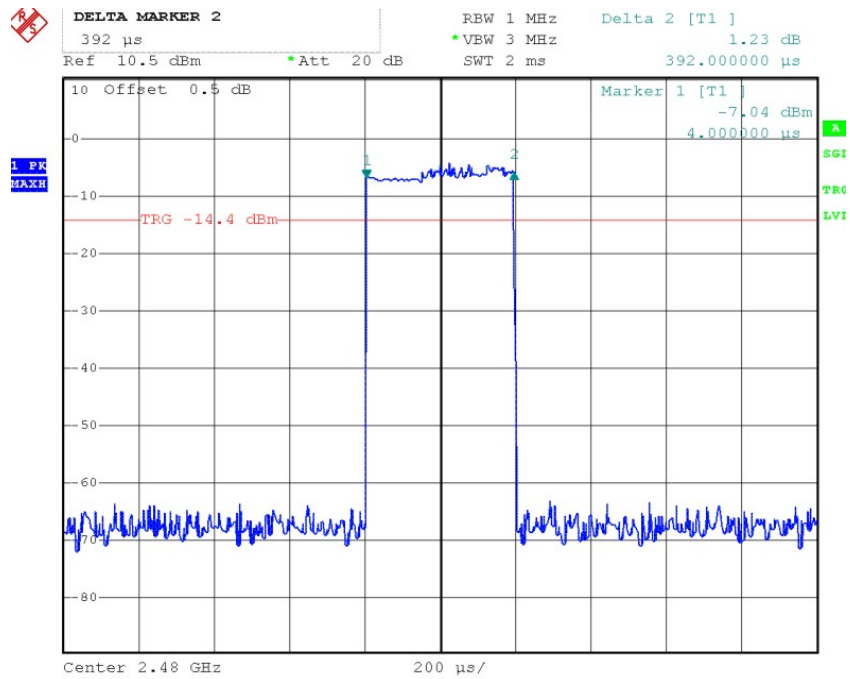

## EDR 3M 3DH3 Channel Low

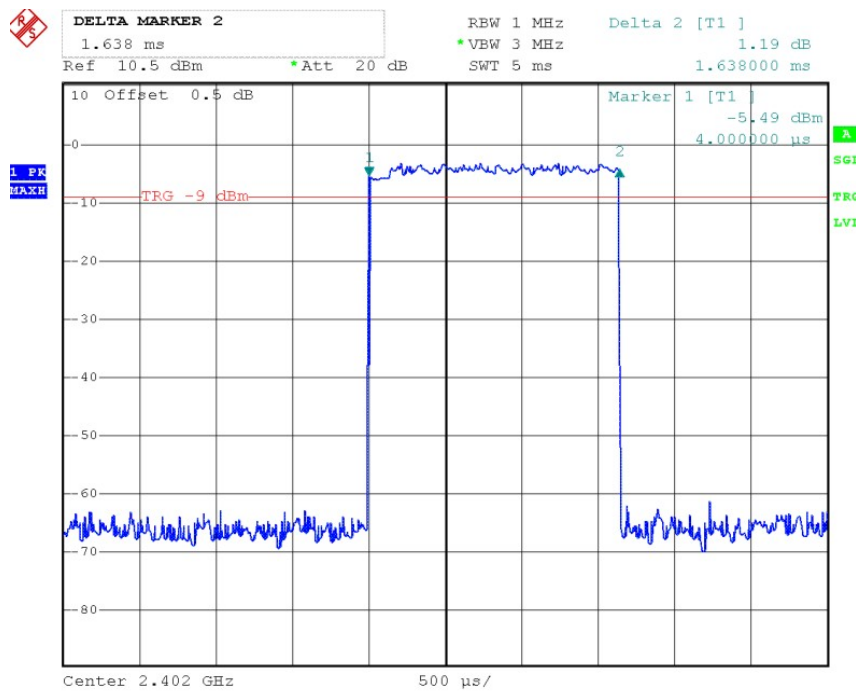

## Channel Middle

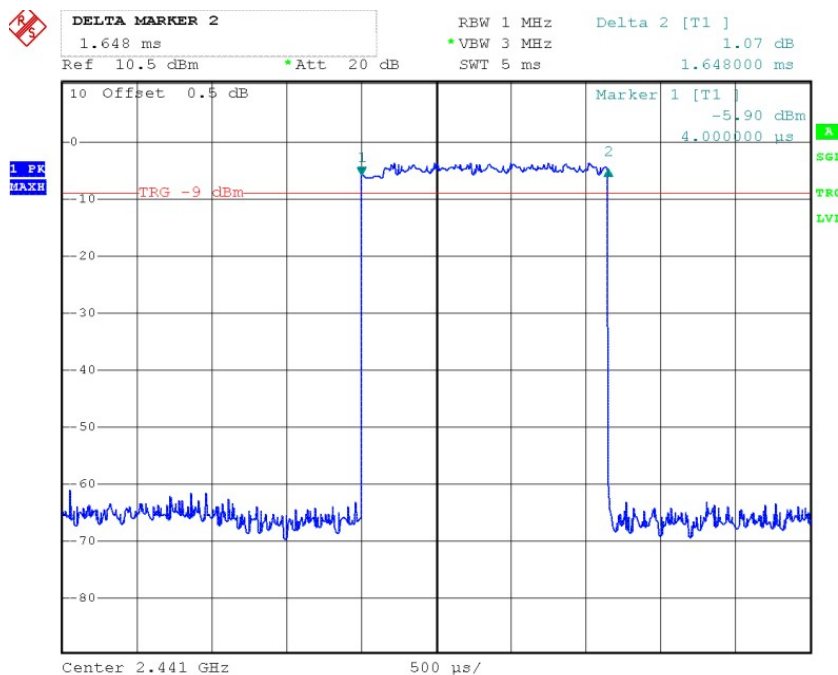

## Channel High

