



Prüfbericht-Nr.: <i>Test Report No.:</i>	10044733 001	Auftrags-Nr.: <i>Order No.:</i>	114015157	Seite 1 von 19 <i>Page 1 of 19</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	October 30, 2013	
Auftraggeber: <i>Client:</i>	ICHIA TECHNOLOGIES INC, 268, HwaYa 2nd Road, Hwa-Ya Tech. Park, TW-333 Gueishan, Taoyuan, Taiwan, R.OC.			
Prüfgegenstand: <i>Test item:</i>	Bluetooth Keyboard			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	TK1001, SK1001			
Auftrags-Inhalt: <i>Order content:</i>				
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.249			
Wareneingangsdatum: <i>Date of receipt:</i>	12/4/2013			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000031463-002			
Prüfzeitraum: <i>Testing period:</i>	5-Dec-2013 - 6-Dec-2013			
Ort der Prüfung: <i>Place of testing:</i>	EMC Laboratory Taipei			
Prüflaboratorium: <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
 2013-12-18 Danny S. C. Sung/Project Manager		 2013-12-16 Rene Charton/Senior Project Manager		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

5.1.1 FIELD STRENGTH OF FUNDAMENTAL

RESULT: Passed

5.1.2 SPURIOUS EMISSION

RESULT: Passed

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS.....	4
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS.....	8
3.3	INDEPENDENT OPERATION MODES.....	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.5	SUBMITTED DOCUMENTS.....	9
4.	TEST SET-UP AND OPERATION MODES.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	11
4.5	TEST SETUP DIAGRAM	11
5.	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	Field strength of fundamental.....	13
5.1.2	Spurious Emission	15
6.	PHOTOGRAPHS OF THE TEST SET-UP.....	16
7.	LIST OF TABLES	19
8.	LIST OF PHOTOGRAPHS.....	19

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Photo Documentation

(File Name: 10044733APPENDIX P)

Appendix D: Test Result of Radiated Emissions

(File Name: 10044733APPENDIX D)

Test Specifications

The following standards were applied (in bold: product standards, otherwise: basic standards).

Table 1: Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.249
ANSI C63.4:2009

2. Test Sites

2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC Registration No.: 365730

TAF Accredited NCC Test Lab. No.:0759

TAF ISO17025 Certification effective periods: 2013-Jul-1st to 2016-Jun-30th



Testing Laboratory
0759

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	R&S	ESCI 7	100797	20-Dec-13
Bilog Antenna	TESEQ	CBL6111D	29802	29-Jun-14
Spectrum Analyzer	R&S	FSV 40	100921	13-Dec-13
Horn Antenna	ETS-Lindgren	3117	138160	10-Jan-14
Horn Antenna (18GHz~40GHz)	COM-POWER	AH840	101031	29-Oct-15
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	2-Sep-14
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	2-Sep-14
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM30180	60558	23-Oct-14
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	28-Sep-14
EMI Test Receiver	R&S	ESCI	101094	29-Aug-14
LISN (1 phase)	R&S	ENV216	101243	5-Jun-14
LISN	Rolf Heine	NNB-2/16Z	99080	30-Aug-14

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are $\pm 3\text{dB}$.

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	$\pm 1 \text{ dB}$
Adjacent channel power	$\pm 3 \text{ dB}$
Radiated emission of transmitter, valid up to 26 GHz	$\pm 6 \text{ dB}$
Radiated emission of receiver, valid up to 26 GHz	$\pm 6 \text{ dB}$
Temperature	$\pm 2 \text{ }^{\circ}\text{C}$
Humidity	$\pm 10 \%$

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a keyboard that can be attached to an iPhone 5. It contains a Bluetooth 3.0 compatible chip which can send key-stroke data through a Wireless interface. For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 Ratings and System Details

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment	Bluetooth Keyboard
Type Designation	TK1001, SK1001
FCC ID	2AA83-TK1001

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequencies	2402~2480 MHz
Channel Spacing	1 MHz
Channel number	79
Operation Voltage	3.8VDC
Modulation	GFSK

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed in section 3.3 as appropriate.

Full test was applied on all test modes, but only worst case was shown.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Kind of Equipment	Manufacturer	Model Name	S/N
Laptop	MSI	MS-1453	MX-233TWK1008000096

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test


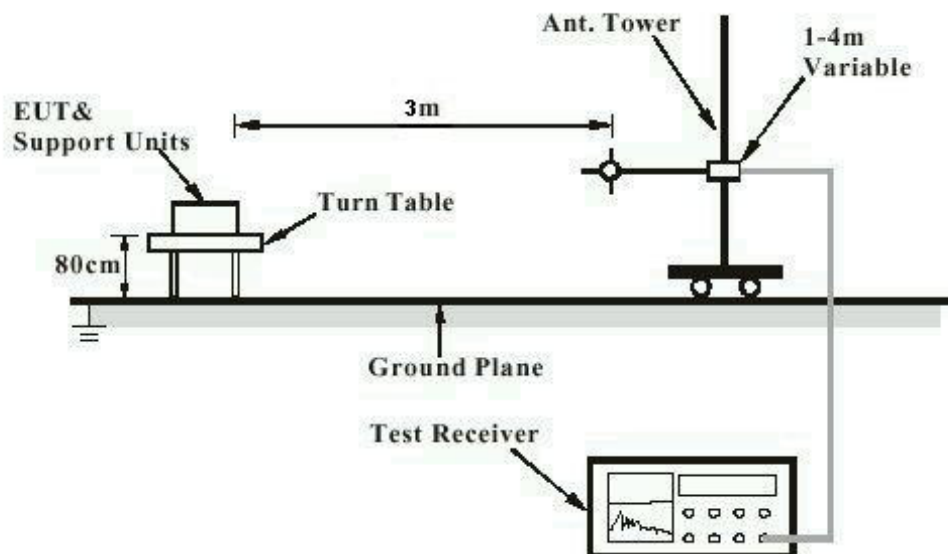


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

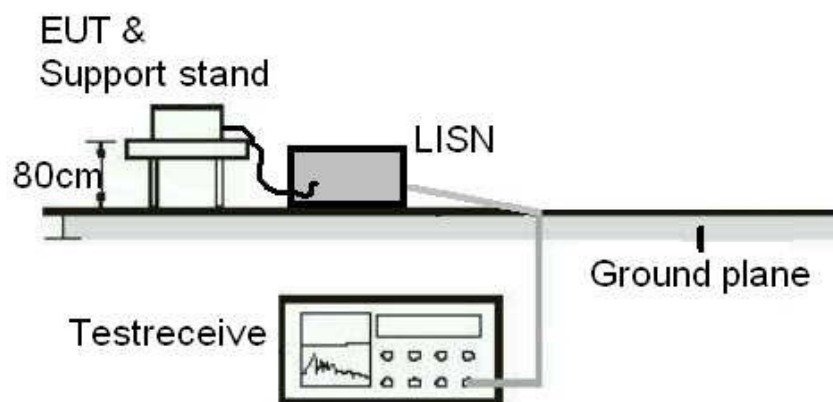

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Field strength of fundamental

RESULT:**Passed**

Test standard	:	FCC Part 15.249(a)
Basic standard	:	ANSI C63.10:2009
Kind of test site	:	Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A

Atmospheric pressure	:	100-103 kPa
----------------------	---	-------------

In the table below the maximum results found are reported.

For detailed results of all frequencies tested, please refer to Appendix D.

Table 6: Test result of Field strength of fundamental

Channel Frequency (MHz)	Test result			
	Level (dBuV/m)	Limit (dBuV/m)	Antenna orientation	Detector
2402	73.61	114	Horizontal	Peak
2402	32.21	94		Average
2402	76.85	114	Vertical	Peak
2402	32.97	94		Average
2441	73.00	114	Horizontal	Peak
2441	31.57	94		Average
2441	76.65	114	Vertical	Peak
2441	32.14	94		Average
2480	72.09	114	Horizontal	Peak
2480	35.38	94		Average
2480	78.21	114	Vertical	Peak
2480	32.42	94		Average

Remark: For details refer to Appendix D.

5.1.2 Spurious Emission

RESULT:**Passed**

Test standard	:	FCC part 15.249(d), FCC 15.205, FCC 15.209,
Basic standard	:	ANSI C63.10: 2009
Limits	:	Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a). Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a) and FCC 15.249(a).
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A


Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic.

For details refer to Appendix D.


The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The X Axis orientation is the worst-case and recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

6. Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (Front View)

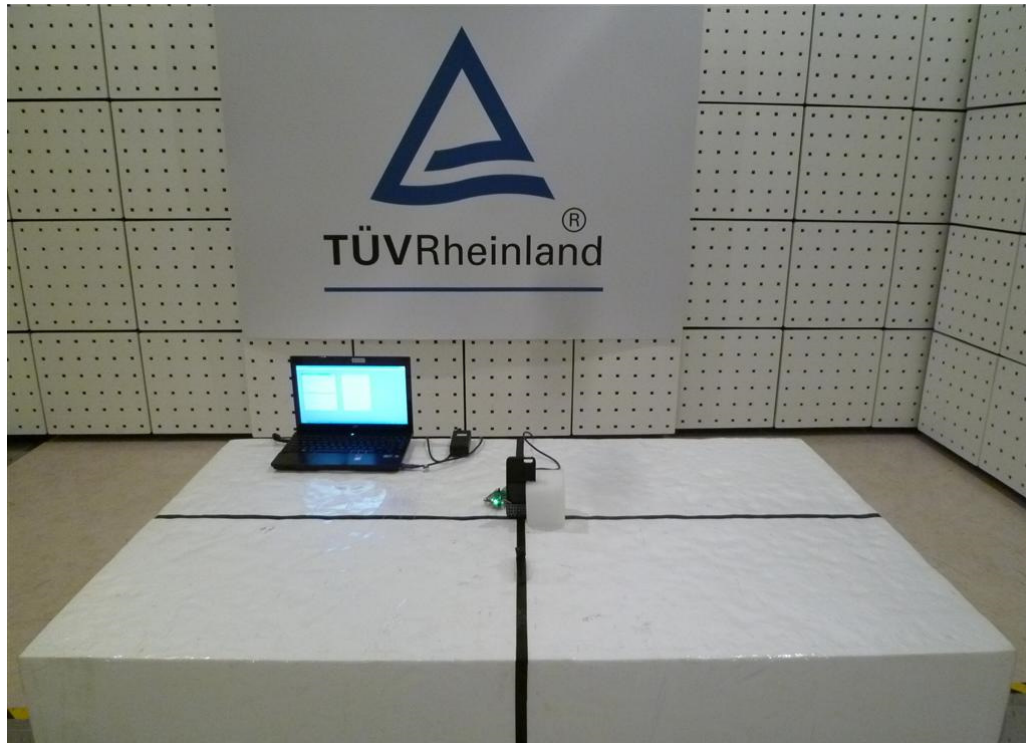

Photograph 2: Set-up for Spurious Emissions (Back View 1)

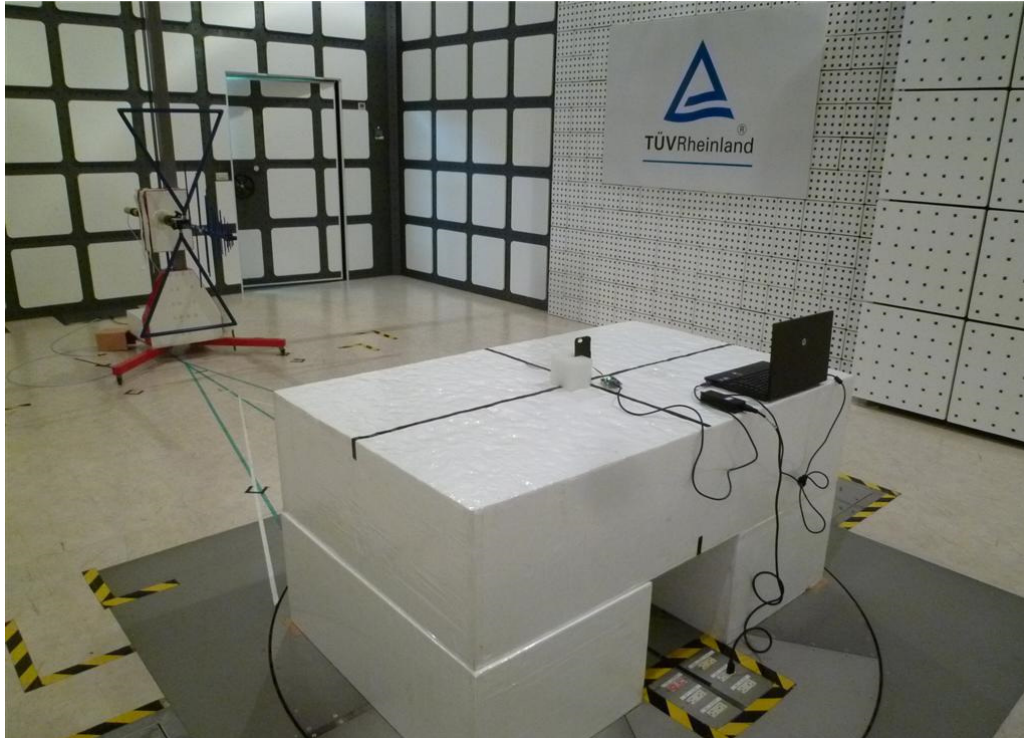


Photograph 3: Set-up for Spurious Emissions (Back View 2)

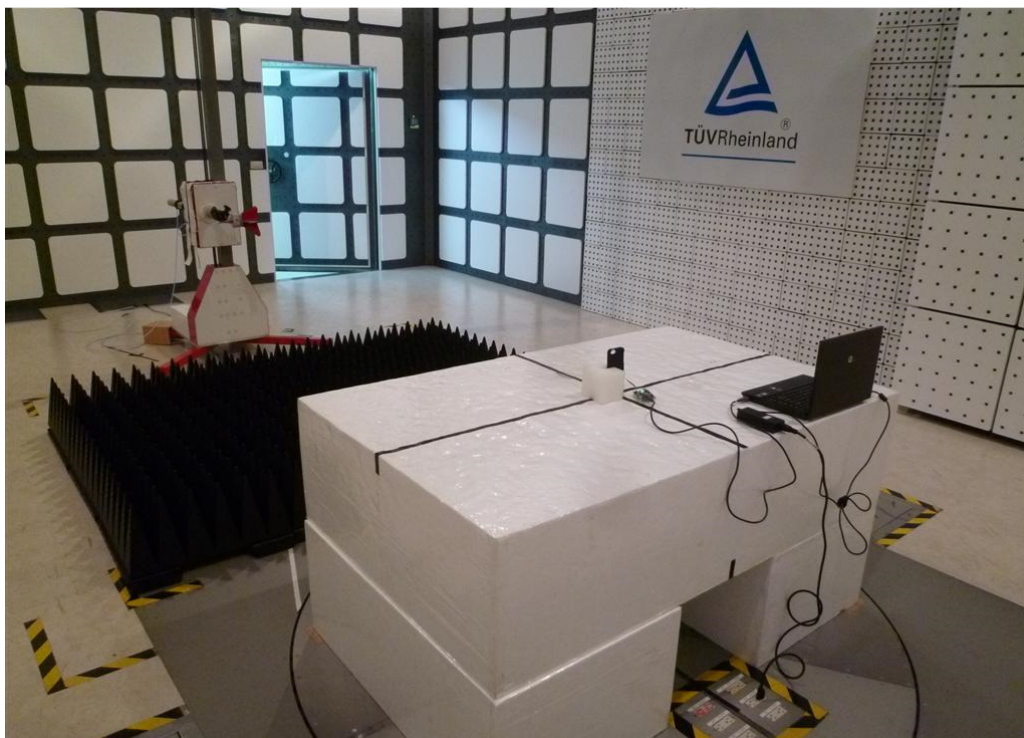

Photograph 4: Set-up for for Mains Conducted testing Back



Photograph 5: Set-up for for Mains Conducted testing Front

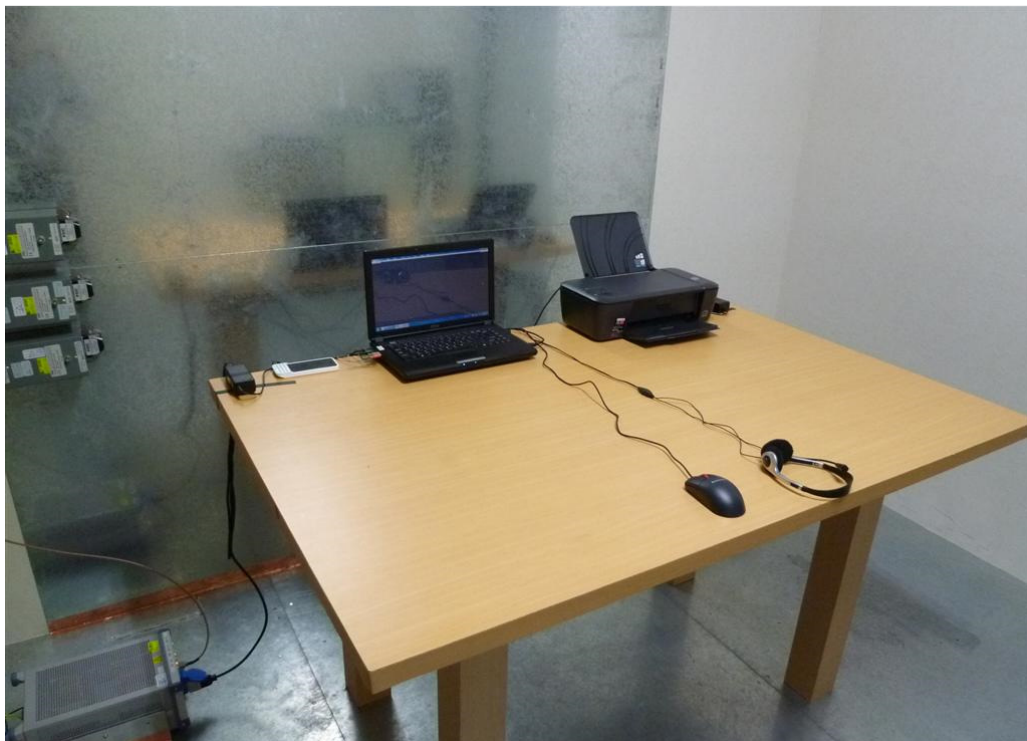

7. List of Tables

Table 1: Applied Standard and Test Levels	4
Table 2: List of Test and Measurement Equipment	6
Table 3: Emission Measurement Uncertainty.....	7
Table 4: Basic Information of EUT	8
Table 5: Technical Specification of EUT	8
Table 6: Test result of Field strength of fundamental.....	14

8. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	16
Photograph 2: Set-up for Spurious Emissions (Back View 1)	17
Photograph 3: Set-up for Spurious Emissions (Back View 2)	17
Photograph 4: Set-up for for Mains Conducted testing Back	18
Photograph 5: Set-up for for Mains Conducted testing Front.....	18