

CENTRE OF TESTING SERVICE INTERNATIONAL

OPERATE ACCORDING TO ISO/IEC 17025

FCC ID/IC TEST REPORT

TEST REPORT NUMBER: CGZ3170406-00507-EFI



CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China





TEST REPORT For FCC ID/IC 47 CFR PART 15 OCT, 2016 RSS-247 Issue 2 Report Reference No. CGZ3170406-00507-EFI Date of issue 10 May 2017 Testing Laboratory Name CENTRE OF TESTING SERVICE CO., LTD. Address........... A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Testing location/ procedure Full application of Harmonised standards ■ Partial application of Harmonised standards □ Other standard testing method \square Applicant's name Rigado, Inc. Test specification Standard RSS-247 Issue 2; RSS-Gen Issue 4 47 CFR PART 15 OCT, 2016; ANSI C63.10:2013 Test Report Form No. CTSEMC-1.0 TRF Originator CENTRE OF TESTING SERVICE CO., LTD. Master TRF Dated 2009-01 CENTRE OF TESTING SERVICE CO., LTD. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the CENTRE OF TESTING SERVICE CO., LTD. is acknowledged as copyright owner and source of the material. CENTRE OF TESTING SERVICE CO., LTD takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. Test item description.....QCA6234 Trade Mark..... Rigado Manufacturer...... Rigado, Inc. Model/Type reference...... QCA6234 Ratings...... DC 3.3~3.6V

Compiled by:

Result Positive

Supervised by:

Approved by:

Kate zhang / Fileadministrators

Duke yang / Technique principal

Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





FCC ID/IC -- TEST REPORT

Test Report No. : CGZ3170406-00507-EFI

10 May 2017
Date of issue

Type / Model	QCA6234
	0040004
EUT	QCA6234
Applicant	Rigado, Inc.
Address	3950 Fariview Industrial Dr SE, Suite 100, Salem, OR USA, 97302
Telephone	+1-971-208-9857
Fax	+1-971-208-9869
Contact	Cam Nichols
Manufacturer	Rigado, Inc.
Address	3950 Fariview Industrial Dr SE, Suite 100, Salem, OR USA, 97302
Telephone	+1-971-208-9857
Fax	+1-971-208-9869
Contact	Cam Nichols
Factory	Rigado, Inc.
Address	3950 Fariview Industrial Dr SE, Suite 100, Salem, OR USA, 97302
Telephone	+1-971-208-9857
Fax	+1-971-208-9869
Contact	Cam Nichols

Test Result according to the standards on page 1: PASSED

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.



TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1.0 TEST STANDARDS	5
2.0 SUMMARY	5
2.1 GENERAL REMARKS	5
2.2 FINAL ASSESSMENT	5
3.0 EQUIPMENT UNDER TEST	5
3.1 Power supply system utilised	5
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
3.3 EUT OPERATION MODE	
3.4 EUT CONFIGURATION	6
4.0 TEST ENVIRONMENT	7
4.1 Address of the test laboratory	7
4.2 TEST FACILITY	
4.3 Environmental conditions	
4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT	
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	
4.6 MEASUREMENT UNCERTAINTY	8
5.0 SUMMARY OF STANDARDS AND RESULTS	8
5.1.DESCRIPTION OF STANDARDS AND RESULTS	8
6.0 POWER LINE CONDUCTED EMISSION TEST	9
6.1.Test Equipment	g
6.2. BLOCK DIAGRAM OF TEST SETUP	
6.3. POWER LINE CONDUCTED EMISSION TEST LIMITS	9
6.4.Test Procedure	9
6.5. POWER LINE CONDUCTED EMISSION TEST RESULTS	
7.0 6DB BANDWIDTH MEASUREMENT	
7.1 LIMITS	
7.2 MEASUREMENT EQUIPMENT USED	
7.3 TEST CONFIGURATION	
7.4 TEST PROCEDURE	
7.5 TEST RESULTS	13
8.0 PEAK POWER	19
8.1 LIMIT	
8.2 MEASUREMENT EQUIPMENT USED	
8.3 TEST CONDIGURATION	
Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.	

CENTRE OF TESTING SERVICE CO., LTD.



8.4 TEST PROCEDURE	
8.5 TEST RESULTS	20
9.0 PEAK POWER SPECTRAL DENSITY	21
9.1 LIMIT	21
9.2 MEASUREMENT EQUIPMENT USED	
9.3 TEST CONFIGURATION	
9.4 TEST PROCEDURE	
9.5 TEST RESULTS	21
10.0 BAND EDGES MEASUREMENT	28
10.1 LIMIT	28
10.2 MEASUREMENT EQUIPMENT USED	28
10.3 TEST CONFIGURATION	28
10.4 TEST PROCEDURE	28
10.5 TEST RESULTS	28
11.0 SPURIOUS EMISSIONS	35
11.1 LIMIT	35
11.2 TEST EQUIPMENT.	
11.3 TEST CONFIGURATION	
11.4 TEST PROCEDURE	37
11.5 TEST RESULTS	37
12.0 RECEIVER SUPRIOUS EMISSION	49
12.1 LIMIT	49
12.2 TEST EQUIPMENT	
12.3 TEST CONFIGURATION	
12.4 TEST PROCEDURE	
12.5 TEST RESULTS	
13. 99% OCCUPIED BANDWIDTH	55
13.1 TEST PROCEDUR	55
13.2. TEST EQUIPMENT	
13.3 TEST CONFIGURATION	
13.4 TEST PROCEDURE	
13.5 TEST RESULTS	55
14.0 ANTENNA REQUIREMENTS	62
14.1 STANDARD APPLICABLE	
14.2 Antenna Construction and Directional Gain	62
15.0 DEVIATION TO TEST SPECIFICATIONS	62





1.0 TEST STANDARDS

The tests were performed according to following standards:

- 47 CFR PART 15 OCT, 2016
- RSS-247 Issue 2
- RSS-Gen Issue 4
- ANSI C63.10:2013

2.0 SUMMARY

2.1 GENERAL REMARKS

Date of receipt of test sample	06 April 2017
Testing commenced on	06 April~10 May 2017
Testing concluded on	10 May 2017

2.2 FINAL ASSESSMENT

The FCC/IC requirements pertaining to the technical standards and tested operation modes are

- fulfilled.
- not fulfilled.

The equipment under test

- fulfils the FCC ID/IC requirements cited on page 1.
- does not fulfil the FCC ID/IC requirements cited on page 1.

3.0 EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : DC 3.3V by Jig, Jig DC 5V by Adapter

3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: 1

Serial number: Prototype

3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- □ Standby
- ☐ TX- Y position
- ☐ TX- Zposition
- TX- X position
- RX

802.11b/g/n(20M):TX-X Position Low (2412.0 MHz) 5.5Mbps worst case,

TX-X Position Middle (2437.0 MHz) 54Mbps worst case,

TX-X Position High (2462.0 MHz) 72Mbps worst case

RX

Note:Operation mode TX -X position of EUT is the radiated test worst case. So only these test results be recorded in the test report.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





3.4 EUT configuration

3.4.1. Description of configuration (EUT)

Description	:	QCA6234
Model Number	:	QCA6234
Operation frequency	:	802.11b/g/n(20M):2412.0 MHZ~2462.0 MHz
WiFi	:	802.11:b/g/n
Modulation Technology	:	DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64QAM
		802.11b: 5.5, 2, 1 Mbps
Date Rate		802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps
		802.11n20: 72Mbps

3.4.2. Tested Supporting System Details

N/A

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





4.0 TEST ENVIRONMENT

4.1 Address of the test laboratory

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

IC-Registration No.: 8374A

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on May 22, 2014.

FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 13,2012.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 ° C
Humidity:	25~75 %
Atmospheric pressure:	86~106 kPa

4.4 Definitions of symbols used in this test report

- - The black square indicates that the listed condition, standard or equipment is applicable for this report.
- The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170406-00507-EFI Page 7 of 62





4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Power disturbance	30MHz~300MHz	±1.38dB	(1)
	30MHz~300MHz	±3.14dB	(1)
Radiation emission (3m)	300MHz~1000MHz	±3.18dB	(1)
	1GHz~26.5GHz	±3.54dB	(1)

^{(1).} This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5.0 Summary of standards and results

5.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Results	
Conducted Emission Test	FCC Part 15 : 15.207 RSS-Gen Issue 4§ 7.2.4 ANSI C63.10:2013	PASSED	
6dB Bandwidth Measurement	FCC Part 15.247(a)(2) RSS-247 Issue 2§ 5.2(a) ANSI C63.10:2013	PASSED	
Peak Power	FCC Part 15.247(b)(3)(4) RSS-247 Issue 2§ 5.4(d) ANSI C63.10:2013	PASSED	
Peak Power Spectral Density	FCC Part 15.247(e) RSS-247 Issue 2§ 5.2(b) ANSI C63.10:2013	PASSED	
Band edges measurement	FCC Part 15.247(d) RSS-247 Issue 2§ 5.5 ANSI C63.10:2013	PASSED	
Spurious Emissions	FCC Part 15: 15.209 RSS-Gen Issue 4§ 7.2 ANSI C63.10:2013	PASSED	
Receiver Spurious Emissions	RSS-Gen Issue 4§ 4.10 ANSI C63.10:2013	PASSED	
99% Bandwidth	RSS-Gen Issue 4 § 6.6 ANSI C63.10:2013	PASSED	
Antenna Requirements	FCC Part 15: 15.203 ANSI C63.10:2013	PASSED	
N/A is an abbreviation for Not Applicable.			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.






6.0 Power Line Conducted Emission Test

6.1.Test Equipment

Conduc	ted Disturbance				
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2016/10
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2016/10
3	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/026	2016/10
4	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2016/10
5	EMI Test Software	EZ-EMC	Farad	N/A	N/A

6.2. Block Diagram of Test Setup



(EUT: QCA6234)

6.3. Power Line Conducted Emission Test Limits

Standard: FCC Part 15: 15.207, ANSI C63.10-2013

		Maximum RF Line Voltage	
Frequ	uency	Quasi-Peak Level	Average Level
		dB(μV)	dB(μV)
150kHz	~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz	~ 5MHz	56	46
5MHz	~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

6.4.Test Procedure

The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC Part 15C on Conducted Emission Test.

6.5. Power Line Conducted Emission Test Results PASSED.

The frequency range from 150KHz~30MHz is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


Report No.: CGZ3170406-00507-EFI Page 9 of 62





Test point:	L	Result:	■ - passed
Frequency range:	0.15MHz~30MHz		☐ - not passed

EUT	QCA6234
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test Date:	06 April~10 May 2017
Operator	Duke
MODEL NO	QCA6234

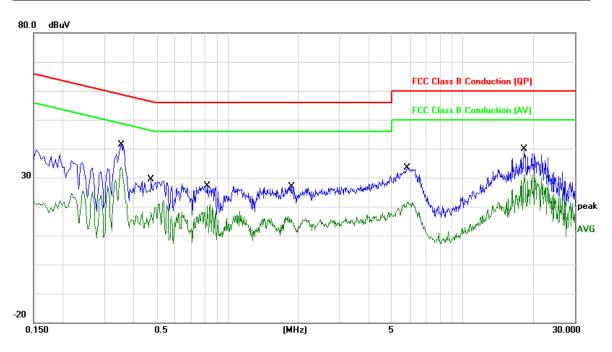

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	0.3540	10.20	29.51	39.71	58.87	-19.16	QP
2	0.3540	10.20	23.14	33.34	48.87	-15.53	AVG
3	0.4740	10.20	15.28	25.48	56.44	-30.96	QP
4	0.4740	10.20	7.32	17.52	46.44	-28.92	AVG
5	0.8220	10.27	14.00	24.27	56.00	-31.73	QP
6	0.8220	10.27	9.58	19.85	46.00	-26.15	AVG
7	1.8740	10.40	12.05	22.45	56.00	-33.55	QP
8	1.8740	10.40	3.67	14.07	46.00	-31.93	AVG
9	5.8300	10.83	18.40	29.23	60.00	-30.77	QP
10	5.8300	10.83	9.22	20.05	50.00	-29.95	AVG
11	18.2420	11.20	25.80	37.00	60.00	-23.00	QP
12	18.2420	11.20	19.46	30.66	50.00	-19.34	AVG
Remark:	: Other frequen	icy mini ma	rgin all >6 dB	of Limit			

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn







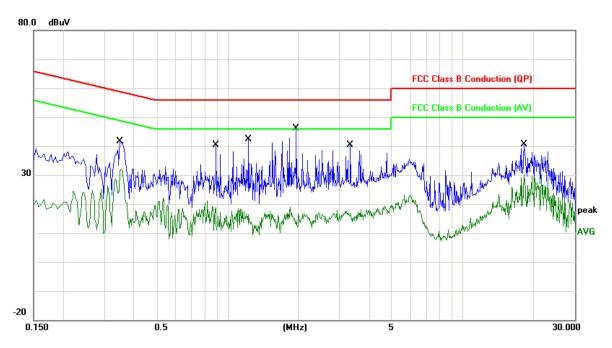

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	0.3500	10.31	30.03	40.34	58.96	-18.62	QP
2	0.3500	10.31	21.58	31.89	48.96	-17.07	AVG
3	0.8980	10.41	14.37	24.78	56.00	-31.22	QP
4	0.8980	10.41	1.60	12.01	46.00	-33.99	AVG
5	1.2300	10.45	14.69	25.14	56.00	-30.86	QP
6	1.2300	10.45	2.74	13.19	46.00	-32.81	AVG
7	1.9660	10.52	15.40	25.92	56.00	-30.08	QP
8	1.9660	10.52	3.02	13.54	46.00	-32.46	AVG
9	3.3340	10.64	14.04	24.68	56.00	-31.32	QP
10	3.3340	10.64	4.07	14.71	46.00	-31.29	AVG
11	18.2420	11.47	25.25	36.72	60.00	-23.28	QP
12	18.2420	11.47	18.11	29.58	50.00	-20.42	AVG
Remark:	Other frequen	icy mini ma	rgin all >6 dB	of Limit			·





7.0 6dB BANDWIDTH MEASUREMENT


7.1 LIMITS

According to §15.247(a)(2), RSS-247 Issue 2§ 5.2(a), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

7.2 MEASUREMENT EQUIPMENT USED

20dB Bandwidth							
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.		
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2017/03		

7.3 TEST CONFIGURATION



7.4 TEST PROCEDURE

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span =1.5 times of bandwidth, Sweep = auto.
- 4. Mark the peak frequency and -6dB (upper and lower) frequency.
- 5. Repeat until all the rest channels are investigated

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.





7.5 TEST RESULTS

Modulation Standard	Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (KHz)	Result
802.11b:	Low	2412	4.25		PASSED
5.5Mbps	Middle	2437	4.25	>500	PASSED
(Worst Case)	High	2462	4.20		PASSED
802.11g:	Low	2412	16.40		PASSED
54Mbps	Middle	2437	16.40	>500	PASSED
(Worst Case)	High	2462	16.40		PASSED
802.11n(20):	Low	2412	17.70		PASSED
72Mbps ´	Middle	2437	17.75	>500	PASSED
(Worst Case)	High	2462	17.70		PASSED

Remark: The Bandwidth is Delta 2 of following the graph. And the Delta 2 is Marker 2 subtract Marker 1.


Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





Test Plot



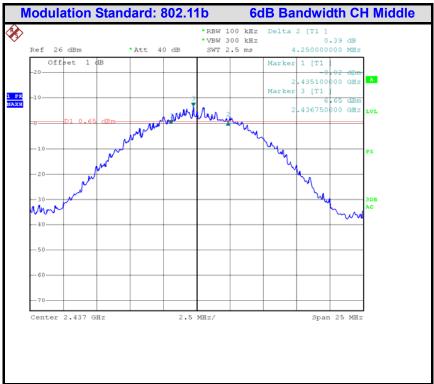



Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.





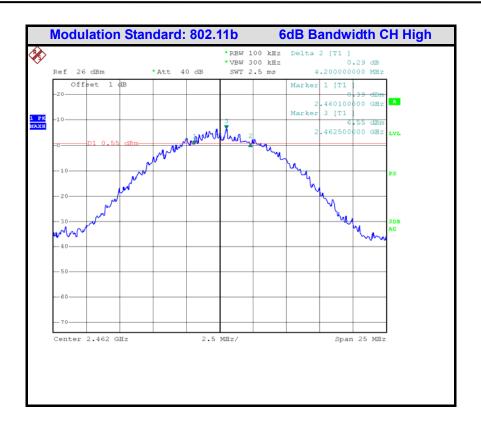


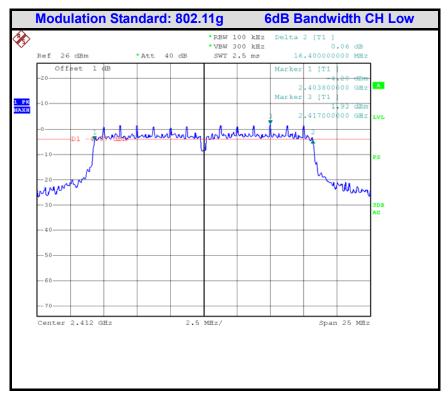


CENTRE OF TESTING SERVICE CO., LTD.





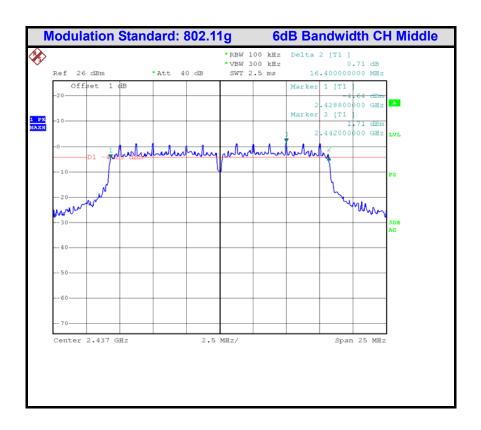

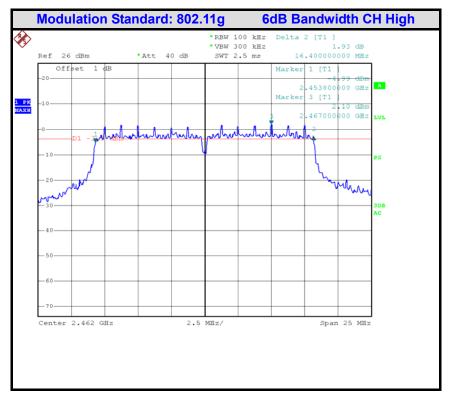

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





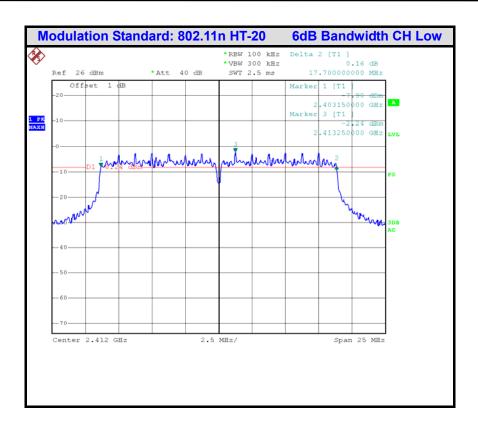

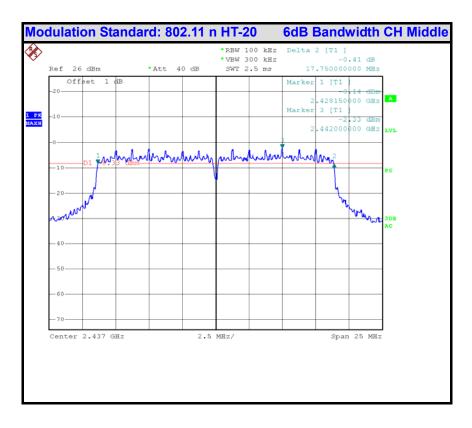

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





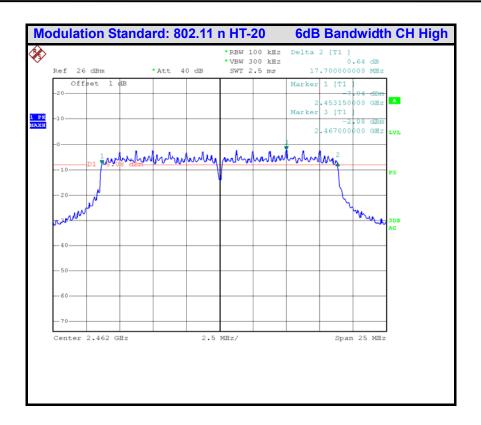





8.0 PEAK POWER

8.1 LIMIT


The maximum peak output power of the intentional radiator shall not exceed the following:

- 1. According to §15.247(b)(3), RSS-247 Issue 2§ 5.4(4), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
- 2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 MEASUREMENT EQUIPMENT USED

Peak Power								
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.			
1	Power meter	ROHDE & SCHWARZ	NRVS	842856/049	2017/03			
2	Power Sensor	ROHDE & SCHWARZ	NRP-Z21	1137.6000.02	2017/03			

8.3 TEST CONDIGURATION



8.4 TEST PROCEDURE

- 1. According to KDB 558074 D01 Setup the Power Sensor on Average mode.
- 2. Set the EUT on transmit continuously mode.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





8.5 TEST RESULTS

Passed Test Data

rest Data					
Modulation Standard	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	Result
802.11b:	Low	2412	14.46		PASSED
5.5Mbps	Middle	2437	14.37		PASSED
(Worst Case)	High	2462	14.95		PASSED
802.11g:	Low	2412	15.59		PASSED
54Mbps	Middle	2437	15.68	30dBm	PASSED
(Worst Case)	High	2462	15.71		PASSED
802.11n(20):	Low	2412	12.85		PASSED
72Mbps (Worst Case)	Middle	2437	12.63		PASSED
(VVOISE Case)	High	2462	13.06		PASSED

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





9.0 PEAK POWER SPECTRAL DENSITY

9.1 LIMIT


 According to §15.247(e), RSS-247 Issue 2 § 5.2(b), For DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz1:

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

9.2 MEASUREMENT EQUIPMENT USED

Peak Power Spectral Density								
Item	em Test Equipment Manufacturer Model No. Serial No.							
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2017/03			

9.3 TEST CONFIGURATION



9.4 TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5 times the bandwidth, Sweep=Auto couple
- 4. Record the max. reading.
- 5. Repeat the above procedure until the measurements for all frequencies are completed.

9.5 TEST RESULTS

PASSED

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170406-00507-EFI Page 21 of 62





Test Data


Modulation Standard	Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b:	Low	2412	-7.89		PASSED
5.5Mbps	Middle	2437	-7.77		PASSED
(Worst Case)	High	2462	-7.89		PASSED
802.11g:	Low	2412	-13.84		PASSED
54Mbps	Middle	2437	-14.13	8	PASSED
(Worst Case)	High	2462	-13.75		PASSED
802.11n(20):	Low	2412	-16.42		PASSED
72Mbps (Worst Case)	Middle	2437	-16.30		PASSED
	High	2462	-16.52		PASSED


Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





Test Plot

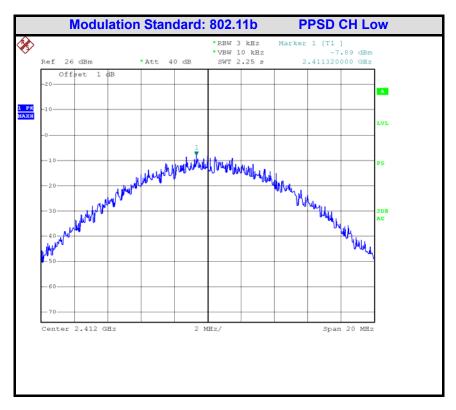

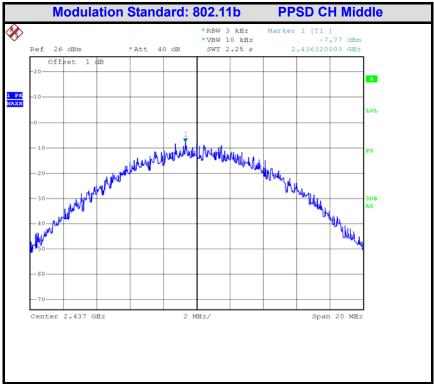

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





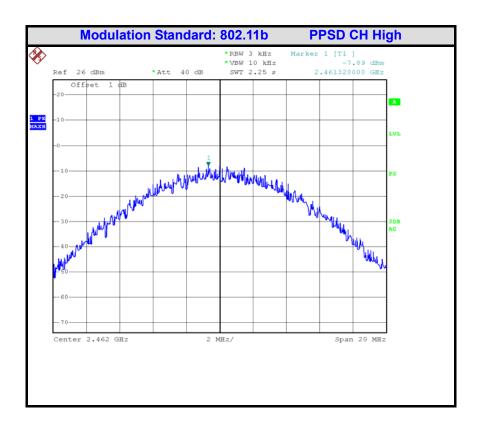

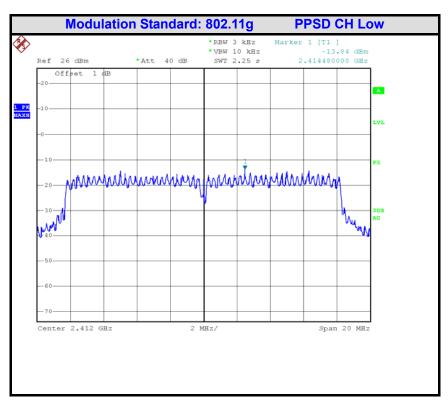

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





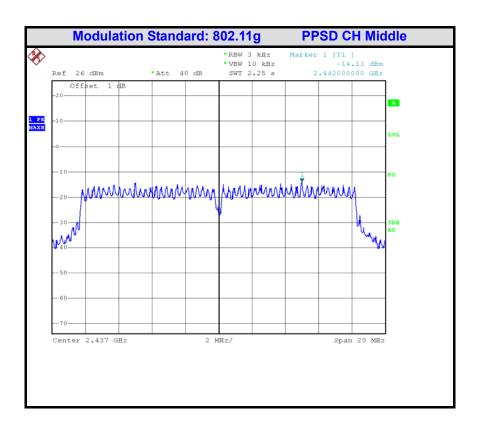

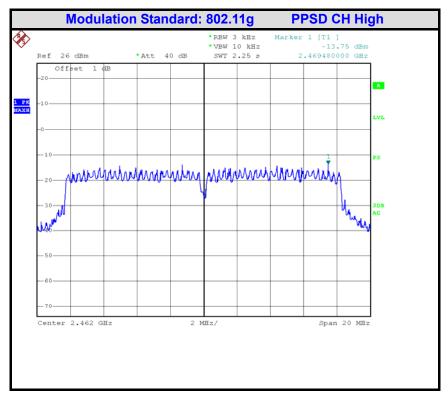

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





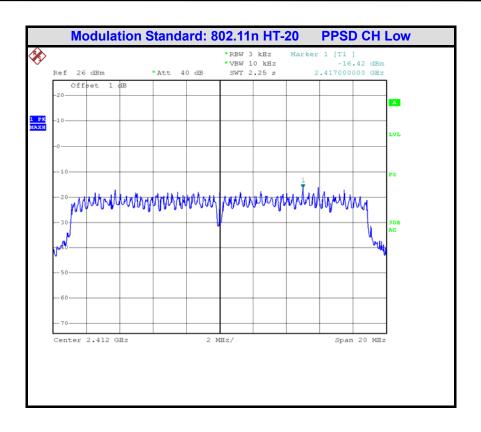

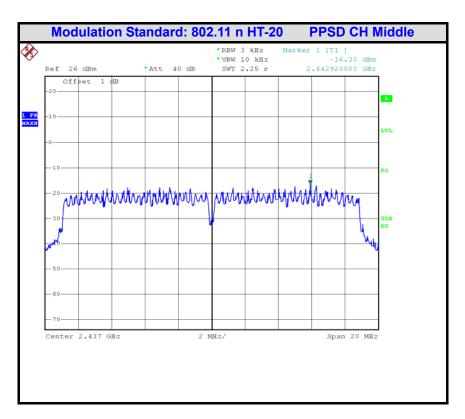

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





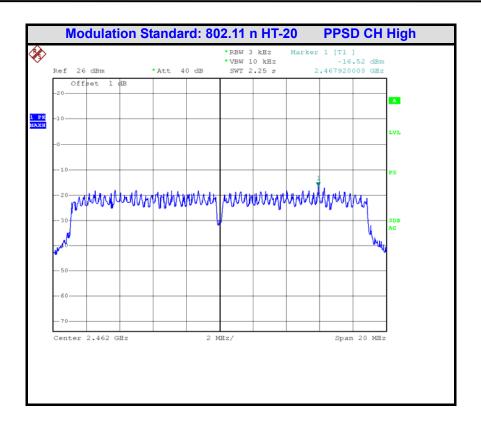





10.0 BAND EDGES MEASUREMENT


10.1 LIMIT

According to §15.247(d), RSS-247 Issue 2 § 5.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required..

10.2 MEASUREMENT EQUIPMENT USED

Radiated disturbance (electric field)								
Item	Test Equipment Manufacturer Model No. Serial No. Last Cal.							
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2017/03			

10.3 Test Configuration



10.4 TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep=Auto couple
- 4. Record the max. reading.
- 5. Repeat the above procedure until the measurements for all frequencies are

10.5 TEST RESULTS

Refer to attach spectrum analyzer data chart.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service


Report No.: CGZ3170406-00507-EFI Page 28 of 62





Test Polt:

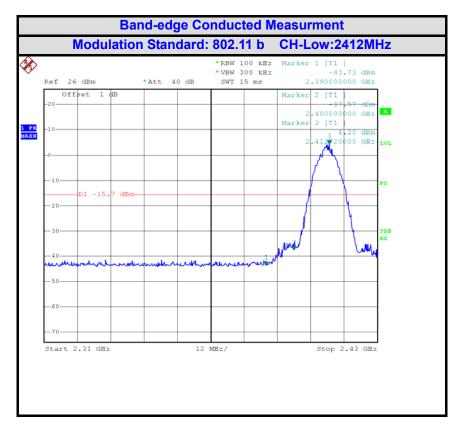


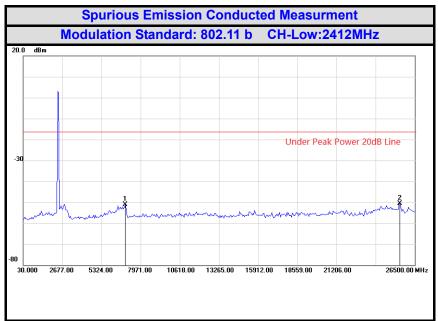


Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.






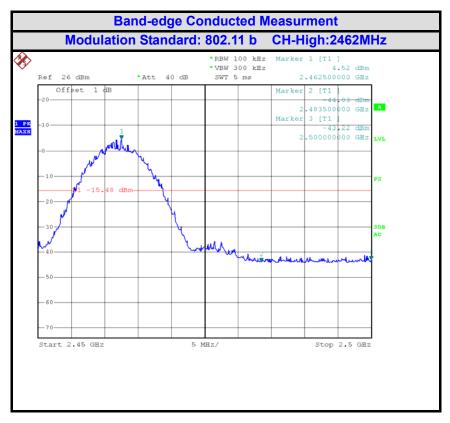


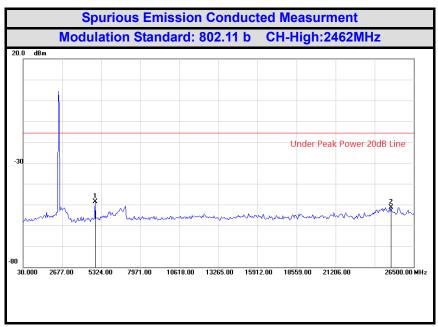






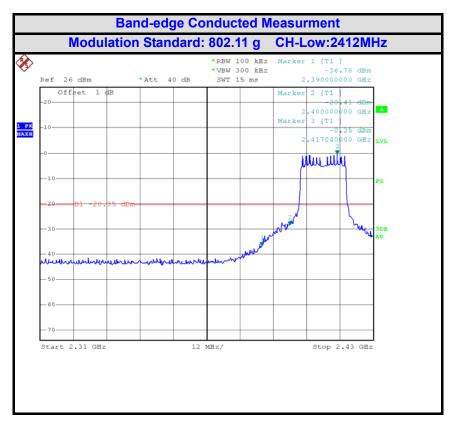


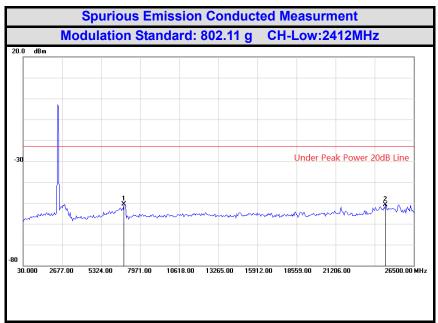





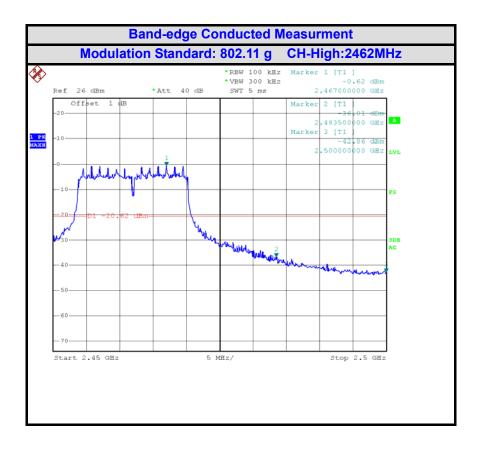


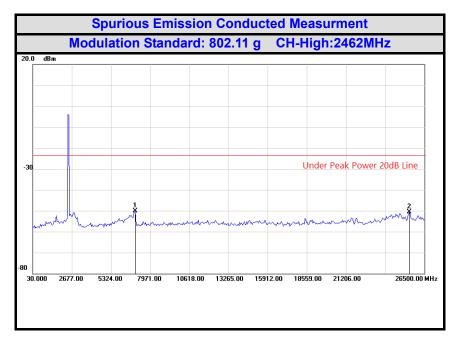


CENTRE OF TESTING SERVICE CO., LTD.






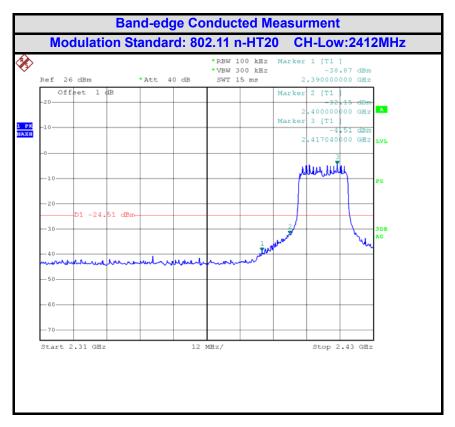


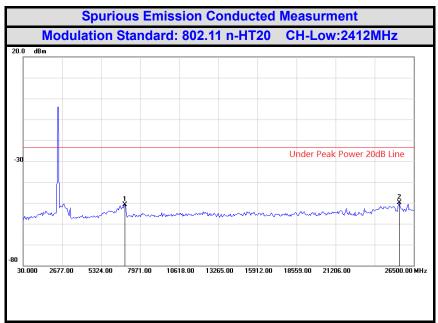





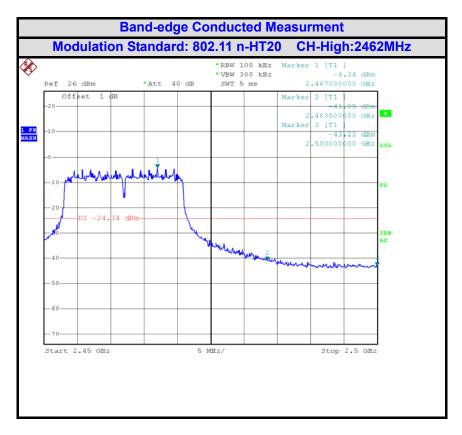

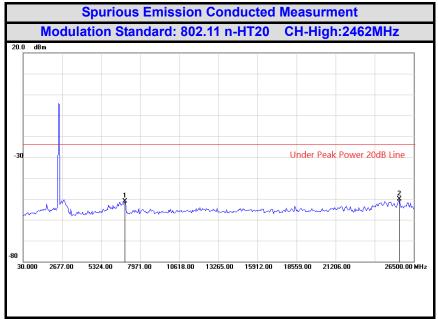

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn





11.0 SPURIOUS EMISSIONS

11.1 LIMIT

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FRE	QUEN	CY	DISTANCE	DISTANCE FIELD STRENGTHS L	
	MHz		Meters	μV/m	dB(μV)/m
0.009	~	0.490	300	2400/F(kHz)	
0.490	~	1.705	30	24000/F(kHz)	
1.705	~	30	30	30	
30	~	88	3	100	40.0
88	~	216	3	150	43.5
216	~	960	3	200	46.0
960	~	1000	3	500	54.0
Above 1000		000	3	Other:74.0 dB(μ 54.0 dB(μV)/n	

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.

11.2 Test Equipment

Radia	Radiated disturbance (electric field)								
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.				
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2016/10				
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2017/03				
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2017/03				
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2017/03				
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2017/03				
6	Loop Antenna	A.R.A	PLA-1030/B	1030	2016/10				
7	EMI Test Software	EZ-EMC	Farad	N/A	N/A				

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.






11.3 TEST CONFIGURATION


Below 30MHz

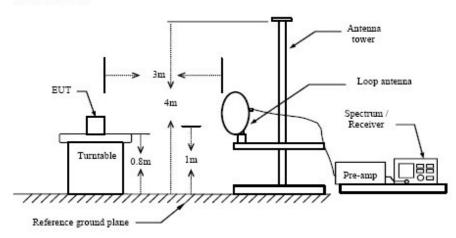

Below 1 GHz

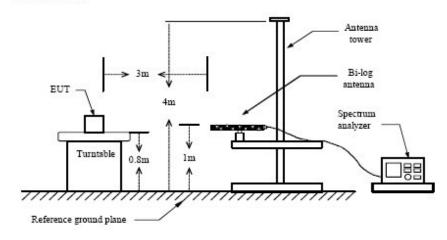

Above 1 GHz

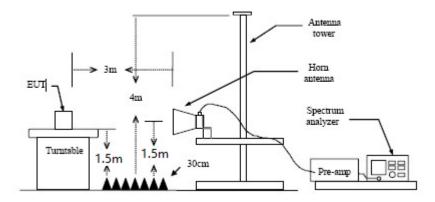

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn





11.4 TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m (1.5m for Above 1GHz) above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.

11.5 TEST RESULTS

The frequency range from 9KHz~30MHz,30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

FCC ID:2AA9B08
IC:12208A-08
CENTRE OF TESTING SERVICE





Test Mode: TX –X Position Mode Result: □ - passed Frequency range: 9KHz~30MHz □ - not passed

No.	Frequency (MHz)	Factor (dB)		Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
Rem	Remark: The test result reading value is to low, margin all > 20dB of the limit.							

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


Report No.: CGZ3170406-00507-EFI





EUT	QCA6234			
Test Condition	Ambient Temperature: 25°C Humidity: 56%			
Test distance	3 Meter			
Test Date:	06 April ~ 10 May 2017			
Operator	Duke			
MODEL NO	QCA6234			

Channel:	TX –X Position	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	30MHz-1GHz		

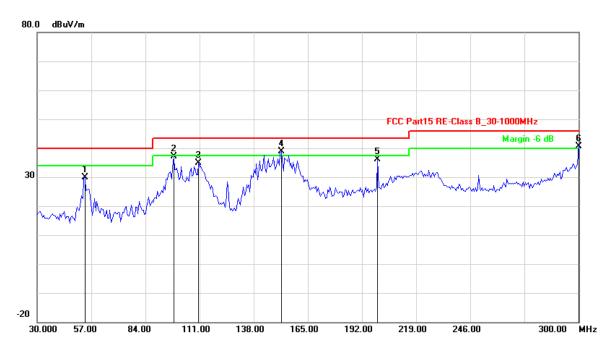

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	53.8076	-18.17	48.00	29.83	40.00	-10.17	QP		
2	98.1764	-17.68	54.91	37.23	43.50	-6.27	QP		
3	110.6212	-16.65	51.54	34.89	43.50	-8.61	QP		
4	151.7435	-15.30	54.17	38.87	43.50	-4.63	QP		
5	199.8998	-11.74	47.89	36.15	43.50	-7.35	QP		
6	300.0000	-1.13	41.78	40.65	46.00	-5.35	QP		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





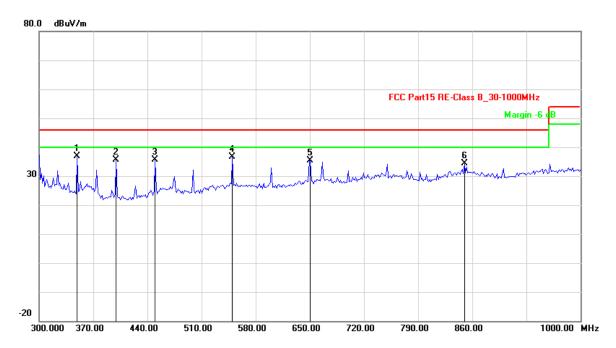

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	349.0981	-11.08	47.89	36.81	46.00	-9.19	QP		
2	399.5991	-10.29	45.81	35.52	46.00	-10.48	QP		
3	450.1001	-8.21	43.83	35.62	46.00	-10.38	QP		
4	549.6993	-5.51	42.03	36.52	46.00	-9.48	QP		
5	650.7014	-3.15	38.55	35.40	46.00	-10.60	QP		
6	849.8998	-0.14	34.55	34.41	46.00	-11.59	QP		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								





Modulation Standard:	802.11 b	Result:	■ - passed
Channel:	Low Channel		☐ - not passed
Test point:	Horizontal		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1351.37	0.46	40.40	40.86	74.00	-33.14	peak		
2	1351.37	0.46	25.68	26.14	54.00	-27.86	AVG		
3	5658.56	7.87	37.87	45.74	74.00	-28.26	peak		
4	5658.56	7.87	23.07	30.95	54.00	-23.05	AVG		
Remark	Remark: Other frequency mini margin all >20 dB of Limit								

Modulation Standard:	802.11 b	Result:	■ - passed
Channel:	Middle Channel		☐ - not passed
Test point:	Horizontal		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1015.11	-2.61	43.50	40.89	74.00	-33.11	peak		
2	1015.11	-2.61	29.07	26.45	54.00	-27.55	AVG		
3	5347.02	6.95	36.55	43.51	74.00	-30.49	peak		
4	5347.02	6.95	22.54	29.50	54.00	-24.50	AVG		
Remark:	Remark: Other frequency mini margin all >20 dB of Limit								

Modulation Standard:	802.11 b	Result:	■ - passed
Channel:	High Channel		□ - not passed
Test point:	Horizontal		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1301.77	0.01	41.22	41.23	74.00	-32.77	peak		
2	1301.77	0.01	26.81	26.82	54.00	-27.18	AVG		
3	5626.37	7.78	38.62	46.40	74.00	-27.60	peak		
4	5626.37	7.78	24.21	31.98	54.00	-22.02	AVG		
Remark:	Remark: Other frequency mini margin all >20 dB of Limit								

CENTRE OF TESTING SERVICE CO., LTD.





Modulation Standard:	802.11 g	Result:	■ - passed
Channel:	Low Channel		□ - not passed
Test point:	Horizontal		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1130.97	-1.55	41.63	40.08	74.00	-33.92	peak		
2	1130.97	-1.55	26.87	25.31	54.00	-28.69	AVG		
3	5392.56	7.09	37.61	44.69	74.00	-29.31	peak		
4	5392.56	7.09	23.16	30.25	54.00	-23.75	AVG		
Remark	Remark: Other frequency mini margin all >20 dB of Limit								

Modulation Standard:	802.11 g	Result:	■ - passed
Channel:	Middle Channel		□ - not passed
Test point:	Horizontal		•
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1778.29	3.43	38.08	41.51	74.00	-32.49	peak		
2	1778.29	3.43	23.83	27.26	54.00	-26.74	AVG		
3	5497.02	7.40	36.13	43.53	74.00	-30.47	peak		
4	5497.02	7.40	21.84	29.24	54.00	-24.76	AVG		
Remark	Remark: Other frequency mini margin all >20 dB of Limit								

Modulation Standard:	802.11 g	Result:	■ - passed
Channel:	High Channel		☐ - not passed
Test point:	Horizontal		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1861.19	3.91	39.77	43.69	74.00	-30.31	peak		
2	1861.19	3.91	25.22	29.13	54.00	-24.87	AVG		
3	5199.35	6.52	36.82	43.34	74.00	-30.66	peak		
4	5199.35	6.52	21.97	28.49	54.00	-25.51	AVG		
Remark:	Remark: Other frequency mini margin all >20 dB of Limit								

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	Low Channel		□ - not passed
Test point:	Horizontal		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	1488.06	1.71	39.52	41.23	74.00	-32.77	peak			
2	1488.06	1.71	24.72	26.43	54.00	-27.57	AVG			
3	5584.56	7.65	38.56	46.22	74.00	-27.78	peak			
4	5584.56	7.65	23.63	31.28	54.00	-22.72	AVG			
Remark	Remark: Other frequency mini margin all >20 dB of Limit									

Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	Middle Channel		□ - not passed
Test point:	Horizontal		•
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1615.81	2.49	40.72	43.21	74.00	-30.79	peak		
2	1615.81	2.49	25.91	28.40	54.00	-25.60	AVG		
3	5834.74	8.39	36.54	44.93	74.00	-29.07	peak		
4	5834.74	8.39	21.58	29.97	54.00	-24.03	AVG		
Remark:	Remark: Other frequency mini margin all >20 dB of Limit								


Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	High Channel		□ - not passed
Test point:	Horizontal		
Frequency range:	1GHz-26.5GHz		


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1010.13	-2.66	46.23	43.58	74.00	-30.42	peak		
2	1010.13	-2.66	32.04	29.38	54.00	-24.62	AVG		
3	5821.69	8.35	38.45	46.80	74.00	-27.20	peak		
4	5821.69	8.35	23.83	32.19	54.00	-21.81	AVG		
Remark:	Remark: Other frequency mini margin all >20 dB of Limit								

CENTRE OF TESTING SERVICE CO., LTD.








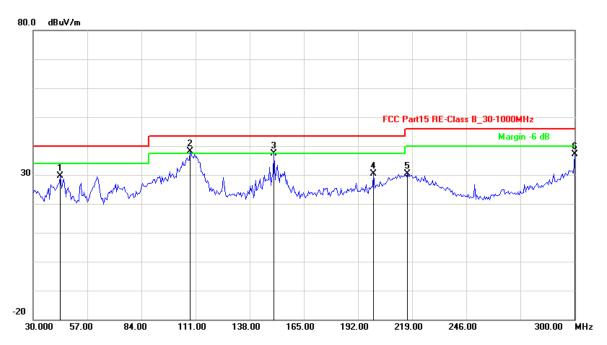

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	43.5270	-16.91	46.46	29.55	40.00	-10.45	QP		
2	108.4569	-16.82	55.05	38.23	43.50	-5.27	QP		
3	150.1202	-15.29	52.76	37.47	43.50	-6.03	QP		
4	199.8997	-11.74	42.23	30.49	43.50	-13.01	QP		
5	216.6733	-10.14	40.44	30.30	46.00	-15.70	QP		
6	300.0000	-1.13	38.36	37.23	46.00	-8.77	QP		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								





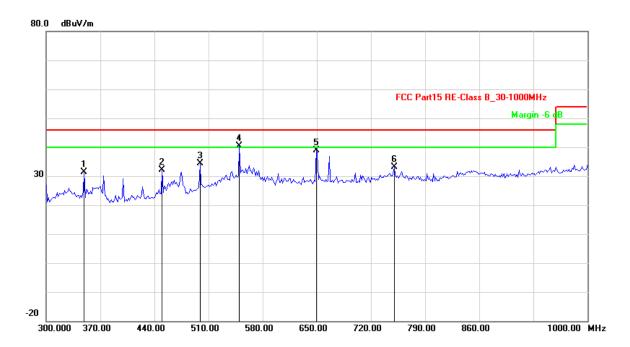

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	349.0982	-11.08	42.44	31.36	46.00	-14.64	QP
2	450.1002	-8.21	40.46	32.25	46.00	-13.75	QP
3	499.1984	-7.68	42.11	34.43	46.00	-11.57	QP
4	549.6994	-5.51	45.99	40.48	46.00	-5.52	QP
5	649.2986	-3.18	41.97	38.79	46.00	-7.21	QP
6	750.3006	-1.34	34.58	33.24	46.00	-12.76	QP
Remark:	Other frequen	icy mini ma	rgin all >6 dB o	of Limit			





Modulation Standard:	802.11 b	Result:	■ - passed
Channel:	Low Channel		□ - not passed
Test point:	Vertical		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1714.78	3.07	37.77	40.83	74.00	-33.17	peak	
2	1714.78	3.07	22.95	26.01	54.00	-27.99	AVG	
3	5793.35	8.27	38.70	46.97	74.00	-27.03	peak	
4	5793.35	8.27	24.17	32.44	54.00	-21.56	AVG	
Remark	Remark: Other frequency mini margin all >20 dB of Limit							

Modulation Standard:	802.11 b	Result:	■ - passed
Channel:	Middle Channel		□ - not passed
Test point:	Vertical		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1152.25	-1.36	44.50	43.14	74.00	-30.86	peak		
2	1152.25	-1.36	30.17	28.81	54.00	-25.19	AVG		
3	5089.48	6.19	36.93	43.13	74.00	-30.87	peak		
4	5089.48	6.19	22.66	28.86	54.00	-25.14	AVG		
Remark:	Remark: Other frequency mini margin all >20 dB of Limit								

Modulation Standard: Channel:	802.11 b High Channel	Result:	■ - passed □ - not passed
Test point: Frequency range:	Vertical 1GHz-26.5GHz		Thet passed

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1536.02	2.03	39.32	41.35	74.00	-32.65	peak	
2	1536.02	2.03	24.77	26.80	54.00	-27.20	AVG	
3	5306.09	6.83	36.18	43.01	74.00	-30.99	peak	
4	5306.09	6.83	21.27	28.10	54.00	-25.90	AVG	
Remark:	Remark: Other frequency mini margin all >20 dB of Limit							

CENTRE OF TESTING SERVICE CO., LTD.





Modulation Standard:	802.11 g	Result:	■ - passed
Channel:	Low Channel		□ - not passed
Test point:	Vertical		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1886.88	4.06	37.23	41.29	74.00	-32.71	peak
2	1886.88	4.06	22.69	26.75	54.00	-27.25	AVG
3	5133.04	6.32	39.38	45.71	74.00	-28.29	peak
4	5133.04	6.32	24.77	31.09	54.00	-22.91	AVG
Remark	Other frequen	icy mini ma	rgin all >20 dB	of Limit			

Modulation Standard:	802.11 g	Result:	■ - passed
Channel:	Middle Channel		□ - not passed
Test point:	Vertical		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1249.79	-0.47	41.55	41.08	74.00	-32.92	peak	
2	1249.79	-0.47	27.51	27.04	54.00	-26.96	AVG	
3	5644.38	7.83	36.49	44.32	74.00	-29.68	peak	
4	5644.38	7.83	21.51	29.34	54.00	-24.66	AVG	
Remark:	Remark: Other frequency mini margin all >20 dB of Limit							

Modulation Standard:	802.11 g	Result:	■ - passed
Channel:	High Channel		□ - not passed
Test point:	Vertical		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1173.71	-1.16	42.51	41.35	74.00	-32.65	peak		
2	1173.71	-1.16	28.03	26.86	54.00	-27.14	AVG		
3	5708.46	8.02	36.25	44.27	74.00	-29.73	peak		
4	5708.46	8.02	21.38	29.40	54.00	-24.60	AVG		
Remark:	Remark: Other frequency mini margin all >20 dB of Limit								

CENTRE OF TESTING SERVICE CO., LTD.





Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	Low Channel		☐ - not passed
Test point:	Vertical		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1643.72	2.65	40.84	43.50	74.00	-30.50	peak	
2	1643.72	2.65	26.20	28.85	54.00	-25.15	AVG	
3	5482.29	7.35	38.81	46.16	74.00	-27.84	peak	
4	5482.29	7.35	24.06	31.41	54.00	-22.59	AVG	
Remark:	Remark: Other frequency mini margin all >20 dB of Limit							

Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	Middle Channel		☐ - not passed
Test point:	Vertical		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1791.67	3.51	38.05	41.57	74.00	-32.43	peak	
2	1791.67	3.51	23.42	26.93	54.00	-27.07	AVG	
3	5014.58	5.97	40.40	46.37	74.00	-27.63	peak	
4	5014.58	5.97	26.36	32.33	54.00	-21.67	AVG	
Remark	Remark: Other frequency mini margin all >20 dB of Limit							

Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	High Channel		☐ - not passed
Test point:	Vertical		not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1272.83	-0.26	43.16	42.90	74.00	-31.10	peak		
2	1272.83	-0.26	29.00	28.75	54.00	-25.25	AVG		
3	5287.15	6.78	39.96	46.74	74.00	-27.26	peak		
4	5287.15	6.78	25.54	32.32	54.00	-21.68	AVG		
Remark	Remark: Other frequency mini margin all >20 dB of Limit								

CENTRE OF TESTING SERVICE CO., LTD.





12.0 RECEIVER SUPRIOUS EMISSION

12.1 LIMIT

According to RSS-Gen Issue 4§7.0.Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCY			DISTANCE	FIELD STRENGTHS LIMIT		
	MHz		Meters	μV/m	dB(μV)/m	
30	~	88	3	100	40.0	
88	~	216	3	150	43.5	
216	216 ~ 960		3	200	46.0	
960	~	1000	3	500	54.0	
Above 1000			3	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)		

12.2 TEST EQUIPMENT

Radia	Radiated disturbance (electric field)								
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.				
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2015/10				
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2017/03				
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2017/03				
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2017/03				
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2017/03				
6	Loop Antenna	A.R.A	PLA-1030/B	1030	2015/10				
7	EMI Test Software	EZ-EMC	Farad	N/A	N/A				

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406


E-mail: cts@cts-lab.com.cn






12.3 TEST CONFIGURATION



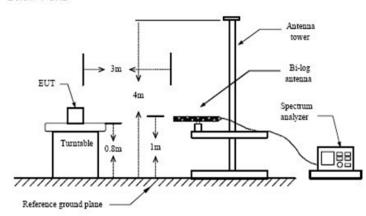

Above 1 GHz

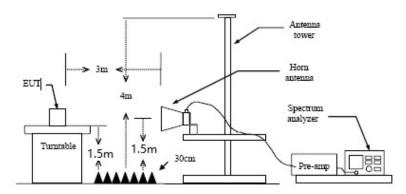

12.4 TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m (1.5m for Above 1GHz) above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.

12.5 TEST RESULTS

The frequency range from 30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406


Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





EUT	QCA6234
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Test Date:	06 April ~10 May 2017
Operator	Duke
MODEL NO	QCA6234

Channel:	RX	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	30MHz-1GHz		-

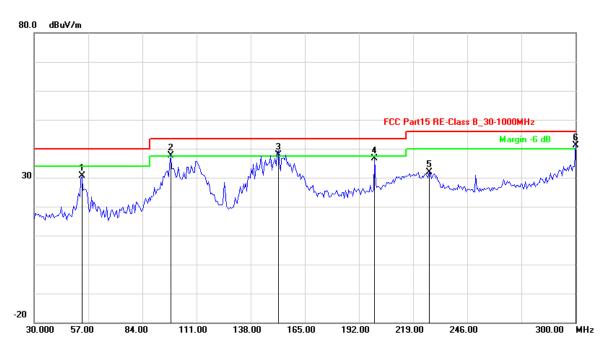


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	53.8076	-18.17	48.86	30.69	40.00	-9.31	QP
2	98.1763	-17.68	55.25	37.57	43.50	-5.93	QP
3	151.7434	-15.30	53.26	37.96	43.50	-5.54	QP
4	199.8997	-11.74	48.31	36.57	43.50	-6.93	QP
5	226.9539	-11.01	42.90	31.89	46.00	-14.11	QP
6	300.0000	-1.13	42.18	41.05	46.00	-4.95	QP
Remark	Other frequen	icy mini ma	rgin all >6 dB	of Limit			

CENTRE OF TESTING SERVICE CO., LTD.





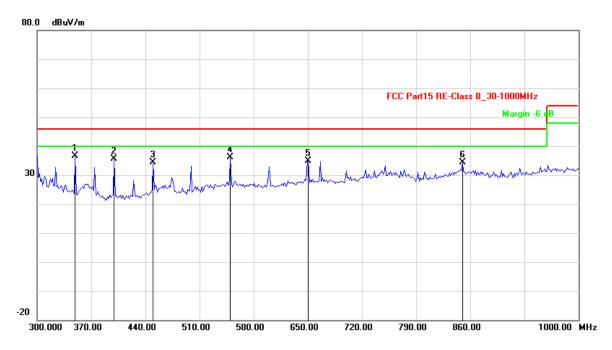

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	349.0982	-11.08	47.77	36.69	46.00	-9.31	QP			
2	399.5992	-10.29	46.00	35.71	46.00	-10.29	QP			
3	450.1002	-8.21	42.68	34.47	46.00	-11.53	QP			
4	549.6994	-5.51	41.75	36.24	46.00	-9.76	QP			
5	650.7014	-3.15	38.15	35.00	46.00	-11.00	QP			
6	849.8998	-0.14	34.61	34.47	46.00	-11.53	QP			
Remark	: Other frequen	Remark: Other frequency mini margin all >6 dB of Limit								

Channel:	RX	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1727.45	3.14	39.50	42.64	74.00	-31.36	peak		
2	1727.45	3.14	27.27	30.41	54.00	-23.59	AVG		
3	5452.90	7.27	38.27	45.54	74.00	-28.46	peak		
4	5452.90	7.27	26.31	33.58	54.00	-20.42	AVG		
Remark:	Remark: Other frequency mini margin all >20 dB of Limit								

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





Channel: RX
Test point: Vertical □ - not passed
Frequency range: 30MHz-1GHz □ - not passed

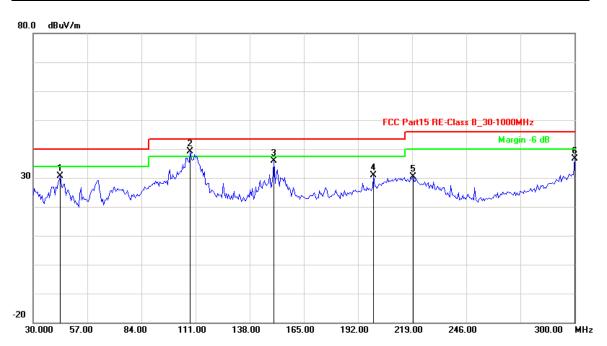


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	43.5271	-16.91	47.64	30.73	40.00	-9.27	QP		
2	108.4569	-16.82	55.88	39.06	43.50	-4.44	QP		
3	150.1202	-15.29	51.15	35.86	43.50	-7.64	QP		
4	199.8998	-11.74	42.66	30.92	43.50	-12.58	QP		
5	219.3788	-10.37	40.84	30.47	46.00	-15.53	QP		
6	300.0000	-1.13	37.88	36.75	46.00	-9.25	QP		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





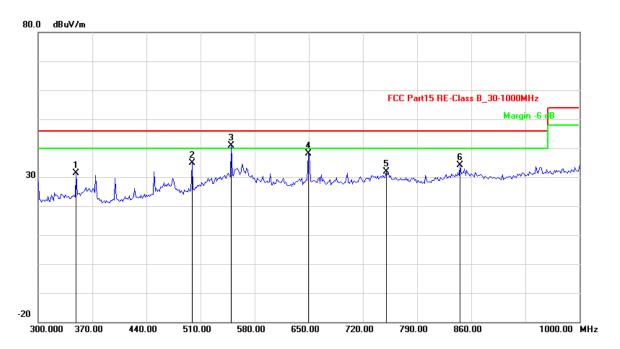

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	349.0981	-11.08	42.35	31.27	46.00	-14.73	QP		
2	499.1983	-7.68	42.57	34.89	46.00	-11.11	QP		
3	549.6993	-5.51	46.32	40.81	46.00	-5.19	QP		
4	649.2985	-3.18	41.25	38.07	46.00	-7.93	QP		
5	750.3006	-1.34	33.18	31.84	46.00	-14.16	QP		
6	845.6913	-0.37	34.48	34.11	46.00	-11.89	QP		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								

Channel:	RX	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1595.19	2.37	38.82	41.19	74.00	-32.81	peak		
2	1595.19	2.37	28.38	30.75	54.00	-23.25	AVG		
3	5717.43	8.05	38.90	46.95	74.00	-27.05	peak		
4	5717.43	8.05	25.60	33.65	54.00	-20.35	AVG		
Remark	Remark: Other frequency mini margin all >20 dB of Limit								

Note:Level=Reading+Factor. Margin= Level-Limit

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





13. 99% OCCUPIED BANDWIDTH


13.1 TEST PROCEDUR

According to RSS-Gen 6.6 The EUT RF output is connected to the spectrum analyzer. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The sweep time is coupled.

13.2. TEST EQUIPMENT

Band Edge Compliance test								
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.			
1	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2017/03			
2	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2017/03			

13.3 TEST CONFIGURATION



13.4 TEST PROCEDURE

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=100kHz, VBW=300kHz, Span=25MHz, Sweep = auto.
- 4. Mark the peak frequency and set 99% occupied bandwidth function on spectrum.
- 5. Repeat until all the test channels are investigated.

13.5 TEST RESULTS

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170406-00507-EFI Page 55 of 62





Modulation Standard	Channel	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Result
802.11b:	Low	2412	12.35		PASSED
5.5Mbps	Middle	2437	12.15		PASSED
(Worst Case)	High	2462	12.05		PASSED
802.11g:	Low	2412	16.55		PASSED
54Mbps	Middle	2437	16.50		PASSED
(Worst Case)	High	2462	16.50		PASSED
802.11n(20):	Low	2412	17.75		PASSED
72Mbps [′]	Middle	2437	17.75		PASSED
(Worst Case)	High	2462	17.75		PASSED


Remark:The Bandwidth is Delta 2 of following the graph. And the Delta 2 is Marker 2 subtract Marker 1.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





Test Plot

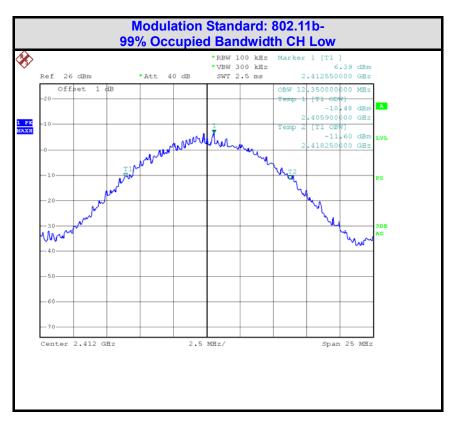





Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.





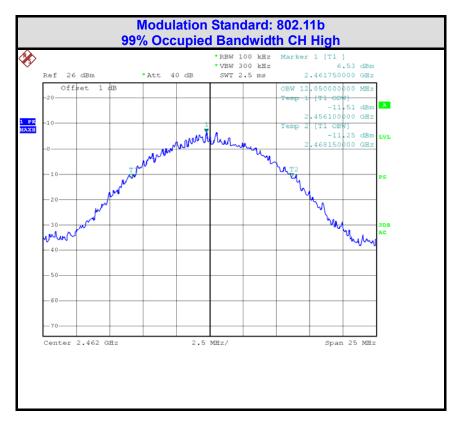

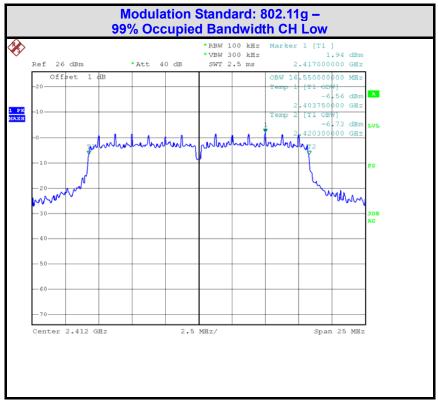

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





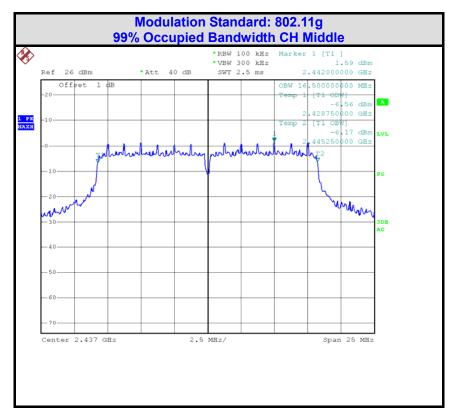

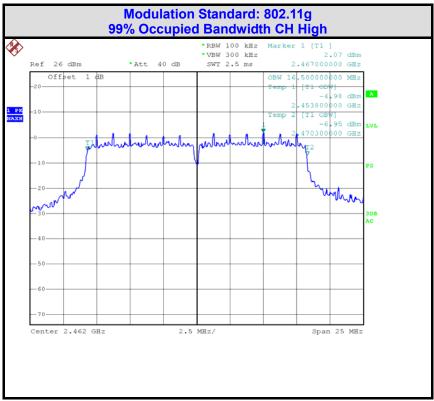

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





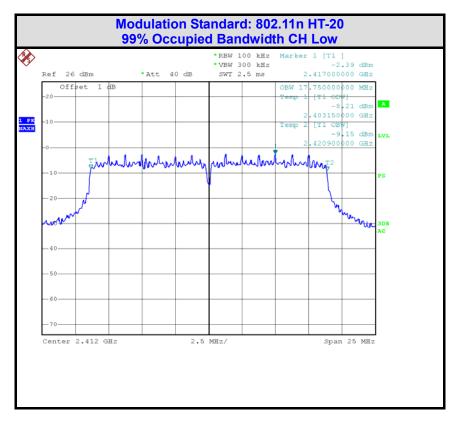



CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





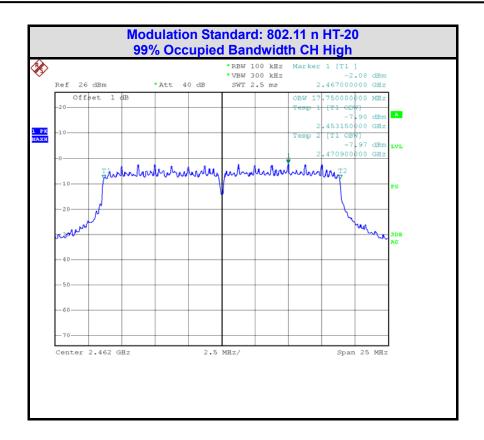





14.0 Antenna Requirements

14.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

14.2 Antenna Construction and Directional Gain

Antenna type:PCB antenna Antenna Gain: 0dBi

15.0 Deviation to test specifications

The following identical model(s):

N/A

Belong to the tested device:

Product description: QCA6234

Model name: QCA6234

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.