

FCC Part 15B

Measurement and Test Report

For

Amelia World Corporation dba LINSAY

1841 NE 146 Street, Miami, Florida

FCC ID: 2AAC3F7XHD

Test Rule(s): FCC Part 15 Subpart B

Product Description: FCC Part 15C

Tested Model: Tablet PC

Report No.: F-7XHD

Tested Date: STR15088241I-2

Issued Date: 2015-08-24 to 2015-09-17

Tested By: Jason Su / Engineer

Reviewed By: Lahm Peng / EMC Manager

Approved & Authorized By: Jandy so / PSQ Manager

Prepared By:

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Jason Su
Lahm peng
Jandyso

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

1.2 TEST STANDARDS.....4

1.3 TEST METHODOLOGY4

1.4 TEST FACILITY4

1.5 EUT SETUP AND OPERATION MODE5

1.6 TEST EQUIPMENT LIST AND DETAILS5

2. SUMMARY OF TEST RESULTS6

3. CONDUCTED EMISSIONS7

3.1 MEASUREMENT UNCERTAINTY7

3.2 TEST PROCEDURE.....7

3.3 BASIC TEST SETUP BLOCK DIAGRAM.....7

3.4 ENVIRONMENTAL CONDITIONS8

3.5 SUMMARY OF TEST RESULTS/PLOTS8

3.6 CONDUCTED EMISSIONS TEST DATA.....8

4. RADIATED EMISSIONS11

4.1 MEASUREMENT UNCERTAINTY11

4.2 TEST PROCEDURE.....11

4.3 TEST RECEIVER SETUP12

4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....12

4.5 ENVIRONMENTAL CONDITIONS12

4.6 SUMMARY OF TEST RESULTS/PLOTS12

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Amelia World Corporation dba LINSAY
Address of applicant: 1841 NE 146 Street, Miami, Florida

Manufacturer: Amelia World Corporation dba LINSAY
Address of manufacturer: 1841 NE 146 Street, Miami, Florida

General Description of EUT

Product Name:	Tablet PC
Trade Name:	LINSAY
Model No.:	F-7XHD
Adding Model(s):	F7HD4CORE

Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model F-7XHD, but the circuit and the electronic construction do not change, declared by the manufacturer.

Technical Characteristics of EUT

Rated Voltage:	Li-ion battery DC 3.7V/2800mAh
Rated Current:	2A
Rated Power:	/
Power Adapter Model:	XHY050200UUCH I/P: AC 100-240V; O/P: DC 5V
Lowest Internal Frequency:	32.768KHz
Highest Internal Frequency:	1.5GHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the Amelia World Corporation dba LINSAY in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging And Playing	
TM2	Downloading	

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	0.8	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Headset Cable	1.2	Unshielded	Without Ferrite

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Notebook	ASUS	X42J	/

1.6 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

3. Conducted Emissions


3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

3.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.3 Basic Test Setup Block Diagram

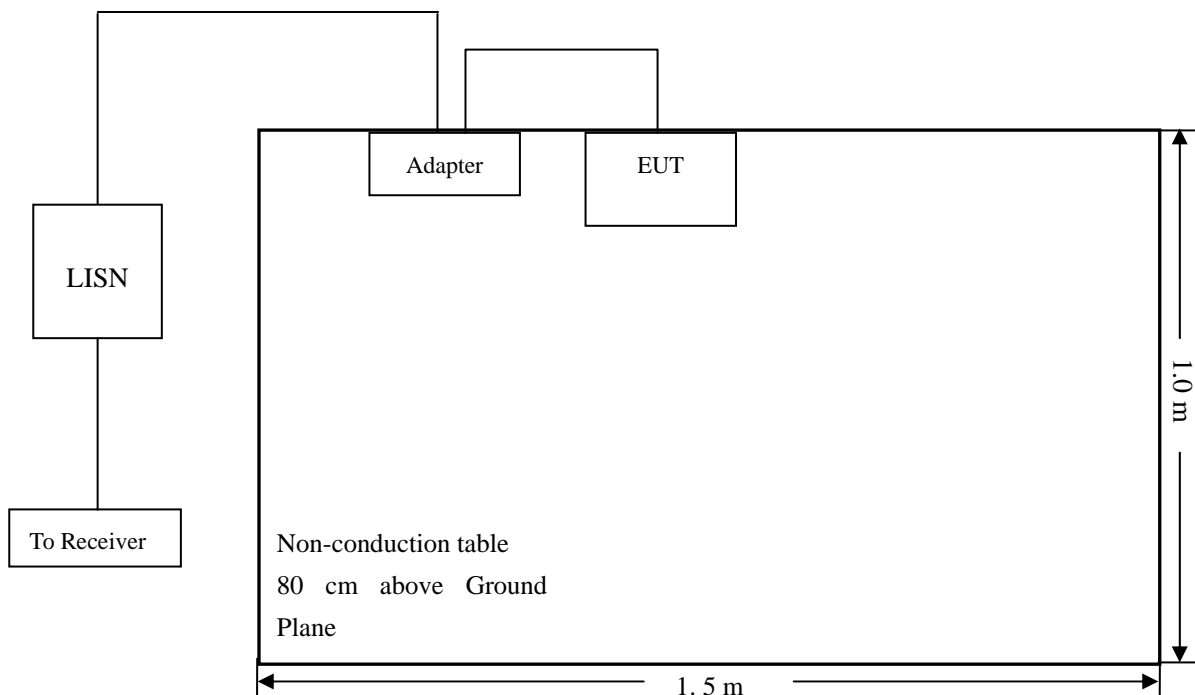

3.4 Environmental Conditions


Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.5 Summary of Test Results/Plots

According to the data in section 3.6, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


-9.66 dB at **2.1300 MHz** in the **Neutral, Peak** detector, 0.15-30MHz

3.6 Conducted Emissions Test Data

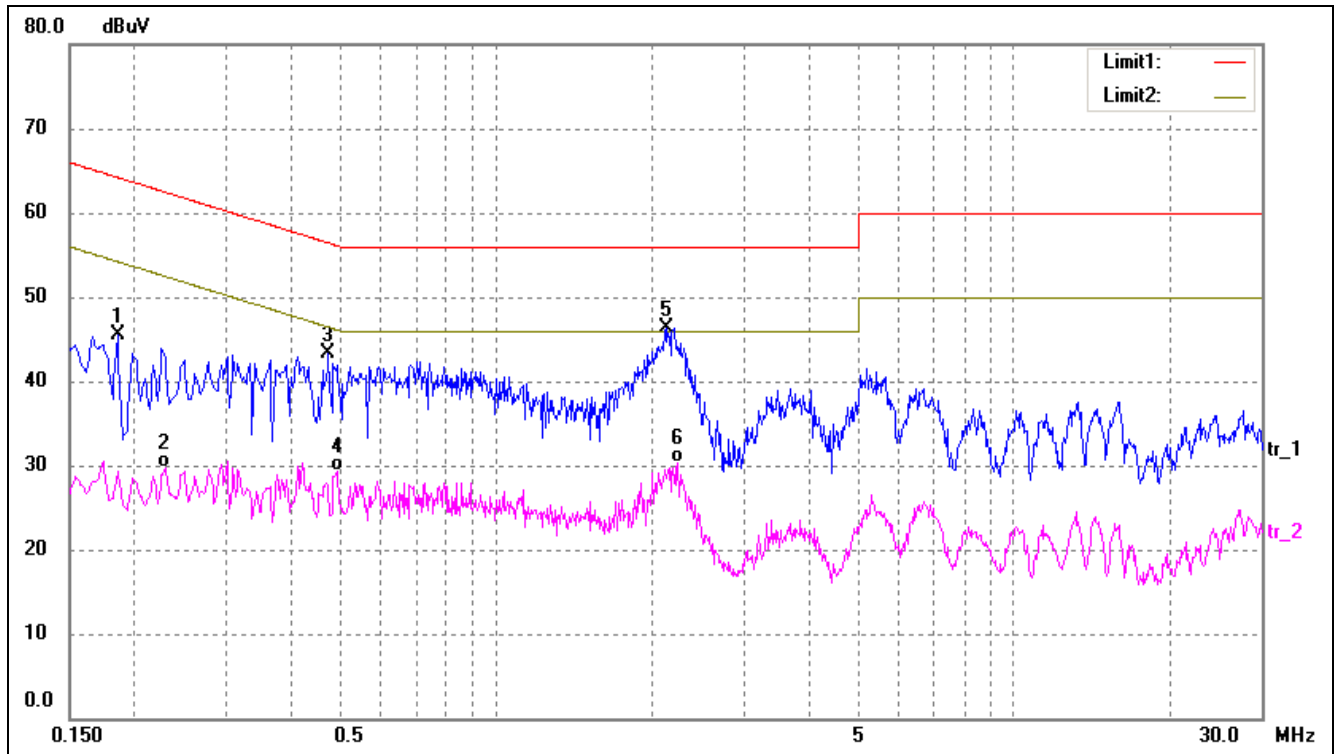Plot of Conducted Emissions Test Data*EUT:* Tablet PC*Tested Model:* F-7XHD*Operating Condition:* Charging And Playing*Comment:* Adapter DC 5V*Test Specification:* Neutral

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.1860	33.05	12.50	45.55	64.21	-18.66	peak
2	0.2300	17.19	12.50	29.69	52.45	-22.76	AVG
3	0.4740	30.83	12.50	43.33	56.44	-13.11	peak
4	0.4940	16.72	12.50	29.22	46.10	-16.88	AVG
5	2.1300	33.34	13.00	46.34	56.00	-9.66	peak
6	2.2460	17.22	13.00	30.22	46.00	-15.78	AVG

Test Specification: Line

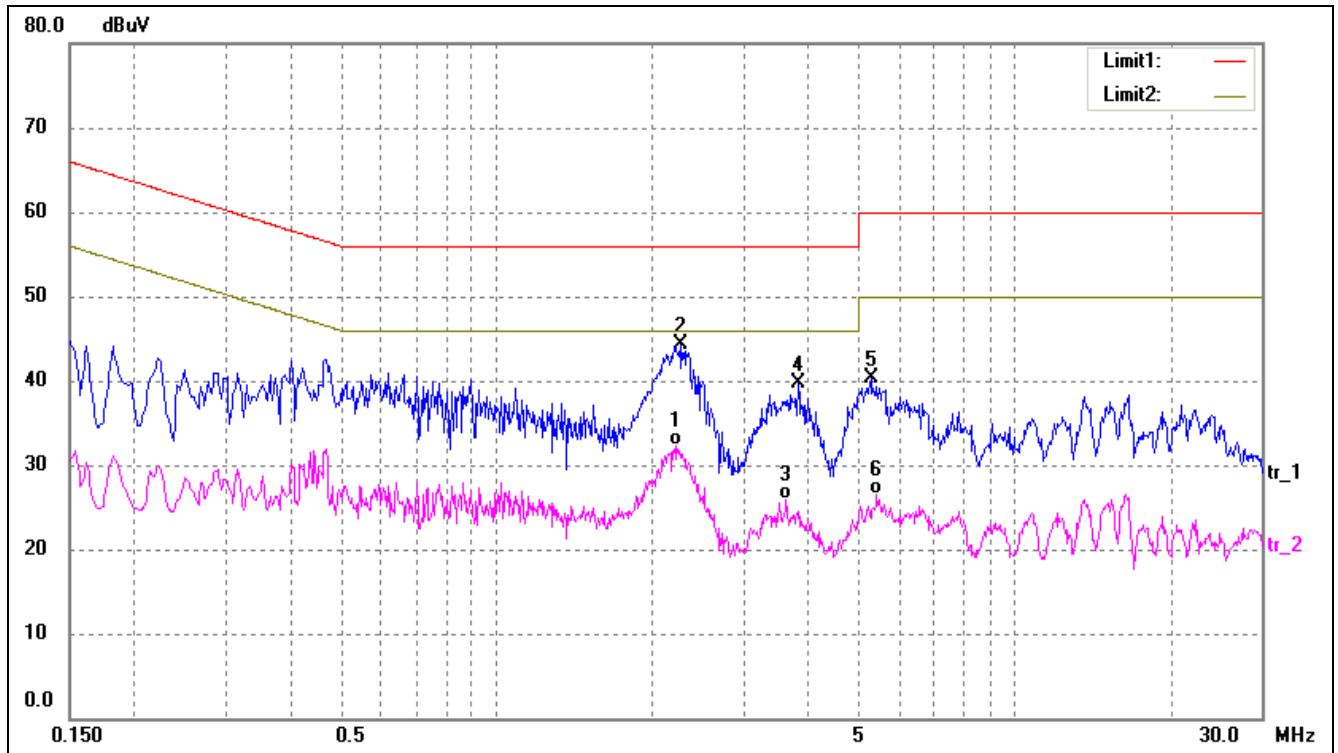

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	2.2220	19.28	13.00	32.28	46.00	-13.72	AVG
2*	2.2700	31.35	13.00	44.35	56.00	-11.65	peak
3	3.6260	12.93	13.00	25.93	46.00	-20.07	AVG
4	3.8260	26.68	13.00	39.68	56.00	-16.32	peak
5	5.2900	27.42	12.88	40.30	60.00	-19.70	peak
6	5.4300	13.61	12.83	26.44	50.00	-23.56	AVG

4. Radiated Emissions

4.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

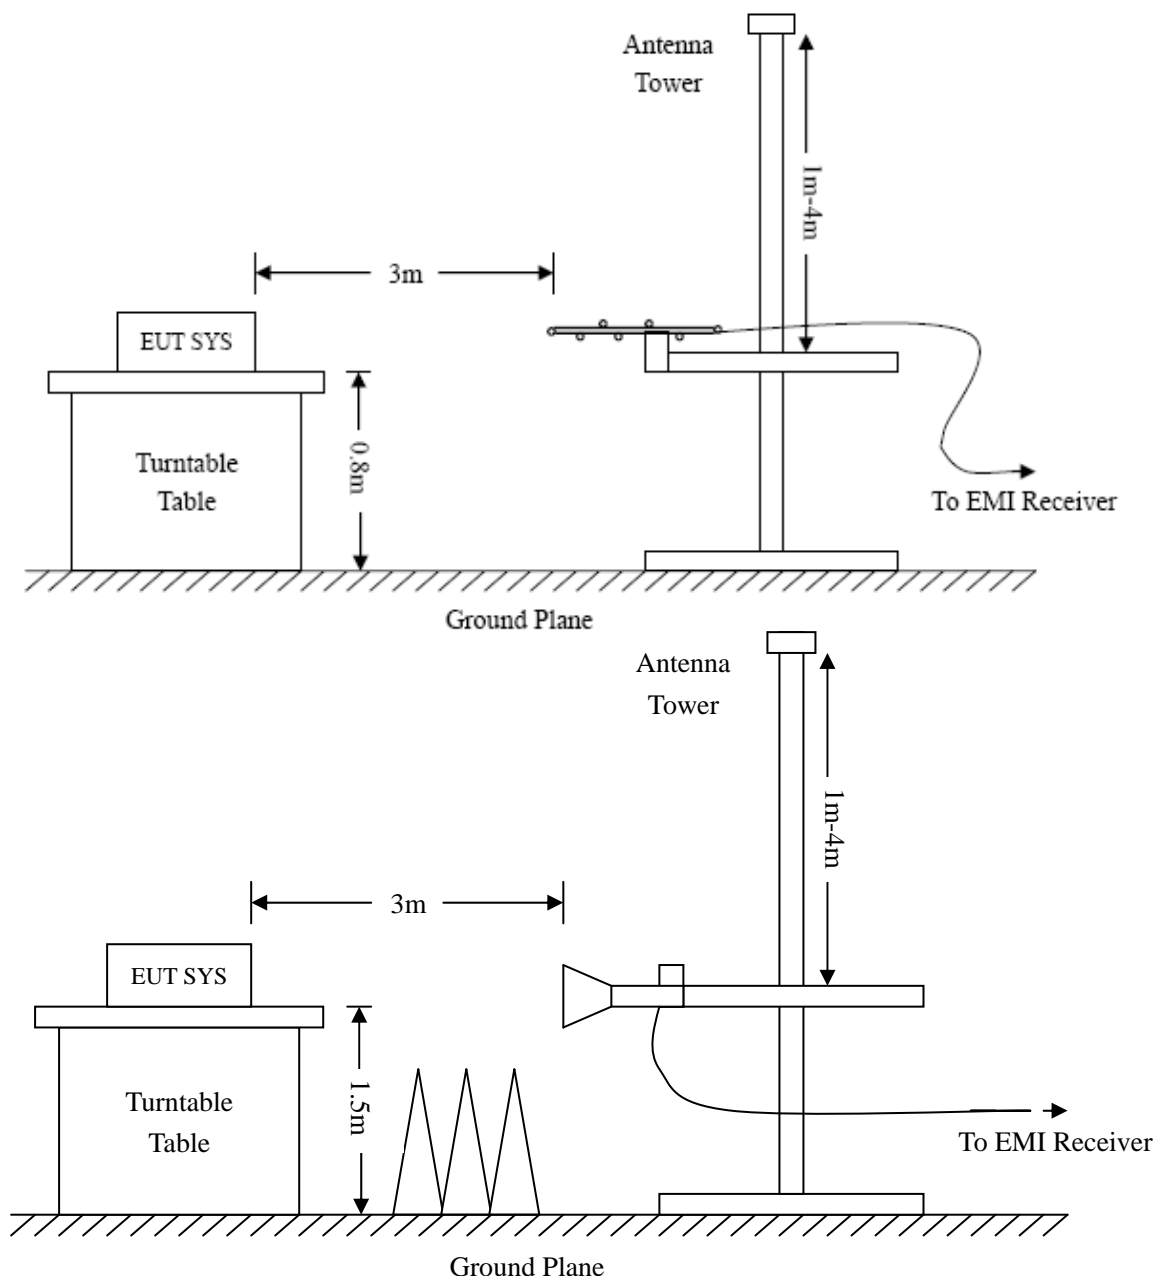

4.3 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$


4.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.6 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-2.52 dB at 64.4331 MHz in the Horizontal polarization, 9 kHz to 7.5 GHz, 3Meters

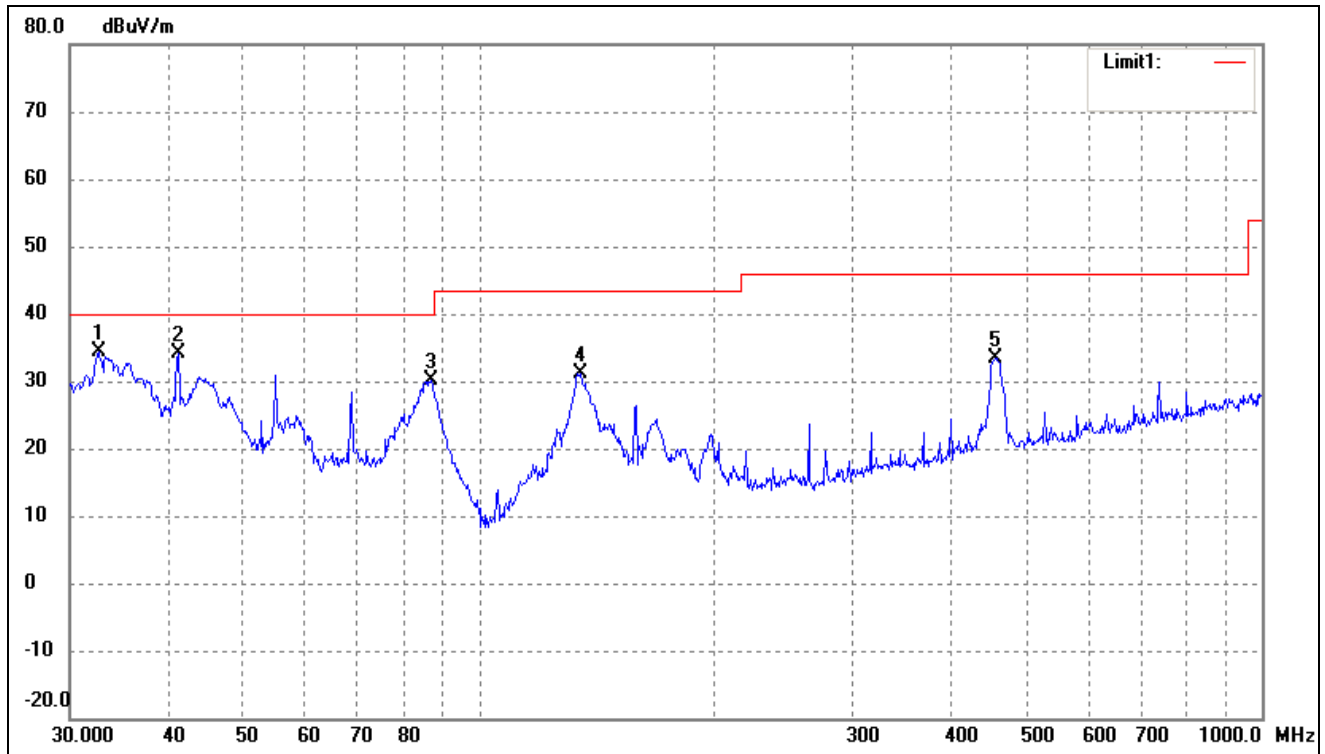
Plot of Radiated Emissions Test Data*EUT: Tablet PC**Tested Model: F-7XHD**Operating Condition: Charging And Playing**Comment: Adapter DC 5V**Test Specification: Horizontal*

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	32.6340	45.25	-10.94	34.31	40.00	-5.69	178	100	peak
2	41.2765	43.65	-9.64	34.01	40.00	-5.99	201	100	peak
3	86.8068	42.13	-12.09	30.04	40.00	-9.96	15	100	peak
4	134.5592	42.02	-10.80	31.22	43.50	-12.28	219	100	peak
5	457.5073	34.87	-1.46	33.41	46.00	-12.59	321	100	peak

Test Specification: Vertical

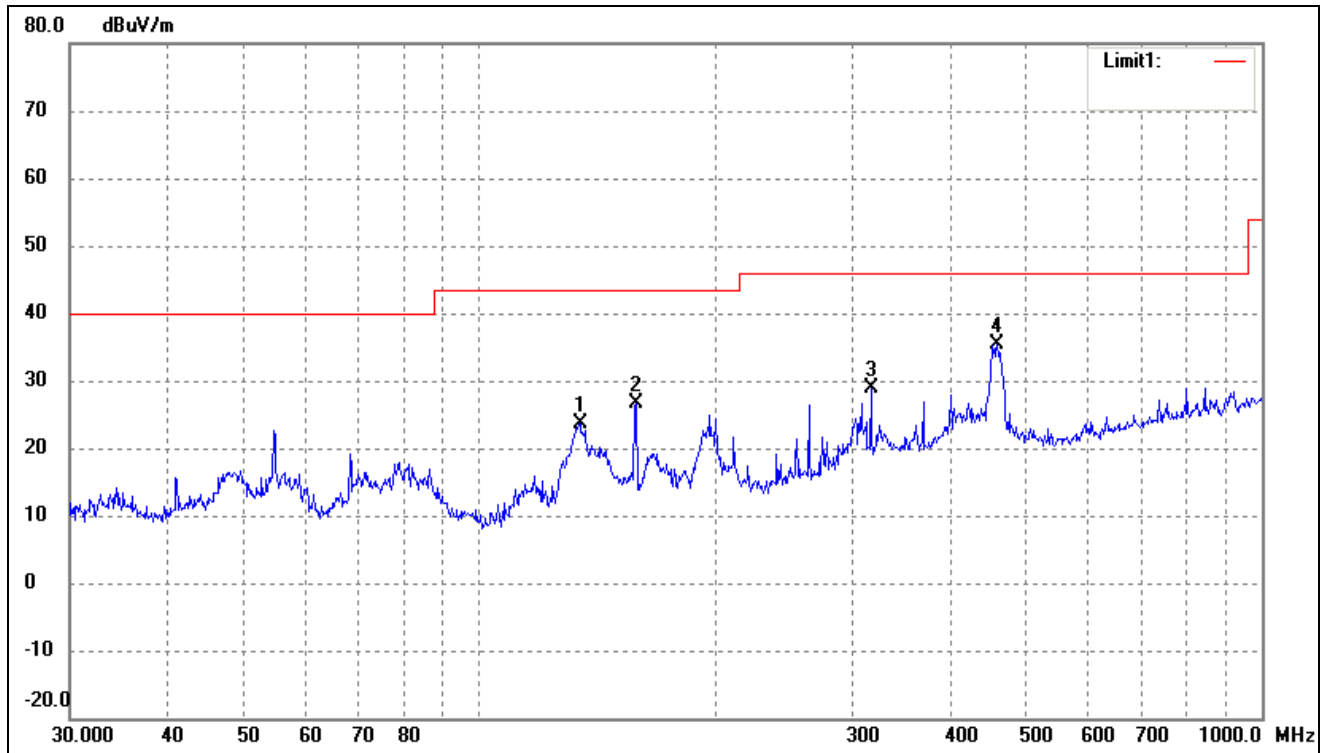


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	134.5592	34.39	-10.80	23.59	43.50	-19.91	78	100	peak
2	158.6677	37.37	-10.63	26.74	43.50	-16.76	318	100	peak
3	316.5890	33.33	-4.53	28.80	46.00	-17.20	112	100	peak
4	459.1144	36.76	-1.43	35.33	46.00	-10.67	26	100	peak

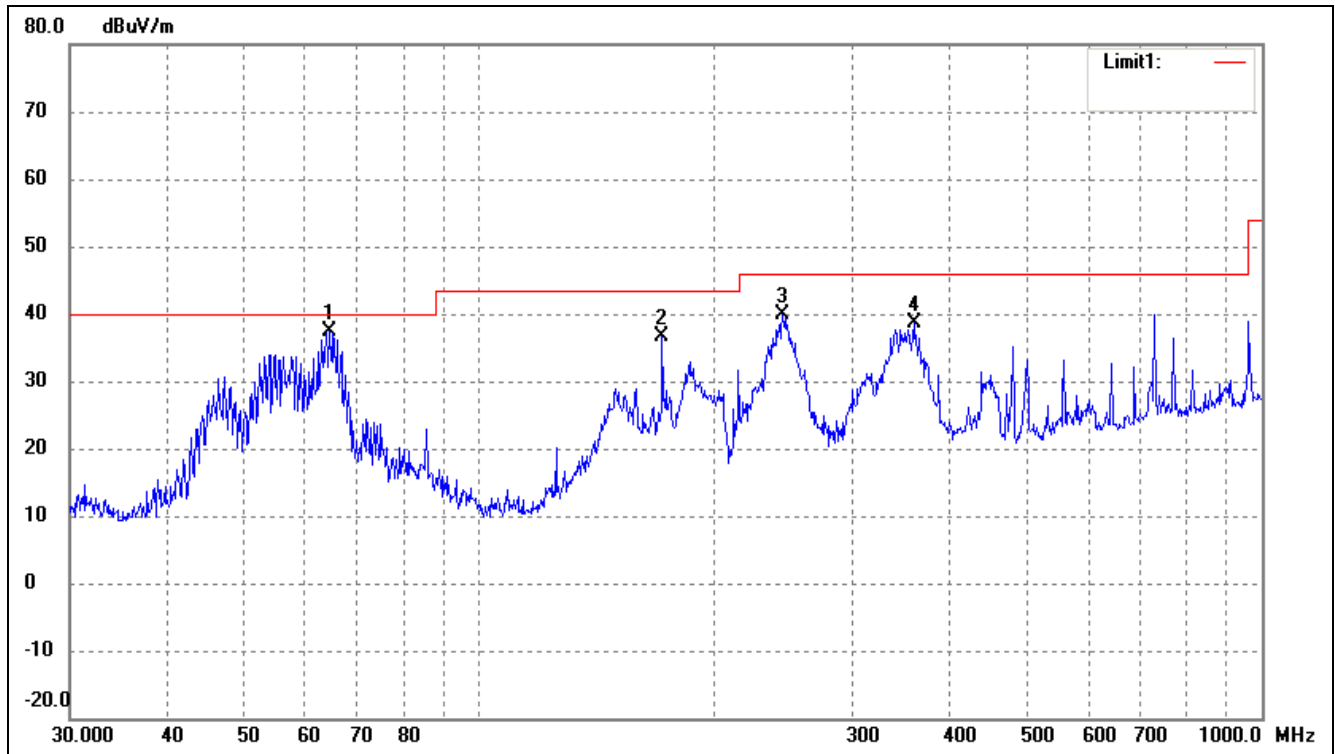Plot of Radiated Emissions Test Data*EUT:* Tablet PC*Tested Model:* F-7XHD*Operating Condition:* Downloading*Comment:* USN DC 5V*Test Specification:* Horizontal

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	64.4331	48.84	-11.36	37.48	40.00	-2.52	178	100	peak
2	171.3926	46.70	-9.97	36.73	43.50	-6.77	51	100	peak
3	244.2321	46.26	-6.32	39.94	46.00	-6.06	48	100	peak
4	359.1860	41.70	-3.15	38.55	46.00	-7.45	9	100	peak

Test Specification: Vertical

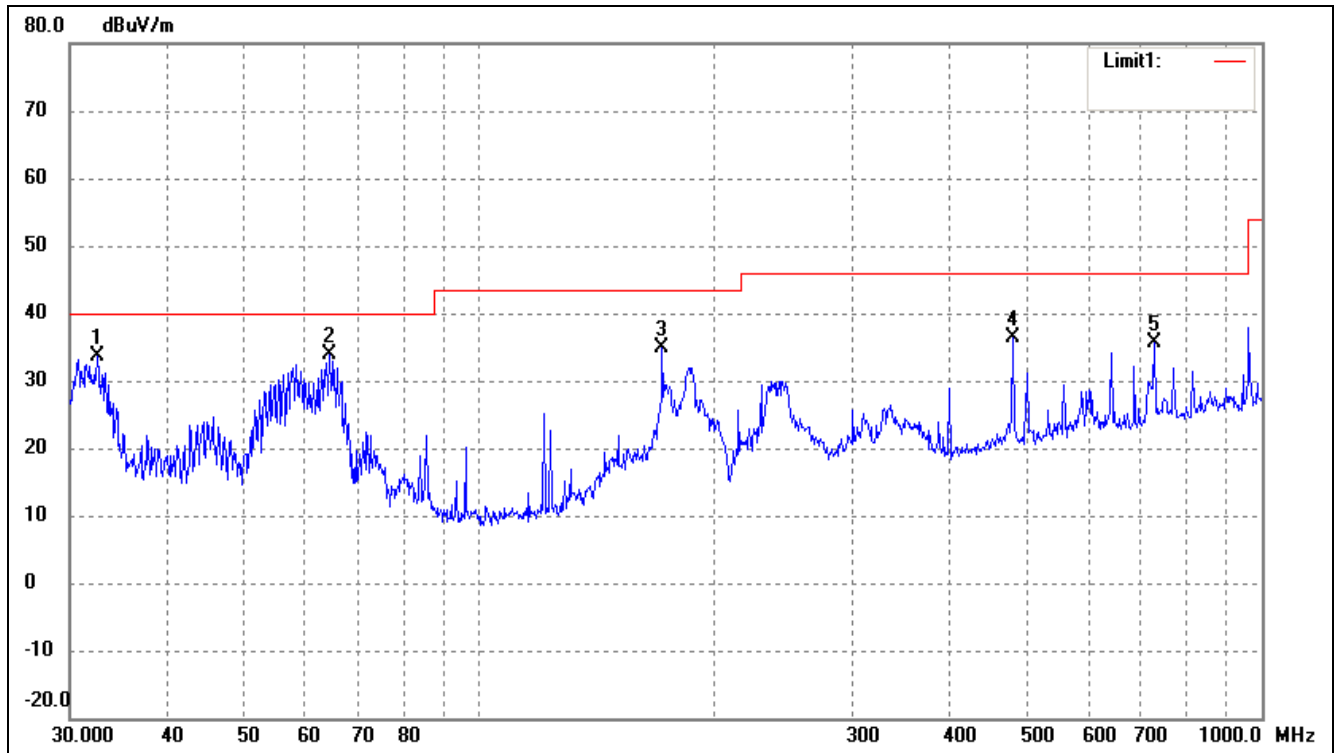

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.5198	44.64	-10.95	33.69	40.00	-6.31	74	100	peak
2	64.4331	45.35	-11.36	33.99	40.00	-6.01	154	100	peak
3	171.3926	44.90	-9.97	34.93	43.50	-8.57	210	100	peak
4	480.5276	37.40	-1.01	36.39	46.00	-9.61	19	100	peak
5	729.3583	32.16	3.42	35.58	46.00	-10.42	13	100	peak

Note: Testing is carried out with frequency rang 9kHz to the 6GHz, which above 7.5GHz is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

The measurements greater than 20dB below the limit from 9kHz to 30MHz and test data are not provided.

***** END OF REPORT *****