

FCC TEST REPORT
for
GUOYA ELECTRONIC TECHNOLOGY CO., LTD.

Wireless Headphone
Model No.: E702B, E705, E706, E707, E708, E709, E710, E711, E712, E715

Prepared for : GUOYA ELECTRONIC TECHNOLOGY CO., LTD.
Address : 7th Fl., Bldg. B8, Tianrui Industrial Zone, Fuyuan Road, Baoan District, Shenzhen City, Guangdong Province, China

Prepared By : Anbotek Compliance Laboratory Limited
Address : 1/F, 1 /Building, SEC Industrial Park, No. 4 Qianhai Road, Nanshan District, Shenzhen, 518054, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : 201304717F
Date of Test : Apr. 22~ May 17, 2013
Date of Report : May 17, 2013

TABLE OF CONTENTS

Description

Page

Test Report

1. GENERAL INFORMATION	5
1.1. Description of Device (EUT)	5
1.2. Auxiliary Equipment Used during Test	6
1.3. Description of Test Facility	6
1.4. Measurement Uncertainty	6
2. TEST PROCEDURE	7
3. CONDUCTED LIMITS	8
3.1. Block Diagram of Test Setup	8
3.2. Power Line Conducted Emission Measurement Limits (15.207)	8
3.3. Configuration of EUT on Measurement	8
3.4. Operating Condition of EUT	9
3.5. Test Procedure	9
3.6. Power Line Conducted Emission Measurement Results	9
4. RADIATION INTERFERENCE	12
4.1. Requirements (15.247, 15.209):	12
4.2 Test Procedure	12
4.3 Test Results	13
5. CHANNEL SEPARATION TEST	16
5.1 Measurement Procedure	16
5.2 Test SET-UP	16
5.3 Test Equipment	16
5.4 Test Results	16
6. 20DB BANDWIDTH TEST	20
6.1 Measurement Procedure	20
6.2 Test SET-UP	20
6.3 Test Equipment	20
6.4 Test Results	20
7. QUANTITY OF HOPPING CHANNEL TEST	24
7.1 Measurement Procedure	24
7.2 Test SET-UP	24
7.3 Test Equipment	24
7.4 Test Results	24
8. DWELL TIME TEST	26
8.1 Measurement Procedure	26
8.2 Test SET-UP	26
8.3 Test Equipment	26
8.4 Test Results	26
9. MAXIMUM PEAK OUTPUT POWER TEST	29
9.1 Measurement Procedure	29
9.2 Test SET-UP	29

9.3 Test Equipment.....	29
9.4 Test Results.....	30
10. BAND EDGE TEST.....	34
10.1 Measurement Procedure	34
10.2 Test SET-UP	34
10.3 Test Equipment.....	34
10.4 Test Results.....	34
11. ANTENNA APPLICATION	36
11.1 Antenna requirement	36
11.2 Result	36
12. PHOTOGRAPH.....	37
12.1. Photo of Power Line Conducted Emission Measurement	37
12.2. Photo of Radiation Emission Test	37

APPENDIX I (External Photos) (1 Pages)

APPENDIX II (Internal Photos) (2 Pages)

TEST REPORT

Applicant : GUOYA ELECTRONIC TECHNOLOGY CO., LTD.
Manufacturer : GUOYA ELECTRONIC TECHNOLOGY CO., LTD.
EUT : Wireless Headphone
Model No. : E702B, E705, E706, E707, E708, E709, E710, E711, E712, E715
Serial No. : N/A
Rating : DC 3.7-4.2V
Trade Mark : N/A

Measurement Procedure Used:

FCC Part15 Subpart C, Paragraph 15.207, 15.247 & 15.209

The device described above is tested by Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited.

Date of Test : Apr. 22~ May 17, 2013

Prepared by :




(Tested Engineer / Rock Zeng)

Reviewer :



(Project Manager / Sally Zhang)

Approved & Authorized Signer :

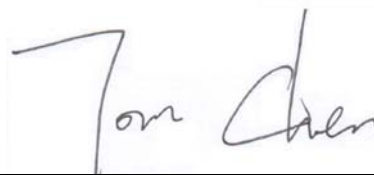

(Manager / Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Wireless Headphone

Model Number : E702B, E705, E706, E707, E708, E709, E710, E711, E712, E715
(Note: The above samples are same except the model number, so we prepare “E702B” for FCC test only.)

Test Power Supply : DC 3.7V

Frequency : 2402~2480MHz

Antenna Specification : Printed Antenna:0dBi

Modulation : GFSK, $\pi/4$ DQPSK, 8DPSK

Applicant : GUOYA ELECTRONIC TECHNOLOGY CO., LTD.
Address : 7th Fl., Bldg. B8, Tianrui Industrial Zone, Fuyuan Road, Baoan District, Shenzhen City, Guangdong Province, China

Manufacturer : GUOYA ELECTRONIC TECHNOLOGY CO., LTD.
Address : Section 2, Guanghua Rd., Electromechanical Industrial Park, Huaying Industrial Zone, Guang'an City, Sichuan Province, China

Date of receiver : Apr. 22, 2013
Date of Test : Apr. 22~ May 17, 2013

1.2. Auxiliary Equipment Used during Test

Adapter : Model: CW0502000
Input: 100-240V~, 50-60Hz, 0.4A Max
Output: DC 3.7V

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010.

IC-Registration No.: 8058A-1

Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, August 30, 2010.

Test Location

All Emissions tests were performed at
Anbotek Compliance Laboratory Limited. at 1/F, 1 /Building, SEC Industrial Park,
No. 4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB
Conduction Uncertainty : Uc = 3.4dB

2. Test Procedure

GENERAL: This report shall NOT be reproduced except in full without the written approval of Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2009 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-2009 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

3. Conducted Limits


Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
2.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2012	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2012	1 Year
4.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A

Conduction Uncertainty : Uc = 3.4dB

3.1. Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators

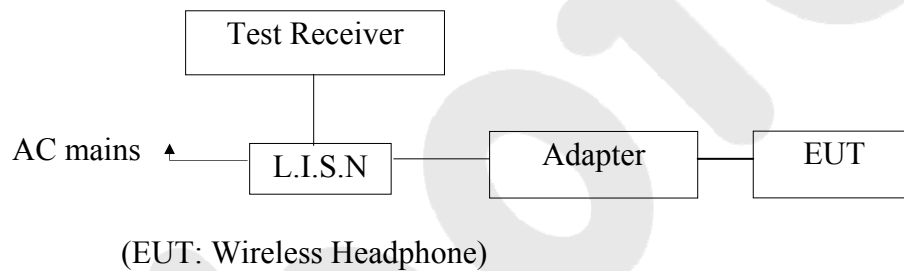

3.2. Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

3.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Wireless Headphone
Model Number : E702B
Applicant : GUOYA ELECTRONIC TECHNOLOGY CO., LTD.

3.4. Operating Condition of EUT

3.4.1. Setup the EUT and simulator as shown as Section 3.1.

3.4.2. Turn on the power of all equipment.

3.4.3. Let the EUT work in test mode (Charging) and measure it.

3.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 3.6.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
5.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
6.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2012	1 Year
7.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2012	1 Year
8.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A

Conduction Uncertainty : $U_c = 3.4\text{dB}$

3.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.


Please refer the following pages.

CONDUCTED EMISSION TEST DATA

EUT: Wireless Headphone M/N: E702B
Operating Condition: Charging
Test Site: 1# Shielded Room
Operator: Finley Li
Test Specification: AC 120V/60Hz
Comment: Live Line
Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

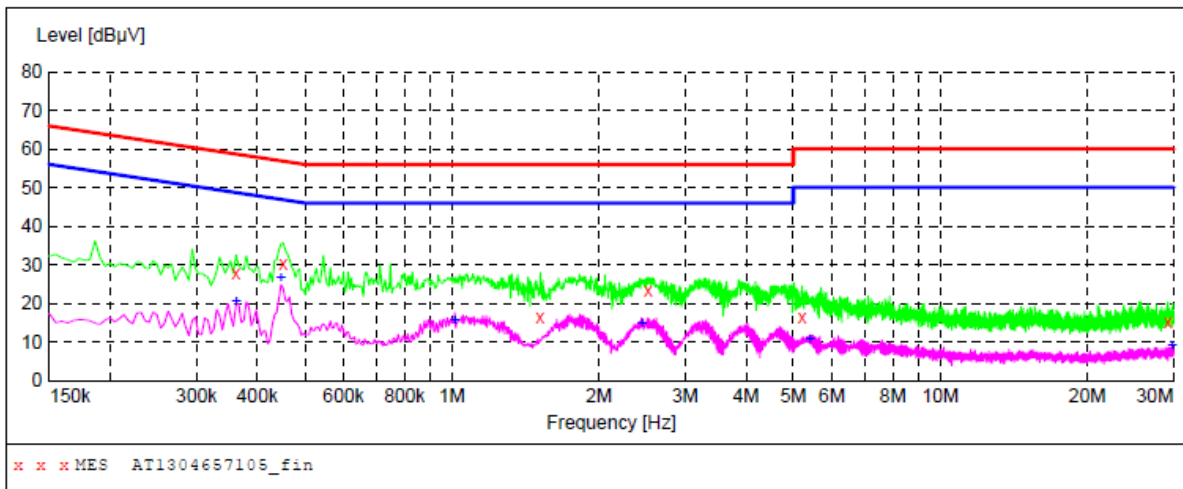

MEASUREMENT RESULT: "AT1304657105_fin"

4/24/2013 5:53PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	27.70	20.1	59	31.0	QP	L1	GND
0.451500	30.40	20.1	57	26.4	QP	L1	GND
1.517500	16.60	20.3	56	39.4	QP	L1	GND
2.525500	23.30	20.4	56	32.7	QP	L1	GND
5.212000	16.60	20.5	60	43.4	QP	L1	GND
29.237500	15.20	20.9	60	44.8	QP	L1	GND

MEASUREMENT RESULT: "AT1304657105_fin2"

4/24/2013 5:53PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	20.70	20.1	49	28.0	AV	L1	GND
0.447000	26.70	20.1	47	20.2	AV	L1	GND
1.013500	15.70	20.2	46	30.3	AV	L1	GND
2.444500	14.60	20.3	46	31.4	AV	L1	GND
5.401000	10.60	20.5	50	39.4	AV	L1	GND
29.840500	8.90	20.9	50	41.1	AV	L1	GND

CONDUCTED EMISSION TEST DATA

EUT: Wireless Headphone M/N: E702B
Operating Condition: Charging
Test Site: 1# Shielded Room
Operator: Finley Li
Test Specification: AC 120V/60Hz
Comment: Neutral Line
Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

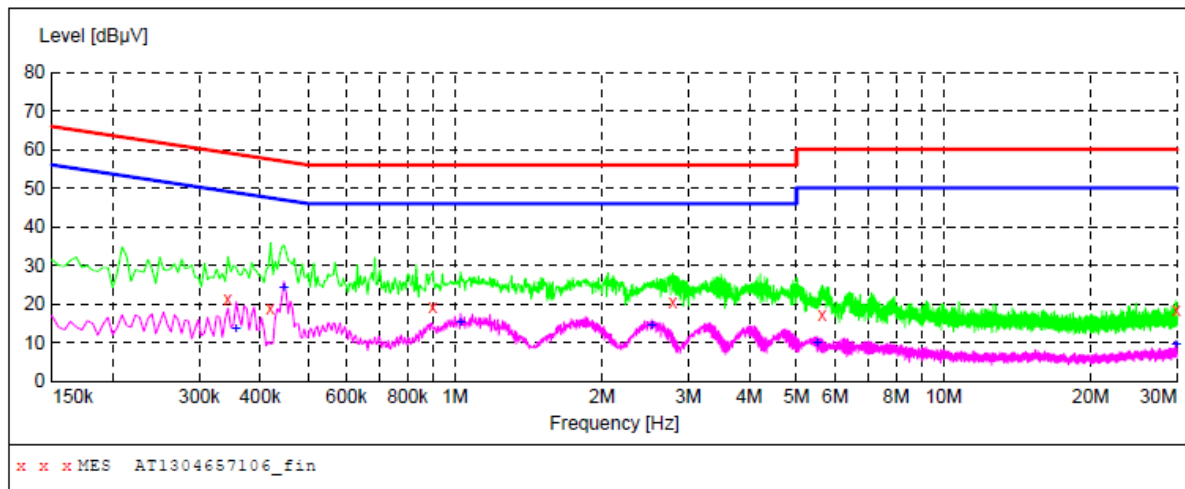

MEASUREMENT RESULT: "AT1304657106_fin"

4/24/2013 5:57PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.343500	21.50	20.1	59	37.6	QP	N	GND
0.420000	18.80	20.1	57	38.6	QP	N	GND
0.901500	19.30	20.1	56	36.7	QP	N	GND
2.791000	20.60	20.4	56	35.4	QP	N	GND
5.639500	17.40	20.5	60	42.6	QP	N	GND
29.899000	18.60	20.9	60	41.4	QP	N	GND

MEASUREMENT RESULT: "AT1304657106_fin2"

4/24/2013 5:57PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.357000	13.60	20.1	49	35.2	AV	N	GND
0.447000	24.30	20.1	47	22.6	AV	N	GND
1.027000	15.40	20.2	46	30.6	AV	N	GND
2.525500	14.20	20.4	46	31.8	AV	N	GND
5.509000	9.80	20.5	50	40.2	AV	N	GND
29.899000	9.60	20.9	50	40.4	AV	N	GND

4. Radiation Interference

4.1. Requirements (15.247, 15.209):

FIELD STRENGTH of Fundamental: 902-928 MHz 2.4-2.4835 GHz 94 dBμV/m @3m	FIELD STRENGTH of Harmonics 54 dBμV/m @3m	S15.209 30 - 88 MHz 88 - 216 MHz 216 - 960 MHz ABOVE 960 MHz	40 dBuV/m @3M 43.5 46 54dBuV/m
---	---	--	---

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

4.2 Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz. The EUT is tested in 9*6*6 Chamber.
The test results are listed in Section 4.3.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
2.	Trilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 17, 2013	1 Year
3.	Pre-amplifier	Compliance Direction	PAP-0203	22008	May 19, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

Radiation Uncertainty : Ur = 4.3dB

4.3 Test Results

PASS.

Please refer the following pages.

Data:

Horizontal CH Low (2402MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
232.95	1.58	13.50	38.90	57.19	33.43	46.00	-11.19	QP
2402.00	2.17	31.21	35.30	86.76	92.75	114.0	-27.24	Peak
2402.00	2.17	31.21	35.30	84.74	89.28	94.0	-9.26	AV
4804.04	2.56	34.01	34.71	41.35	43.66	74.0	-32.65	Peak
4804.04	2.56	34.01	34.71	38.22	40.21	54.0	-15.78	AV
7207.98	2.98	36.16	35.15	38.94	42.54	74.0	-35.06	Peak
7207.98	2.98	36.16	35.15	28.21	39.76	54.0	-25.79	AV
9608.00	---	---	---	---	---	---	---	---
12010.00	---	---	---	---	---	---	---	---
14412.00	---	---	---	---	---	---	---	---
16814.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Vertical CH Low (2402MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
38.19	1.43	12.13	38.45	53.19	28.13	40.00	-11.87	QP
2402.00	2.17	31.21	35.30	84.62	89.65	114.0	-24.35	Peak
2402.00	2.17	31.21	35.30	81.31	88.41	94.0	-5.59	AV
4804.10	2.56	34.01	34.71	41.07	42.27	74.0	-31.73	Peak
4804.10	2.56	34.01	34.71	38.45	40.65	54.0	-13.35	AV
7207.93	2.98	36.16	35.15	37.89	41.33	74.0	-32.67	Peak
7207.93	2.98	36.16	35.15	34.22	38.19	54.0	-15.81	AV
9608.00	---	---	---	---	---	---	---	---
12010.00	---	---	---	---	---	---	---	---
14412.00	---	---	---	---	---	---	---	---
16814.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Horizontal CH Middle (2441MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
316.98	1.60	13.52	38.82	56.25	32.65	46.00	-13.35	QP
2441.00	2.19	31.22	34.60	85.44	90.42	114.0	-23.58	Peak
2441.00	2.19	31.22	34.60	83.36	84.51	94.0	-9.49	AV
4882.08	2.57	35.00	34.58	39.27	42.79	74.0	-31.21	Peak
4882.08	2.57	35.00	34.58	37.68	40.02	54.0	-13.98	AV
7323.05	3.00	36.17	35.14	35.51	42.22	74.0	-31.78	Peak
7323.05	3.00	36.17	35.14	34.77	40.16	54.0	-13.84	AV
9764.00	---	---	---	---	---	---	---	---
12205.00	---	---	---	---	---	---	---	---
14646.00	---	---	---	---	---	---	---	---
17087.00	---	---	---	---	---	---	---	---

Vertical CH Middle (2441MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
155.49	1.50	13.40	38.89	53.11	29.12	43.50	-14.38	QP
2441.01	2.19	31.22	34.60	81.46	91.07	114.0	-22.93	Peak
2441.01	2.19	31.22	34.60	82.25	86.35	94.0	-7.65	AV
4882.11	2.57	35.00	34.58	43.36	43.48	74.0	-30.52	Peak
4882.11	2.57	35.00	34.58	35.19	40.76	54.0	-13.24	AV
7323.02	3.00	36.17	35.14	37.05	42.21	74.0	-31.79	Peak
7323.02	3.00	36.17	35.14	38.44	40.44	54.0	-13.56	AV
9764.00	---	---	---	---	---	---	---	---
12205.00	---	---	---	---	---	---	---	---
14646.00	---	---	---	---	---	---	---	---
17087.00	---	---	---	---	---	---	---	---

Horizontal CH High (2480MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
314.68	1.60	13.52	38.82	54.12	29.52	46.00	-16.48	QP
2480.00	2.20	31.65	36.00	97.78	90.41	114.0	-23.59	Peak
2480.00	2.20	31.65	36.00	88.51	85.76	94.0	-8.24	AV
4960.05	2.58	35.06	34.79	43.19	44.04	74.0	-29.96	Peak
4960.05	2.58	35.06	34.79	37.82	42.82	54.0	-11.18	AV
7439.99	3.02	36.19	34.90	41.37	43.84	74.0	-30.16	Peak
7439.99	3.02	36.20	35.20	37.40	41.92	54.0	-12.08	AV
9920.00	---	---	---	---	---	---	---	---
12400.00	---	---	---	---	---	---	---	---
14880.00	---	---	---	---	---	---	---	---
17360.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Vertical CH High (2480MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
404.19	1.62	13.54	38.45	53.16	27.22	46.00	-18.78	QP
2480.00	2.20	31.65	36.00	83.79	91.45	114.0	-22.55	Peak
2480.00	2.20	31.65	36.00	82.12	86.17	94.0	-7.83	AV
4960.10	2.58	35.06	34.79	40.58	42.44	74.0	-31.56	Peak
4960.10	2.58	35.06	34.79	38.31	40.05	54.0	-13.95	AV
7439.96	3.02	36.19	34.90	38.68	42.76	74.0	-31.24	Peak
7439.96	3.02	36.20	35.20	36.91	40.21	54.0	-13.79	AV
9920.00	---	---	---	---	---	---	---	---
12400.00	---	---	---	---	---	---	---	---
14880.00	---	---	---	---	---	---	---	---
17360.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---


**NOTE: “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
The results of different modulations are the same.**

5. CHANNEL SEPARATION TEST

5.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

5.2 Test SET-UP



5.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

5.4 Test Results

Product	: Wireless Headphone	Test Mode	: CH Low ~ CH High
Test Item	: Frequency Separation	Temperature	: 24°C
Test Voltage	: DC 3.7V	Humidity	: 55%RH
Test Result	: PASS		


Channel	Frequency (MHz)	Separation Read Value (kHz)	Limit (kHz)	Modulation Mode
Low	2401	1002	960	GFSK
Mid	2441	1002	966	GFSK
High	2480	1038	966	GFSK
Low	2401	996	900	π /4DQPSK
Mid	2441	1002	912	π /4DQPSK
High	2480	1002	912	π /4DQPSK
Low	2401	996	900	8DPSK
Mid	2441	1002	912	8DPSK
High	2480	1002	912	8DPSK

Remark:

1. The limit of modulation (π /4DQPSK, 8DPSK) is 2/3 of 20dB BW;


Modulation Mode: GFSK

CH Low

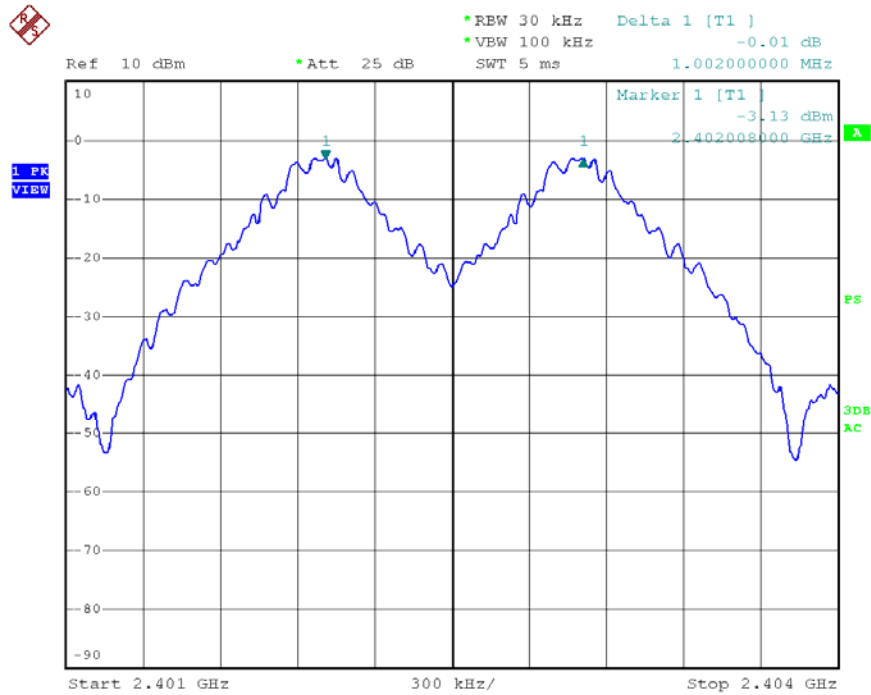


Date: 15.MAY.2013 14:47:31

CH Mid

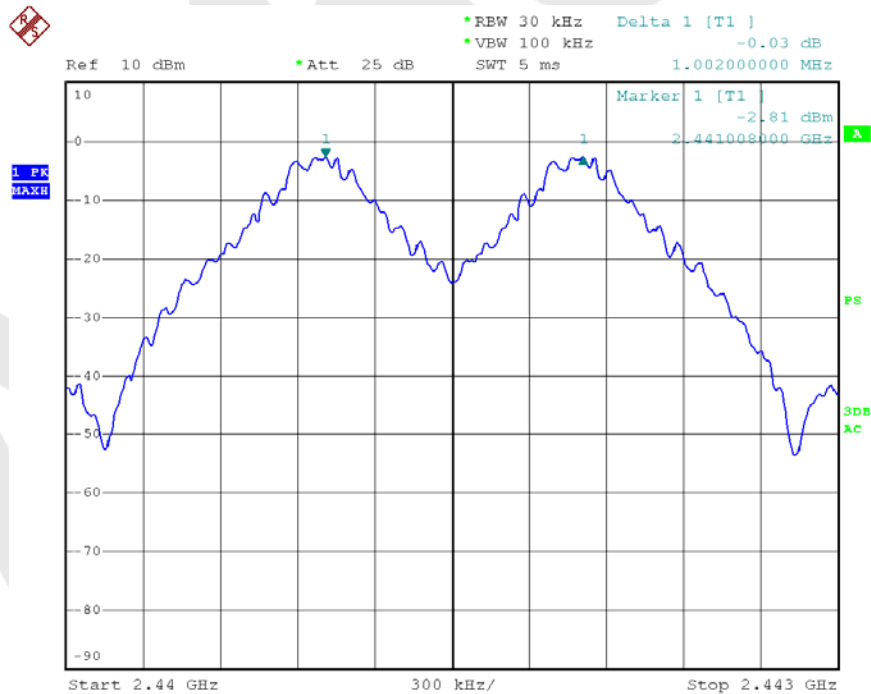


Date: 15.MAY.2013 14:48:42

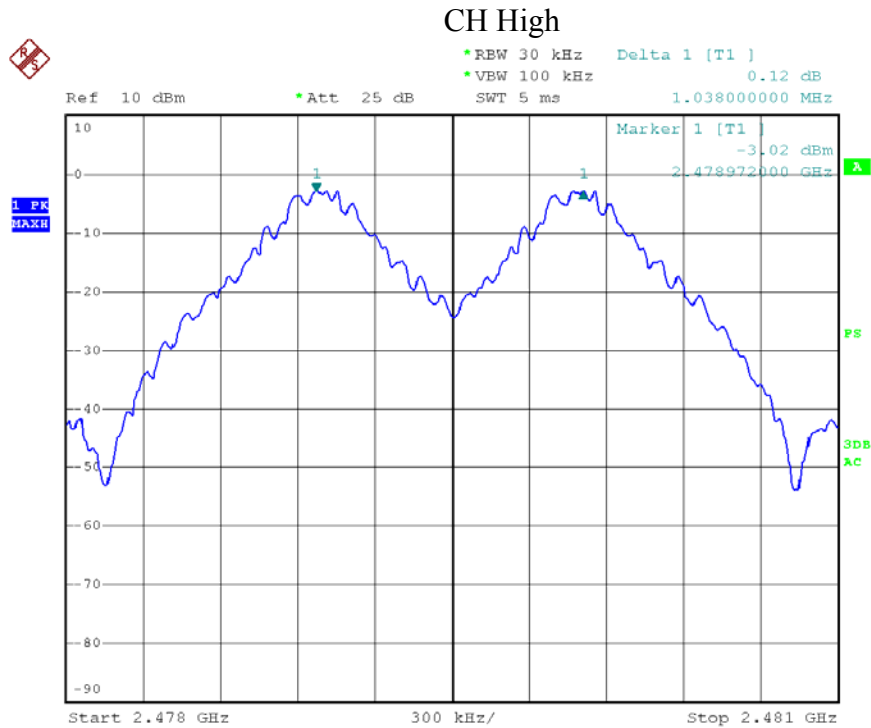


Date: 15.MAY.2013 14:50:32

Modulation Mode: $\pi/4$ DQPSK & 8DPSK

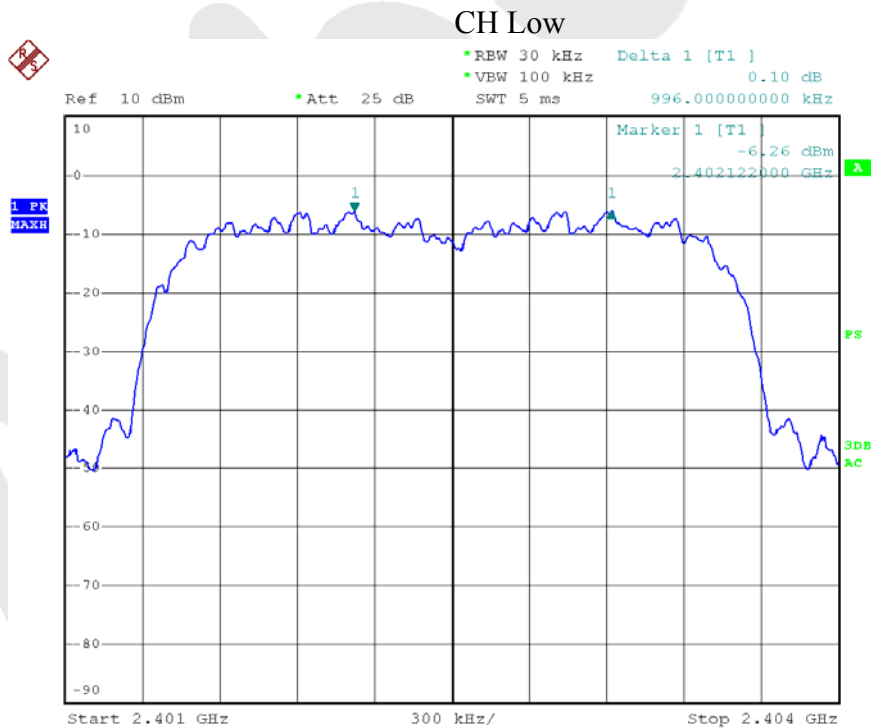


Date: 15.MAY.2013 15:24:11

CH Mid

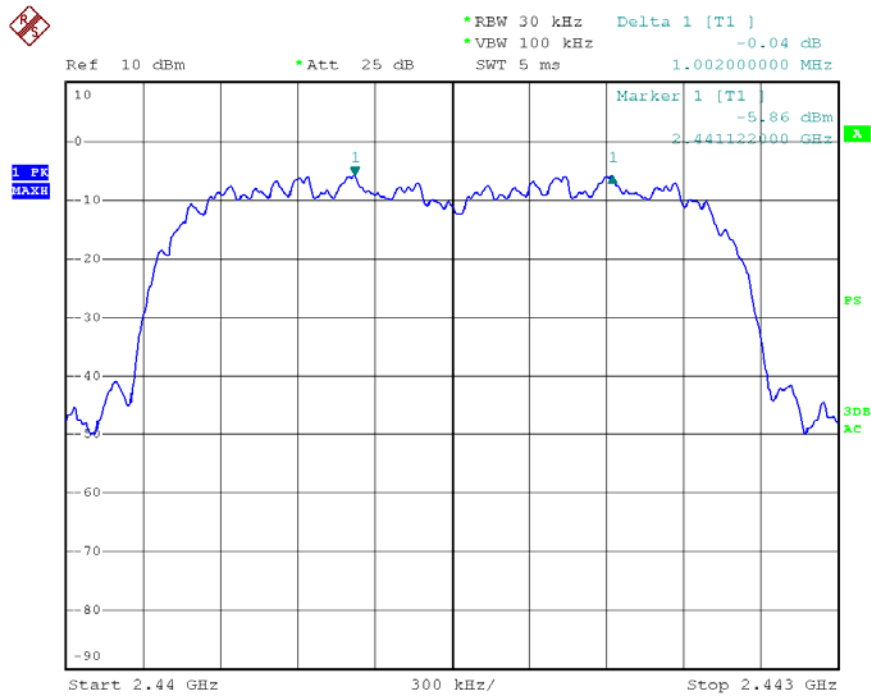

Date: 15.MAY.2013 15:25:40

CH High

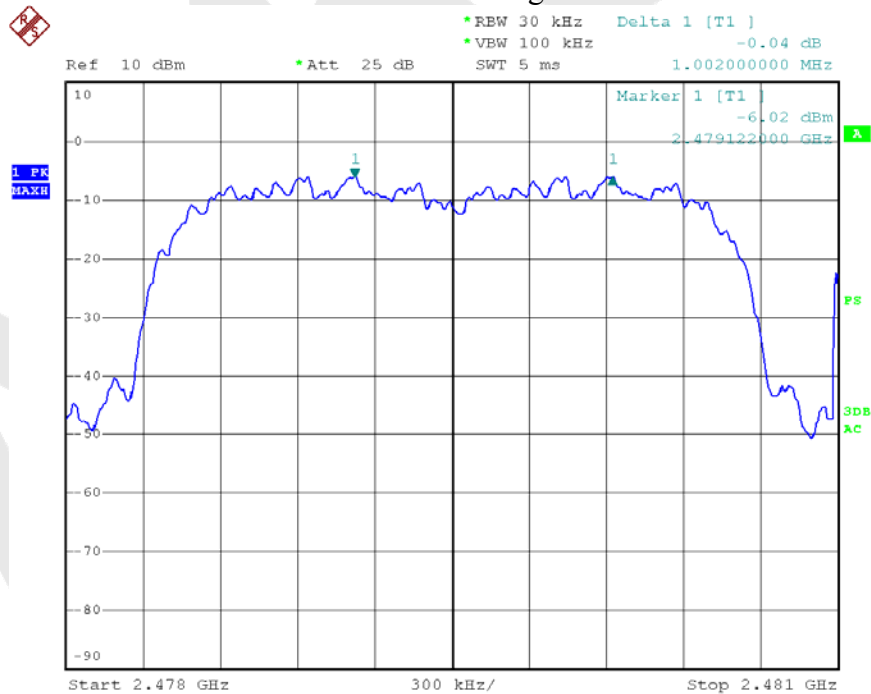


Date: 15.MAY.2013 15:26:40

6. 20DB BANDWIDTH TEST

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP



6.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

6.4 Test Results


Product	: Wireless Headphone	Test Mode	: CH Low ~ CH High
Test Item	: 20dB BW	Temperature	: 24℃
Test Voltage	: DC 3.7V	Humidity	: 55%RH
Test Result	: PASS		

Channel	Frequency (MHz)	20dB Down BW(kHz)	Modulation Mode
Low	2401	960	GFSK
Mid	2441	966	GFSK
High	2480	966	GFSK
Low	2401	1350	π /4DQPSK
Mid	2441	1368	π /4DQPSK
High	2480	1368	π /4DQPSK
Low	2401	1350	8DPSK
Mid	2441	1368	8DPSK
High	2480	1368	8DPSK

Remark: The results of modulations π /4DQPSK and 8DPSK are the same.


Modulation Mode: GFSK

CH Low

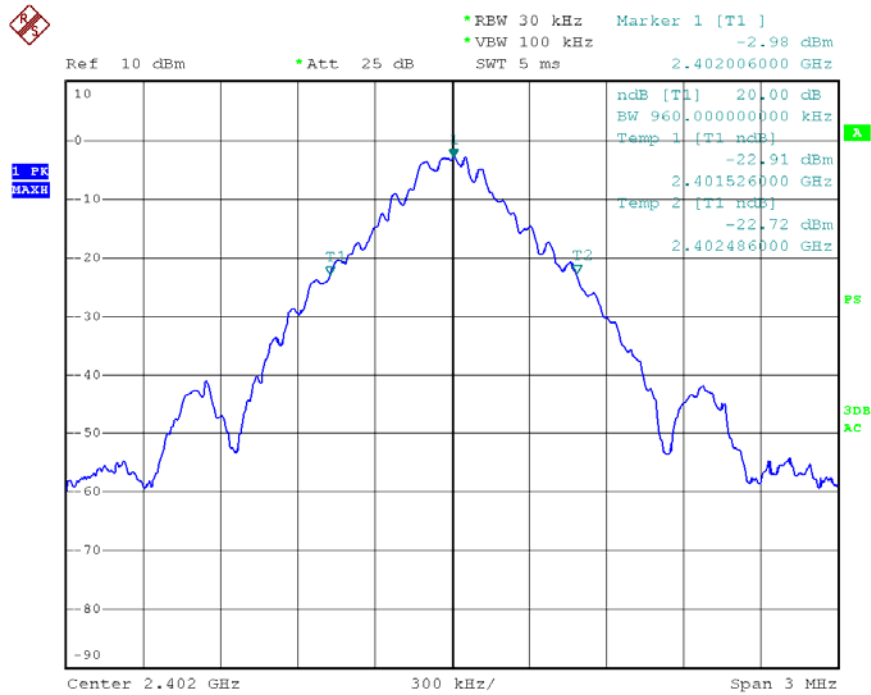


Date: 15.MAY.2013 14:36:30

CH Mid

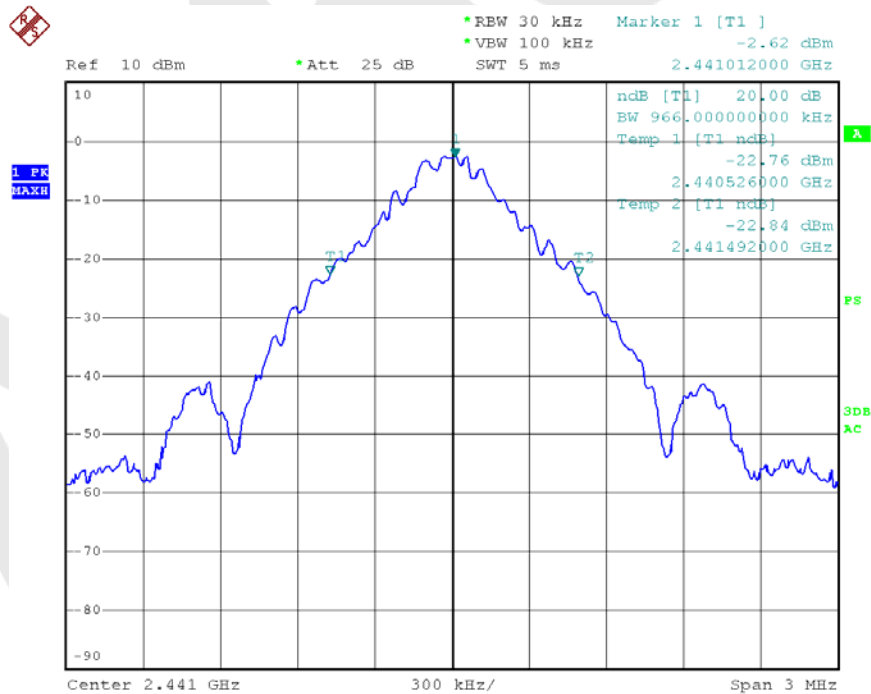


Date: 15.MAY.2013 14:36:03

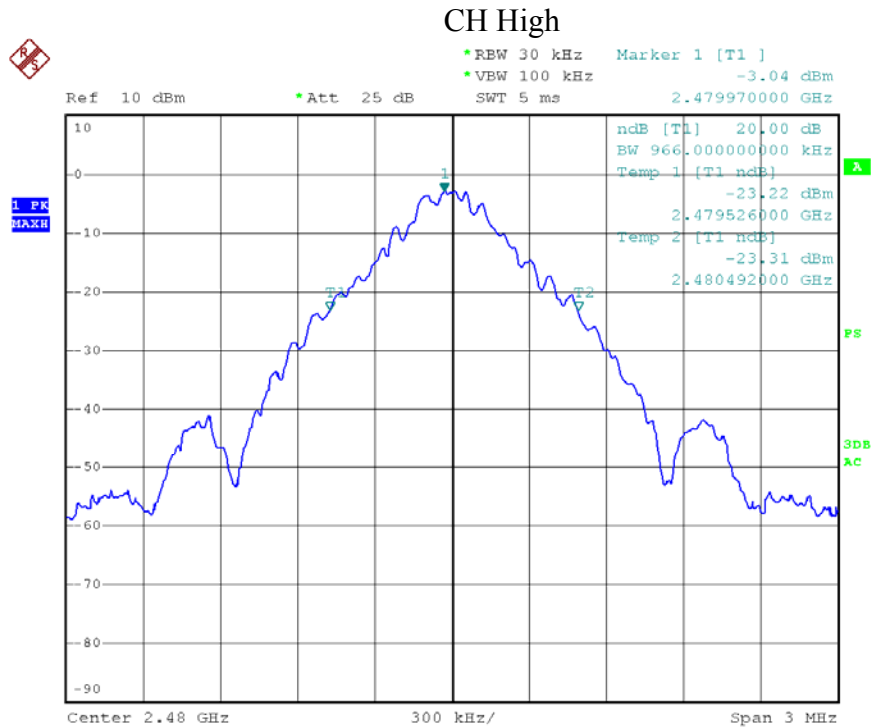


Date: 15.MAY.2013 14:31:04

Modulation Mode: $\pi/4$ DQPSK & 8DPSK

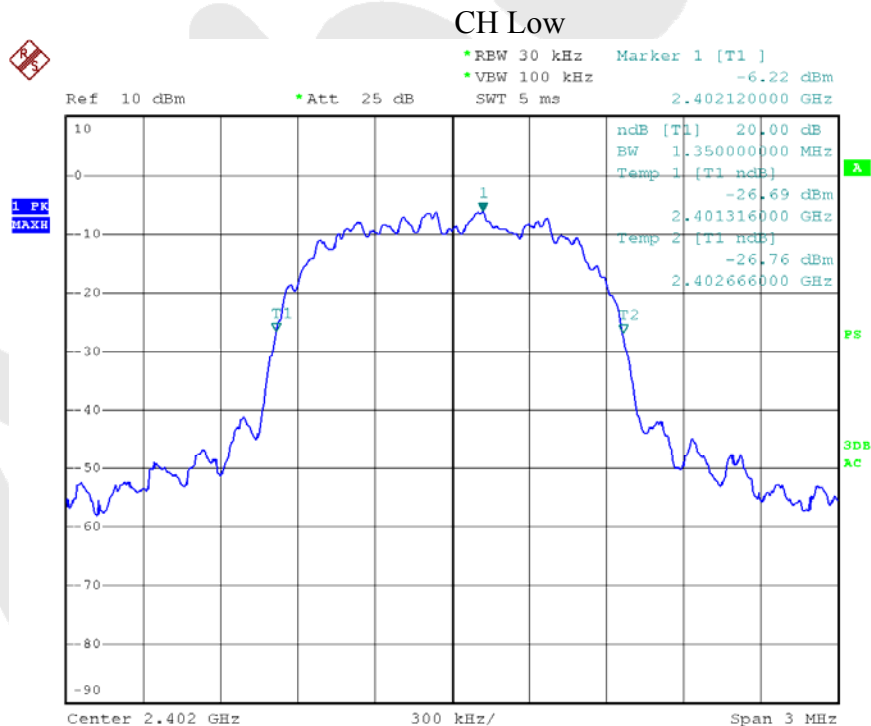


Date: 15.MAY.2013 15:19:14

CH Mid

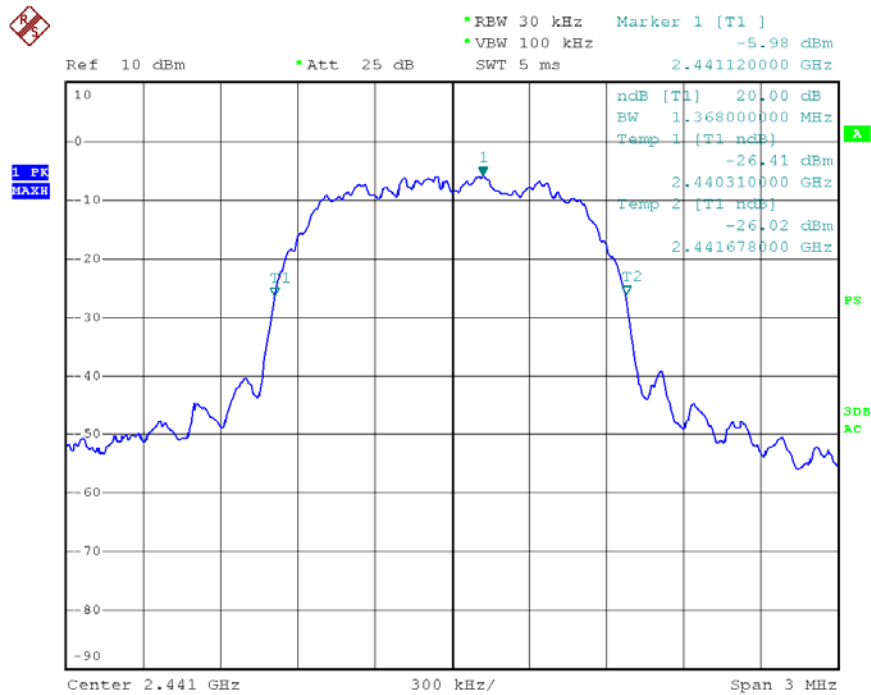

Date: 15.MAY.2013 15:18:53

CH High

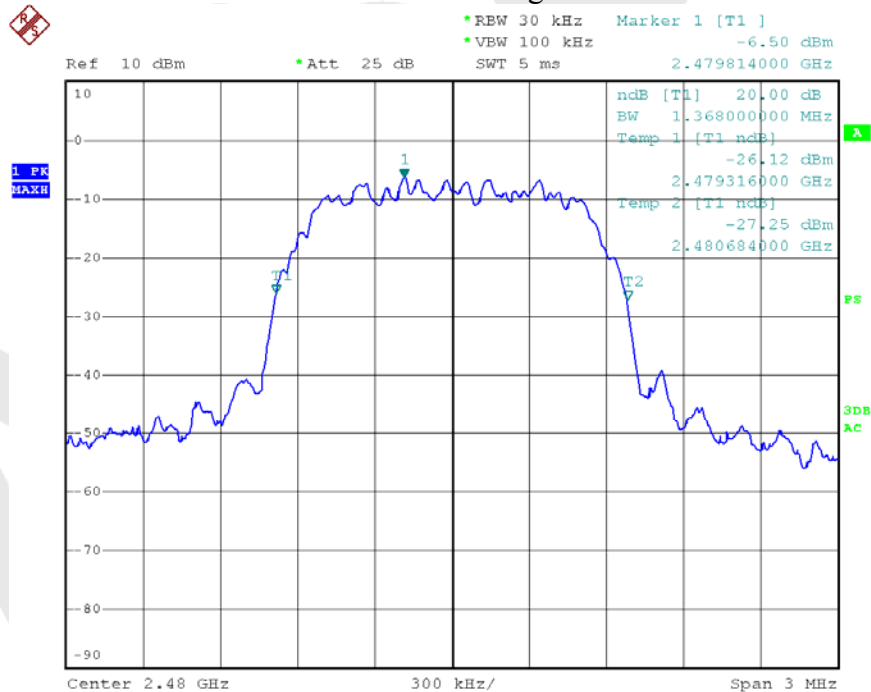


Date: 15.MAY.2013 15:17:29

7. QUANTITY OF HOPPING CHANNEL TEST

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP




7.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A


7.4 Test Results

Product	: Wireless Headphone	Test Mode	: CH Low ~ CH High
Test Item	: Number of Hopping Frequency	Temperature	: 24°C
Test Voltage	: DC 3.7V	Humidity	: 55%RH
Test Result	: PASS		

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

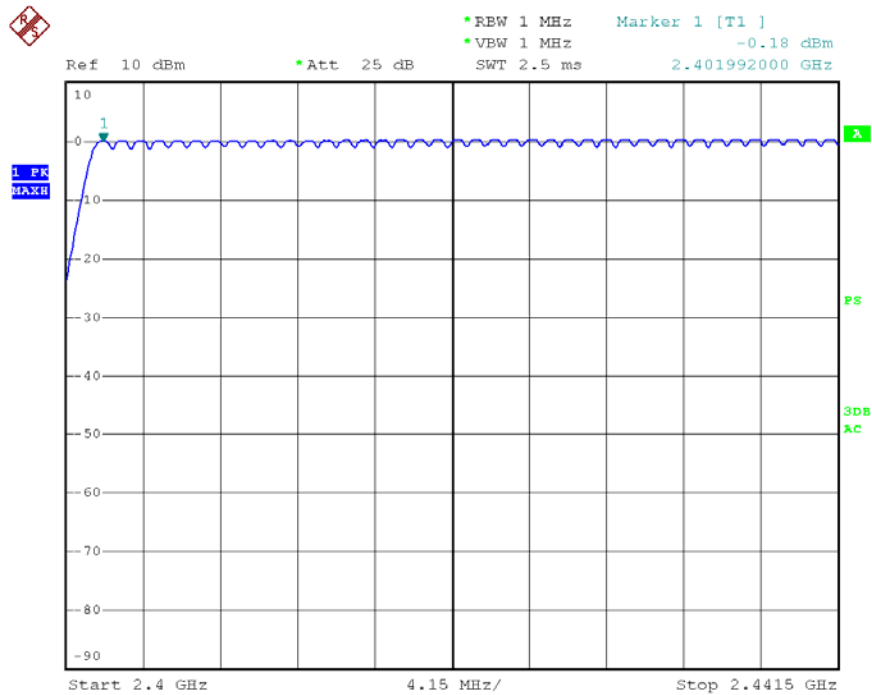

Date: 15.MAY.2013 15:02:50

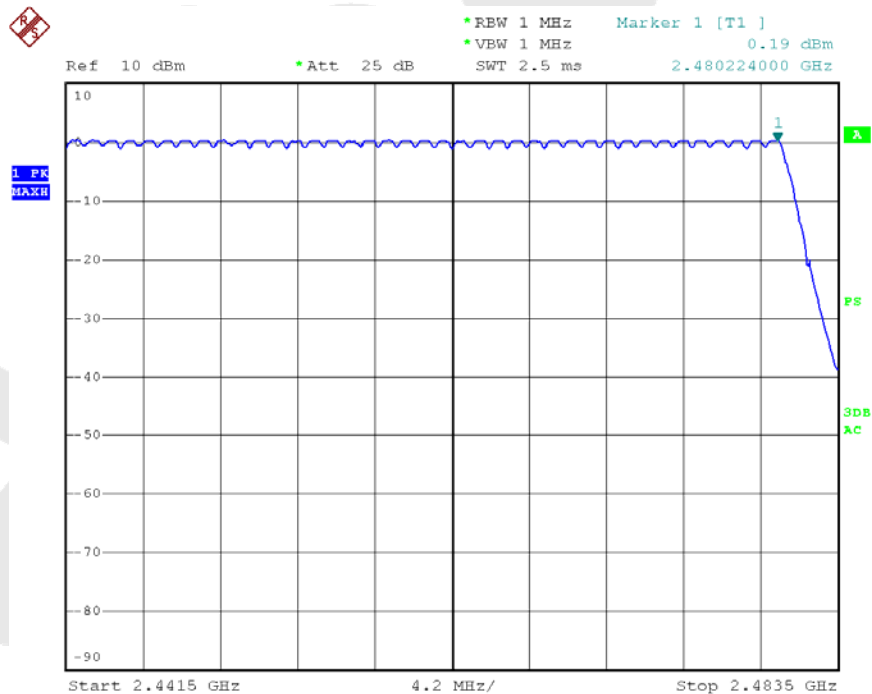


Date: 15.MAY.2013 15:06:27

8. DWELL TIME TEST

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP



8.3 Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

8.4 Test Results

Product	: Wireless Headphone	Test Mode	: CH Low ~ CH High
Test Item	: Time of Occupancy	Temperature	: 24°C
Test Voltage	: DC 3.7V	Humidity	: 55%RH
Test Result	: PASS		


Channel	Pulse width (ms)	Time slot length(ms)	Dwell time (s)	Limit (s)
Low Channel	0.6277	time slot length *1600/2 /79 * 31.6	200.864	0.4
Mid Channel	1.9344	time slot length *1600/4 /79 * 31.6	309.504	0.4
High Channel	3.1620	time slot length *1600/6 /79 * 31.6	337.280	0.4

Low Channel

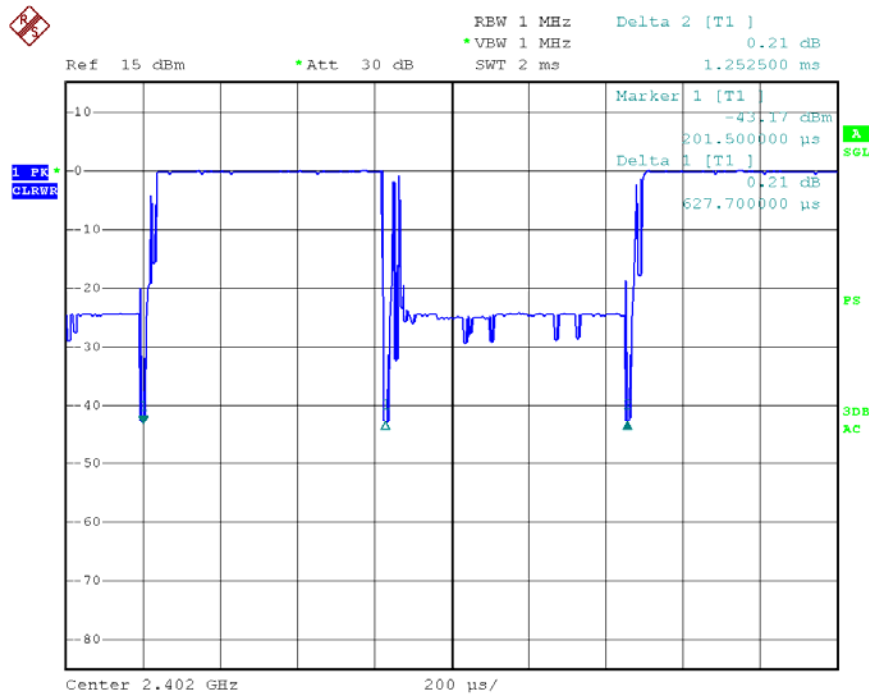


Date: 15.MAY.2013 20:23:10

Mid Channel

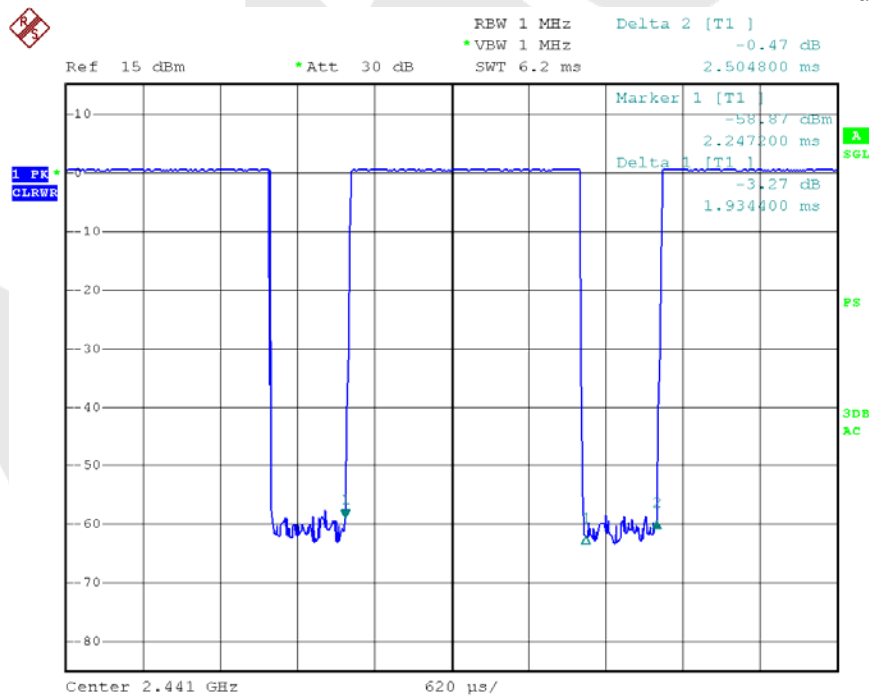

Date: 15.MAY.2013 20:14:07

High Channel

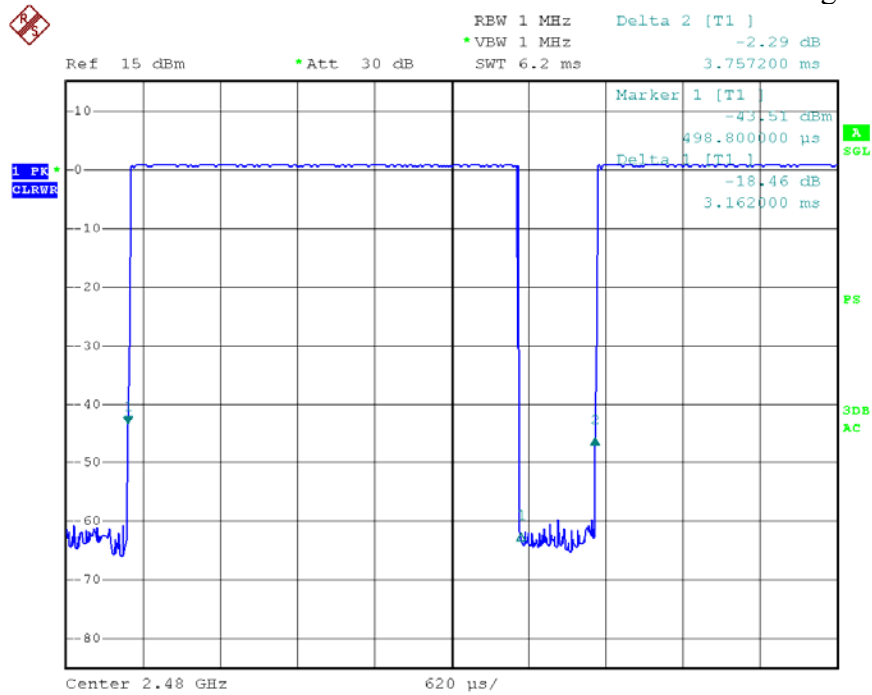


Date: 15.MAY.2013 20:12:01

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

9.2 Test SET-UP



9.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A


9.4 Test Results

Product : Wireless Headphone Test Mode : CH Low ~ CH High
Test Item : Max. peak output power Temperature : 24°C
Test Voltage : DC 3.7V Humidity : 55%RH
Test Result : PASS


Channel Frequency (MHz)	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(mW)	Results	Modulation
2402	0.94	-0.27	125	PASS	GFSK
2441	1.00	0.00	125	PASS	GFSK
2480	0.99	-0.04	125	PASS	GFSK
2402	1.69	2.28	125	PASS	$\pi/4$ DQPSK
2441	1.79	2.53	125	PASS	$\pi/4$ DQPSK
2480	1.79	2.53	125	PASS	$\pi/4$ DQPSK
2402	1.69	2.28	125	PASS	8DPSK
2441	1.79	2.53	125	PASS	8DPSK
2480	1.79	2.53	125	PASS	8DPSK

Remark: The results of modulations $\pi/4$ DQPSK and 8DPSK are the same.


Modulation Mode: GFSK

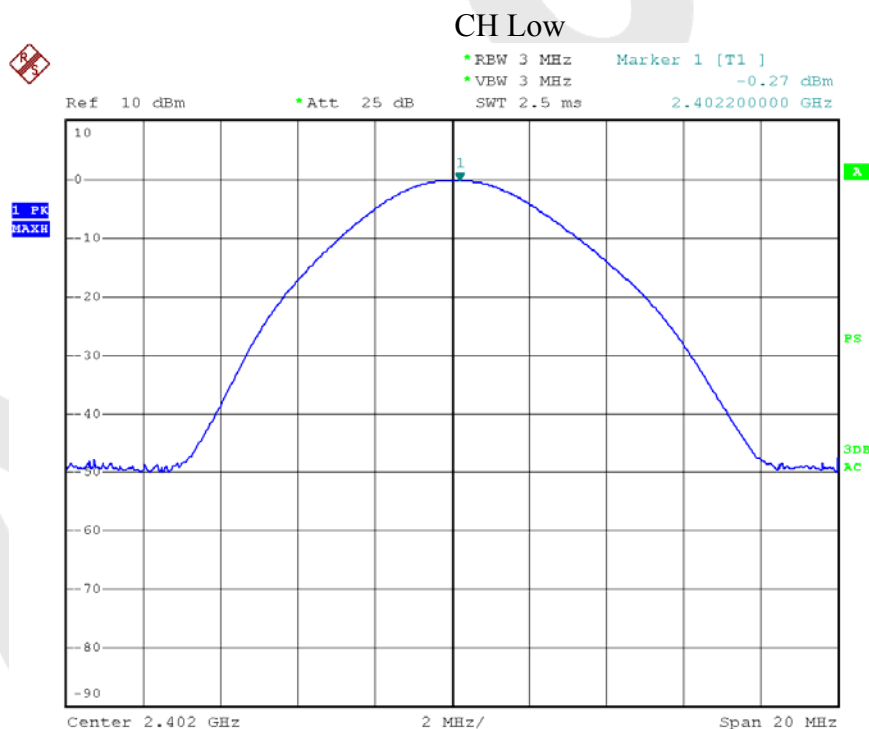

Date: 15.MAY.2013 14:26:29

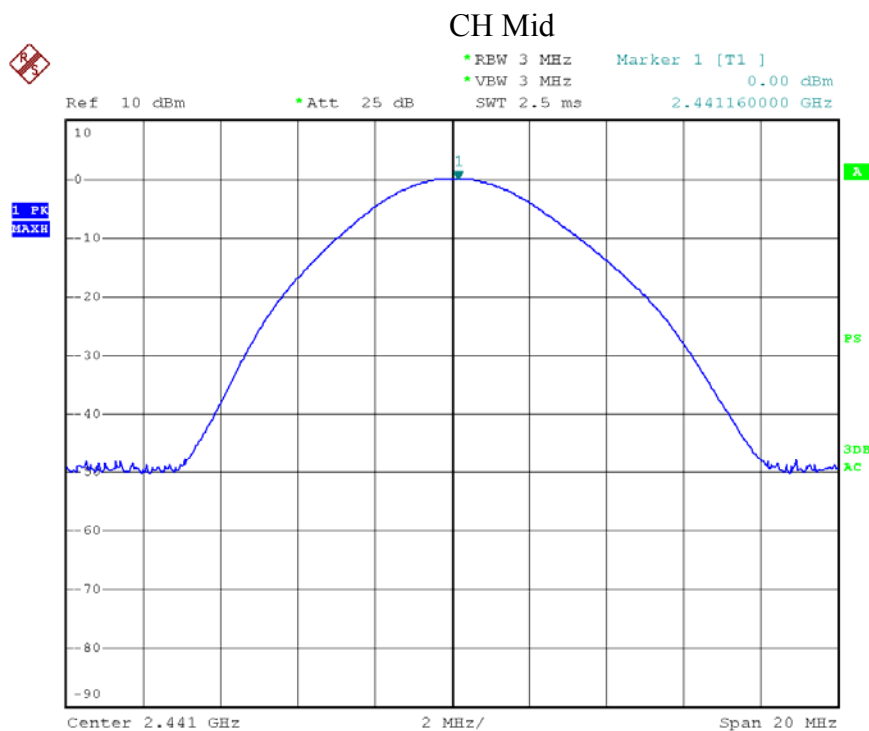


Date: 15.MAY.2013 14:26:54

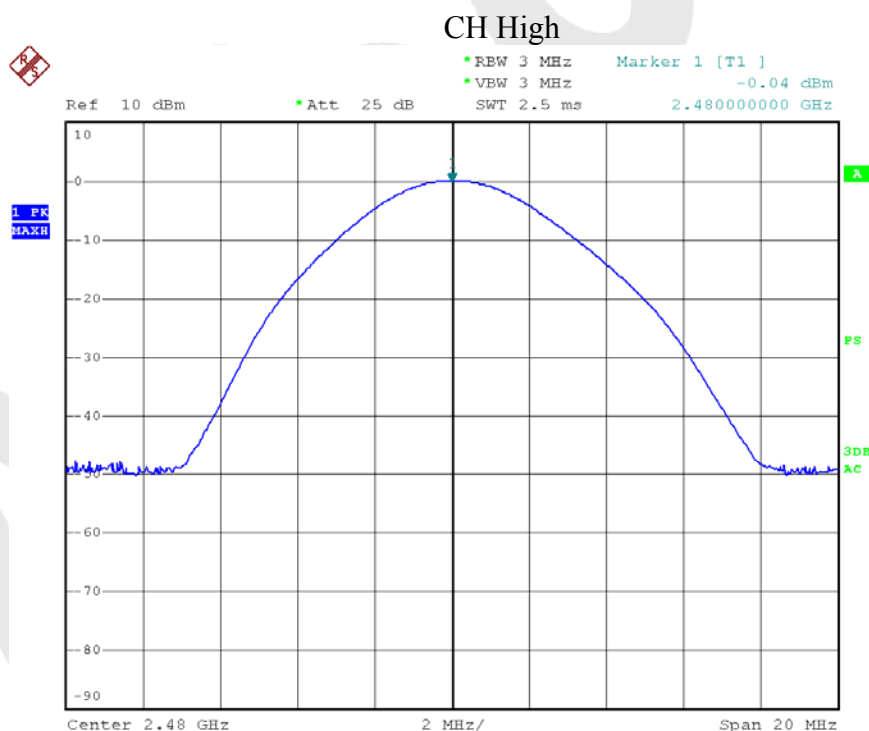


Date: 15.MAY.2013 14:27:24


Modulation Mode: $\pi/4$ DQPSK & 8DPSK

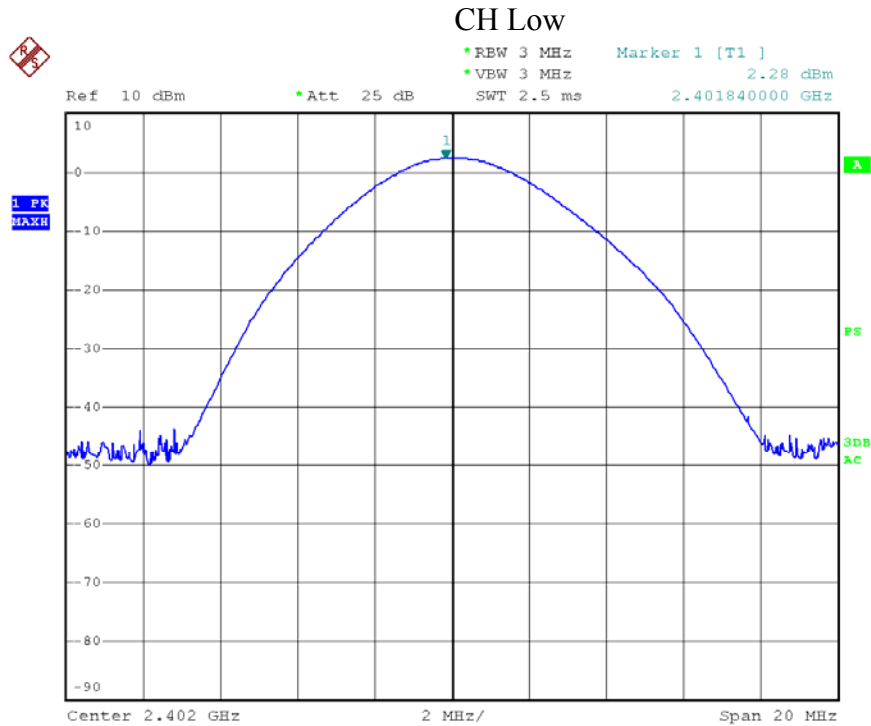

Date: 15.MAY.2013 15:15:49

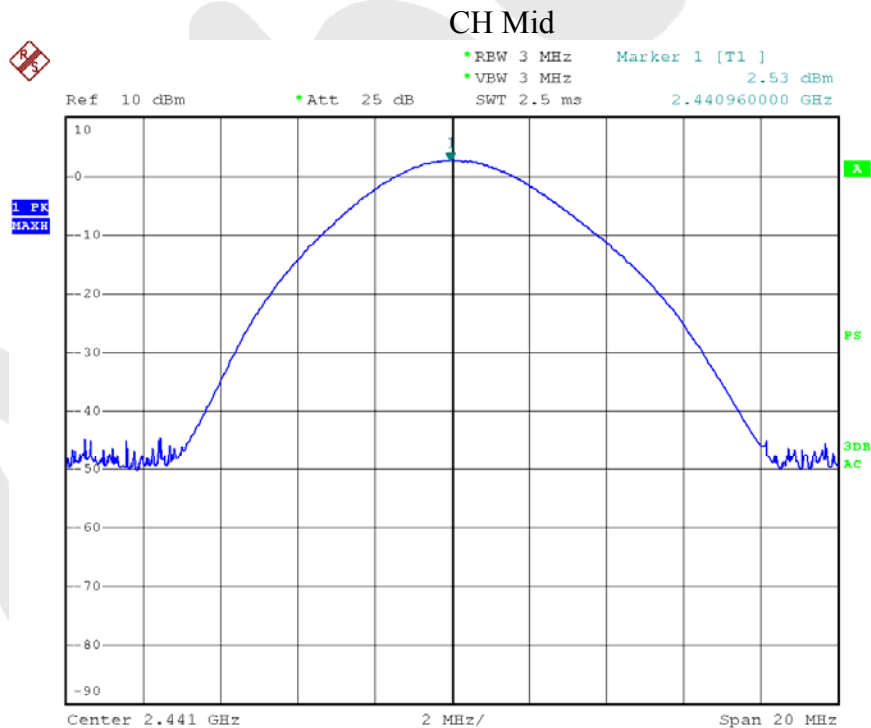

Date: 15.MAY.2013 15:16:11

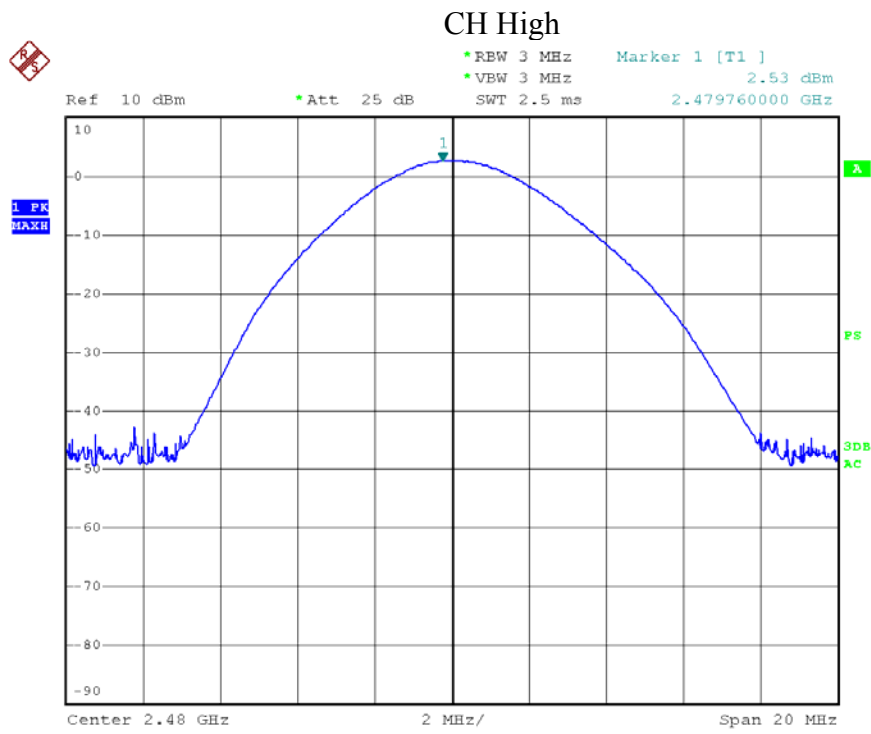

Date: 15.MAY.2013 15:16:40

10. BAND EDGE TEST

10.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

10.2 Test SET-UP

Same as the radiated emission test.

10.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

10.4 Test Results

Pass.

Please refer the following data.

Product : Wireless Headphone Test Mode : CH Low ~ CH High
Test Item : Band eadge Temperature : 24℃
Test Voltage : DC 3.7V Humidity : 55%RH
Test Result : PASS

1. Conducted Test

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)	Modulation
<2400	-0.58	-55.55	54.97	>20dBc	GFSK
	-2.31	-55.09	52.78	>20dBc	π /4DQPSK
	-2.31	-55.09	52.78	>20dBc	8DPSK
>2483.5	-0.53	-60.55	60.02	>20dBc	GFSK
	-2.02	-61.75	59.73	>20dBc	π /4DQPSK
	-2.02	-61.75	59.73	>20dBc	8DPSK

2. Radiated emission Test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Modulation
		PK	AV	PK	AV	
<2400	V	51.36	38.19	74.00	54.00	GFSK
	V	52.7	39.21	74.00	54.00	π /4DQPSK
	V	48.66	37.54	74.00	54.00	8DPSK
>2483.5	V	49.25	38.77	74.00	54.00	GFSK
	V	48.45	36.61	74.00	54.00	π /4DQPSK
	V	49.33	37.76	74.00	54.00	8DPSK

11.ANTENNA APPLICATION

11.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

11.2 Result


The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 0dBi and meets the requirement.


12. PHOTOGRAPH

12.1. Photo of Power Line Conducted Emission Measurement



12.2. Photo of Radiation Emission Test

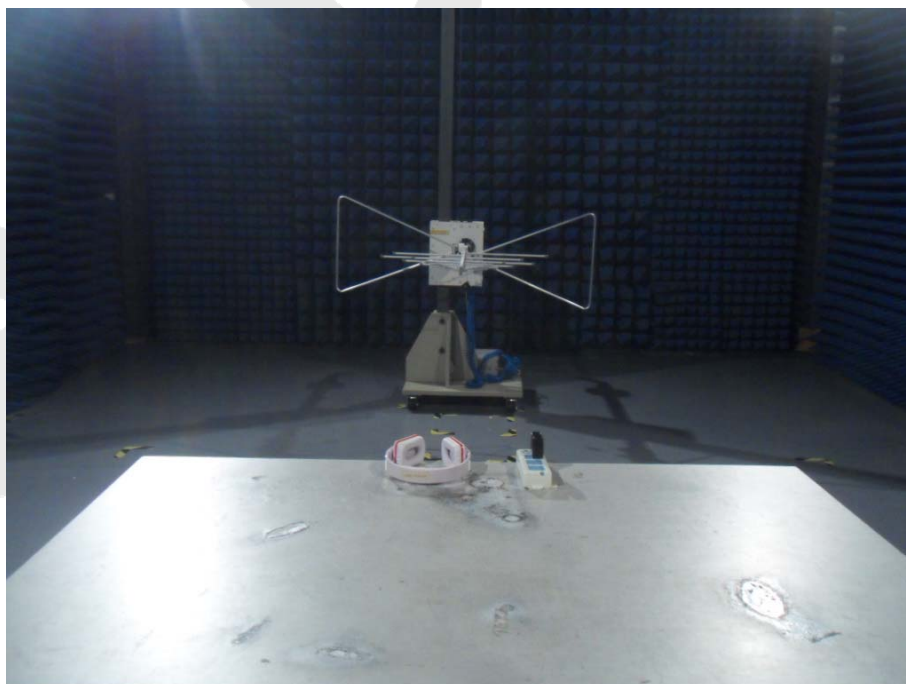

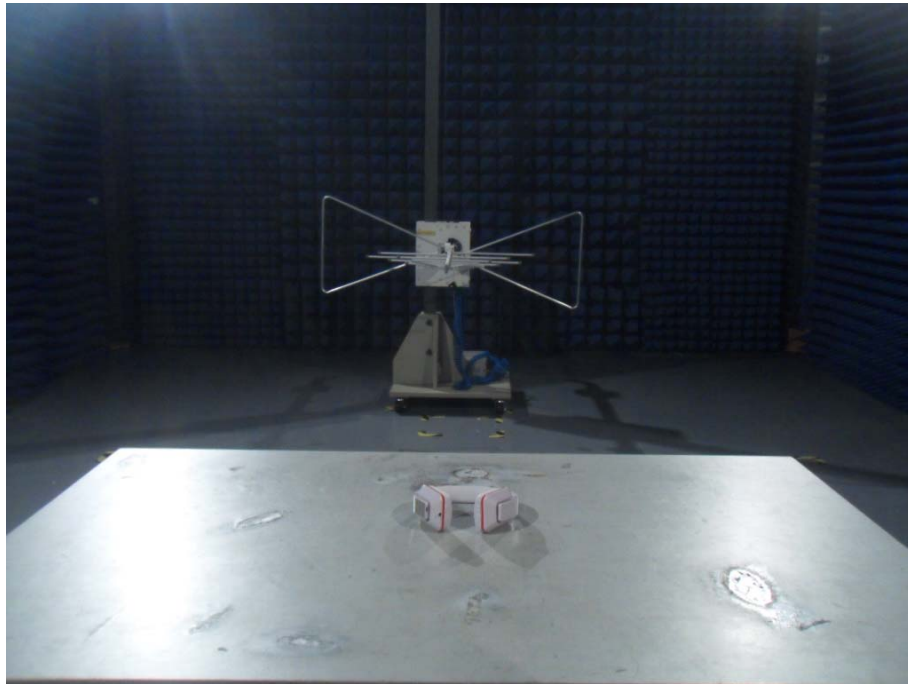

APPENDIX I (External Photos)

Figure 1

The EUT-Front View



Figure 2

The EUT-Back View



APPENDIX II (Internal Photos)

Figure 3

The EUT-Inside View



Figure 4

PCB of the EUT View

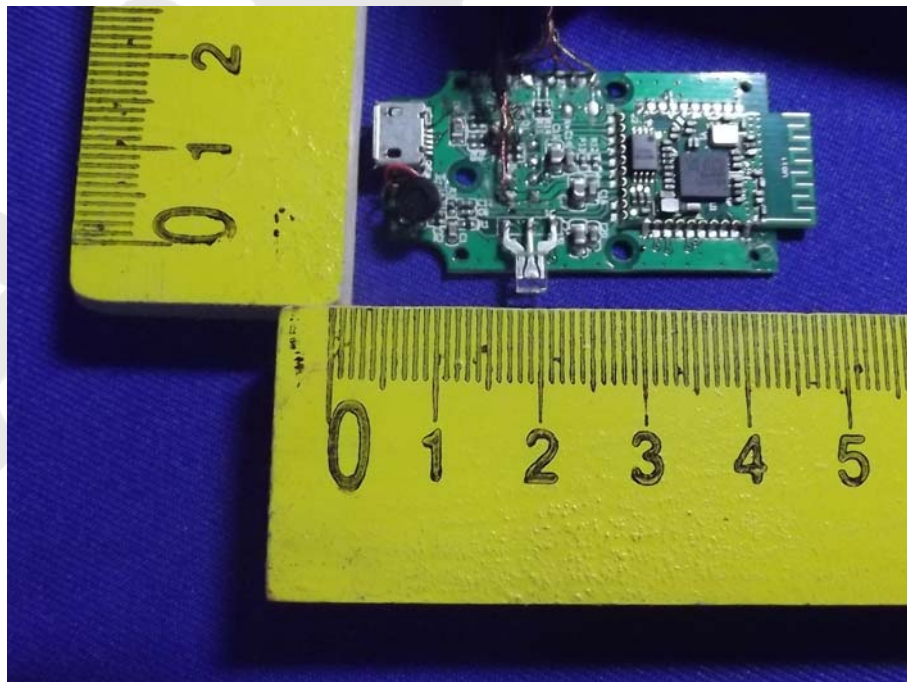


Figure 5
PCB of the EUT View

