



FCC PART 15C


TEST REPORT

For

Chengdu Vantron Technology, Ltd.

No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China 610045

FCC ID: 2AAGETAB5071-TM

Report Type: Original Report	Product Name: Tablet Computer
Report Number: RSC170626001E	
Report Date: 2017-07-11	
Sula Huang	
Reviewed By:	EMC Director 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Chengdu) No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China Tel: 028-65525123 Fax: 028-65525125 www.baclcorp.com

Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
MECHANICAL DESCRIPTION OF EUT	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S)	3
MEASUREMENT UNCERTAINTY	3
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE	5
BLOCK DIAGRAM OF TEST SETUP	6
TEST EQUIPMENTS LIST	7
SUMMARY OF TEST RESULTS	8
FCC§15.203 - ANTENNA REQUIREMENT	9
APPLICABLE STANDARD	9
ANTENNA CONNECTED CONSTRUCTION	9
FCC §15.207 – AC LINE CONDUCTED EMISSION	10
APPLICABLE STANDARD	10
EUT SETUP	10
EMI TEST RECEIVER SETUP	10
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	15
TEST DATA	16
FCC§15.225(E) - FREQUENCY STABILITY	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST DATA	18
FCC §15.215(C) – 20 DB EMISSION BANDWIDTH	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST DATA	20

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The **Chengdu Vantron Technology, Ltd.**, model number: **VT-TABLET-5071-TM-FP (FCC ID: 2AAGETAB5071-TM)** or the "EUT" as referred to in this report was the **Tablet Computer**.

Mechanical Description of EUT

The EUT was measured approximately: 226mm (L) x 127 mm (W) x 18 mm (H).

Rated input voltage: DC 3.7V rechargeable Li-ion battery or DC 5V charging from USB port.

**All measurement and test data in this report were gathered from final production sample, serial number: 170626001/01 (assigned by BACL). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2017-06-23, and EUT complied with test requirement.*

Objective

This Type approval report is prepared on behalf of **Chengdu Vantron Technology, Ltd.** in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communications Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2AAGETAB5071-TM.
FCC Part 15C DSS submissions with FCC ID: 2AAGETAB5071-TM.
FCC Part 15C DTS submissions with FCC ID: 2AAGETAB5071-TM.
FCC Part 15E NII submissions with FCC ID: 2AAGETAB5071-TM.

Measurement Uncertainty

Item			Uncertainty
AC power line conducted emission			2.71dB
Radiated Emission(Field Strength)	9kHz-30MHz		6.1dB
	30MHz-200MHz	H	4.57dB
		V	4.81dB
	200MHz-1GHz	H	5.69dB
		V	6.07dB
	1GHz-6GHz		5.49dB
	6GHz-18GHz		5.57dB

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Chengdu). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The test site used by BACL to collect test data is located No.5040, Huilongwan Plaza, No. 1, Shawan Road, Jinniu District, Chengdu, Sichuan, China.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules, The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014. The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332.

BACL's test facility has been fully described in reports on file and registered with the Innovation, Science and Economic Development Canada under Registration Numbers: 3062C-1.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a test mode

EUT Exercise Software

N/A

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
N/A	Earphone	N/A	N/A
Xinheyuan	Adapter	XHY0501WLC	N/A

External I/O Cable

Cable Description	Length (m)	From	To
Unshielded USB Cable	1.0	Adapter	EUT
Unshielded Earphone Cable	1.2	EUT	Earphone

Block Diagram of Test Setup

For AC Line Conducted Emission

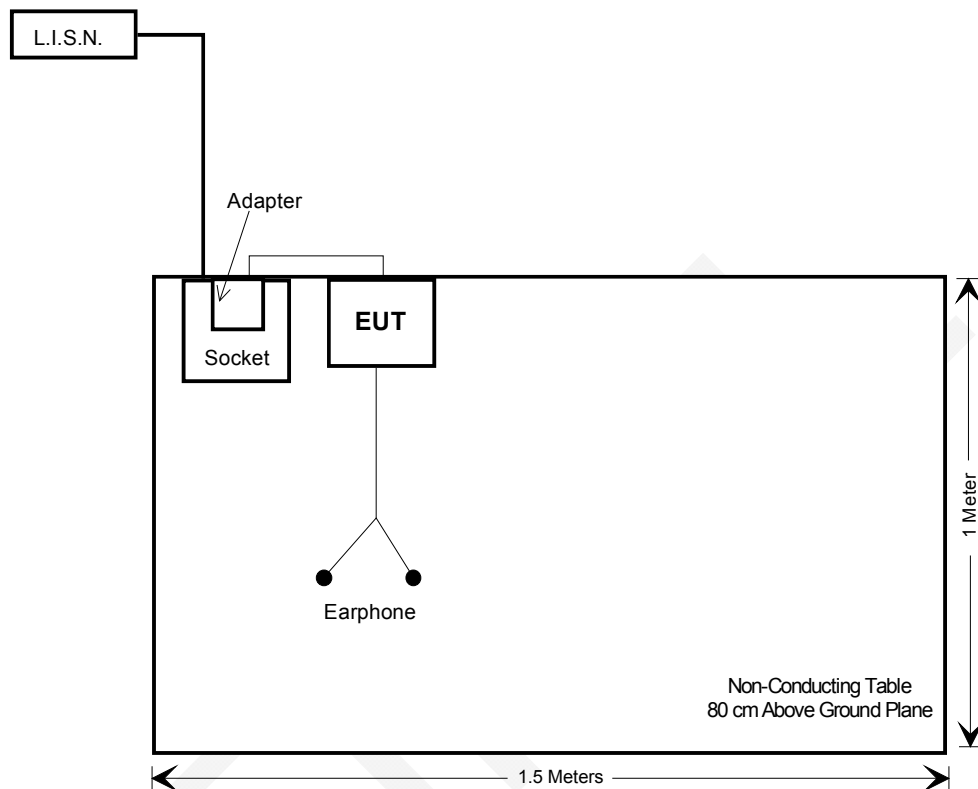

Test Equipments List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS 30	836858/0016	2016-12-02	2017-12-01
Rohde & Schwarz	L.I.S.N.	ENV216	100018	2017-05-20	2018-05-19
Rohde & Schwarz	PULSE LIMITER	ESH3Z2	DE14781	2016-11-10	2017-11-09
N/A	Conducted Cable	NO.5	N/A	N/A	N/A
Rohde & Schwarz	EMC32	N/A	V 8.52.0	N/A	N/A
Radiated Emissions Test					
Agilent	Pre-Amplifier	8447D	2944A10442	2016-12-02	2017-12-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2017-05-20	2018-05-19
Sunol Sciences	Broadband Antenna	JB3	A121808	2017-05-18	2020-05-17
A.H.Systems,inc	Active 12" Loop Antenna	SAS-563B	365	2016-12-02	2017-12-01
INMET	Attenuator	N-6dB	/	2016-11-10	2017-11-09
EMCT	Semi-Anechoic Chamber	966	N/A	2015-04-24	2018-04-23
N/A	RF Cable (below 1GHz)	NO.1	N/A	2016-11-10	2017-11-09
N/A	RF Cable (below 1GHz)	NO.4	N/A	2016-11-10	2017-11-09
Rohde & Schwarz	EMC32	N/A	V 8.52.0	N/A	N/A
Frequency Stability Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2017-05-20	2018-05-19
A.H.Systems,inc	Active 12" Loop Antenna	SAS-563B	365	2016-12-02	2017-12-01
ZhaoXin	DC Power supply	RXN-305D	20141218916	2016-11-05	2017-11-04
Shenzhen BACL	High Temperature Test Chamber	BTH-150	30024	2016-12-02	2017-12-01

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207	AC Line Conducted Emission	Compliance
§15.225 §15.209 §15.205	Radiated Emission Test	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20 dB Emission Bandwidth	Compliance

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction

The EUT has one integrated loop inductive antenna arrangement, which was permanently attached and fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 – AC LINE CONDUCTED EMISSION

Applicable Standard

FCC §15.207

EUT Setup

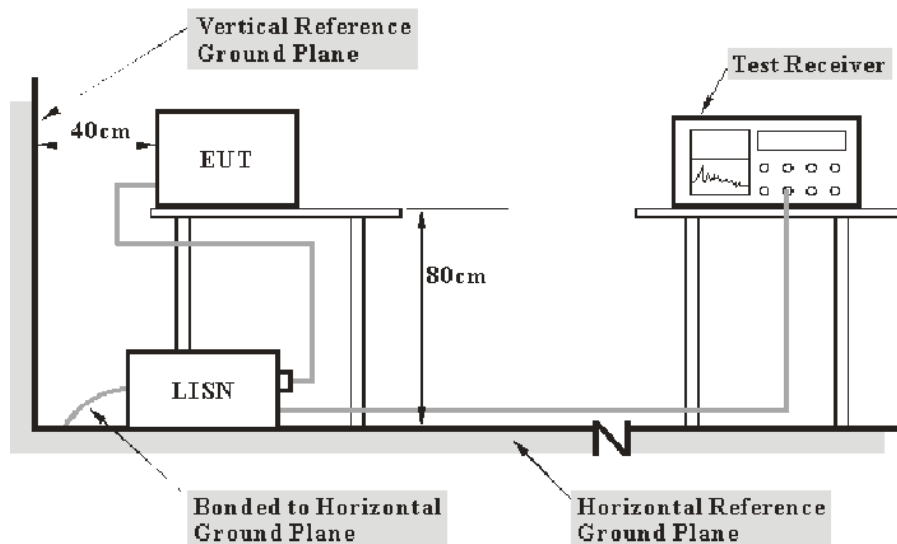

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

According FCC publication number 174176, for a device with a permanent antenna operating at or below 30 MHz, the measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) perform the AC line conducted tests with the permanent antenna to determine compliance with the Section 15.207 limits outside the transmitter's fundamental emission band; (2) retest with a dummy load in lieu of the permanent antenna to determine compliance with the Section 15.207 limits within the transmitter's fundamental emission band.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	29 °C
Relative Humidity:	50 %
ATM Pressure:	94.9 kPa

The testing was performed by Tom Tang on 2017-07-08.

Test Mode: Transmitting


AC120V/60Hz, Line:

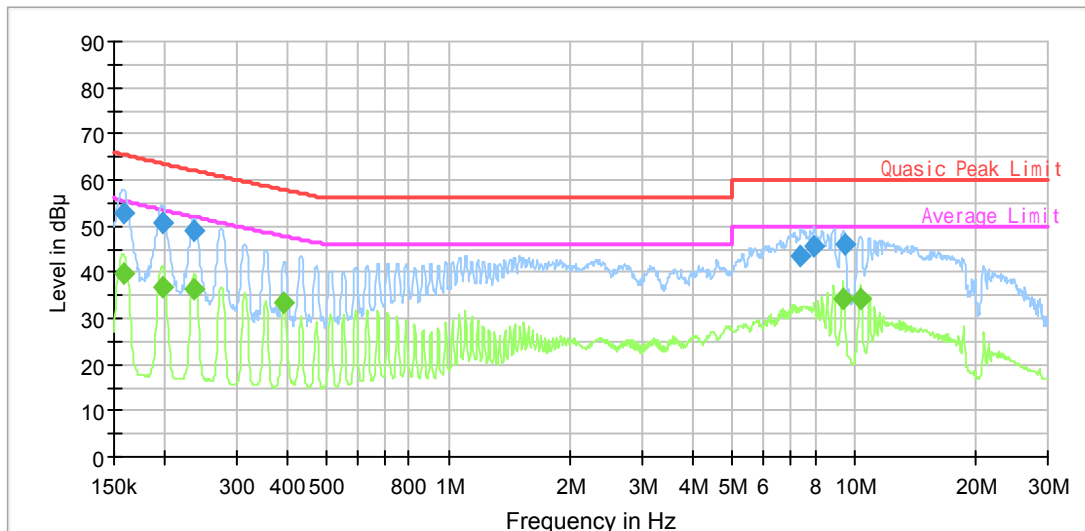

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158200	53.0	200.0	9.000	L1	19.7	12.5	65.5
0.197569	50.7	200.0	9.000	L1	19.7	12.9	63.6
0.236458	48.9	200.0	9.000	L1	19.7	13.1	62.0
7.382361	43.4	200.0	9.000	L1	20.0	16.6	60.0
7.998940	45.7	200.0	9.000	L1	20.0	14.3	60.0
9.447849	46.2	200.0	9.000	L1	20.0	13.8	60.0

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.157990	39.6	200.0	9.000	L1	19.7	15.9	55.5
0.197569	36.8	200.0	9.000	L1	19.7	16.7	53.5
0.236448	36.4	200.0	9.000	L1	19.7	15.6	52.0
0.394140	33.6	200.0	9.000	L1	19.8	14.3	47.8
9.380328	34.2	200.0	9.000	L1	20.0	15.8	50.0
10.364798	34.2	200.0	9.000	L1	20.0	15.8	50.0

AC120V/60Hz, Neutral:

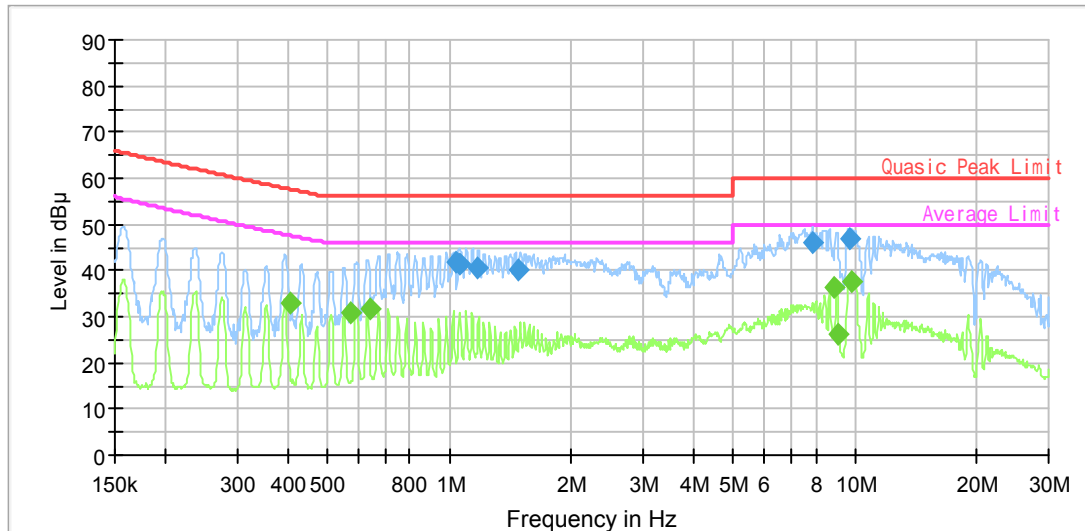

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.034404	41.7	200.0	9.000	L1	19.8	14.1	56.0
1.065745	41.3	200.0	9.000	L1	19.8	14.7	56.0
1.174330	40.8	200.0	9.000	L1	19.8	15.2	56.0
1.479280	40.2	200.0	9.000	L1	19.8	15.8	56.0
7.892274	46.2	200.0	9.000	L1	20.0	13.8	60.0
9.753473	47.0	200.0	9.000	L1	20.0	13.0	60.0

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.404140	33.1	200.0	9.000	L1	19.8	14.7	47.8
0.569868	31.0	200.0	9.000	L1	19.8	15.0	46.0
0.640245	31.6	200.0	9.000	L1	19.8	14.4	46.0
8.860516	36.2	200.0	9.000	L1	20.0	13.8	50.0
9.043239	26.0	200.0	9.000	L1	20.0	13.1	50.0
9.837623	37.5	200.0	9.000	L1	20.0	12.5	50.0

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter
- 3) Margin = Limit – Corrected Amplitude


FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST

Applicable Standard

As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

EUT Setup

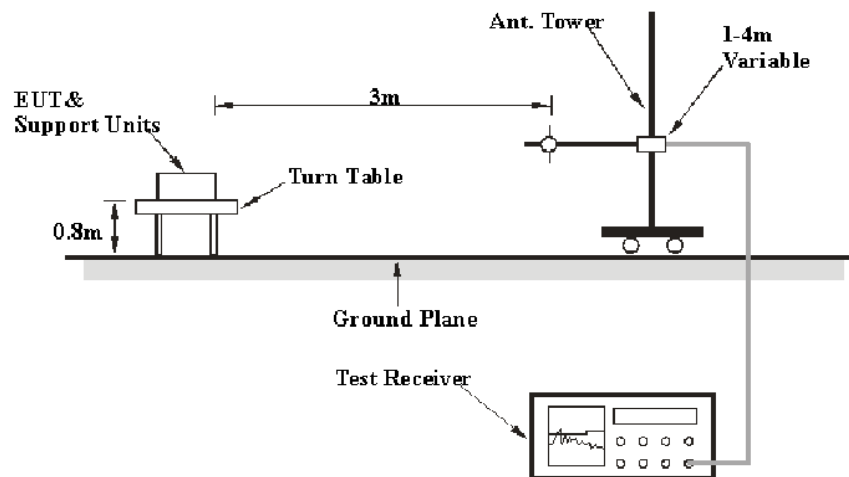

All measurements contained in this report were conducted with ANSI C63.10-2013. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to 120VAC/60Hz power source.

EMI Test Receiver Setup

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	QP
150 kHz – 30 MHz	9 kHz	30 kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209.

Test Data

Environmental Conditions

Temperature:	28°C
Relative Humidity:	56 %
ATM Pressure:	94.9 kPa

* The testing was performed by Tom Tang on 2017-07-08.

Test mode: Transmitting

1) Fundamental (9 kHz~30 MHz):

Frequency	Receiver		Rx Antenna	Cable loss	Corrected Amplitude	Corrected Amplitude	Limit	Margin
	Reading	Detector	MAF					
MHz	dBμV	PK/QP/AV	dB/m	dB	dBμA/m	dBμV/m	dBμV/m@3m	dB
13.56	40.4	QP	-56.04	0.33	-15.31	36.19	124.00	87.81
13.553	24.2	QP	-56.04	0.33	-31.51	19.99	90.47	70.48
13.567	28.2	QP	-56.04	0.33	-27.51	23.99	90.47	66.48
13.35	12.2	QP	-55.98	0.33	-43.45	8.05	80.51	72.46
12.11	13.1	QP	-55.89	0.31	-42.48	9.02	69.54	60.52

2) Spurious Emissions (30 MHz ~1 GHz):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
	Reading	Detector	Polar	Factor					
MHz	dBμV	PK/QP/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dB
30.61	29.4	QP	V	22.32	0.32	28.57	23.47	40.00	16.53
40.67	32.2	QP	V	14.70	0.34	28.52	18.72	40.00	21.28
81.29	30.8	QP	V	8.23	0.47	28.38	11.12	40.00	28.88
115.12	29.5	QP	V	14.38	0.62	28.20	16.30	43.50	27.20
720.16	34.7	QP	V	21.08	2.05	28.66	29.17	46.00	16.83
945.68	32.1	QP	V	23.35	2.56	28.04	29.97	46.00	16.03
32.06	26.4	QP	H	21.41	0.34	28.56	19.59	40.00	20.41
36.18	22.5	QP	H	18.40	0.38	28.54	12.74	40.00	27.26
116.45	25.4	QP	H	14.71	0.65	28.19	12.57	43.50	30.93
661.59	29.1	QP	H	20.42	1.94	28.82	22.64	46.00	23.36
720.52	31.6	QP	H	21.09	2.05	28.65	26.09	46.00	19.91
854.99	32.1	QP	H	22.26	2.31	28.32	28.35	46.00	17.65

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor

Margin = Limit- Corr. Amplitude

FCC§15.225(e) - FREQUENCY STABILITY

Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to DC power supply source which connected to an external AC power supply and loop antenna was connected to a Spectrum Analyzer.

The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Test Data

Environmental Conditions

Temperature:	29 °C
Relative Humidity:	50 %
ATM Pressure:	94.9 kPa

** The testing was performed by Tom Tang on 2017-07-08.*

Test Mode: Transmitting

Test Result: Compliant. Please refer to the below table.

f _o = 13.56 MHz				
Temperature	Voltage	Measure Frequency	Frequency Error	Limit
	Vdc	MHz		
0	3.7	13.56045	0.0033%	±0.01%
10		13.56087	0.0064%	
20		13.56031	0.0023%	
30		13.56064	0.0047%	
40		13.56059	0.0044%	
20	4.2	13.56064	0.0047%	
	3.5	13.56045	0.0033%	

FCC §15.215(c) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Per FCC §15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of band operation.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Test Data


Environmental Conditions

Temperature:	29 °C
Relative Humidity:	50 %
ATM Pressure:	94.9 kPa

** The testing was performed by Tom Tang on 2017-07-08.*

Test Mode: Transmitting

20 dB Emission Bandwidth

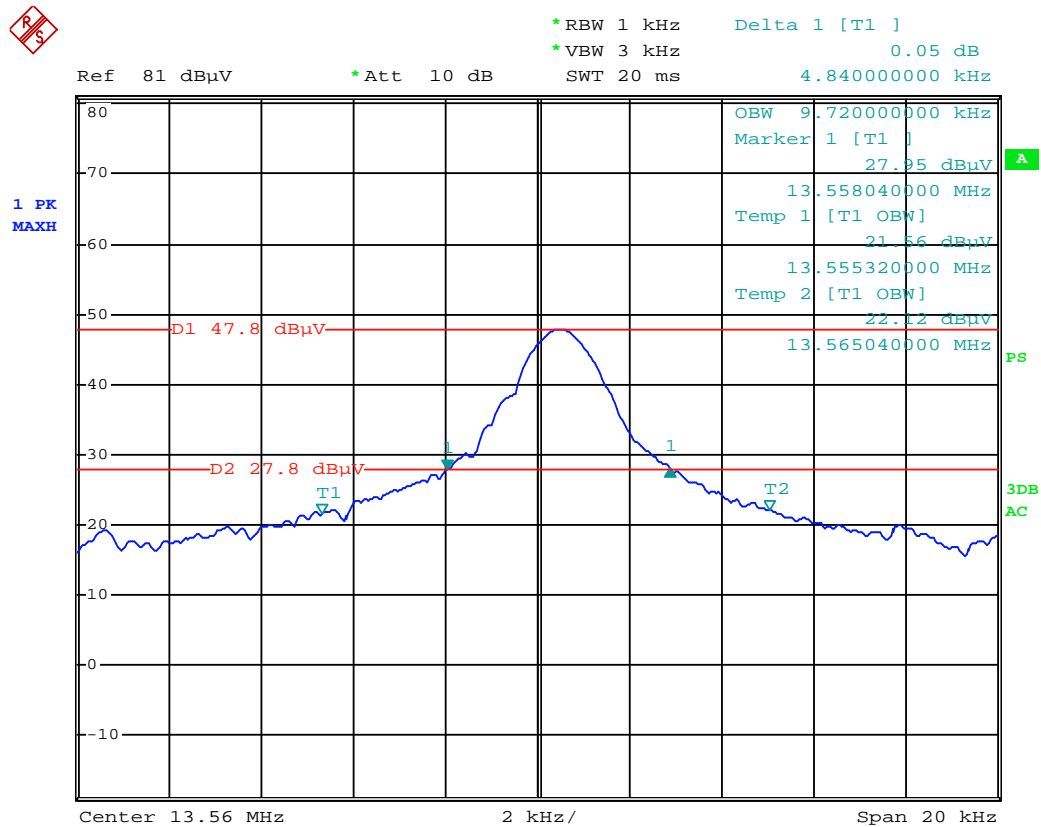

Date: 8.JUL.2017 14:37:09

*****END OF REPORT*****