

FCC PART 15.247



TEST REPORT

For

ISAW CAMERA INC.

#501, Suntech City 1st, Dunchon-Daero 474, Jungwon, Seongnam, Gyeonggi, Korea

FCC ID: 2AAHK-ISS1W

Report Type: Original Report	Product Type: ISAW-S1W
Test Engineer:	Allen Qiao 
Report Number:	RDG150713006-00A
Report Date:	2015-07-30
Reviewed By:	Sula Huang  RF Leader
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28

TEST DATA	28
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	36
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §15.247(e) - POWER SPECTRAL DENSITY	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	43
DECLARATION LETTER	51

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The ISAW CAMERA INC.'s product, model number: ISS1W(FCC ID: 2AAHK-ISS1W) (or the "EUT") in this report was a ISAW-S1W, which was measured approximately: 5.5cm (L) x3.9 cm (W) x 2.7cm (H), rated input voltage: DC3.7V from Li-ion Battery or DC 5V charging from USB port.

Note: The series product, model ISS1W and ISS1, SCS1, SCS1W are electrically identical, the difference between them just is the model name, we selected ISS1W for fully testing, the details was explained in the attached declaration letter.

* All measurement and test data in this report was gathered from production sample serial number: 150713006 (Assigned by applicant). The EUT was received on 2015-07-14.

Objective

This report is prepared on behalf of ISAW CAMERA INC. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2AAHK-ISS1W.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.
For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were tested with Channel 1, 6 and 11.
For 802.11n ht40 mode were tested with Channel 3, 6 and 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:

Software and version			IPOP	
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Power Level
802.11 b	Low	2412	1	26
	Middle	2437	1	24
	High	2462	1	23
802.11 g	Low	2412	6	36
	Middle	2437	6	34
	High	2462	6	34
802.11n20	Low	2412	MCS0	37
	Middle	2437	MCS0	35
	High	2462	MCS0	34
802.11n40	Low	2422	MCS0	37
	Middle	2437	MCS0	36
	High	2452	MCS0	35

Equipment Modifications

No modification was made to the EUT tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Dongguan Aohai Power Technology Co.,Ltd	Adapter	A8-501000	N/A

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	Yes	No	0.6	USB Port of Adapter	EUT

Block Diagram of Test Setup

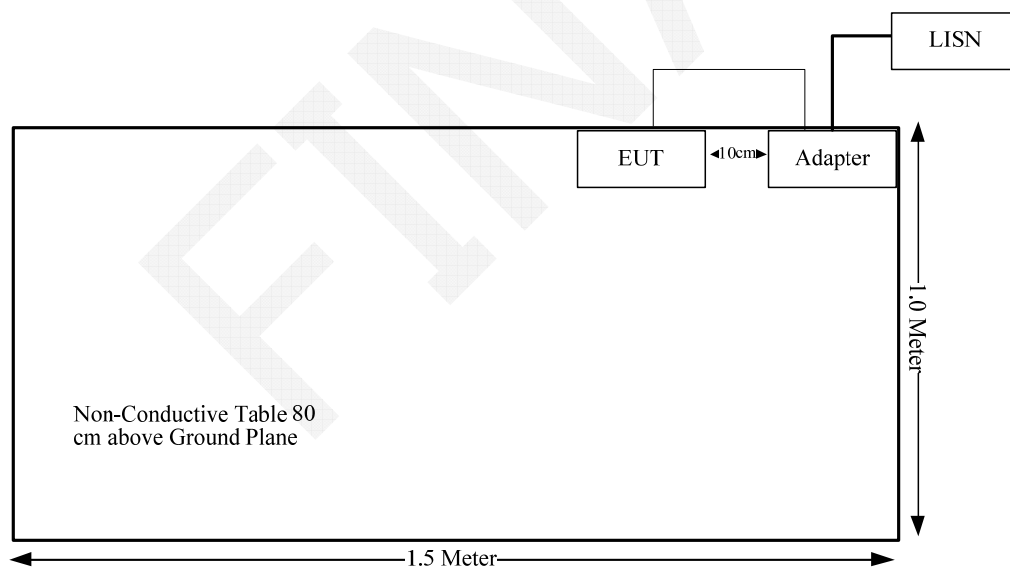

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The maximum conducted average output power = 9.28 dBm (8.47 mW) at 2462 MHz

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 8.47/5 \cdot (\sqrt{2.462}) = 2.66 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 0.44 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-20	2015-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-06-09	2016-06-09
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

12.20 dB at 0.528270 MHz in the **Neutral** conducted mode


Test Data**Environmental Conditions**

Temperature:	28.6 °C
Relative Humidity:	57%
ATM Pressure:	99.5 kPa

The testing was performed by Dean Liu on 2015-07-20.


Test Mode: Transmitting

AC120 V, 60 Hz, Line:

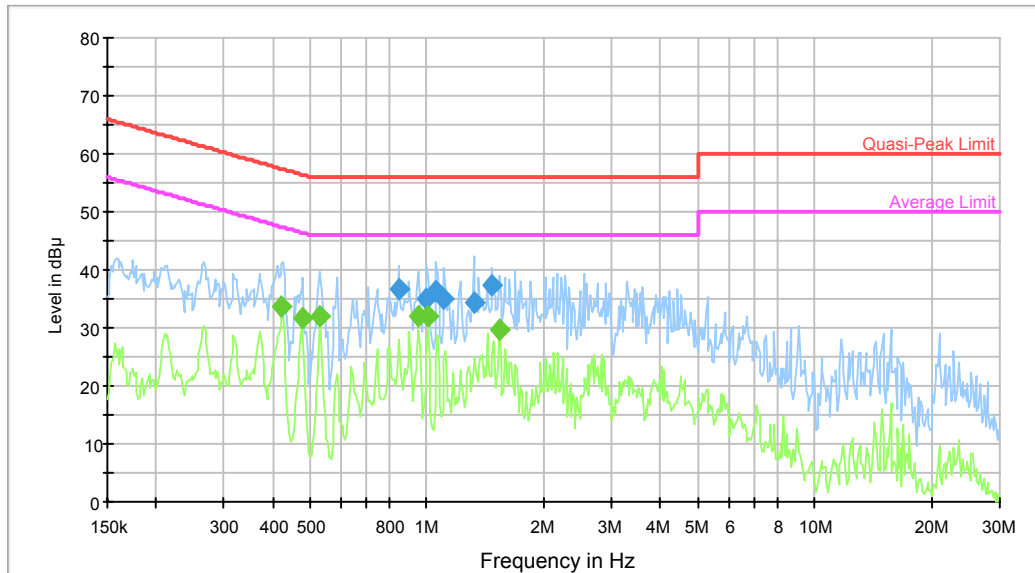

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.845331	36.8	9.000	L1	10.4	19.2	56.0	Compliance
0.999305	35.2	9.000	L1	10.4	20.8	56.0	Compliance
1.056628	36.2	9.000	L1	10.4	19.8	56.0	Compliance
1.108371	34.9	9.000	L1	10.4	21.1	56.0	Compliance
1.320738	34.3	9.000	L1	10.4	21.7	56.0	Compliance
1.476605	37.3	9.000	L1	10.4	18.7	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.422630	33.8	9.000	L1	10.2	13.6	47.4	Compliance
0.476287	31.7	9.000	L1	10.1	14.7	46.4	Compliance
0.532496	32.0	9.000	L1	10.1	14.0	46.0	Compliance
0.952654	32.1	9.000	L1	10.4	13.9	46.0	Compliance
1.007300	32.1	9.000	L1	10.4	13.9	46.0	Compliance
1.536622	29.6	9.000	L1	10.4	16.4	46.0	Compliance

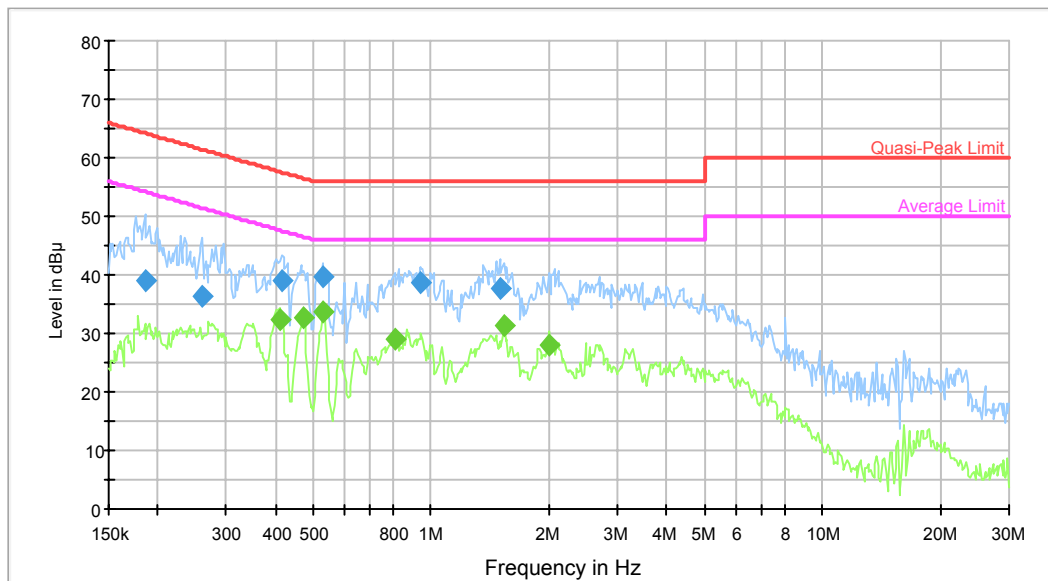AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.186006	39.1	9.000	N	10.2	25.1	64.2	Compliance
0.259937	36.4	9.000	N	10.2	25.0	61.4	Compliance
0.415949	39.0	9.000	N	10.2	18.5	57.5	Compliance
0.528270	39.6	9.000	N	10.1	16.4	56.0	Compliance
0.937592	38.8	9.000	N	10.4	17.2	56.0	Compliance
1.500325	37.5	9.000	N	10.4	18.5	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.409372	32.4	9.000	N	10.2	15.2	47.7	Compliance
0.472507	32.7	9.000	N	10.1	13.7	46.5	Compliance
0.528270	33.8	9.000	N	10.1	12.2	46.0	Compliance
0.805868	29.1	9.000	N	10.4	16.9	46.0	Compliance
1.536622	31.2	9.000	N	10.4	14.8	46.0	Compliance
1.998778	28.1	9.000	N	10.4	17.9	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 2 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

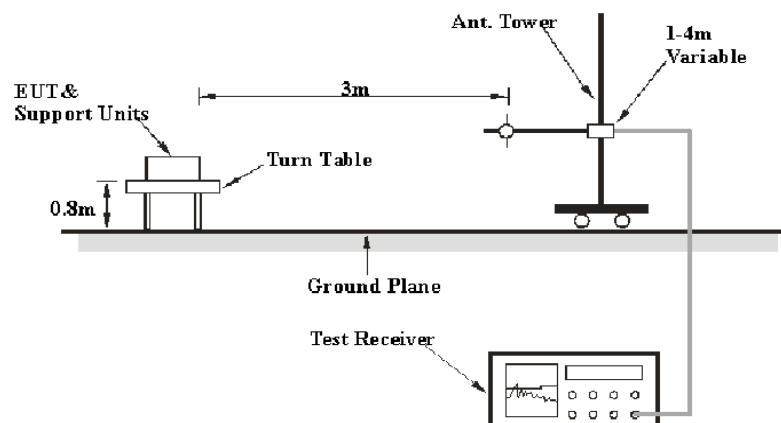

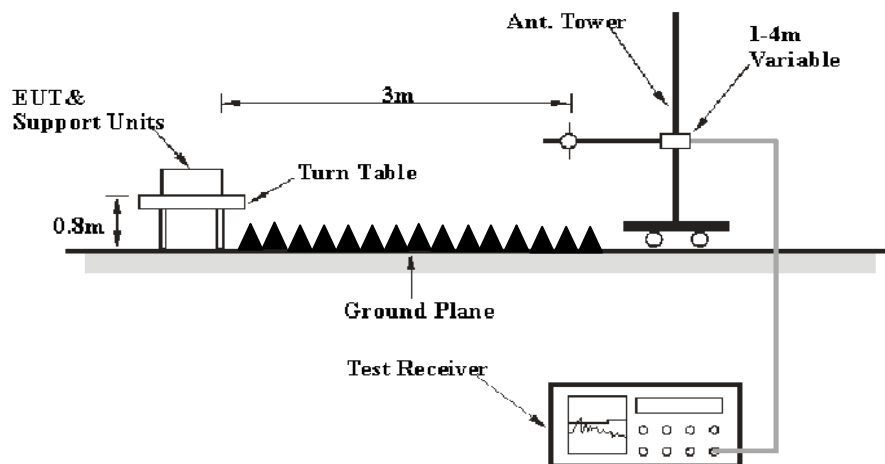Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-05-09	2016-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2014-12-04	2015-12-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2014-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

3.40dB at 140.58MHz in the **Vertical** polarization for 802.11 b Mode

Test Data

Environmental Conditions

Temperature:	26.4°C
Relative Humidity:	60 %
ATM Pressure:	100.4 kPa

* The testing was performed by Allen Qiao on 2015-07-29.

Test Mode: Transmitting

802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	58.04	PK	H	25.67	3.68	0.00	87.39	N/A	N/A
2412	53.40	AV	H	25.67	3.68	0.00	82.75	N/A	N/A
2412	57.34	PK	V	25.67	3.68	0.00	86.69	N/A	N/A
2412	52.78	AV	V	25.67	3.68	0.00	82.13	N/A	N/A
2390	26.45	PK	H	25.61	3.63	0.00	55.69	74.00	18.31
2390	13.59	AV	H	25.61	3.63	0.00	42.83	54.00	11.17
4824	31.8	PK	H	30.64	5.03	27.41	40.06	74.00	33.94
4824	18.18	AV	H	30.64	5.03	27.41	26.44	54.00	27.56
7236	32.48	PK	H	34.17	6.65	25.90	47.40	74.00	26.60
7236	18.4	AV	H	34.17	6.65	25.90	33.32	54.00	20.68
9648	30.3	PK	H	36.06	8.55	27.46	47.45	74.00	26.55
9648	15.99	AV	H	36.06	8.55	27.46	33.14	54.00	20.86
3131	35.15	PK	H	27.62	6.93	27.43	42.27	74.00	31.73
3131	22.47	AV	H	27.62	6.93	27.43	29.59	54.00	24.41
140.58	46.78	QP	V	13.19	1.45	21.42	40.00	43.50	3.50*
Middle Channel: 2437 MHz									
2437	59.13	PK	H	25.74	3.75	0.00	88.62	N/A	N/A
2437	54.23	AV	H	25.74	3.75	0.00	83.72	N/A	N/A
2437	58.18	PK	V	25.74	3.75	0.00	87.67	N/A	N/A
2437	53.55	AV	V	25.74	3.75	0.00	83.04	N/A	N/A
4874	32.03	PK	H	30.77	5.14	27.42	40.52	74.00	33.48
4874	17.97	AV	H	30.77	5.14	27.42	26.46	54.00	27.54
7311	32.72	PK	H	34.35	6.74	25.88	47.93	74.00	26.07
7311	18.47	AV	H	34.35	6.74	25.88	33.68	54.00	20.32
9748	30.26	PK	H	36.30	8.61	27.24	47.93	74.00	26.07
9748	15.93	AV	H	36.30	8.61	27.24	33.60	54.00	20.40
3131	35.24	PK	H	27.62	6.93	27.43	42.36	74.00	31.64
3131	22.4	AV	H	27.62	6.93	27.43	29.52	54.00	24.48
3190	33.31	PK	H	27.81	6.26	27.38	40.00	74.00	34.00
3190	20.74	AV	H	27.81	6.26	27.38	27.43	54.00	26.57
140.58	46.77	QP	V	13.19	1.45	21.42	39.99	43.50	3.51*
High Channel: 2462 MHz									
2462	59.86	PK	H	25.80	3.75	0.00	89.41	N/A	N/A
2462	55.06	AV	H	25.80	3.75	0.00	84.61	N/A	N/A
2462	59.06	PK	V	25.80	3.75	0.00	88.61	N/A	N/A
2462	54.54	AV	V	25.80	3.75	0.00	84.09	N/A	N/A
2483.5	28.16	PK	H	25.86	3.67	0.00	57.69	74.00	16.31
2483.5	15.22	AV	H	25.86	3.67	0.00	44.75	54.00	9.25
4924	32.18	PK	H	30.90	5.34	27.43	40.99	74.00	33.01
4924	18.48	AV	H	30.90	5.34	27.43	27.29	54.00	26.71
7386	32.94	PK	H	34.53	6.83	25.86	48.44	74.00	25.56
7386	18.98	AV	H	34.53	6.83	25.86	34.48	54.00	19.52
9848	30.65	PK	H	36.54	8.66	26.94	48.91	74.00	25.09
9848	16.42	AV	H	36.54	8.66	26.94	34.68	54.00	19.32
3131	35.53	PK	H	27.62	6.93	27.43	42.65	74.00	31.35
3131	22.85	AV	H	27.62	6.93	27.43	29.97	54.00	24.03
140.58	46.88	QP	V	13.19	1.45	21.42	40.10	43.50	3.40*

*Within measurement uncertainty!

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	59.1	PK	H	25.67	3.68	0.00	88.45	N/A	N/A
2412	50.46	AV	H	25.67	3.68	0.00	79.81	N/A	N/A
2412	58.34	PK	V	25.67	3.68	0.00	87.69	N/A	N/A
2412	49.7	AV	V	25.67	3.68	0.00	79.05	N/A	N/A
2390	27.25	PK	H	25.61	3.63	0.00	56.49	74.00	17.51
2390	14.28	AV	H	25.61	3.63	0.00	43.52	54.00	10.48
4824	31.76	PK	H	30.64	5.03	27.41	40.02	74.00	33.98
4824	17.67	AV	H	30.64	5.03	27.41	25.93	54.00	28.07
7236	31.21	PK	H	34.17	6.65	25.90	46.13	74.00	27.87
7236	17.98	AV	H	34.17	6.65	25.90	32.90	54.00	21.10
9648	29.6	PK	H	36.06	8.55	27.46	46.75	74.00	27.25
9648	16.36	AV	H	36.06	8.55	27.46	33.51	54.00	20.49
2115	34.74	PK	H	24.90	3.24	27.37	35.51	74.00	38.49
2115	22.11	AV	H	24.90	3.24	27.37	22.88	54.00	31.12
140.58	46.64	QP	V	13.19	1.45	21.42	39.86	43.50	3.64*
Middle Channel: 2437 MHz									
2437	60.26	PK	H	25.74	3.75	0.00	89.75	N/A	N/A
2437	51.17	AV	H	25.74	3.75	0.00	80.66	N/A	N/A
2437	59.2	PK	V	25.74	3.75	0.00	88.69	N/A	N/A
2437	50.61	AV	V	25.74	3.75	0.00	80.10	N/A	N/A
4874	31.99	PK	H	30.77	5.14	27.42	40.48	74.00	33.52
4874	18.06	AV	H	30.77	5.14	27.42	26.55	54.00	27.45
7311	31.76	PK	H	34.35	6.74	25.88	46.97	74.00	27.03
7311	18.56	AV	H	34.35	6.74	25.88	33.77	54.00	20.23
9748	29.82	PK	H	36.30	8.61	27.24	47.49	74.00	26.51
9748	16.85	AV	H	36.30	8.61	27.24	34.52	54.00	19.48
2115	35.25	PK	H	24.90	3.24	27.37	36.02	74.00	37.98
2115	22.65	AV	H	24.90	3.24	27.37	23.42	54.00	30.58
3610	33.75	PK	H	29.04	4.61	27.28	40.12	74.00	33.88
3610	19.92	AV	H	29.04	4.61	27.28	26.29	54.00	27.71
140.58	46.54	QP	V	13.19	1.45	21.42	39.76	43.50	3.74*
High Channel: 2462 MHz									
2462	60.92	PK	H	25.80	3.75	0.00	90.47	N/A	N/A
2462	52.13	AV	H	25.80	3.75	0.00	81.68	N/A	N/A
2462	60.11	PK	V	25.80	3.75	0.00	89.66	N/A	N/A
2462	51.48	AV	V	25.80	3.75	0.00	81.03	N/A	N/A
2483.5	28.85	PK	H	25.86	3.67	0.00	58.38	74.00	15.62
2483.5	15.99	AV	H	25.86	3.67	0.00	45.52	54.00	8.48
4924	32.2	PK	H	30.90	5.34	27.43	41.01	74.00	32.99
4924	18.36	AV	H	30.90	5.34	27.43	27.17	54.00	26.83
7386	32.08	PK	H	34.53	6.83	25.86	47.58	74.00	26.42
7386	18.91	AV	H	34.53	6.83	25.86	34.41	54.00	19.59
9848	30.35	PK	H	36.54	8.66	26.94	48.61	74.00	25.39
9848	17.2	AV	H	36.54	8.66	26.94	35.46	54.00	18.54
2115	35.63	PK	H	24.90	3.24	27.37	36.40	74.00	37.60
2115	22.94	AV	H	24.90	3.24	27.37	23.71	54.00	30.29
140.58	46.49	QP	V	13.19	1.45	21.42	39.71	43.50	3.79*

*Within measurement uncertainty!

802.11n20Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	60.22	PK	H	25.67	3.68	0.00	89.57	N/A	N/A
2412	50.54	AV	H	25.67	3.68	0.00	79.89	N/A	N/A
2412	59.13	PK	V	25.67	3.68	0.00	88.48	N/A	N/A
2412	49.45	AV	V	25.67	3.68	0.00	78.80	N/A	N/A
2390	27.46	PK	H	25.61	3.63	0.00	56.70	74.00	17.30
2390	14.65	AV	H	25.61	3.63	0.00	43.89	54.00	10.11
4824	31.56	PK	H	30.64	5.03	27.41	39.82	74.00	34.18
4824	17.16	AV	H	30.64	5.03	27.41	25.42	54.00	28.58
7236	31.09	PK	H	34.17	6.65	25.90	46.01	74.00	27.99
7236	17.77	AV	H	34.17	6.65	25.90	32.69	54.00	21.31
9648	30.1	PK	H	36.06	8.55	27.46	47.25	74.00	26.75
9648	17	AV	H	36.06	8.55	27.46	34.15	54.00	19.85
2950	34.38	PK	H	27.07	6.61	27.54	40.52	74.00	33.48
2950	21.85	AV	H	27.07	6.61	27.54	27.99	54.00	26.01
140.58	46.49	QP	V	13.19	1.45	21.42	39.71	43.50	3.79*
Middle Channel: 2437 MHz									
2437	61.5	PK	H	25.74	3.75	0.00	90.99	N/A	N/A
2437	51.36	AV	H	25.74	3.75	0.00	80.85	N/A	N/A
2437	59.96	PK	V	25.74	3.75	0.00	89.45	N/A	N/A
2437	50.13	AV	V	25.74	3.75	0.00	79.62	N/A	N/A
4874	31.84	PK	H	30.77	5.14	27.42	40.33	74.00	33.67
4874	17.95	AV	H	30.77	5.14	27.42	26.44	54.00	27.56
7311	31.67	PK	H	34.35	6.74	25.88	46.88	74.00	27.12
7311	18.31	AV	H	34.35	6.74	25.88	33.52	54.00	20.48
9748	29.66	PK	H	36.30	8.61	27.24	47.33	74.00	26.67
9748	16.72	AV	H	36.30	8.61	27.24	34.39	54.00	19.61
2950	34.98	PK	H	27.07	6.61	27.54	41.12	74.00	32.88
2950	22.32	AV	H	27.07	6.61	27.54	28.46	54.00	25.54
3610	33.62	PK	H	29.04	4.61	27.28	39.99	74.00	34.01
3610	19.84	AV	H	29.04	4.61	27.28	26.21	54.00	27.79
140.58	46.38	QP	V	13.19	1.45	21.42	39.60	43.50	3.90*
High Channel: 2462 MHz									
2462	62.12	PK	H	25.80	3.75	0.00	91.67	N/A	N/A
2462	52.21	AV	H	25.80	3.75	0.00	81.76	N/A	N/A
2462	60.78	PK	V	25.80	3.75	0.00	90.33	N/A	N/A
2462	51.12	AV	V	25.80	3.75	0.00	80.67	N/A	N/A
2483.5	29.1	PK	H	25.86	3.67	0.00	58.63	74.00	15.37
2483.5	16.34	AV	H	25.86	3.67	0.00	45.87	54.00	8.13
4924	32.1	PK	H	30.90	5.34	27.43	40.91	74.00	33.09
4924	17.87	AV	H	30.90	5.34	27.43	26.68	54.00	27.32
7386	31.65	PK	H	34.53	6.83	25.86	47.15	74.00	26.85
7386	18.5	AV	H	34.53	6.83	25.86	34.00	54.00	20.00
9848	30.82	PK	H	36.54	8.66	26.94	49.08	74.00	24.92
9848	17.68	AV	H	36.54	8.66	26.94	35.94	54.00	18.06
2950	35.16	PK	H	27.07	6.61	27.54	41.30	74.00	32.70
2950	22.35	AV	H	27.07	6.61	27.54	28.49	54.00	25.51
140.58	46.45	QP	V	13.19	1.45	21.42	39.67	43.50	3.83*

*Within measurement uncertainty!


802.11n40Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2422 MHz									
2422	54.9	PK	H	25.70	3.71	0.00	84.31	N/A	N/A
2422	45.32	AV	H	25.70	3.71	0.00	74.73	N/A	N/A
2422	54.01	PK	V	25.70	3.71	0.00	83.42	N/A	N/A
2422	44.43	AV	V	25.70	3.71	0.00	73.84	N/A	N/A
2390	26.33	PK	H	25.61	3.63	0.00	55.57	74.00	18.43
2390	13.72	AV	H	25.61	3.63	0.00	42.96	54.00	11.04
4844	31.68	PK	H	30.69	4.99	27.42	39.94	74.00	34.06
4844	17.87	AV	H	30.69	4.99	27.42	39.72	54.00	14.28
7266	31.46	PK	H	34.24	6.68	25.89	33.39	74.00	40.61
7266	18.36	AV	H	34.24	6.68	25.89	33.39	54.00	20.61
9688	29.72	PK	H	36.15	8.58	27.37	47.08	74.00	26.92
9688	16.66	AV	H	36.15	8.58	27.37	34.02	54.00	19.98
2005	34.92	PK	H	24.61	3.16	27.48	35.21	74.00	38.79
2005	22.36	AV	H	24.61	3.16	27.48	22.65	54.00	31.35
140.58	45.89	QP	V	13.19	1.45	21.42	39.11	43.50	4.39*
Middle Channel: 2437 MHz									
2437	56.07	PK	H	25.74	3.75	0.00	85.56	N/A	N/A
2437	46.21	AV	H	25.74	3.75	0.00	75.70	N/A	N/A
2437	54.85	PK	V	25.74	3.75	0.00	84.34	N/A	N/A
2437	45.39	AV	V	25.74	3.75	0.00	74.88	N/A	N/A
4874	31.89	PK	H	30.77	5.14	27.42	40.38	74.00	33.62
4874	17.65	AV	H	30.77	5.14	27.42	26.14	54.00	27.86
7311	31.64	PK	H	34.35	6.74	25.88	46.85	74.00	27.15
7311	18.31	AV	H	34.35	6.74	25.88	33.52	54.00	20.48
9748	29.66	PK	H	36.30	8.61	27.24	47.33	74.00	26.67
9748	16.48	AV	H	36.30	8.61	27.24	34.15	54.00	19.85
2005	34.95	PK	H	24.61	3.16	27.48	35.24	74.00	38.76
2005	22.31	AV	H	24.61	3.16	27.48	22.60	54.00	31.40
3610	33.22	PK	H	29.04	4.61	27.28	39.59	74.00	34.41
3610	19.47	AV	H	29.04	4.61	27.28	25.84	54.00	28.16
140.58	45.88	QP	V	13.19	1.45	21.42	39.10	43.50	4.40
High Channel: 2452 MHz									
2452	56.73	PK	H	25.78	3.78	0.00	86.29	N/A	N/A
2452	47.03	AV	H	25.78	3.78	0.00	76.59	N/A	N/A
2452	55.7	PK	V	25.78	3.78	0.00	85.26	N/A	N/A
2452	46.22	AV	V	25.78	3.78	0.00	75.78	N/A	N/A
2483.5	27.97	PK	H	25.86	3.67	0.00	57.50	74.00	16.50
2483.5	15.48	AV	H	25.86	3.67	0.00	45.01	54.00	8.99
4904	31.91	PK	H	30.85	5.31	27.43	40.64	74.00	33.36
4904	17.82	AV	H	30.85	5.31	27.43	26.55	54.00	27.45
7356	31.61	PK	H	34.45	6.79	25.87	46.98	74.00	27.02
7356	18.54	AV	H	34.45	6.79	25.87	33.91	54.00	20.09
9808	29.77	PK	H	36.44	8.64	27.09	47.76	74.00	26.24
9808	16.7	AV	H	36.44	8.64	27.09	34.69	54.00	19.31
2005	35.09	PK	H	24.61	3.16	27.48	35.38	74.00	38.62
2005	22.4	AV	H	24.61	3.16	27.48	22.69	54.00	31.31
140.58	45.74	QP	V	13.19	1.45	21.42	38.96	43.50	4.54*


*Within measurement uncertainty!

Conducted Spurious Emissions at Antenna Port


802.11b Low Channel

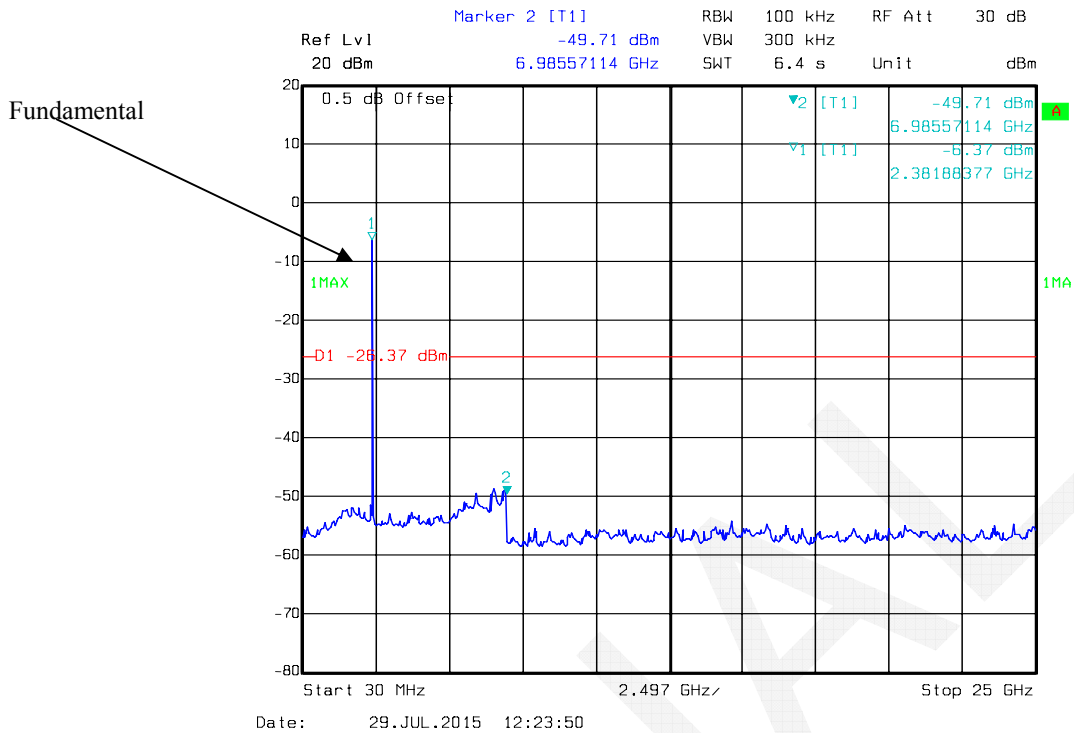


802.11b Middle Channel

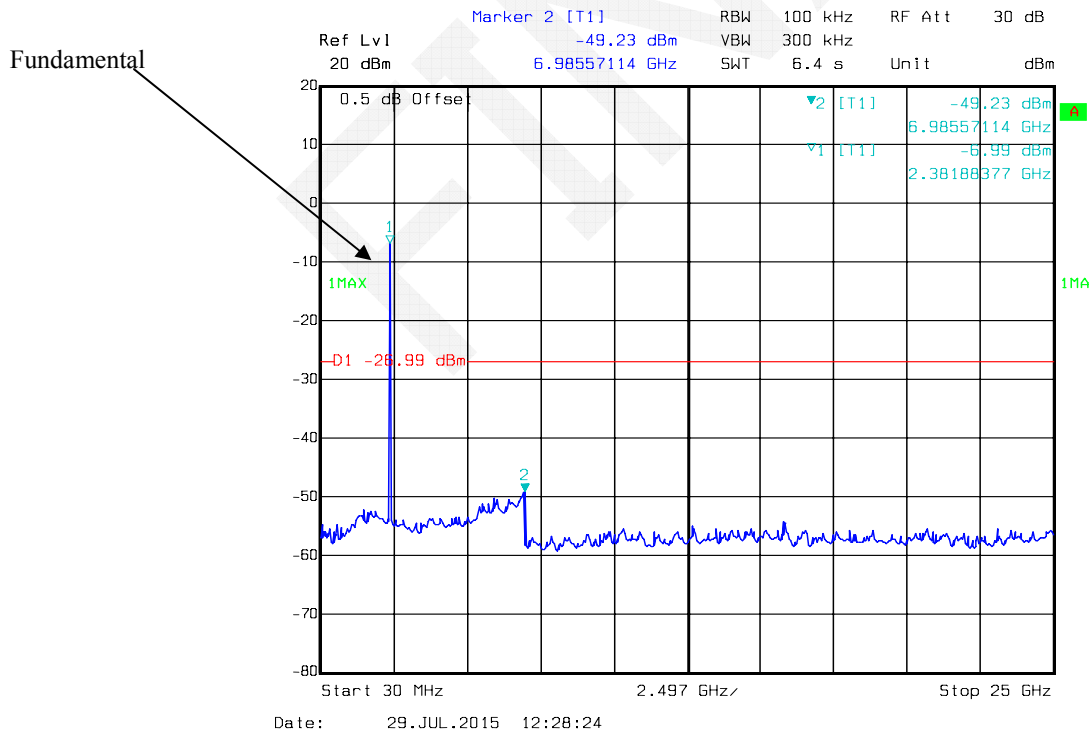

802.11b High Channel

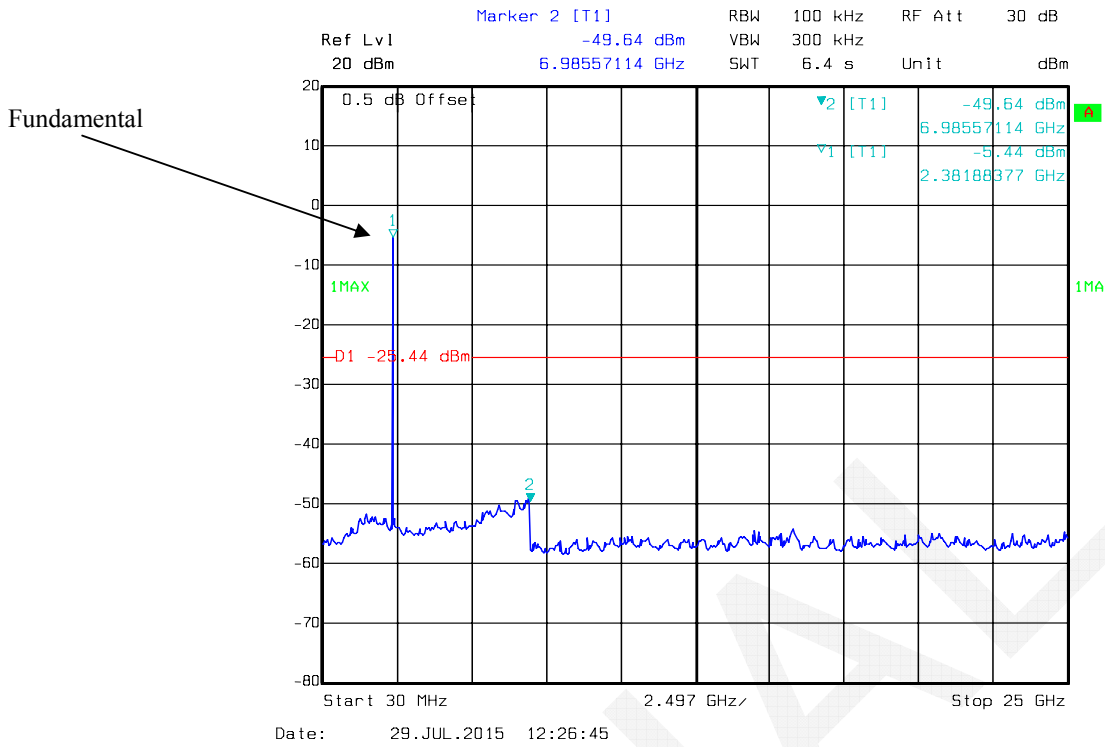


802.11g Low Channel

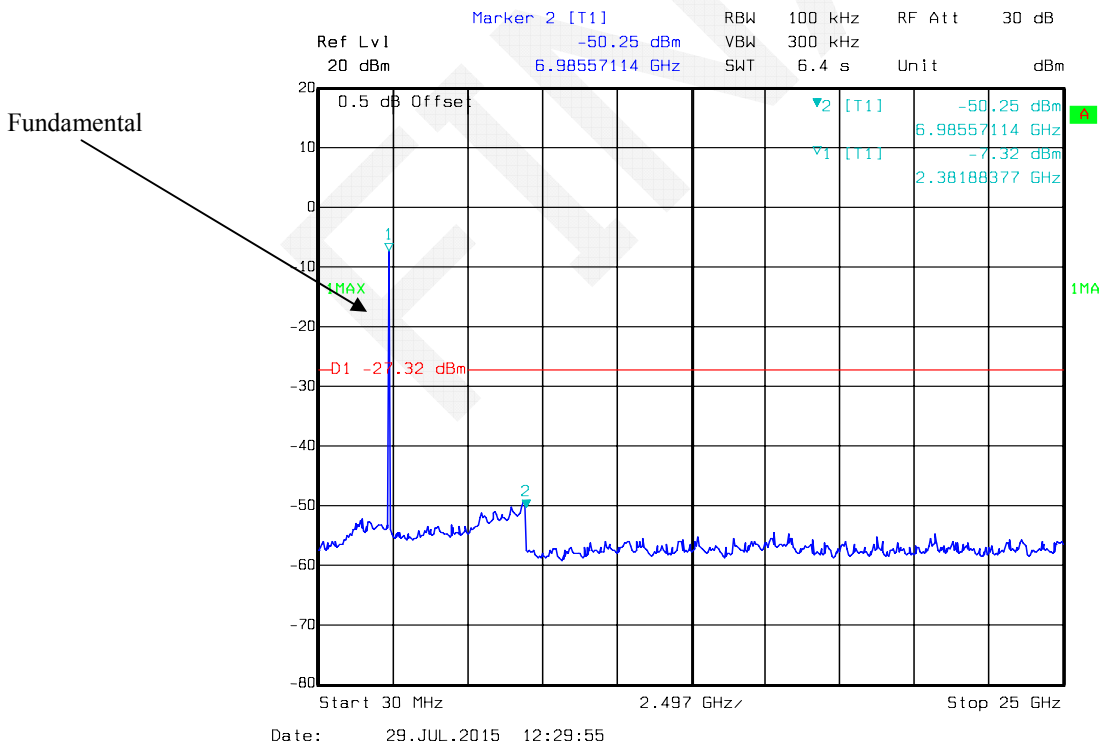


Marker 2 [T1]

RBW	100 kHz	RF Att	30 dB
VBW	300 kHz		
SWT	6.4 s	Unit	dB

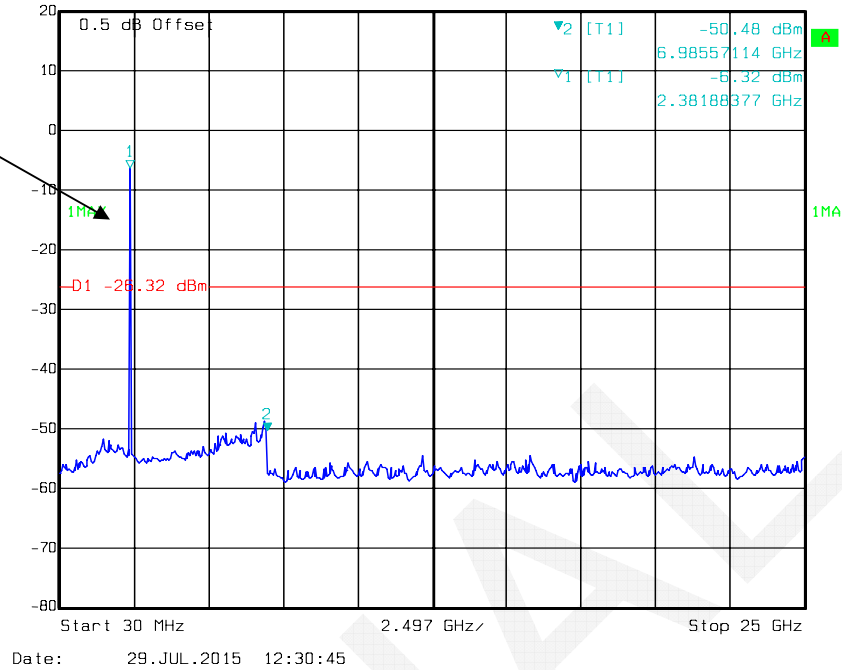


Marker 2 [T1]


RBW	100 kHz	RF Att	30 dB
VBW	300 kHz		
SWT	6.4 s	Unit	dB

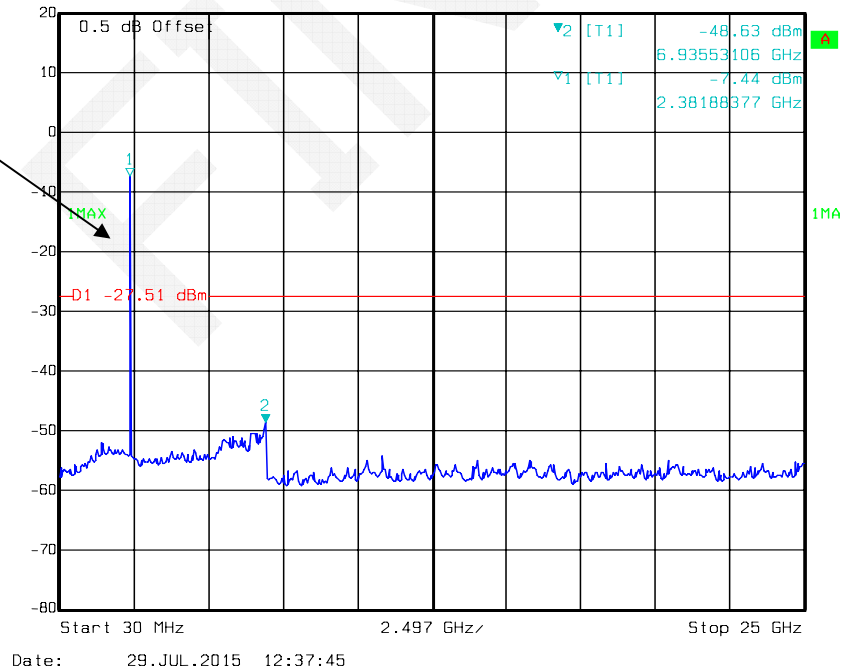


802.11n20 Low Channel

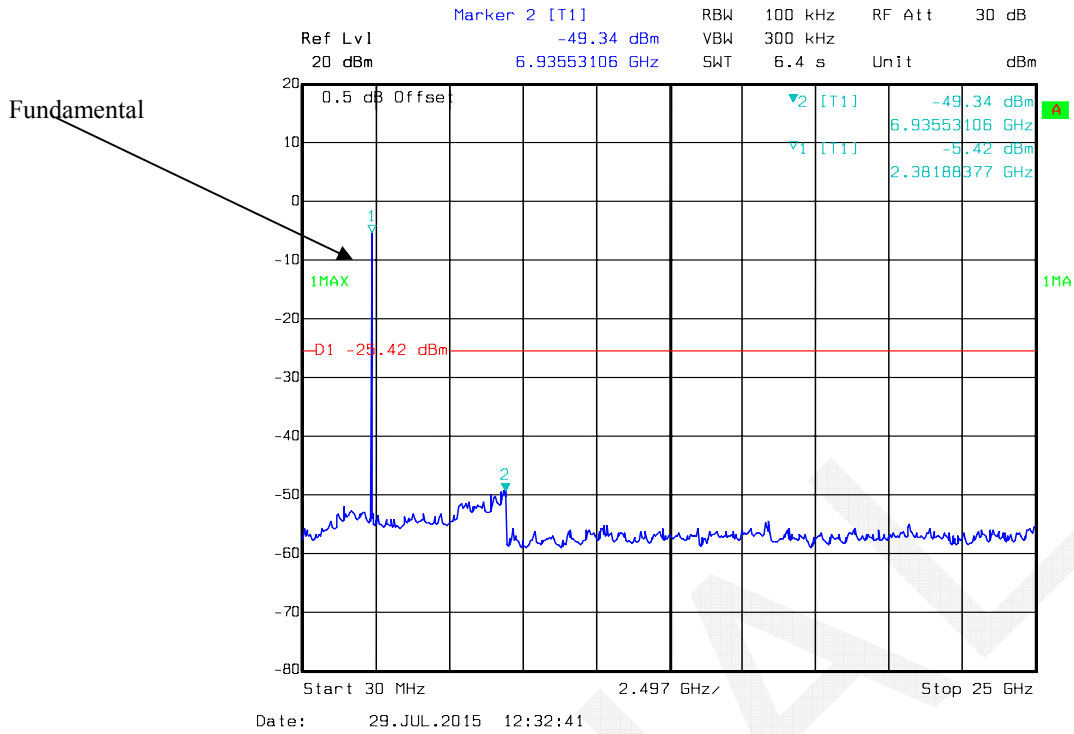


802.11n20 Middle Channel

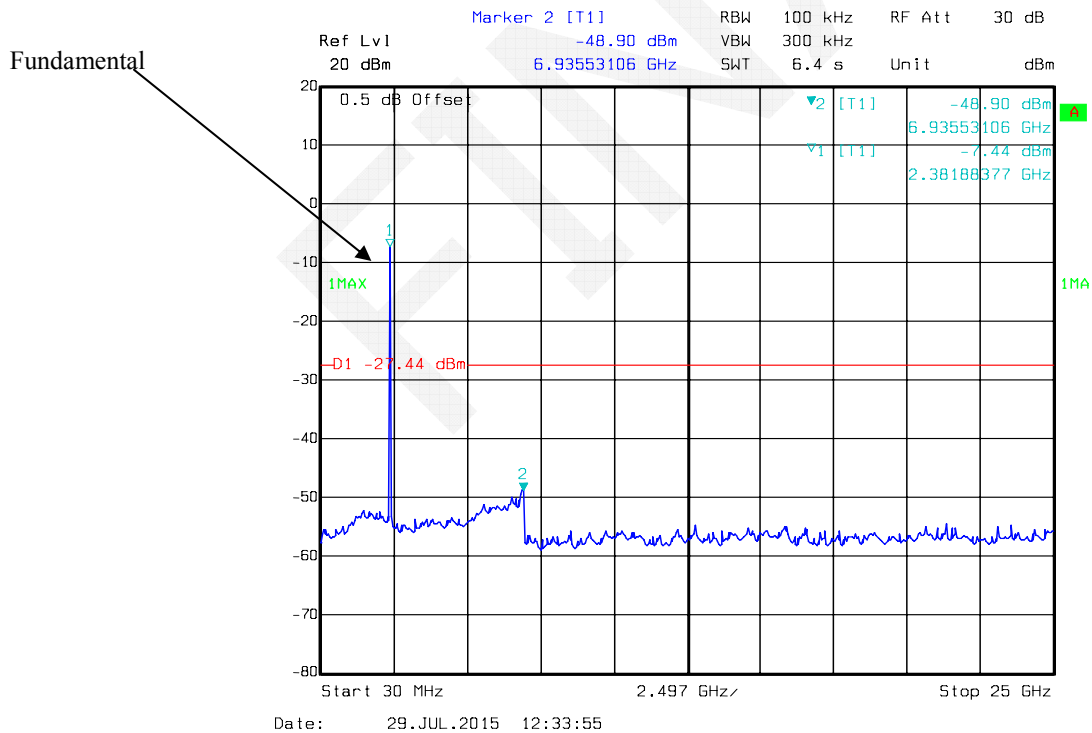

802.11n20 High Channel

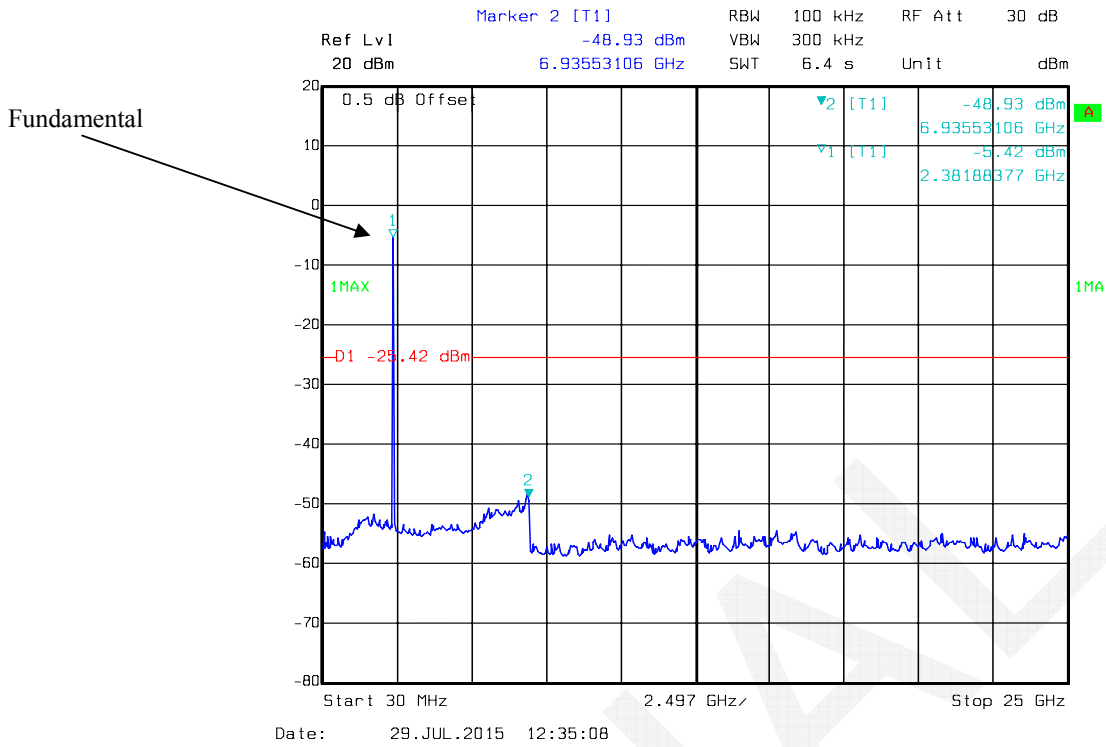


802.11n40 Low Channel

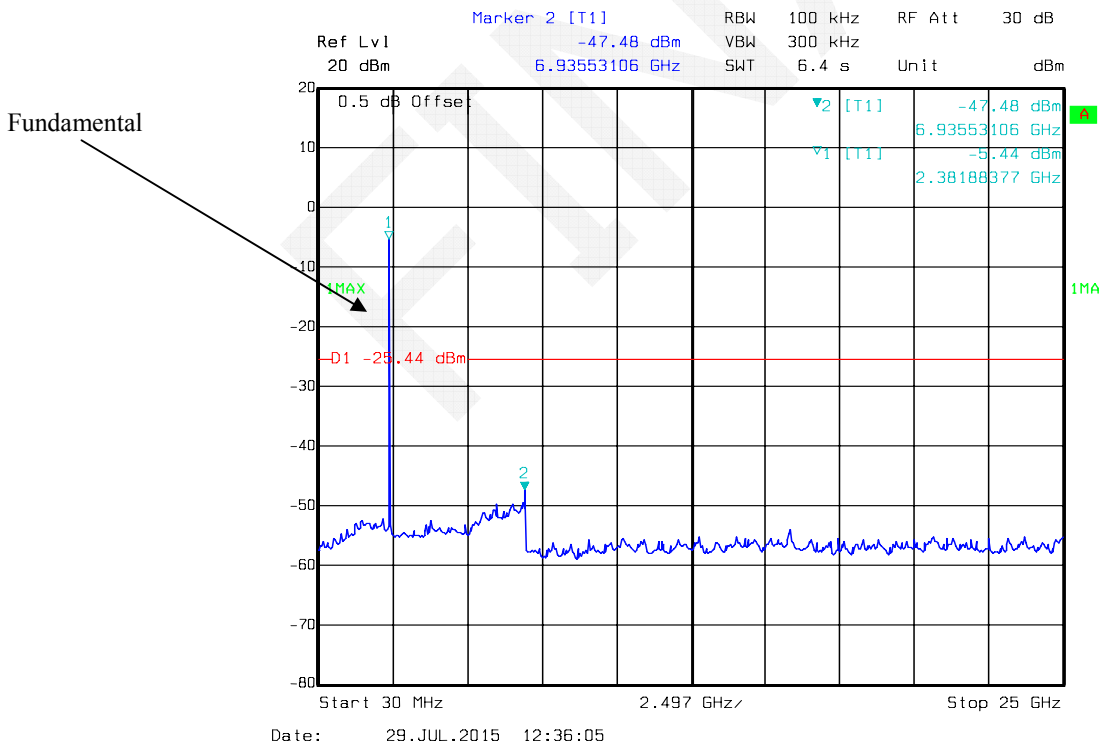


Marker 2 [T1]

RBW	100 kHz	RF Att	30 dB
VBW	300 kHz		
SWT	6.4 s	Unit	dB

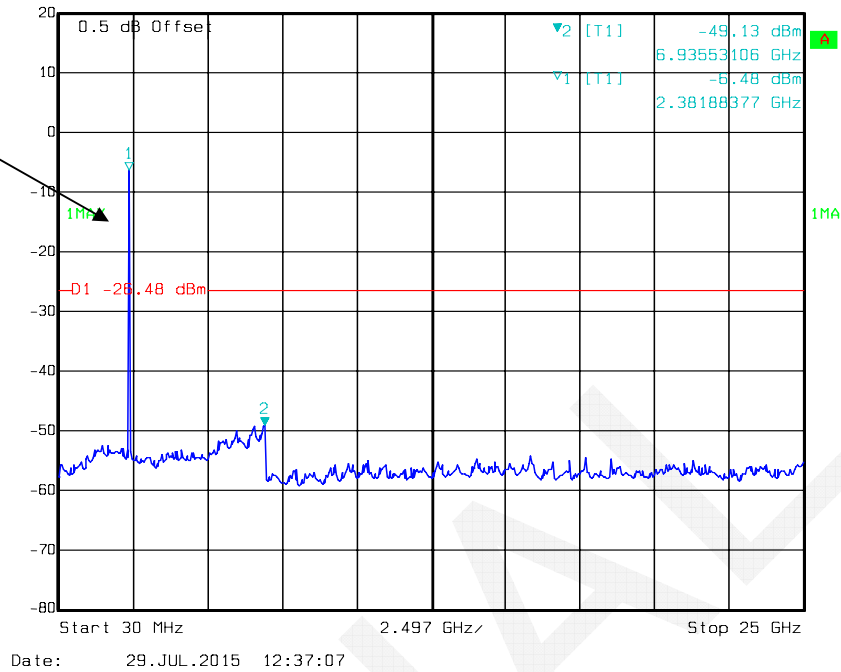

Marker 2 [T1]

RBW	100 kHz	RF Att	30 dB
VBW	300 kHz		
SWT	6.4 s	Unit	dB

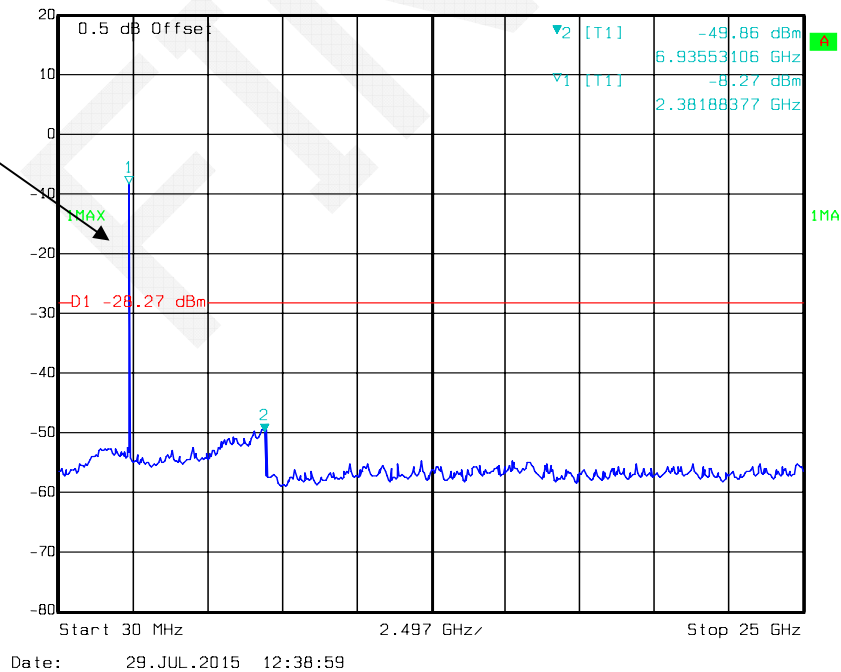

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.5 °C
Relative Humidity:	57 %
ATM Pressure:	100 kPa


The testing was performed by Allen Qiao on 2015-07-21.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Mode	Channel	Frequency (MHz)	6dB Emission Bandwidth (MHz)	Limit (MHz)
802.11 b	Low	2412	10.16	0.5
	Middle	2437	10.16	0.5
	High	2462	10.08	0.5
802.11 g	Low	2412	16.64	0.5
	Middle	2437	16.60	0.5
	High	2462	16.64	0.5
802.11 n ht20	Low	2412	17.92	0.5
	Middle	2437	17.88	0.5
	High	2462	17.84	0.5
802.11 n ht40	Low	2422	36.44	0.5
	Middle	2437	36.48	0.5
	High	2452	36.32	0.5

802.11b Low Channel

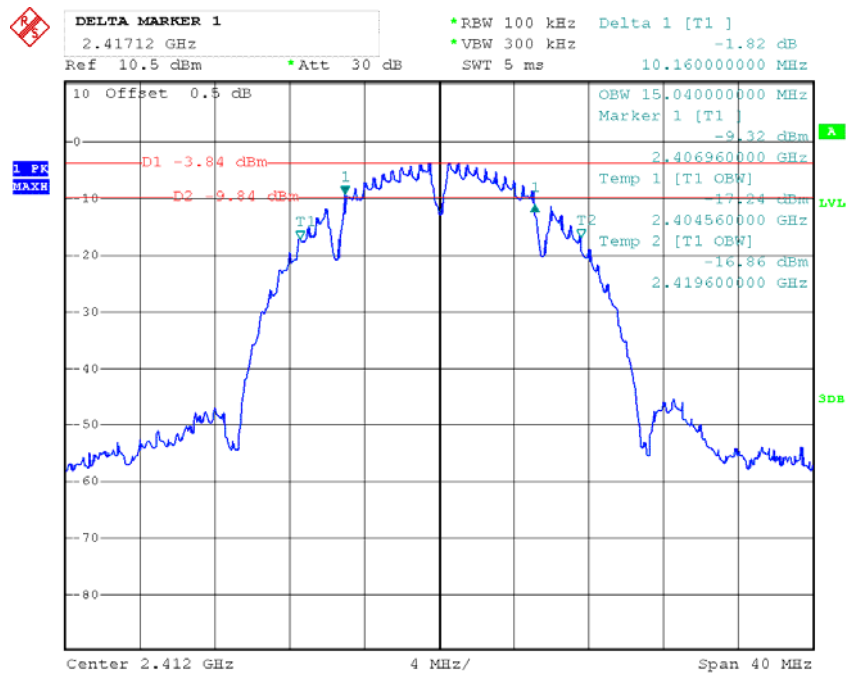


Date: 21.JUL.2015 20:07:03

802.11b Middle Channel

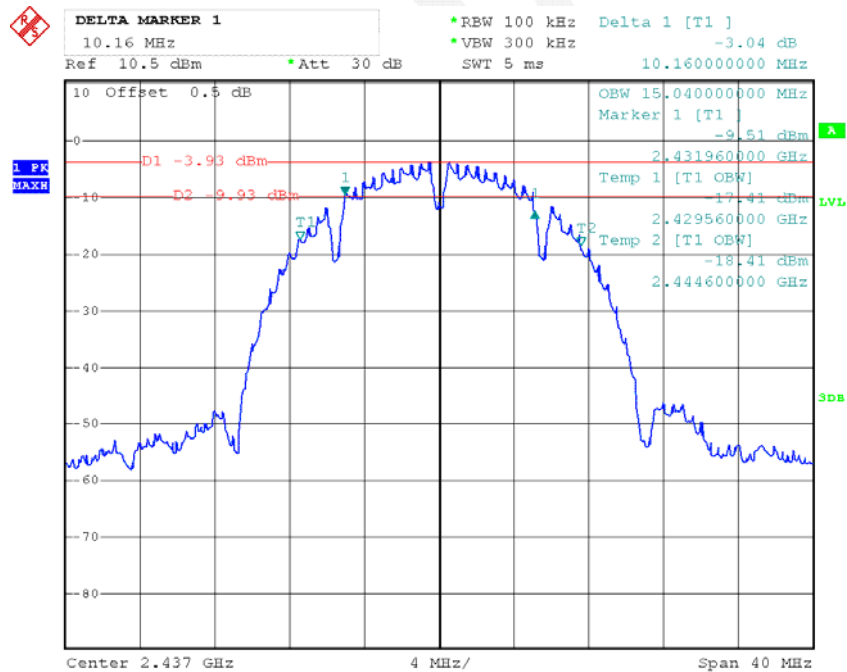


Date: 21.JUL.2015 20:05:58

802.11b High Channel

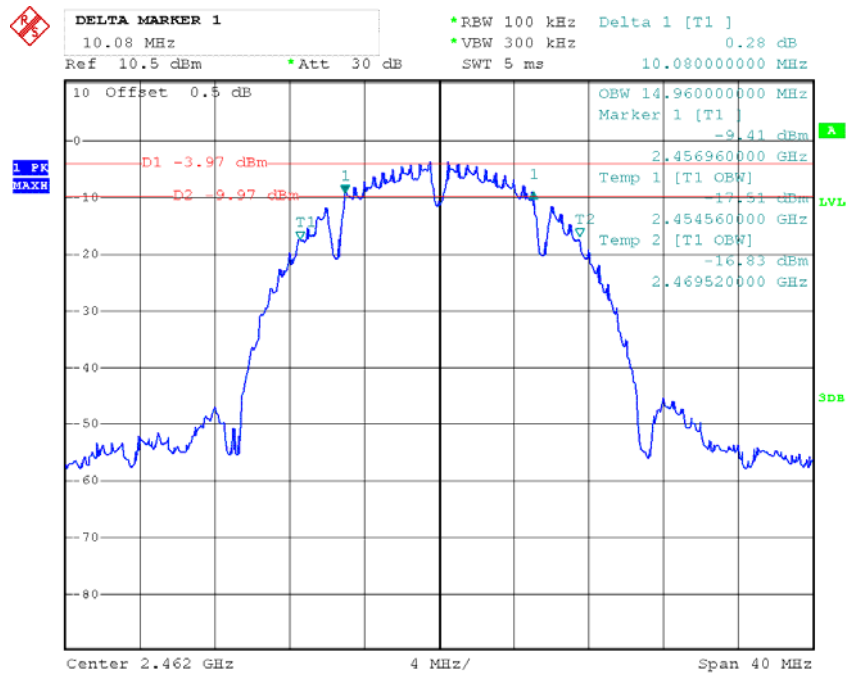


Date: 21.JUL.2015 20:04:55

802.11g Low Channel

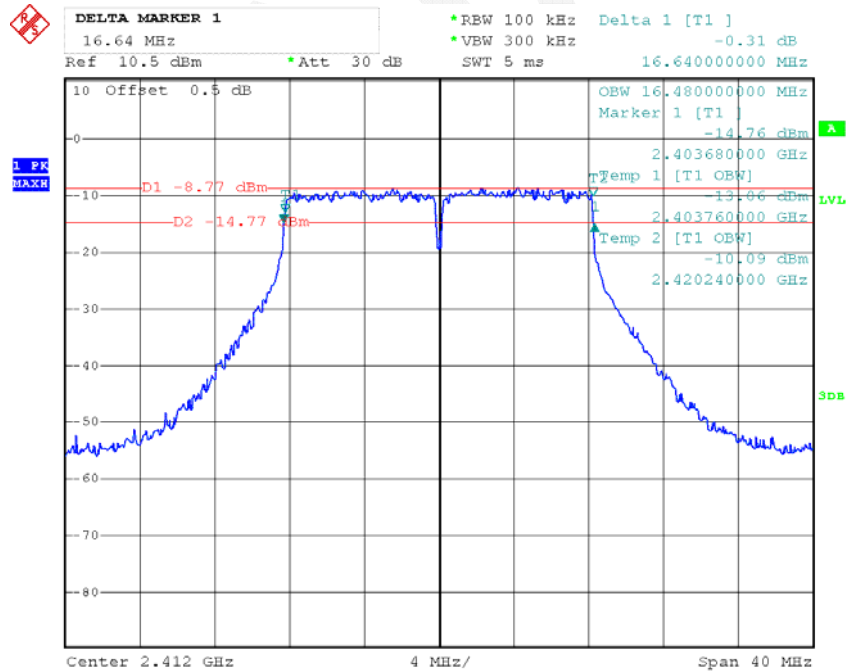


Date: 21.JUL.2015 20:00:59

802.11g Middle Channel

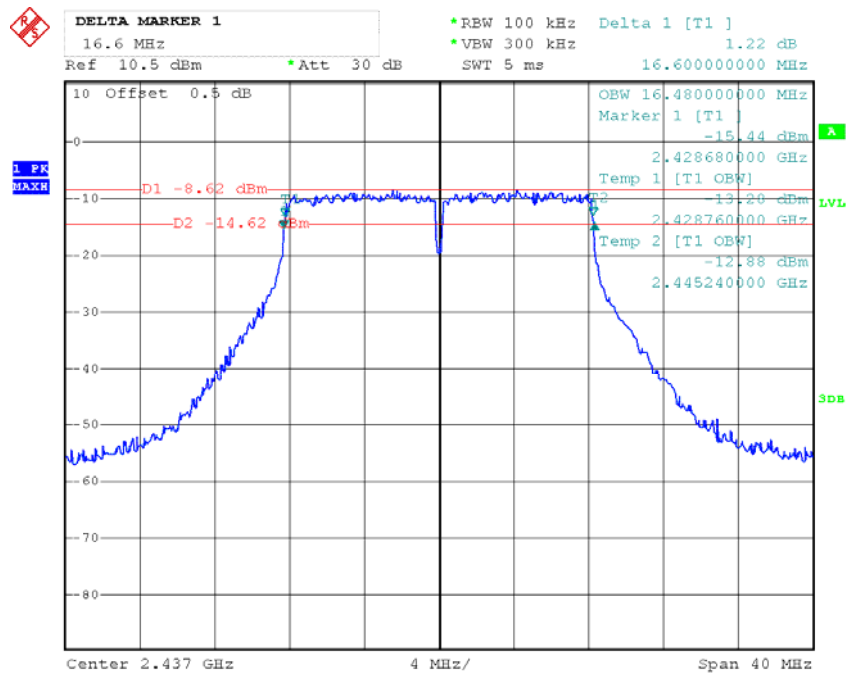

Date: 21.JUL.2015 20:02:17

802.11g High Channel

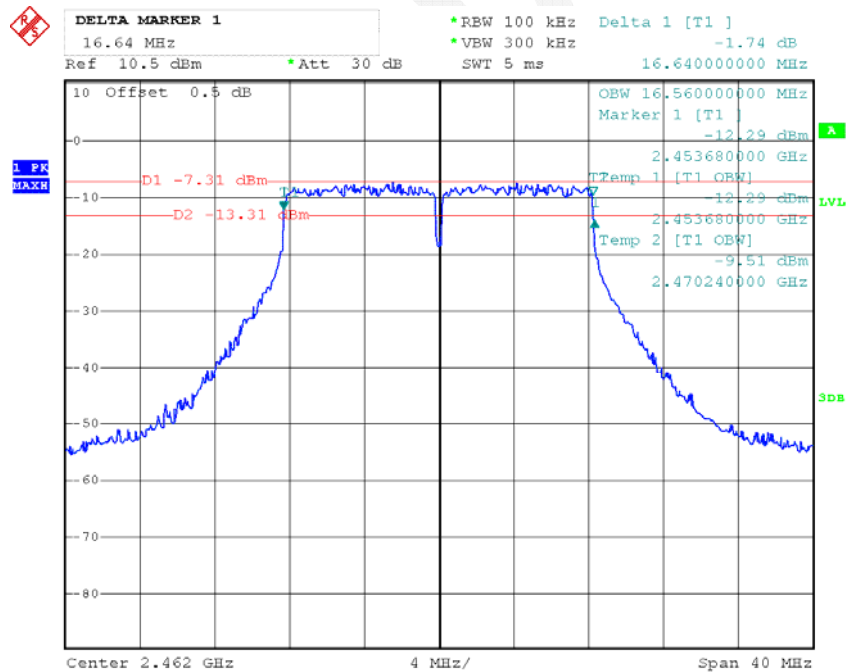

Date: 21.JUL.2015 20:03:22

DELTA MARKER 1
2.42096 GHz

Ref 10.5 dBm Att 30 dB SWT 5 ms

OBW 17.760000000 MHz
Marker 1 [T1]
-13.65 dBm
2.403040000 GHz
Temp 1 [T1 OBW]
-12.13 dBm
2.403120000 GHz
Temp 2 [T1 OBW]
-11.80 dBm
2.420880000 GHz

1 PK MAX

Center 2.412 GHz 4 MHz/ Span 40 MHz

Date: 21.JUL.2015 19:50:55

DELTA MARKER 1
17.88 MHz

Ref 10.5 dBm *Att 30 dB SWT 5 ms 17.880000000 MHz

10 Offset 0.5 dB

OBW 17.760000000 MHz
Marker 1 [T1]
-13.90 dBm

2.428040000 GHz
Temp 1 [T1 OBW]
-13.23 dBm

2.429120000 GHz
Temp 2 [T1 OBW]
-11.29 dBm


2.445880000 GHz

D1 -7.76 dBm
D2 -13.76 dBm

Center 2.437 GHz 4 MHz/ Span 40 MHz


Date: 21.JUL.2015 19:52:55

802.11n20 High Channel

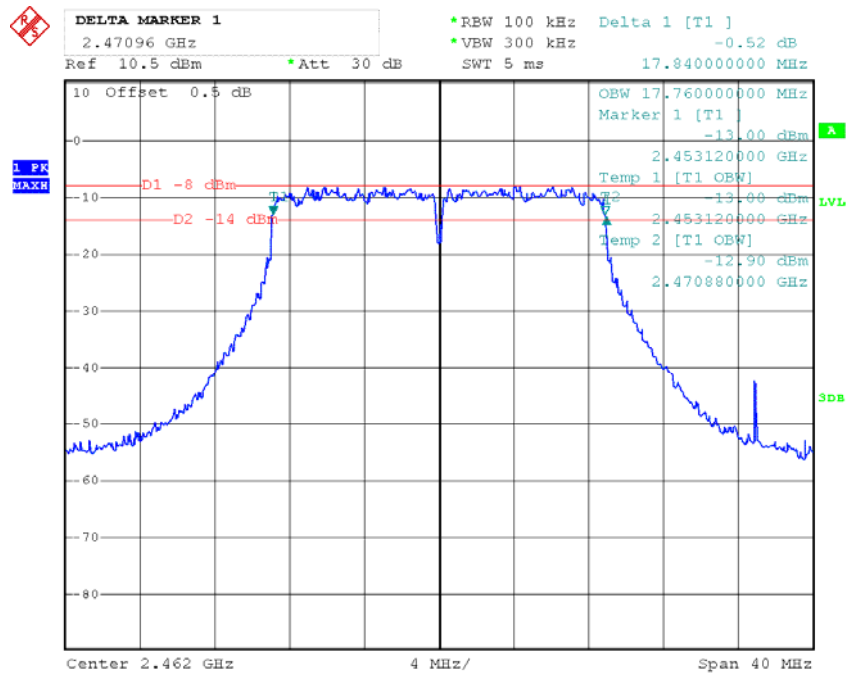


Date: 21.JUL.2015 19:54:22

802.11n40 Low Channel

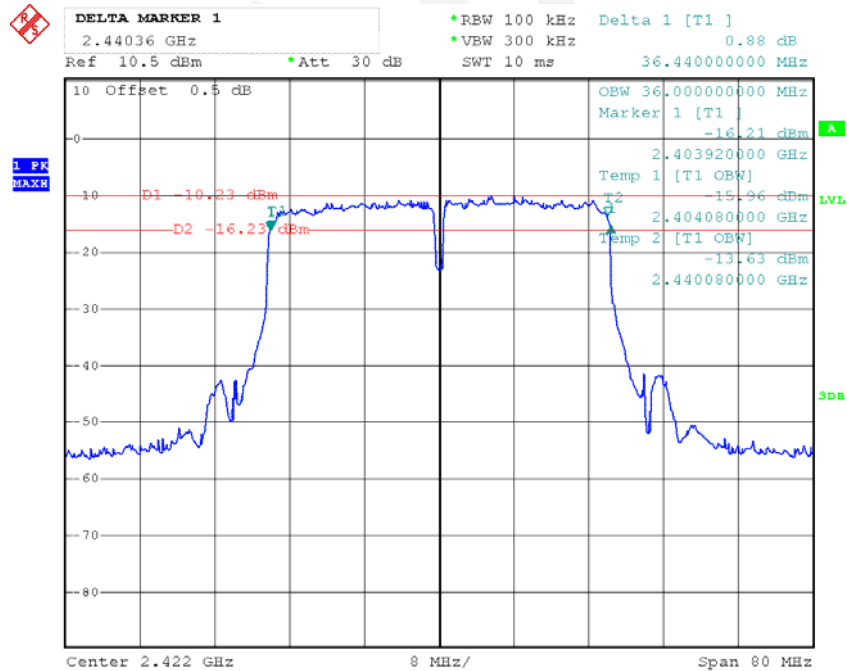


Date: 21.JUL.2015 19:58:20

802.11n40 Middle Channel

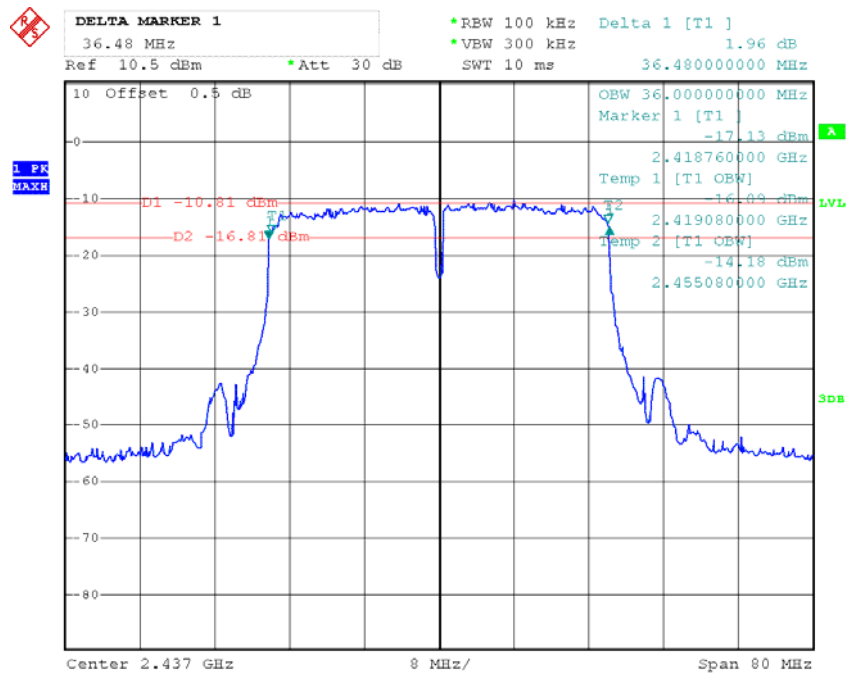

Date: 21.JUL.2015 19:57:05

802.11n40 High Channel

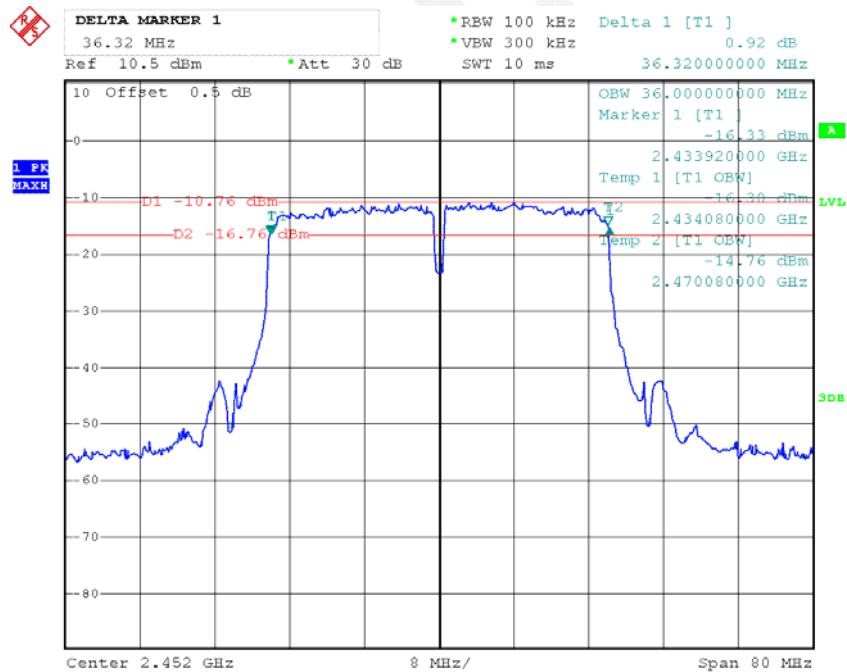

Date: 21.JUL.2015 19:55:44

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2014-11-03	2015-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2014-11-03	2015-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2014-11-03	2015-11-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.1 °C
Relative Humidity:	58 %
ATM Pressure:	99.9 kPa

The testing was performed by Allen Qiao on 2015-07-22.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Mode	Channel	Frequency (MHz)	Maximum Conducted Peak output power (dBm)	Limit (dBm)
802.11 b	Low	2412	10.14	30
	Middle	2437	10.14	30
	High	2462	9.97	30
802.11 g	Low	2412	12.66	30
	Middle	2437	12.43	30
	High	2462	13.01	30
802.11 n ht 20	Low	2412	14.06	30
	Middle	2437	13.81	30
	High	2462	13.85	30
802.11 n ht 40	Low	2422	13.64	30
	Middle	2437	13.59	30
	High	2452	13.32	30

Mode	Channel	Frequency (MHz)	Maximum Conducted Average output power (dBm)	Limit (dBm)
802.11 b	Low	2412	9.14	30
	Middle	2437	9.03	30
	High	2462	9.02	30
802.11 g	Low	2412	8.81	30
	Middle	2437	8.57	30
	High	2462	9.14	30
802.11 n ht 20	Low	2412	9.24	30
	Middle	2437	9.17	30
	High	2462	9.28	30
802.11 n ht 40	Low	2422	9.28	30
	Middle	2437	9.22	30
	High	2452	9.05	30

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	26.5°C
Relative Humidity:	57 %
ATM Pressure:	100 kPa

The testing was performed by Allen Qiao on 2015-07-21.

Test mode: Transmitting


Test Result: Compliant. Please refer to following plots.

802.11b: Band Edge, Left Side

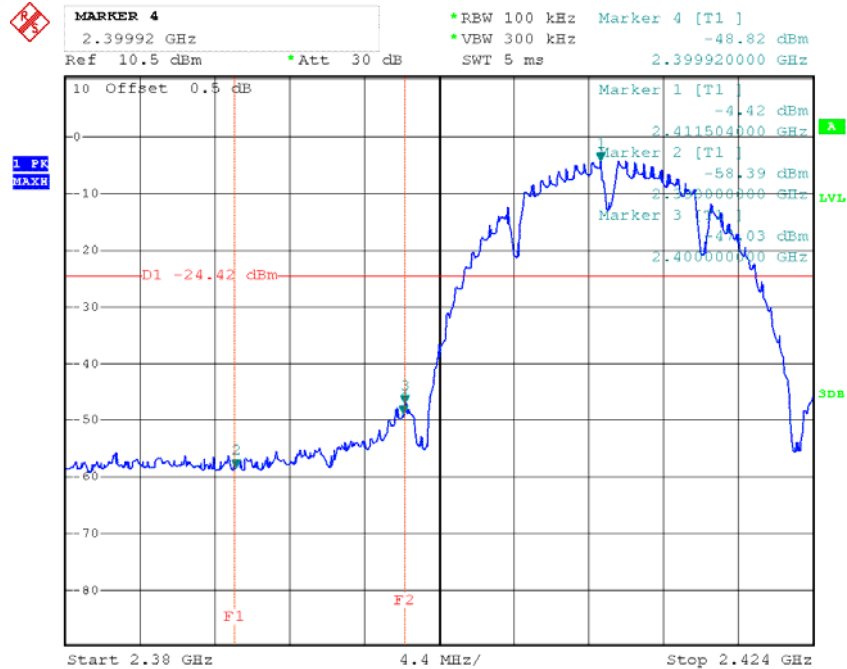


Date: 21.JUL.2015 20:22:25

802.11b: Band Edge, Right Side

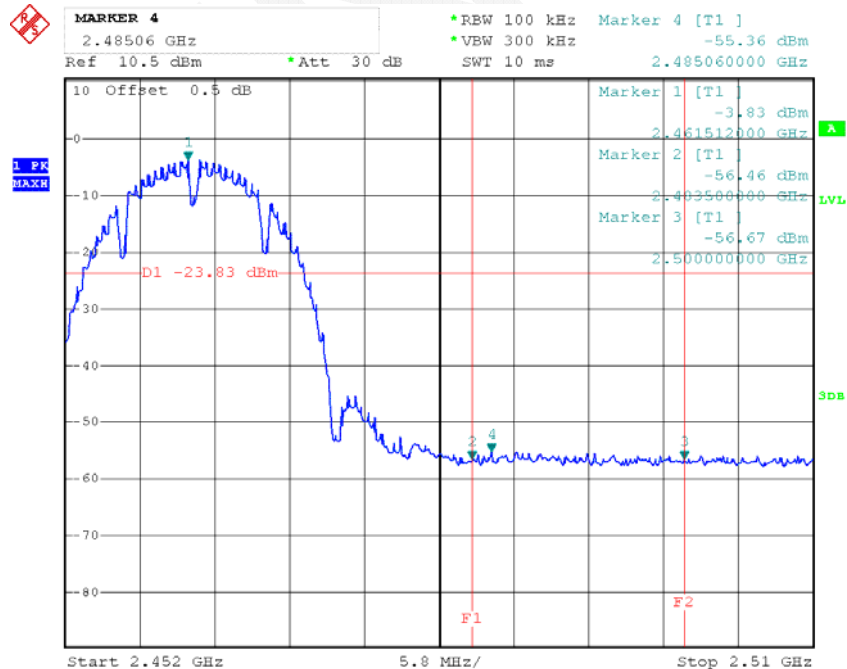


Date: 21.JUL.2015 20:10:54


802.11g: Band Edge, Left Side

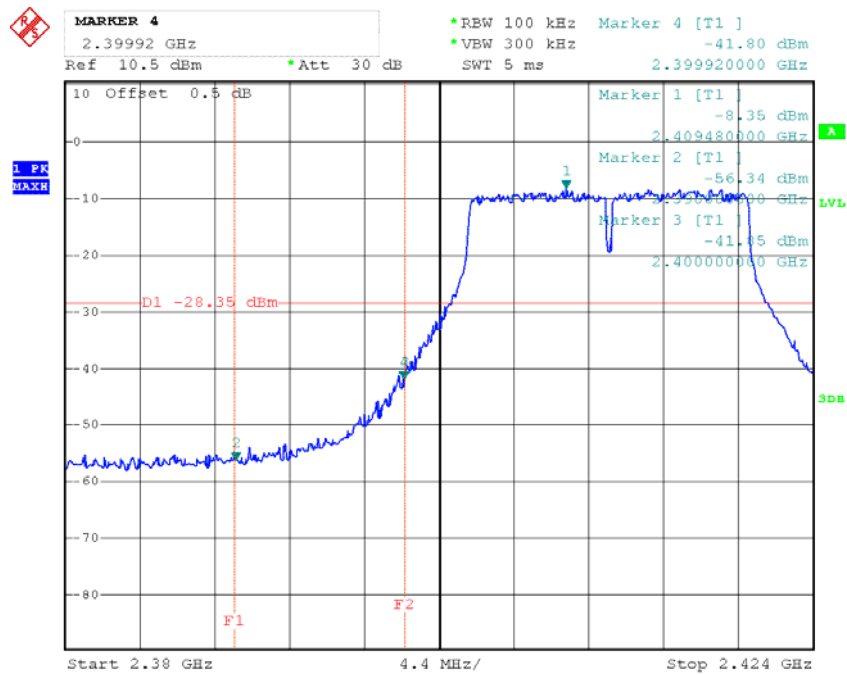


802.11g: Band Edge, Right Side

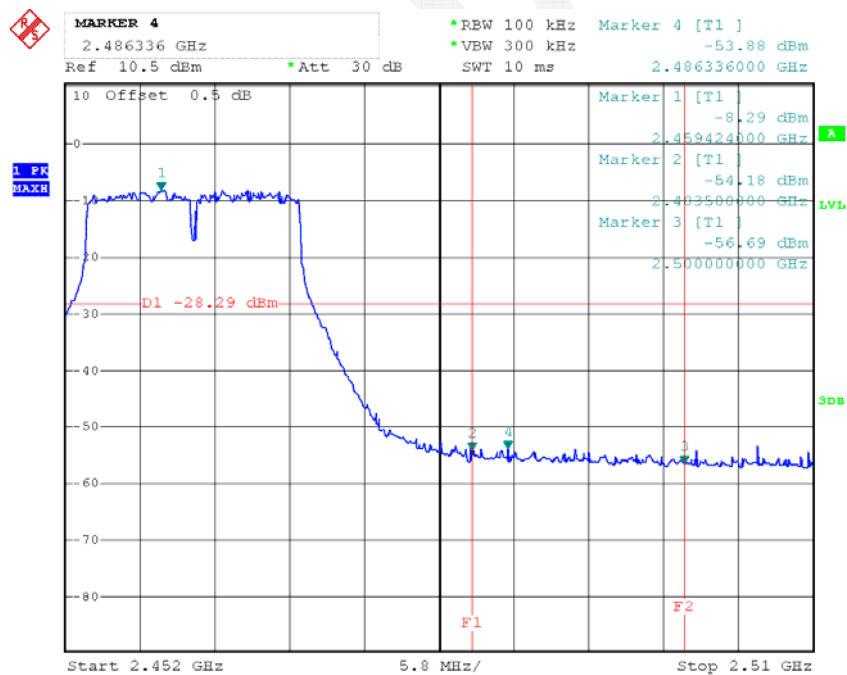

802.11n20: Band Edge, Left Side

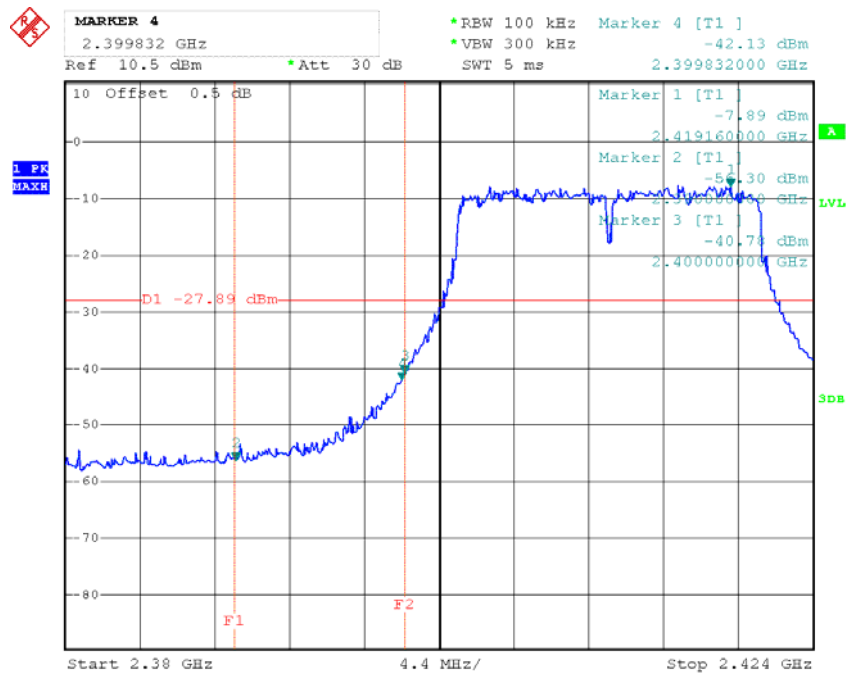

802.11n20: Band Edge, Right Side

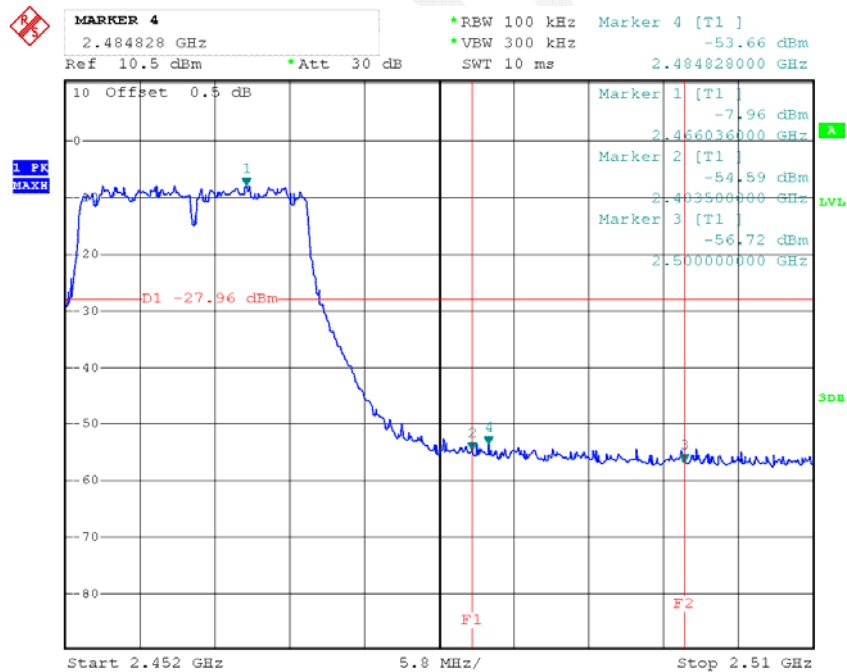

MARKER 4
 2.3986 GHz
 *RBW 100 kHz
 *VBW 300 kHz
 -44.17 dBm

Ref 10.5 dBm
 *Att 30 dB
 SWT 10 ms
 2.398600000 GHz

10 Offset 0.5 dB

Marker 1 [T1]
 -11.90 dBm
 2.427616000 GHz

Marker 2 [T1]
 -55.92 dBm
 2.390000000 GHz

Marker 3 [T1]
 -48.74 dBm
 2.400000000 GHz

D1 -31.9 dBm


F1 F2

Start 2.38 GHz
 6.2 MHz/
 Stop 2.442 GHz

1 PK
 MAXH

LVL
 SDB

802.11n40: Band Edge, Right Side

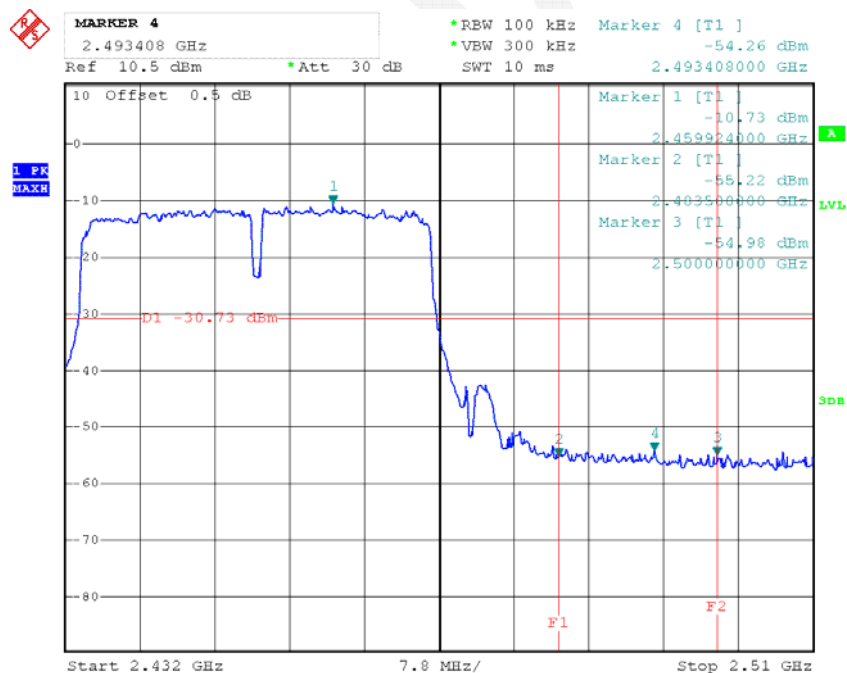

Page 42 of 51

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.1 °C
Relative Humidity:	58 %
ATM Pressure:	99.9 kPa


The testing was performed by Allen Qiao on 2015-07-22.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots


Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
802.11 b	Low	2412	-24.28	8
	Middle	2437	-24.22	8
	High	2462	-24.04	8
802.11 g	Low	2412	-23.42	8
	Middle	2437	-23.62	8
	High	2462	-23.04	8
2.4G 802.11 n20	Low	2412	-22.99	8
	Middle	2437	-23.09	8
	High	2462	-21.80	8
2.4G 802.11 n40	Low	2422	-25.24	8
	Middle	2437	-25.69	8
	High	2452	-25.55	8

Power Spectral Density, 802.11b Low Channel

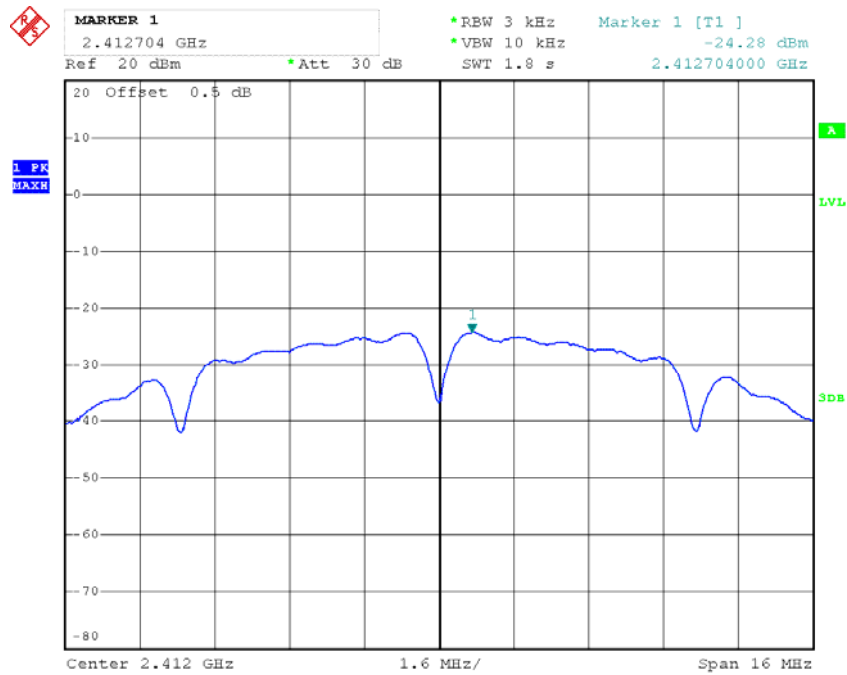


Date: 22.JUL.2015 15:53:53

Power Spectral Density, 802.11b Middle Channel

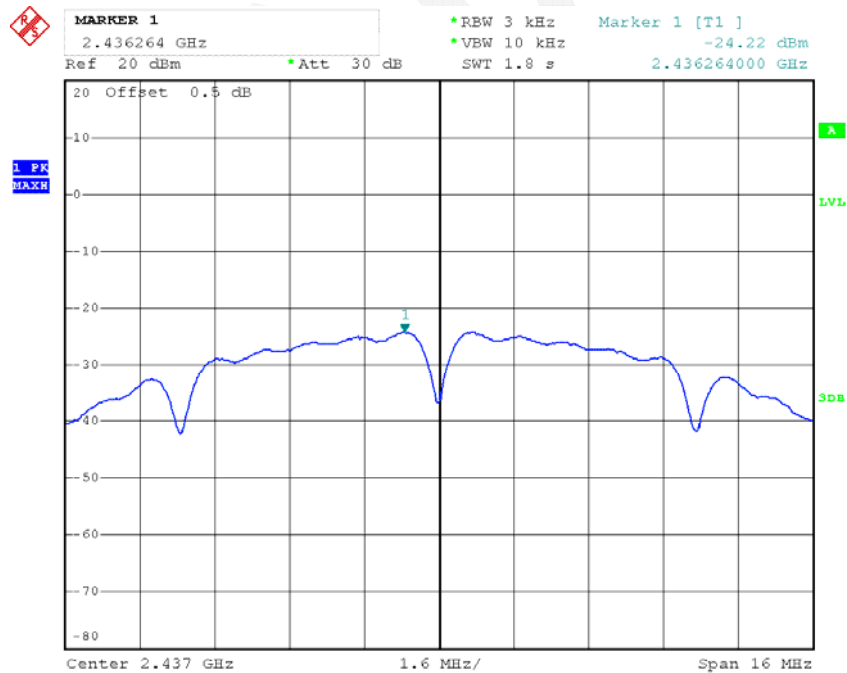


Date: 22.JUL.2015 15:57:21

Power Spectral Density, 802.11b High Channel

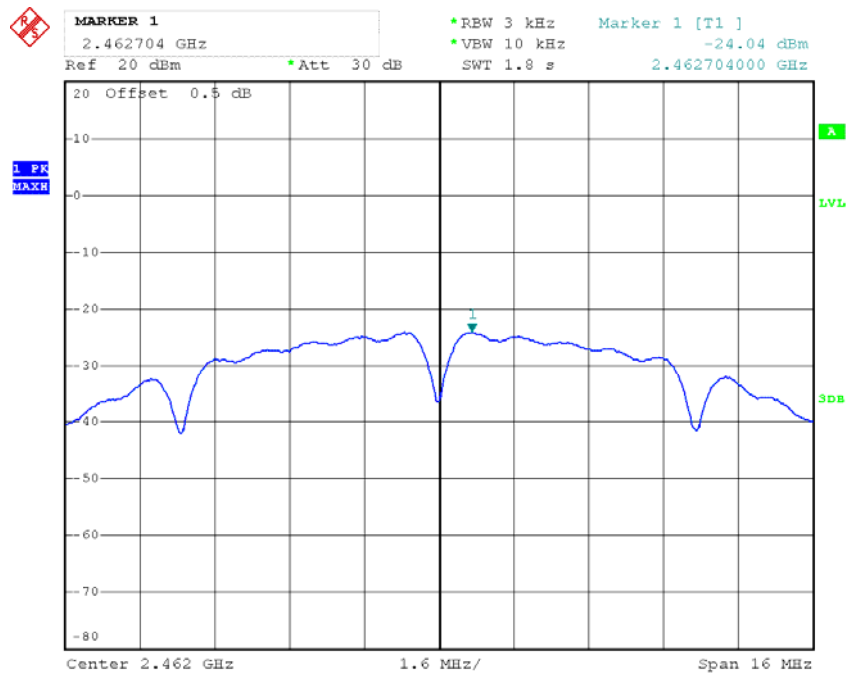


Date: 22.JUL.2015 15:58:03

Power Spectral Density, 802.11g Low Channel

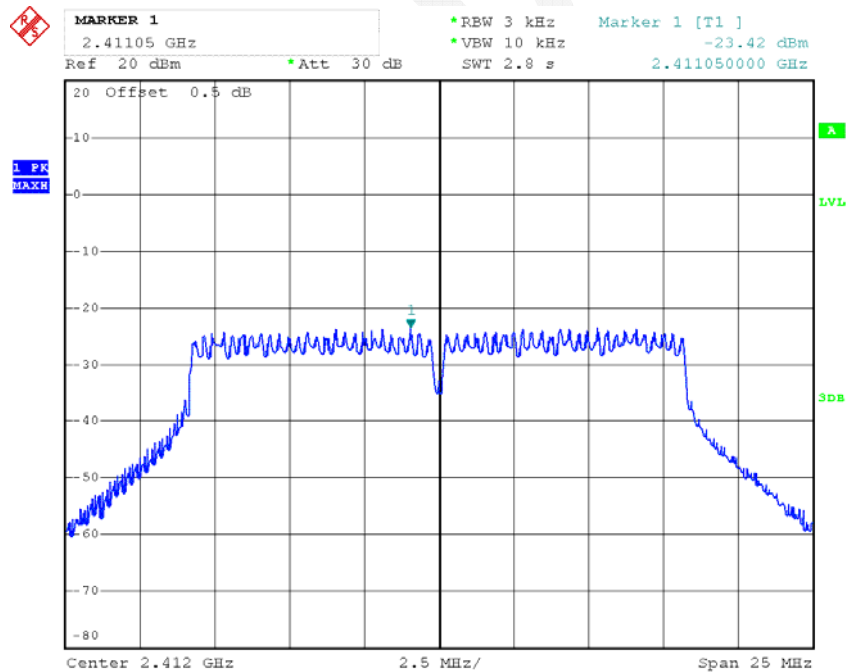


Date: 22.JUL.2015 16:01:23

Power Spectral Density, 802.11g Middle Channel

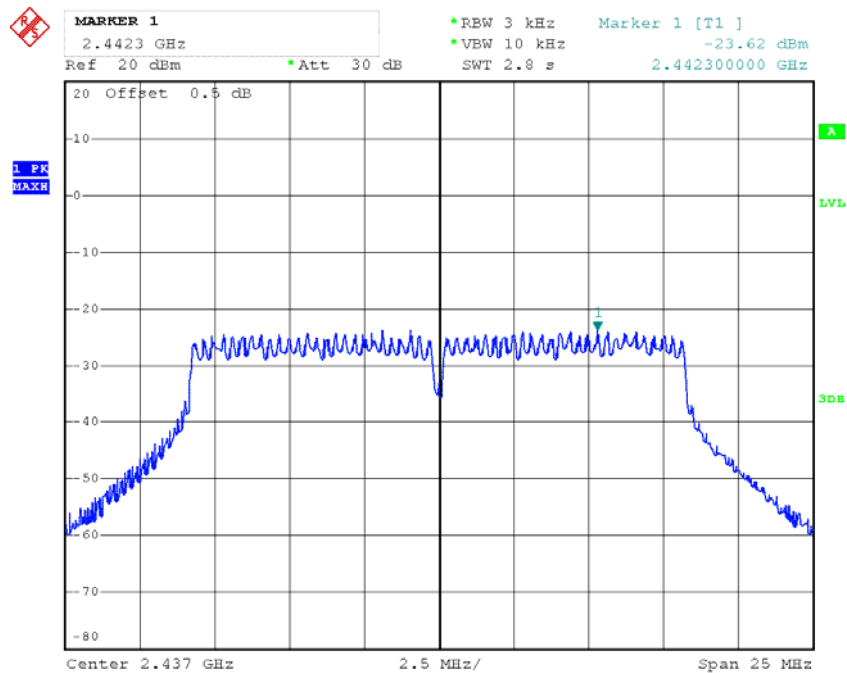


Date: 22.JUL.2015 16:00:32

Power Spectral Density, 802.11g High Channel

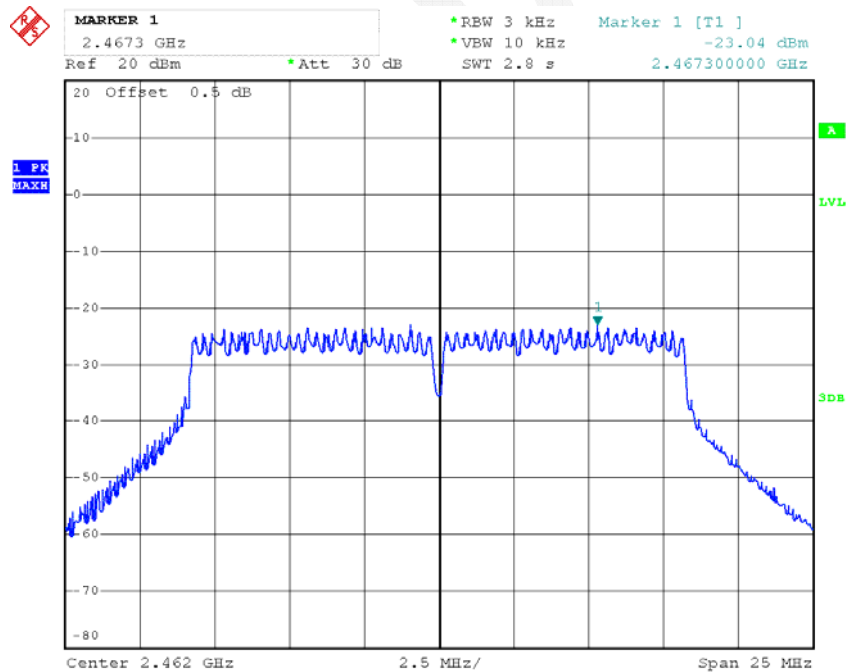


Date: 22.JUL.2015 15:59:32

Power Spectral Density, 802.11n20 Low Channel

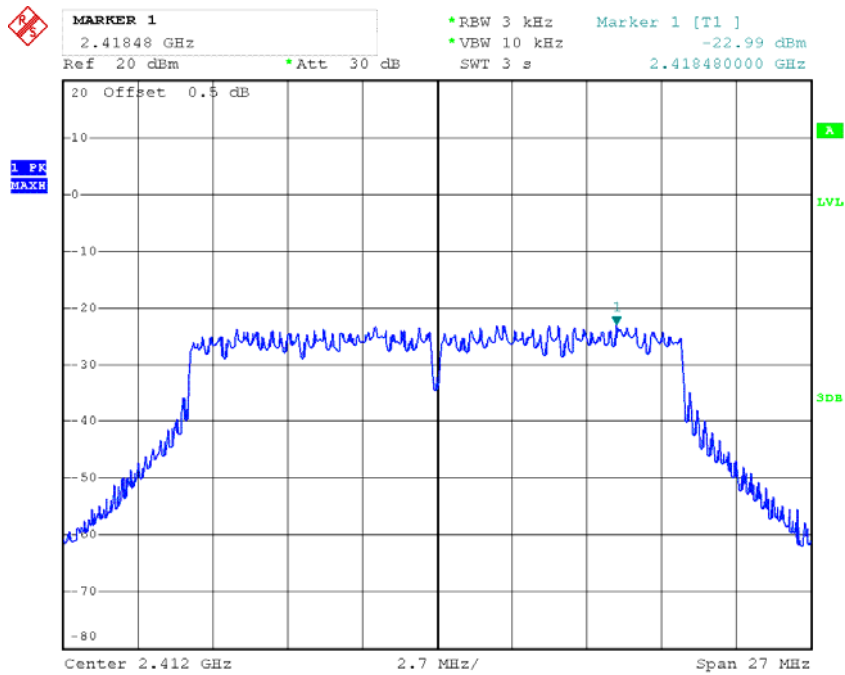


Date: 22.JUL.2015 16:02:23

Power Spectral Density, 802.11n20 Middle Channel

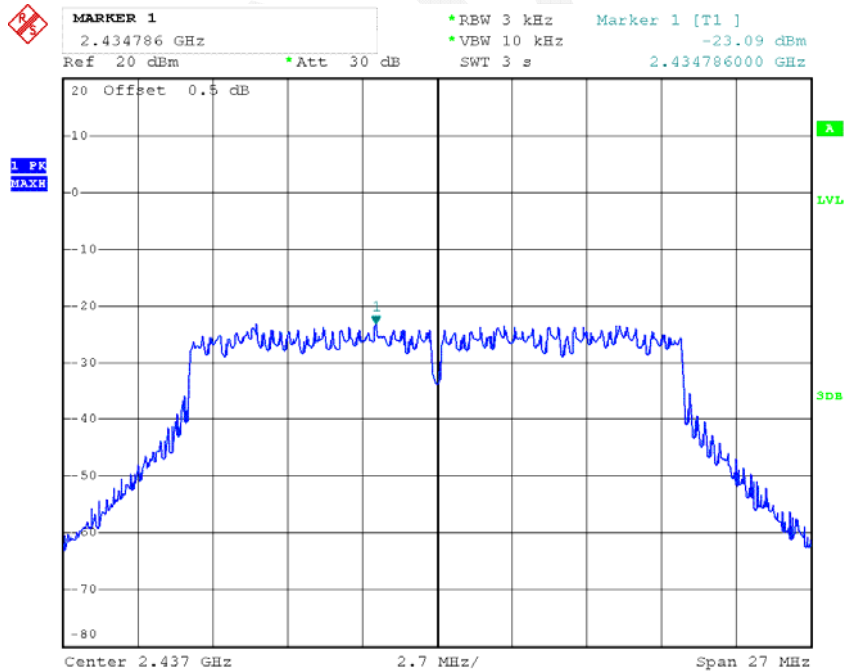


Date: 22.JUL.2015 16:03:12

Power Spectral Density, 802.11n20 High Channel

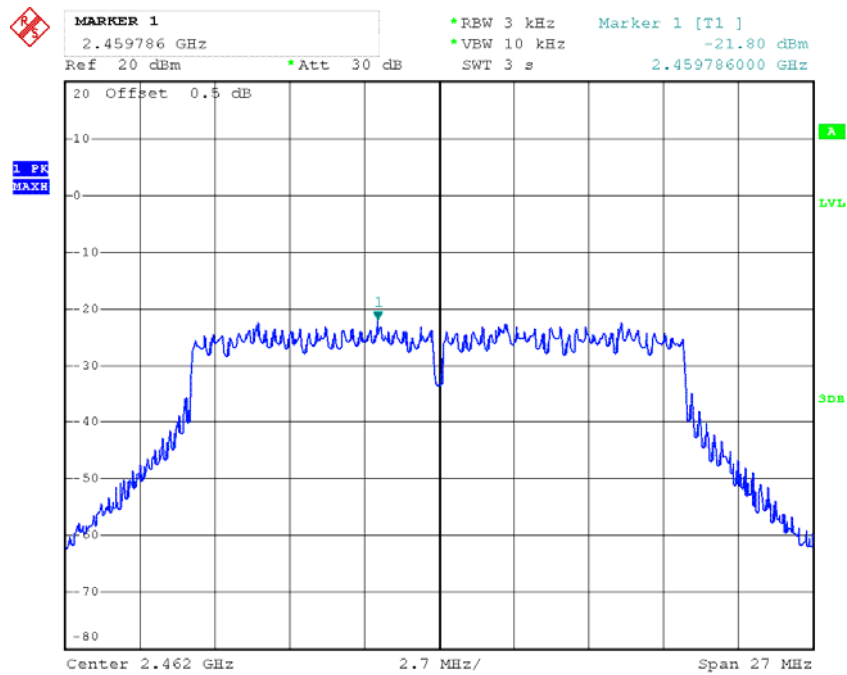


Date: 22.JUL.2015 16:03:40

Power Spectral Density, 802.11n40 Low Channel

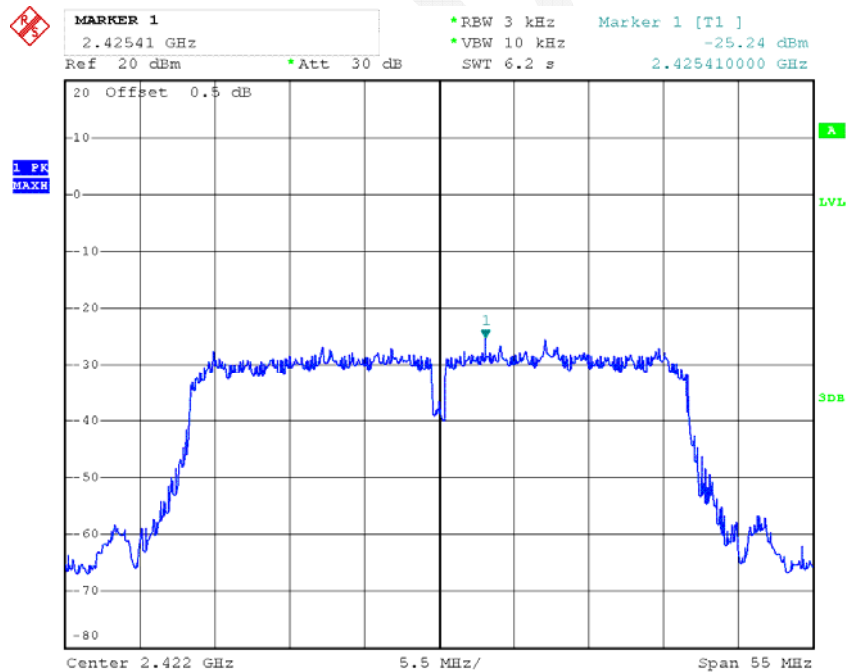


Date: 22.JUL.2015 16:04:54

Power Spectral Density, 802.11n40 Middle Channel

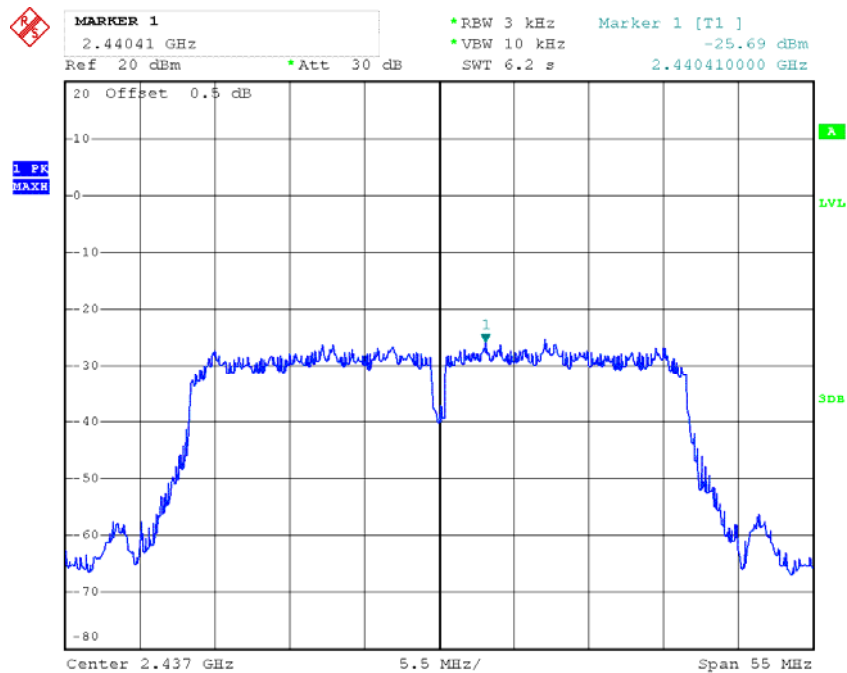

Date: 22.JUL.2015 16:05:38

Power Spectral Density, 802.11n40 High Channel

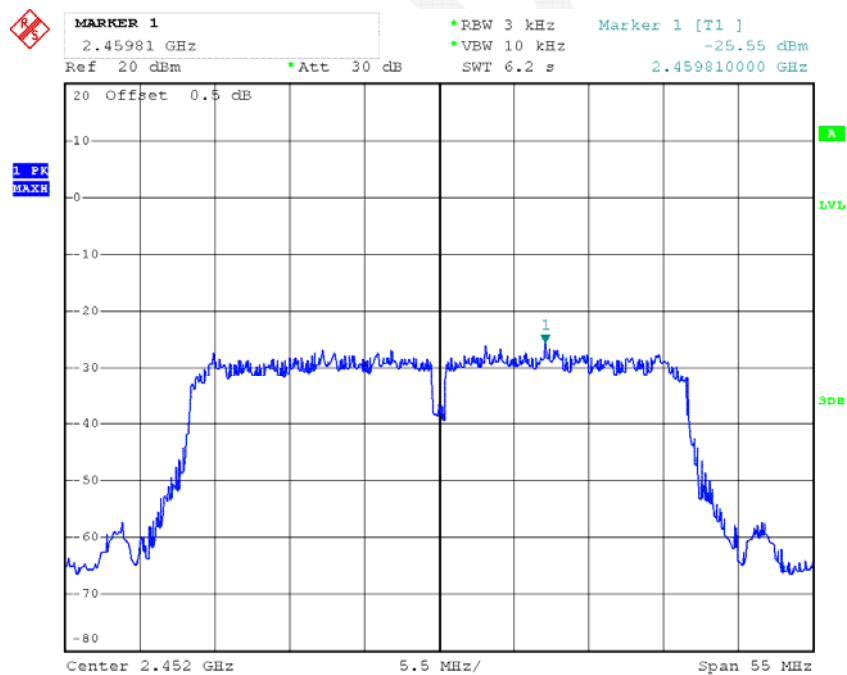

Date: 22.JUL.2015 16:09:01

DECLARATION LETTER

ISAW CAMERA INC.

#501, Suntech City 1st, Dunchon-Daero 474, Jungwon, Seongnam, Gyeonggi, Korea

Tel: +82-31-777-2090 Fax: +82-777-2089

DECLARATION OF SIMILARITY

2015-07-20

To:

Dear Sir or Madam:

We, ISAW CAMERA INC., hereby declare that product: ISAW-S1W, Model numbers: ISS1W, ISS1, SCS1, SCS1W are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics. Model Number: ISS1, SCS1, SCS1W are electrically identical with the Model Number: ISS1W that was certified by BACL. Their only difference is the model name.

Please contact me should there be need for any additional clarification or information.

Best Regards,

DAE HWAN KIM
CHIEF OF SALES



ISAW CAMERA INC.


LIM CHANG SEOP / President


***** END OF REPORT *****