



FCC Radio Test Report

FCC ID: 2AAJE-M736

FCC 47 CFR Part 15 Subpart C

Product : Tablet PC

Trade Name : KOCASO

Model Number : M736, M836, M870, M1062, M1066, M872,
M1070

Issued for

Global Phoenix Computer T&S, Inc.

21 Dutch Mill Road, Ithaca, NY 14850

Issued by

Shenzhen STONE Testing Technology Co., Ltd.

F/6, Bldg.12, Zhongxing Industrial City, Chuangye Rd.,
Nanshan District, Shenzhen, Guangdong, China

Tel.: +86-0755-26582862 Fax.: +86-0755-61673854

Website: www.stt-lab.org

*Note: This report shall not be reproduced except in full, without the written approval of Shenzhen STONE Testing Technology Co., Ltd.. This document may be altered or revised by Shenzhen STONE Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document.
The test results in the report only apply to the tested sample.*



TEST RESULT CERTIFICATION

Product.....: Tablet PC
Applicant: Global Phoenix Computer T&S, Inc.
Address: 21 Dutch Mill Road, Ithaca, NY 14850
Manufacturer.....: Global Phoenix Computer T&S, Inc.
Address: 21 Dutch Mill Road, Ithaca, NY 14850
Model No.....: M736, M836, M870, M1062, M1066, M872, M1070
Standards.....: FCC Part 15 Subpart C (15.247)
Test Method.....: ANSI C63.4: 2003

The above equipment has been tested by Shenzhen STONE Testing Technology Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Test.....:

Date of receipt of test item 2013-07-03

Date(s) of performance of test..... 2013-07-10 to 2013-07-16

Test Result.....: Pass

Testing by	:	<u>Linna Liu</u>	Date	:	<u>2013-07-15</u>
		(Linna Liu)			
Check by	:	<u>Andy Huang</u>	Date	:	<u>2013-07-17</u>
		(Andy Huang)			
Approved by	:	<u>Ethan Chen</u>	Date	:	<u>2013-07-18</u>
		(Ethan Chen)			



Table of Contents	Page
1 . TEST SUMMARY	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	9
2.3 DESCRIPTION OF TEST SETUP	10
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	11
2.5 EUT Exercise Software	11
3 . CONDUCTED EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT (Frequency Range 150KHz-30MHz)	12
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	13
3.4 TEST INSTRUMENTS	13
3.5 EUT OPERATING CONDITIONS	13
3.6 TEST RESULTS	14
4 . RADIATED EMISSION MEASUREMENT	18
4.1 RADIATED EMISSION LIMIT (Frequency Range 9KHz-1000MHz)	18
4.2 TEST PROCEDURE	18
4.3 TEST SETUP	19
4.4 TEST INSTRUMENTS	20
4.5 EUT OPERATING CONDITIONS	20
4.6 TEST RESULTS	21
5 . CONDUCTED OUTPUT POWER MEASUREMENT	29
5.1 LIMITS	29
5.2 TEST PROCEDURE	29
5.3 TEST SETUP	29
5.4 TEST INSTRUMENTS	29
5.5 EUT OPERATING CONDITIONS	29
5.6 TEST RESULTS	29



Table of Contents	Page
6 . OCCUPIED BANDWIDTH MEASUREMENT	34
6.1 LIMITS	34
6.2 TEST PROCEDURE	34
6.3 TEST SETUP	34
6.4 TEST INSTRUMENTS	34
6.5 EUT OPERATING CONDITIONS	34
6.6 TEST RESULTS	34
7 . CARRIER FREQUENCY SEPARATION MEASUREMENT	42
7.1 LIMITS	42
7.2 TEST PROCEDURE	42
7.3 TEST SETUP	42
7.4 TEST INSTRUMENTS	42
7.5 EUT OPERATING CONDITIONS	42
7.6 TEST RESULTS	42
8 . NUMBER OF HOPPING	47
8.1 LIMITS	47
8.2 TEST PROCEDURE	47
8.3 TEST SETUP	47
8.4 TEST INSTRUMENTS	47
8.5 EUT OPERATING CONDITIONS	47
8.6 TEST RESULTS	47
9 . DWELL TIME	50
9.1 LIMITS	50
9.2 TEST PROCEDURE	50
9.3 TEST SETUP	50
9.4 TEST INSTRUMENTS	50
9.5 EUT OPERATING CONDITIONS	50
9.6 TEST RESULTS	50
10 . BAND EDGES MEASUREMENT	63
10.1 LIMITS	63
10.2 TEST PROCEDURE	63



Table of Contents	Page
10.3 TEST SETUP	63
10.4 TEST INSTRUMENTS	64
10.5 EUT OPERATING CONDITIONS	64
10.6 TEST RESULTS	64
11 . OUT OF BAND CONDUCTED EMISSIONS MEASUREMENT	68
11.1 LIMITS	68
11.2 TEST PROCEDURE	68
11.3 TEST SETUP	68
11.4 TEST INSTRUMENTS	68
11.5 EUT OPERATING CONDITIONS	68
11.6 TEST RESULTS	68
12 . ANTENNA REQUIREMENT	75
12.1 REQUIREMENT	75
12.2 ANTENNA CONNECTOR CONSTRUCTION	75



1. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part 15 Subpart C (15.247)			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Conducted Emission	PASS	
15.247(c)	Transmitter Radiated Emissions	PASS	
15.247(b)(1)	Output Power	PASS	
15.247(a)(1)	20dB RF Bandwidth	PASS	
15.247(a)(1)(iii)	Carrier Frequency Separation	PASS	
15.247(a)(1)(iii)	Hopping Number	PASS	
15.247(a)(1)(iii)	Dwell Time	PASS	
15.247(c)	Occupied Bandwidth Measurement	PASS	
15.247(c)	Out of Band Conducted Spurious Emission	PASS	
15.247(c)	Band Edge Measurement	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) The test results of this report relate only to the tested sample(s) identified in this report.



1.1 TEST FACILITY

Shenzhen STONE Testing Technology Co., Ltd.

Add. : F/6, Bldg.12, Zhongxing Industrial City, Chuangye Rd., Nanshan District, Shenzhen, Guangdong, China

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

FCC Registration No.: 323508

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

A. Conducted Emission :

The measurement uncertainty is evaluated as ± 3.2 dB.

B. Radiated Measurement :

The measurement uncertainty is evaluated as ± 3.7 dB.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet PC
Model Name	M736
Additional Model Number(s)	M836, M870, M1062, M1066, M872, M1070
Model Difference	All models are identical except model names.
Frequency Range	IEEE 802.11b/g/n(HT20): 2412~2462 MHz Bluetooth(Version: 3.0): 2402~2480 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM Bluetooth: GFSK/ π /4-DQPSK/8-DPSK
RF Output Power	IEEE 802.11b: 8.54 dBm IEEE 802.11g: 8.13 dBm IEEE 802.11n: 8.26 dBm Bluetooth: GFSK: 0.75 dBm 8-DPSK: -0.33 dBm
Antenna Type	PIFA Antenna (Gain: 0 dBi)
Power Source	DC power from AC/DC Adapter DC power from USB cable by host system
Power Rating	AC/DC Adapter: Input: AC 120~240V 50/60 Hz Output: DC5V 2A DC 5.0V from USB cable.
Remark	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Note:

- (1) This Test Report is FCC Part 15 Subpart C, 15.247 for Bluetooth. And the Test procedure follows the FCC Public Notice DA00-705-Filing and Measurement Guidance for Frequency Hopping Spectrum Systems.



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	AC Charging Mode
Mode 2	USB Charging and Loading Mode
Mode 3	BT TX Mode

For Conducted Test	
Final Test Mode	Description
Mode 1	AC Charging Mode
Mode 2	USB Charging and Loading Mode

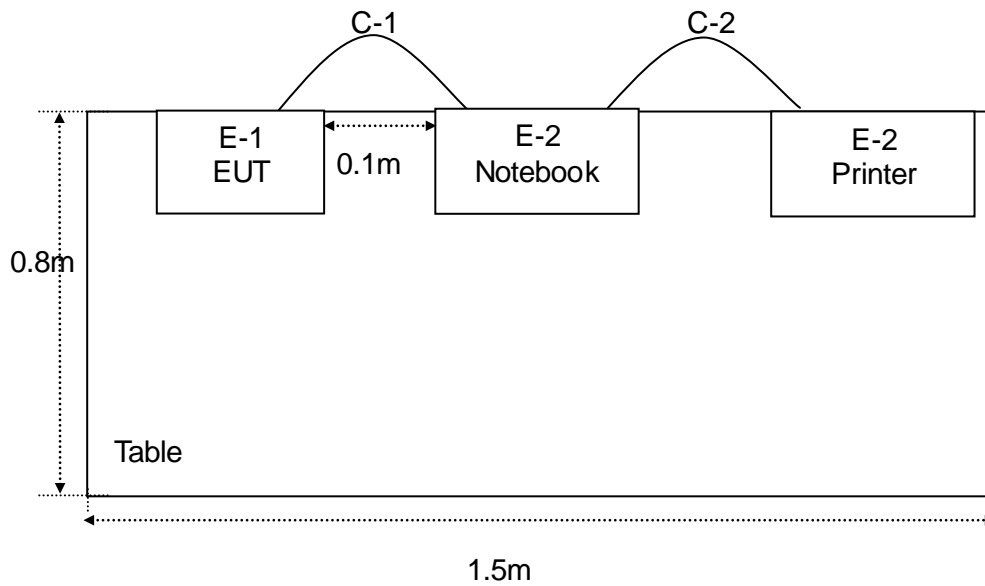
For Radiated Test	
Final Test Mode	Description
Mode 1	AC Charging Mode
Mode 2	USB Charging and Loading Mode
Mode 3	BT TX Mode

Note:

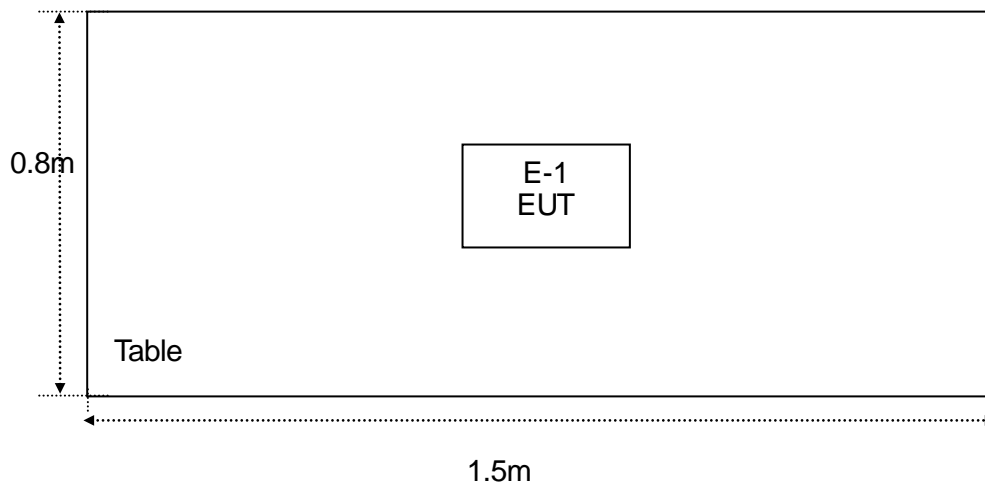
- (1) Software used to control the EUT for staying in continuous transmitting mode was programmed. After verification, all tests were carried out with the worst case test modes as shown below.
- (2) GFSK Mode:
Channel (2402/2441/2480 MHz) with DH1 data packet were chosen for full testing.
- (3) 8-DPSK Mode:
Channel (2402/2441/2480 MHz) with DH1 data packet were chosen for full testing.
- (4) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

2.3 DESCRIPTION OF TEST SETUP

Conducted Emission



Radiated Emission





2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Tablet PC	KOCASO	M736	N/A	EUT
E-2	Notebook	N/A	8.3R	N/A	
E-3	Printer	HP	5015N	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.5m	
C-2	USB Cable	YES	1.5m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

2.5 EUT Exercise Software

Test Software: CMD.exe

IEEE 802.11b:The command set for RF power- 0

IEEE 802.11g:The command set for RF power- 0

IEEE 802.11n:The command set for RF power- 0



3. CONDUCTED EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Quasi-peak	Average
	dBuV	dBuV
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

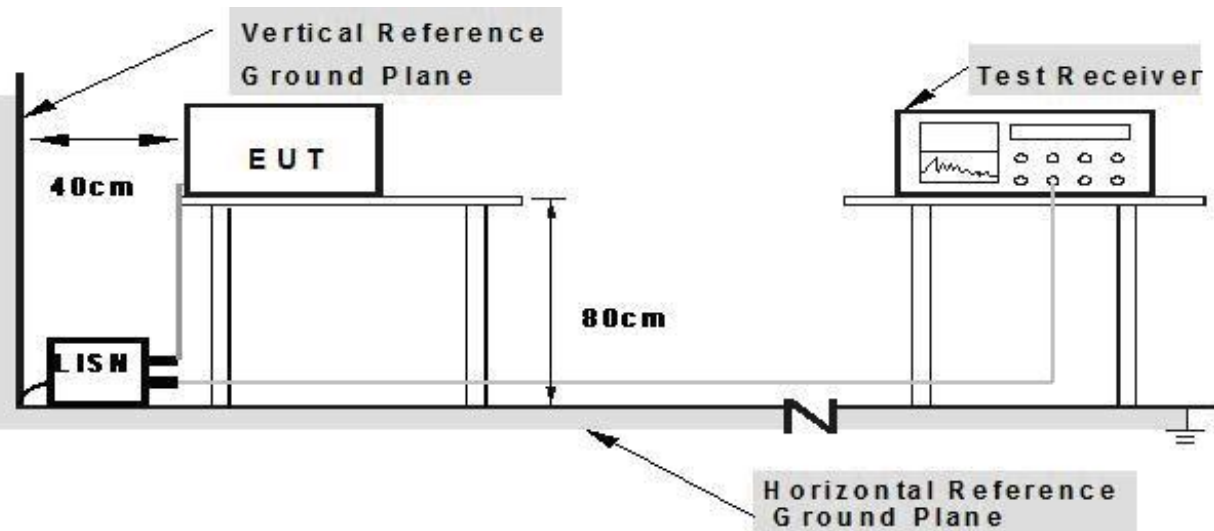
The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP



Note: 1.Support units were connected to second LISN.

2.Both of LISN's (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
LISN	R&S	NSLK81	8126466	Jul. 06, 2012	Jul. 05, 2014	1 year
LISN	R&S	NSLK81	8126487	Dec. 25, 2012	Dec. 24, 2013	1 year
50Ω Switch	ANRITSU CORP	MP59B	6200983704	Jul. 06, 2012	Jul. 05, 2014	1 year
Test Cable	N/A	C01	N/A	Jul. 06, 2012	Jul. 05, 2014	1 year
Test Cable	N/A	C02	N/A	Jul. 06, 2012	Jul. 05, 2014	1 year
Test Cable	N/A	C03	N/A	Jul. 06, 2012	Jul. 05, 2014	1 year
EMI Test Receiver	R&S	ESCI	1166.595	Jul. 06, 2012	Jul. 05, 2014	1 year
Passive Voltage Probe	ESH2-Z3	R&S	100196	Jul. 06, 2012	Jul. 05, 2014	1 year

3.5 EUT OPERATING CONDITIONS

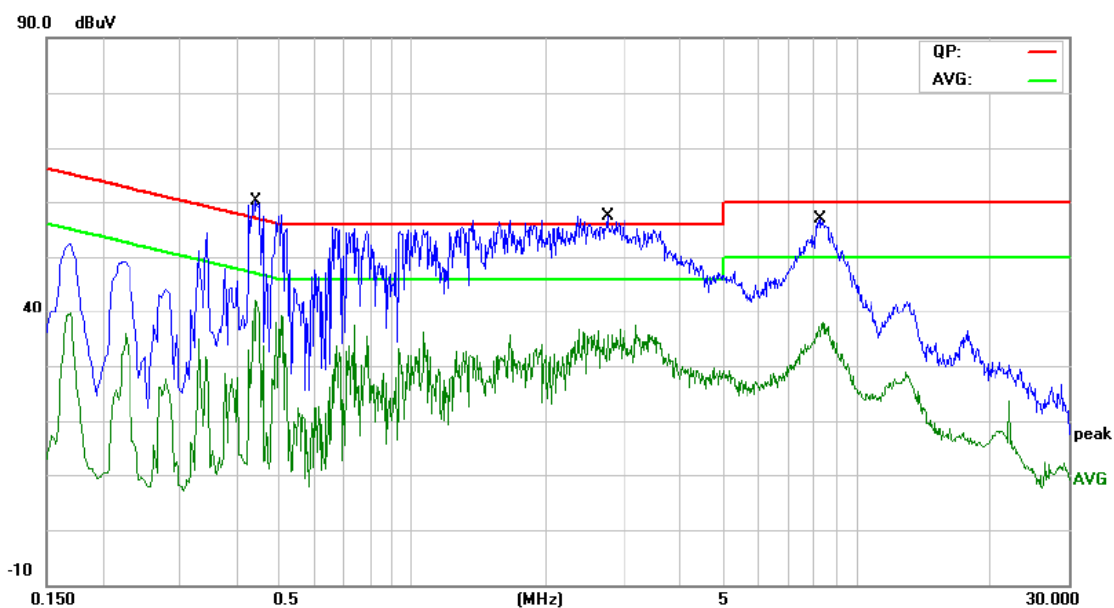
The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.



3.6 TEST RESULTS

EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2013-07-12
Test Mode :	Mode 1	Phase :	Line
Test Voltage :	120V/ 60Hz		

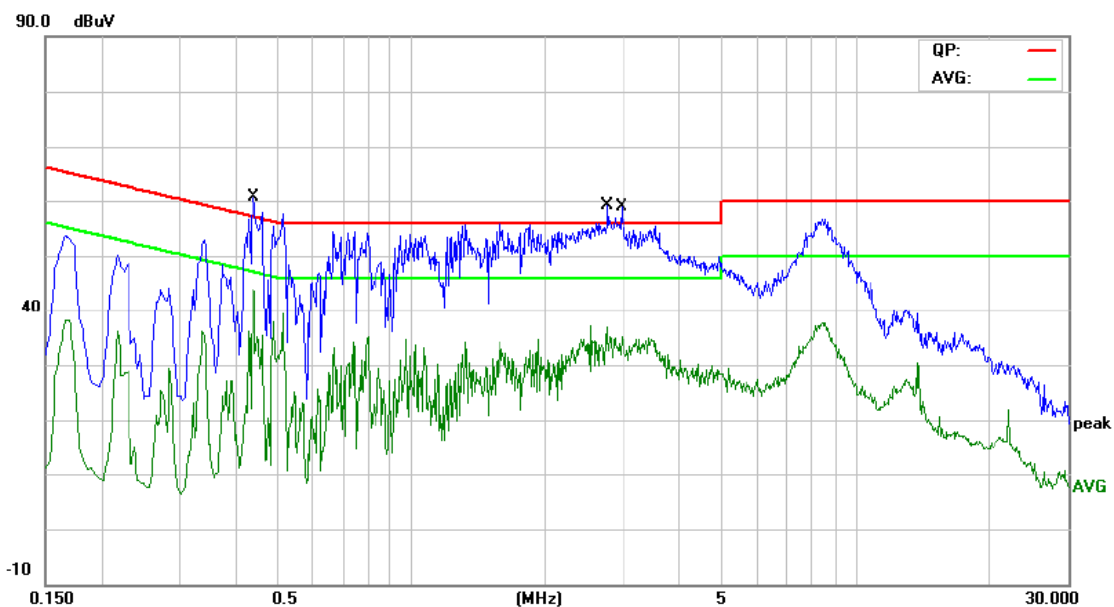
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.4460	45.96	9.55	55.51	56.95	-1.44	QP	
2		0.4460	26.74	9.55	36.29	46.95	-10.66	AVG	
3		2.7380	39.87	9.37	49.24	56.00	-6.76	QP	
4		2.7380	22.00	9.37	31.37	46.00	-14.63	AVG	
5		8.2980	38.81	9.83	48.64	60.00	-11.36	QP	
6		8.2980	24.00	9.83	33.83	50.00	-16.17	AVG	





EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2013-07-12
Test Mode :	Mode 1	Phase :	Neutral
Test Voltage :	120V/ 60Hz		

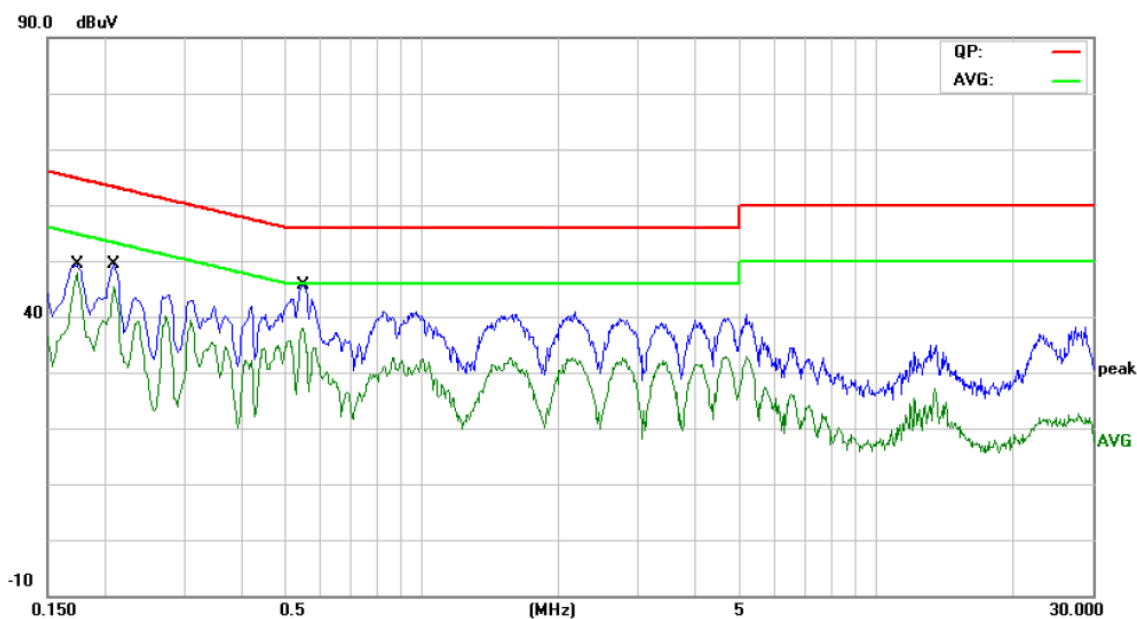
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.4420	46.02	9.58	55.60	57.02	-1.42	QP	
2		0.4420	26.22	9.58	35.80	47.02	-11.22	AVG	
3		2.7620	40.88	9.40	50.28	56.00	-5.72	QP	
4		2.7620	21.70	9.40	31.10	46.00	-14.90	AVG	
5		2.9700	39.72	9.41	49.13	56.00	-6.87	QP	
6		2.9700	22.06	9.41	31.47	46.00	-14.53	AVG	





EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2013-07-12
Test Mode :	Mode 2	Phase :	Line
Test Voltage :	120V/ 60Hz		

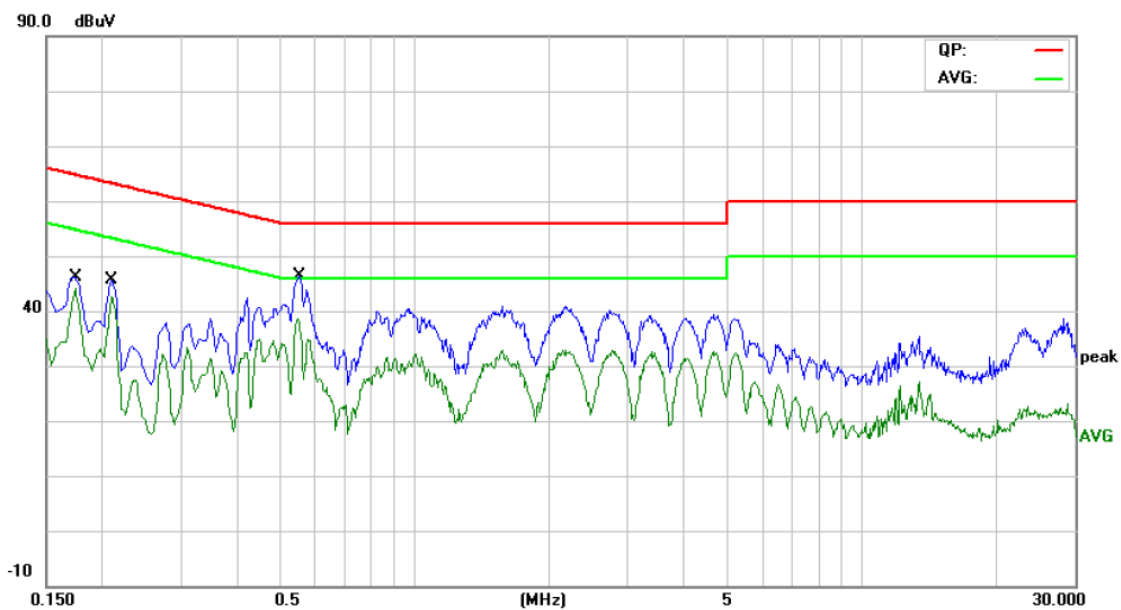
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1740	37.71	10.62	48.33	64.76	-16.43	QP	
2	*	0.1740	37.23	10.62	47.85	54.76	-6.91	AVG	
3		0.2100	37.72	10.25	47.97	63.20	-15.23	QP	
4		0.2100	34.57	10.25	44.82	53.20	-8.38	AVG	
5		0.5500	35.18	9.43	44.61	56.00	-11.39	QP	
6		0.5500	28.34	9.43	37.77	46.00	-8.23	AVG	





EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2013-07-12
Test Mode :	Mode 2	Phase :	Neutral
Test Voltage :	120V/ 60Hz		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1740	34.13	10.65	44.78	64.76	-19.98	QP	
2		0.1740	33.51	10.65	44.16	54.76	-10.60	AVG	
3		0.2100	34.16	10.28	44.44	63.20	-18.76	QP	
4		0.2100	32.41	10.28	42.69	53.20	-10.51	AVG	
5		0.5540	36.39	9.46	45.85	56.00	-10.15	QP	
6	*	0.5540	28.32	9.46	37.78	46.00	-8.22	AVG	





4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMIT (Frequency Range 9KHz-1000MHz)

20 dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Field Strength (uV/m at meter)	Measurement Distance (meters)
0.009 -0.490	2400/F(KHz)	300
0.490 -1.705	24000/F(KHz)	30
1.705 -30.0	30	30
30 -88	100	3
88 -216	150	3
216~960	200	3
Above 960	500	3

RADIATED EMISSION LIMITS (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m)(at 3 M)		Class B (dBuV/m)(at 3 M)	
	Peak	Average		Peak
Above 1000	80	60	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency~ Stop Frequency	9kHz~150kHz/ RB 200Hz for QP
Start Frequency~ Stop Frequency	150kHz~30MHz/ RB 9kHz for QP
Start Frequency~ Stop Frequency	30MHz~1000MHz/ RB120kHz for QP

The following table is the setting of the spectrum

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB/ VB (emission in restricted band)	1MHz/ 3 MHz for Peak, 1MHz/ 10Hz for Average

4.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.

- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

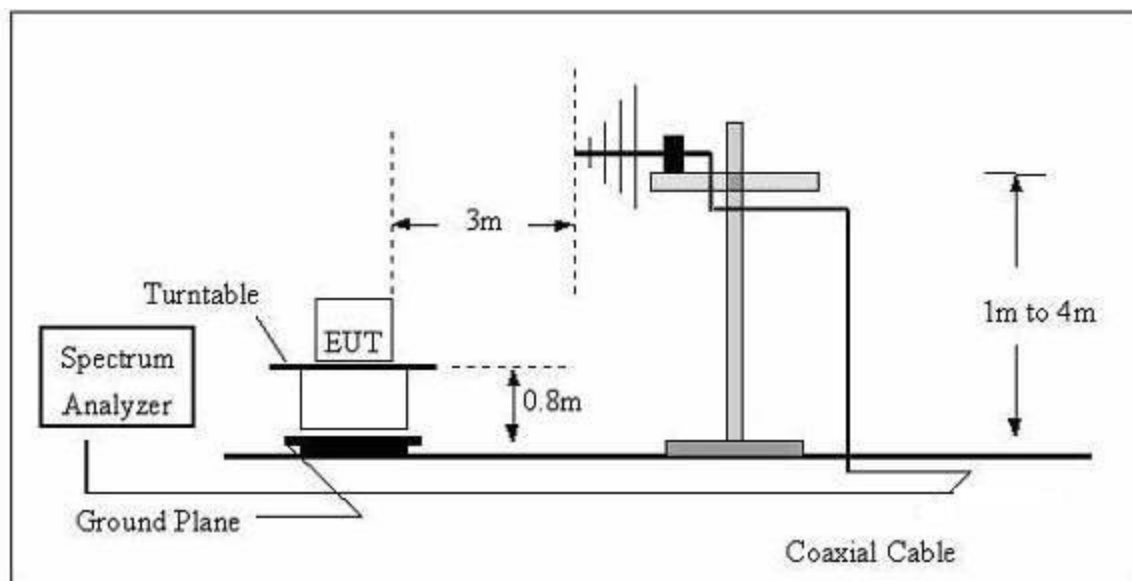
Note:

Both horizontal and vertical antenna polarities were tested.

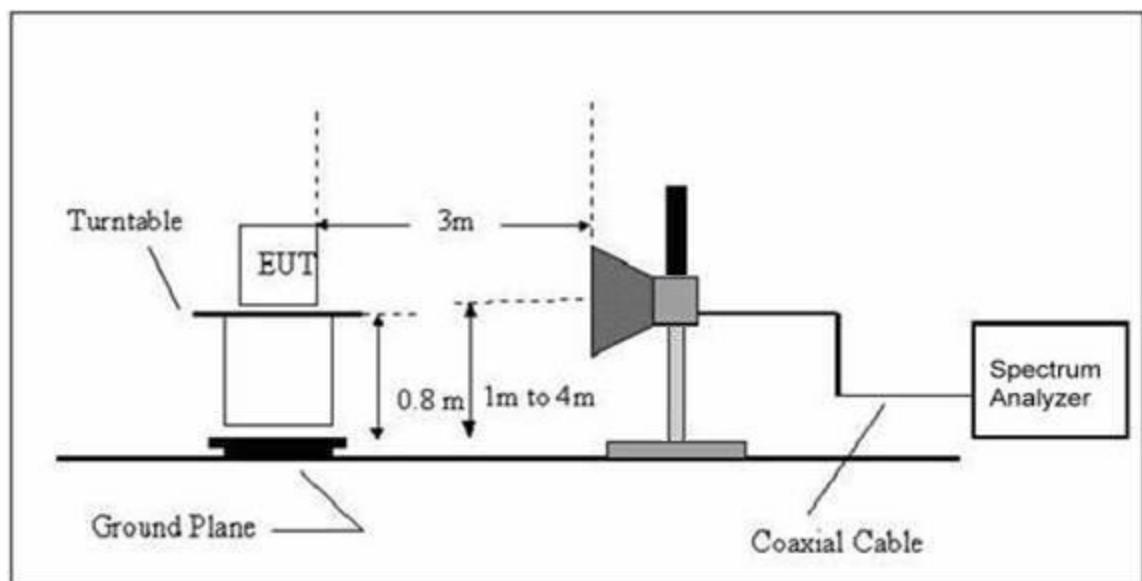
And performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz



(B) Radiated Emission Test Set-Up Frequency Above 1GHz



4.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Broadband Antenna	R&S	VULB 9168	VULB 9168-456	Jul. 06, 2012	Jul. 05, 2014	1 year
Test Cable	N/A	R-01	N/A	Dec. 25, 2012	Dec. 24, 2013	1 year
Test Cable	N/A	R-02	N/A	Dec. 25, 2012	Dec. 24, 2013	1 year
EMI Test Receiver	R&S	ESCI	101324	Jul. 06, 2012	Jul. 05, 2014	1 year
Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
Turn Table	EM	SC100	060531	N/A	N/A	N/A
50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 06, 2012	Jul. 05, 2014	1 year
Spectrum Analyzer	R&S	FSP40	100154	Jul. 06, 2012	Jul. 05, 2014	1 year
Horn Antenna	R&S	HF906	10029	Jul. 06, 2012	Jul. 05, 2014	1 year
Amplifier	EM	EM-30180	060538	Jul. 06, 2012	Jul. 05, 2014	1 year

4.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.



4.6 TEST RESULTS

4.6.1 TEST RESULTS (Bellow 1GHz)

EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	BT TX Mode	Polarization :	Horizontal
Test Power :	AC 120V/60 Hz		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		132.8200	23.60	15.41	39.01	43.50	-4.49	peak
2	*	229.8200	24.64	17.13	41.77	46.00	-4.23	peak
3		332.6400	20.78	20.85	41.63	46.00	-4.37	peak
4		402.4800	17.96	22.48	40.44	46.00	-5.56	peak
5		457.7700	18.71	23.02	41.73	46.00	-4.27	peak
6		826.3700	11.57	27.33	38.90	46.00	-7.10	peak

Remark:

Factor = Antenna Factor + Cable Loss.



EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	BT TX Mode	Polarization :	Vertical
Test Power :	AC 120V/60 Hz		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		98.8700	30.40	8.17	38.57	43.50	-4.93	peak
2		327.7900	27.99	11.75	39.74	46.00	-6.26	peak
3		397.6300	26.77	13.61	40.38	46.00	-5.62	peak
4	*	457.7700	27.67	14.00	41.67	46.00	-4.33	peak
5		810.8500	20.09	18.16	38.25	46.00	-7.75	peak
6		885.5400	20.56	18.91	39.47	46.00	-6.53	peak

Remark:

Factor = Antenna Factor + Cable Loss.



4.6.2 TEST RESULTS (Above 1GHz)

EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	GFSK TX 2402MHz	Polarization :	Horizontal
Test Power :	AC 120V/60Hz		

Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
4803.980	42.44	4.45	46.89	74.00	-27.11	peak
4803.980	34.04	4.45	38.49	54.00	-15.51	AVG

EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	GFSK TX 2402MHz	Polarization :	Vertical
Test Power :	AC 120V/60Hz		

Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
4803.980	41.80	4.45	46.25	74.00	-27.75	peak
4803.980	32.27	4.45	36.72	54.00	-17.28	AVG



EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	GFSK TX 2441 MHz	Polarization :	Horizontal
Test Power :	AC 120V/60Hz		

Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
4882.040	44.71	4.70	49.41	74.00	-24.59	peak
4882.040	38.58	4.70	43.28	54.00	-10.72	AVG

EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	GFSK TX 2441 MHz	Polarization :	Vertical
Test Power :	AC 120V/60Hz		

Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
4882.040	45.03	4.70	49.73	74.00	-24.27	peak
4882.040	38.49	4.70	43.19	54.00	-10.81	AVG



EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	GFSK TX 2480MHz	Polarization :	Horizontal
Test Power :	AC 120V/60Hz		

Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
4960.060	45.51	4.95	50.46	74.00	-23.54	peak
4960.060	39.19	4.95	44.14	54.00	-9.86	AVG

EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	GFSK TX 2480MHz	Polarization :	Vertical
Test Power :	AC 120V/60Hz		

Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
4960.060	45.87	4.95	50.82	74.00	-23.18	peak
4960.060	38.41	4.95	43.36	54.00	-10.64	AVG



EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	8DPSK TX 2402MHz	Polarization :	Horizontal
Test Power :	AC 120V/60Hz		

Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
4804.100	44.60	5.01	49.61	74.00	-24.39	peak
4804.100	35.53	5.01	40.54	54.00	-13.46	AVG

EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	8DPSK TX 2402MHz	Polarization :	Vertical
Test Power :	AC 120V/60Hz		

Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
4804.080	47.32	5.01	52.33	74.00	-21.67	peak
4804.080	41.74	5.01	46.75	54.00	-7.25	AVG



EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	8DPSK TX 2441MHz	Polarization :	Horizontal
Test Power :	AC 120V/60Hz		

	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
	4882.100	36.11	5.19	41.30	54.00	-12.70	AVG
	4882.600	45.85	5.20	51.05	74.00	-22.95	peak

EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	8DPSK TX 2441MHz	Polarization :	Vertical
Test Power :	AC 120V/60Hz		

	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
	4882.000	47.77	5.19	52.96	74.00	-21.04	peak
	4882.000	42.36	5.19	47.55	54.00	-6.45	AVG



EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	8DPSK TX 2480MHz	Polarization :	Horizontal
Test Power :	AC 120V/60Hz		

Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
MHz	dBuV	dB	dBuV/m	dBuV/m	dB
4882.100	48.67	5.19	53.86	74.00	-20.14
4882.100	38.91	5.19	44.10	54.00	-9.90

EUT :	Tablet PC	Model Name. :	M736
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2013-07-12
Test Mode :	8DPSK TX 2480MHz	Polarization :	Vertical
Test Power :	AC 120V/60Hz		

Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
4960.000	49.83	5.38	55.21	74.00	-18.79	peak
4960.000	43.79	5.38	49.17	54.00	-4.83	AVG



5. CONDUCTED OUTPUT POWER MEASUREMENT

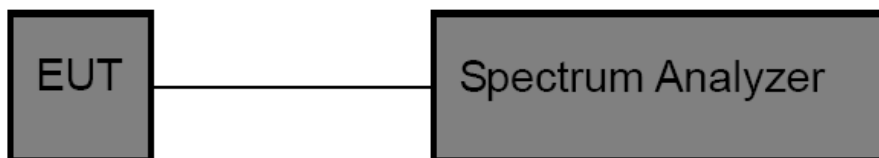
5.1 LIMITS

Peak Output Power	For frequency Hopping systems in 2400~2483.5MHz band and employing at least 75 non-overlapping hopping channels < 1 watt (30 dBm).
-------------------	--

5.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.

5.3 TEST SETUP



5.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 06, 2012	Jul. 05. 2014	1 year

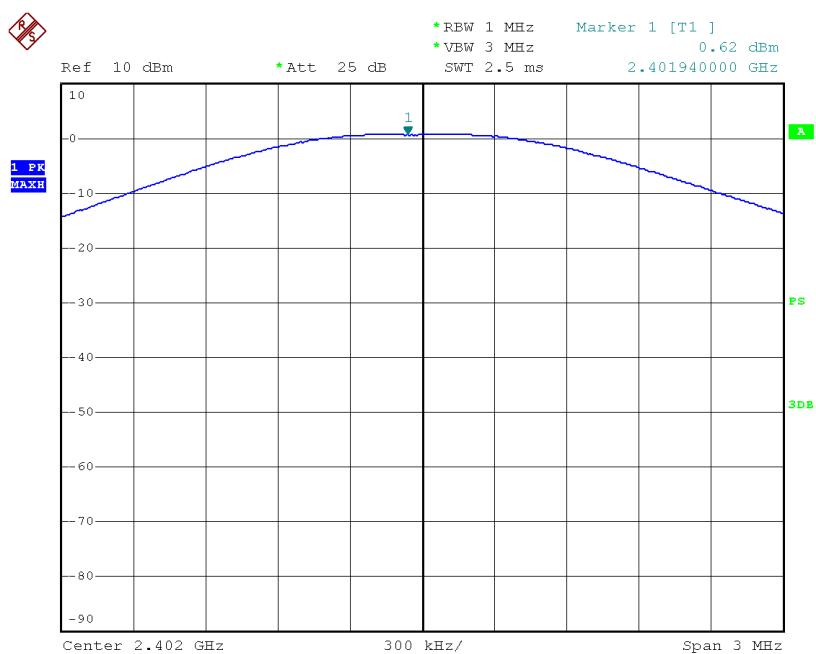
5.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.

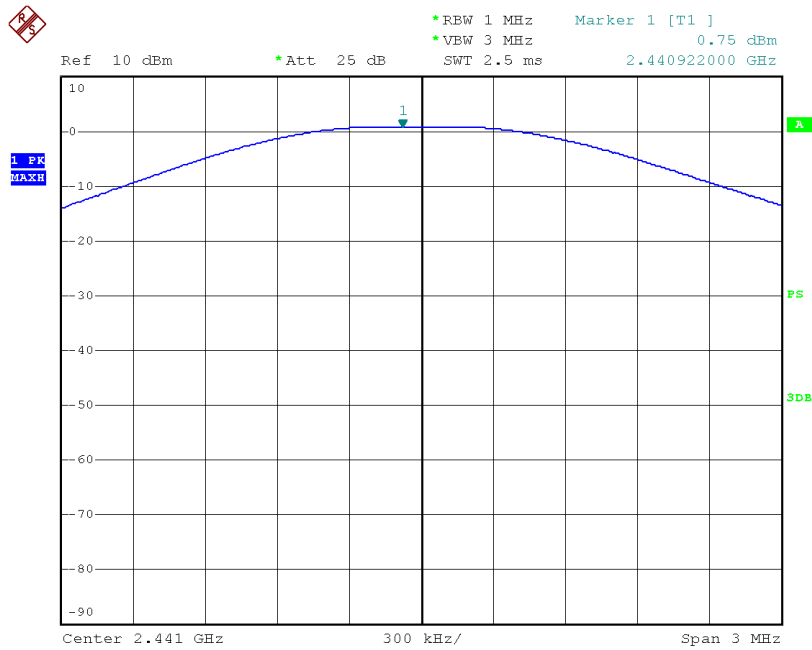
5.6 TEST RESULTS



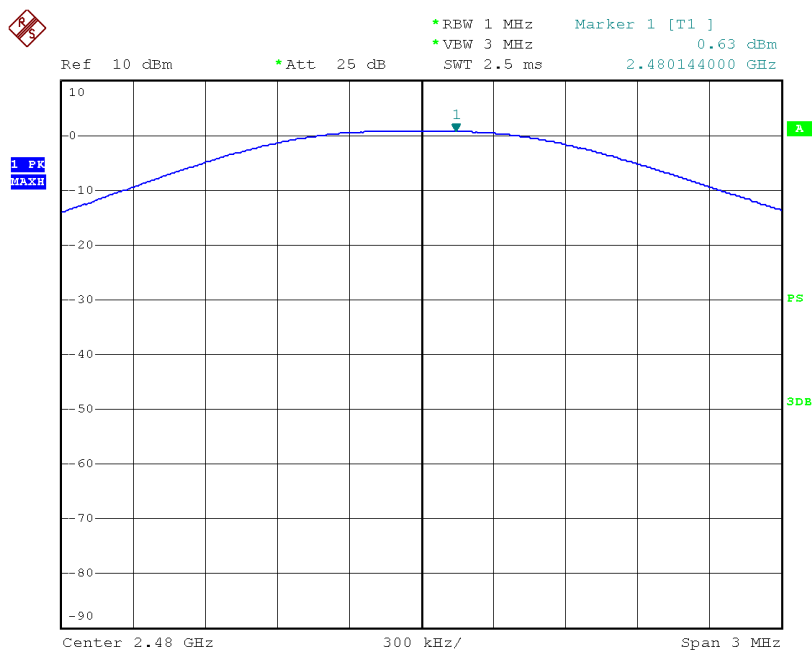
GFSK (1Mbps)		
Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
2402	0.62	<30
2441	0.75	
2480	0.63	

2402 MHz

Date: 12.JUL.2013 15:01:22

**2441 MHz**

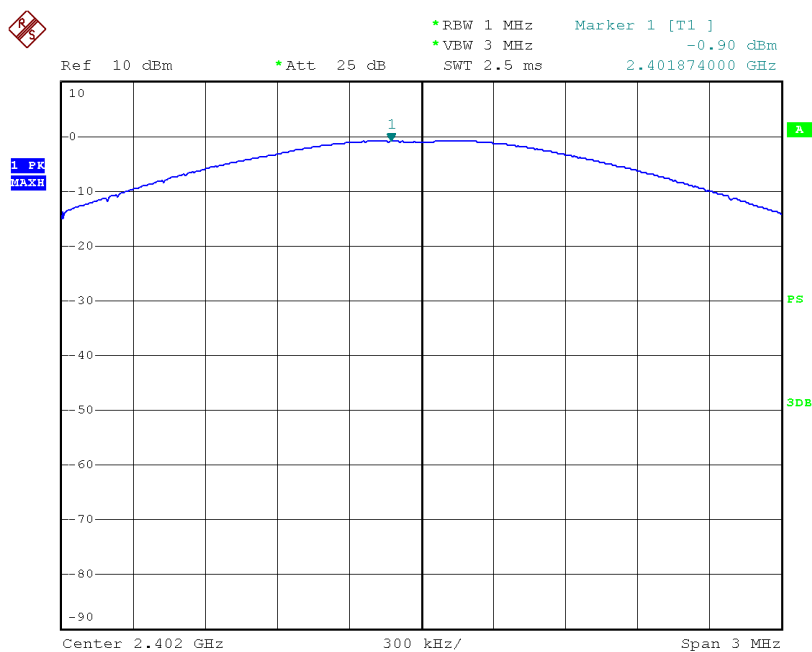
Date: 12.JUL.2013 14:56:59

2480 MHz

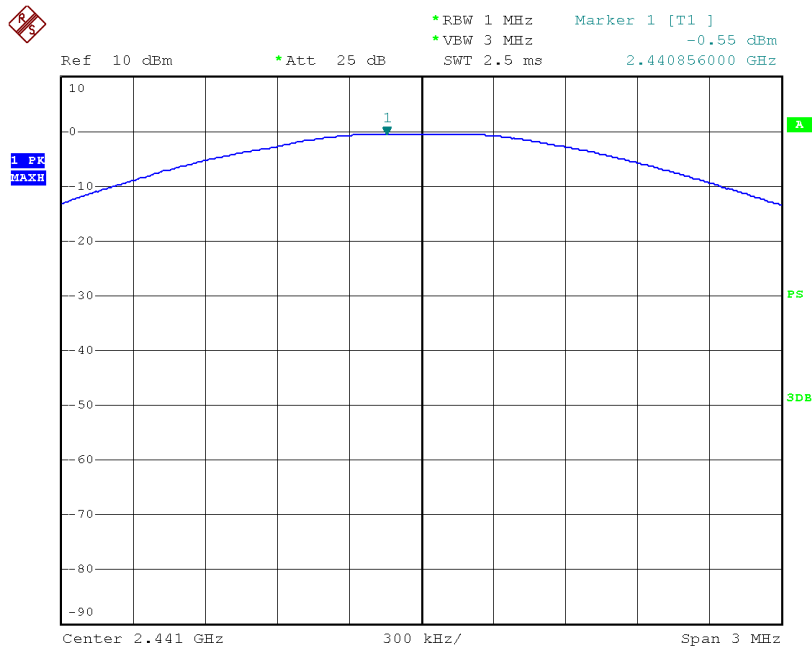
Date: 12.JUL.2013 15:01:54



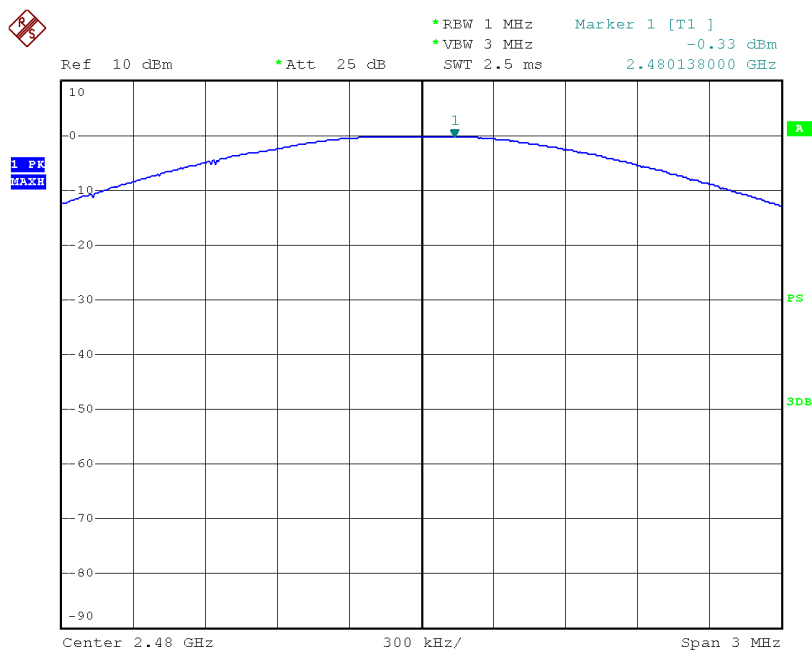
8-DPSK (3Mbps)		
Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
2402	-0.90	<30
2441	-0.55	
2480	-0.33	

2402 MHz

Date: 12.JUL.2013 15:08:32

**2441 MHz**

Date: 12.JUL.2013 15:05:11

2480 MHz

Date: 12.JUL.2013 15:04:34



6. OCCUPIED BANDWIDTH MEASUREMENT

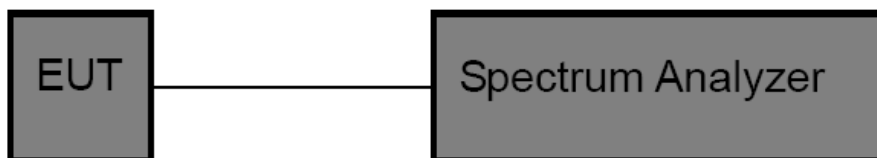
6.1 LIMITS

20dB Bandwidth	N/A
99% Occupied Bandwidth	N/A

6.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.

6.3 TEST SETUP



6.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 06, 2012	Jul. 05. 2014	1 year

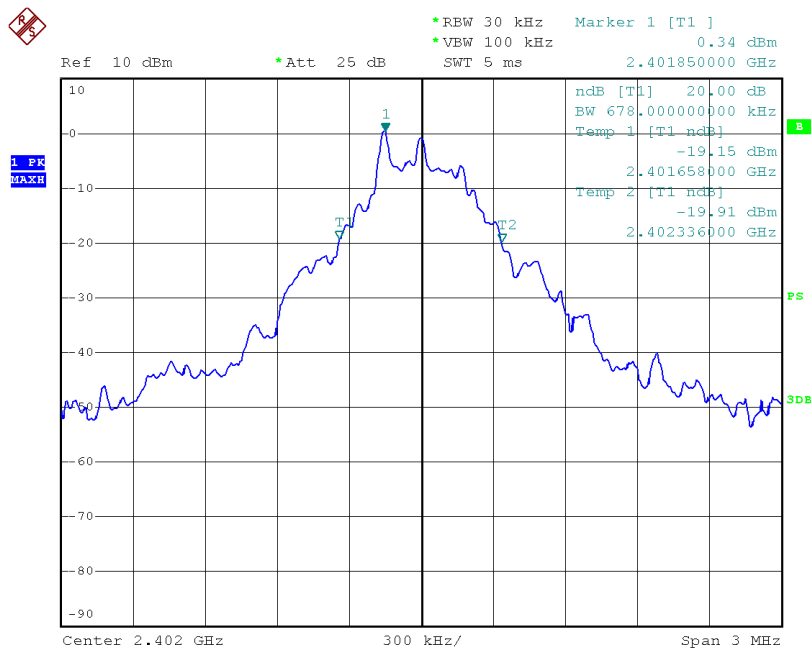
6.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.

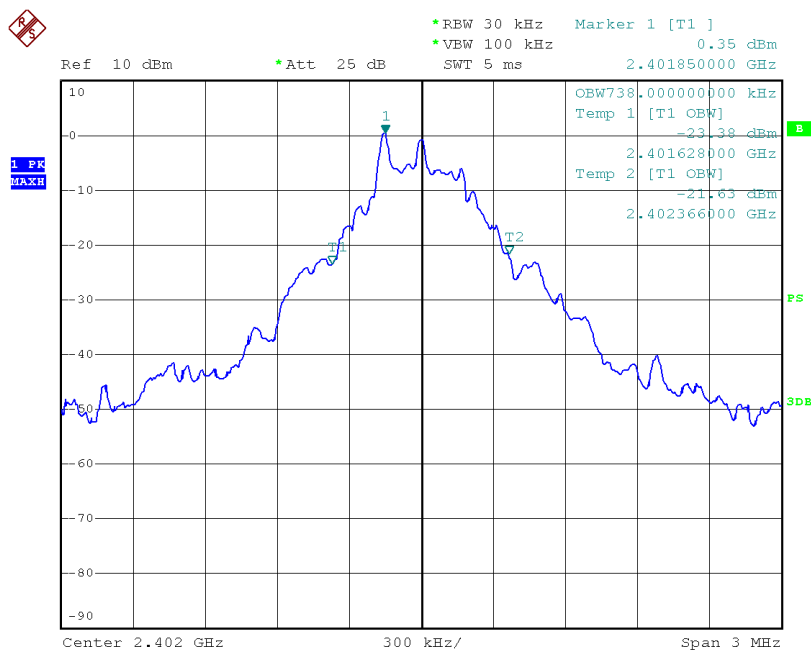
6.6 TEST RESULTS



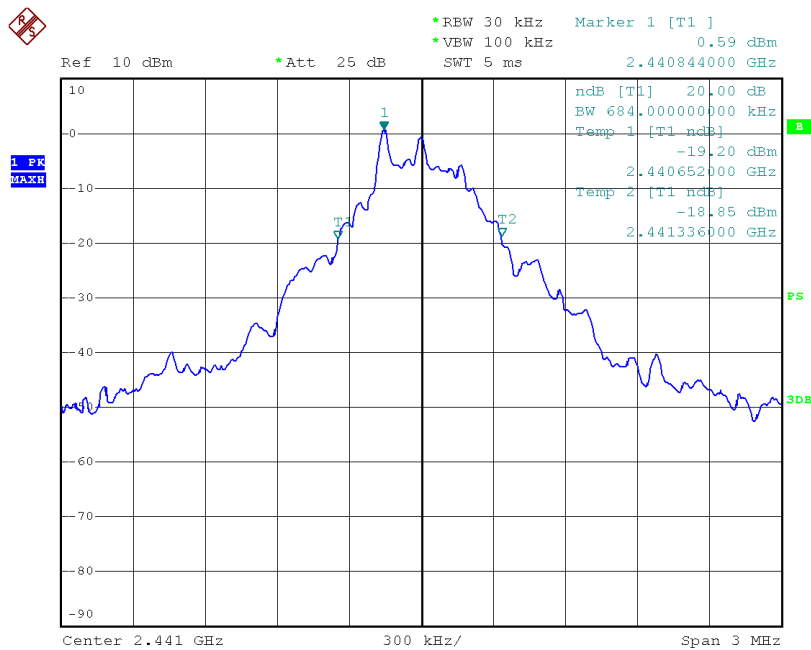
GFSK Mode (1Mbps)			
Frequency (MHz)	20dB Bandwidth (kHz)	99% OBW (kHz)	Limit
2402	678.00	738.00	N/A
2441	684.00	738.00	
2480	684.00	744.00	
8-DPSK Mode (3Mbps)			
Frequency (MHz)	20dB Bandwidth (kHz)	99% OBW (kHz)	Limit
2402	1152.00	1092.00	N/A
2441	1152.00	1086.00	
2480	1152.00	1092.00	
Note: Test plots please refer following pages.			

**2402 MHz(GFSK)-20 dB Bandwidth**

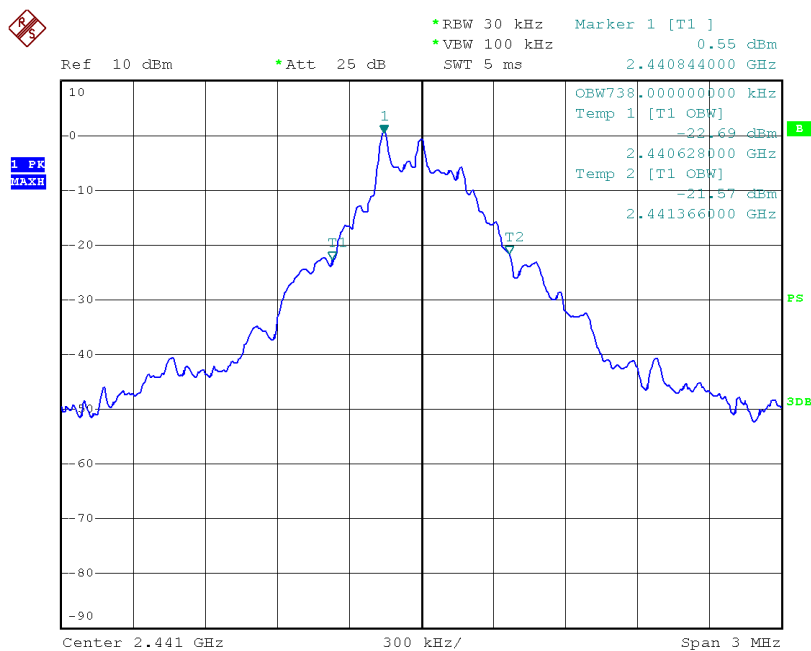
Date: 12.JUL.2013 15:00:59

2402 MHz(GFSK)-99% OBW

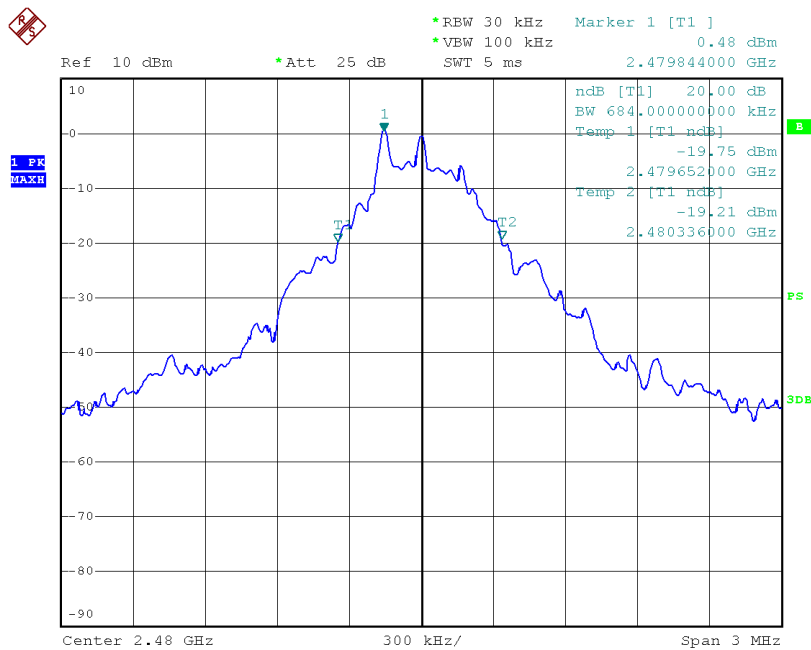
Date: 12.JUL.2013 15:00:37

**2441 MHz(GFSK)-20 dB Bandwidth**

Date: 12.JUL.2013 14:58:42

2441 MHz(GFSK)-99% OBW

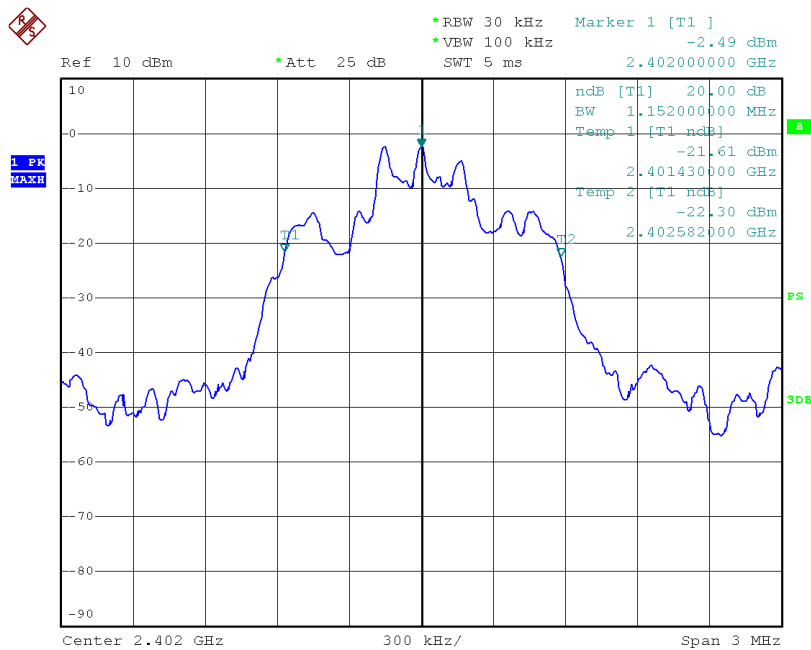
Date: 12.JUL.2013 15:00:01

**2480 MHz(GFSK)-20 dB Bandwidth**

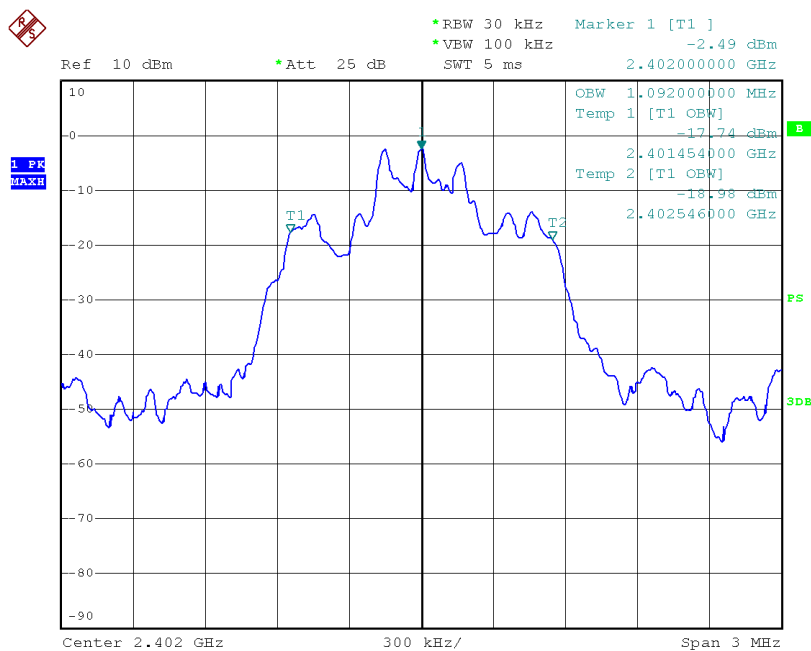
Date: 12.JUL.2013 15:02:22

2480 MHz(GFSK)-99% OBW

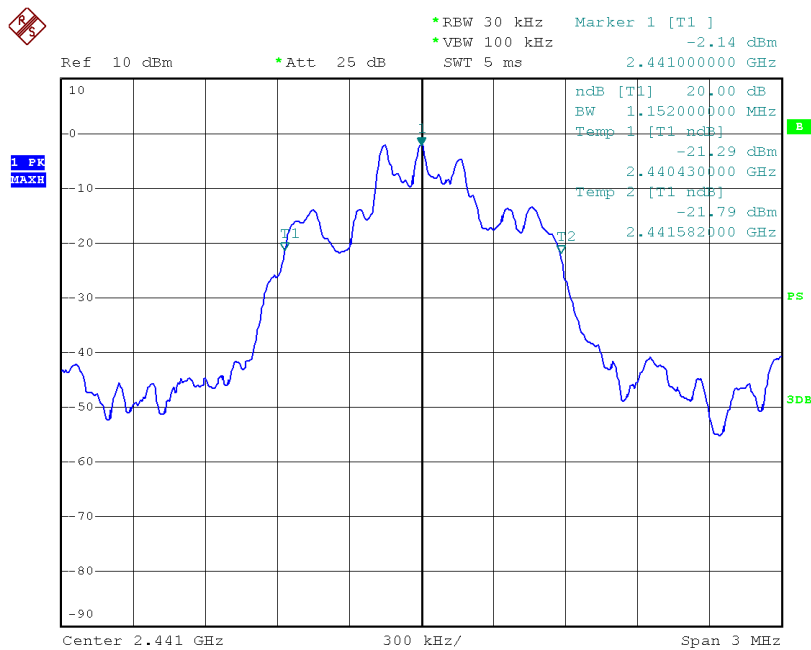
Date: 12.JUL.2013 15:02:46

**2402 MHz(8-DPSK)-20 dB Bandwidth**

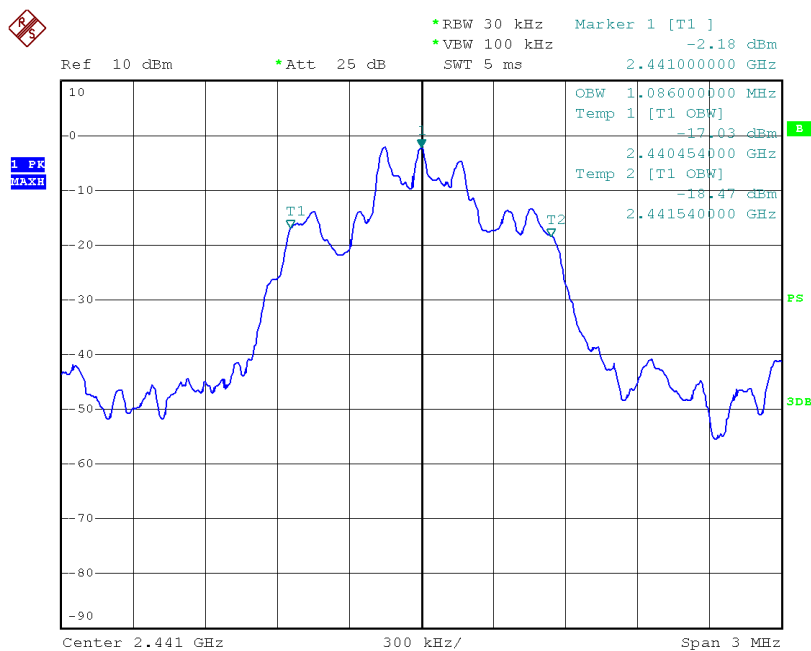
Date: 12.JUL.2013 15:07:59

2402 MHz(8-DPSK)-99% OBW

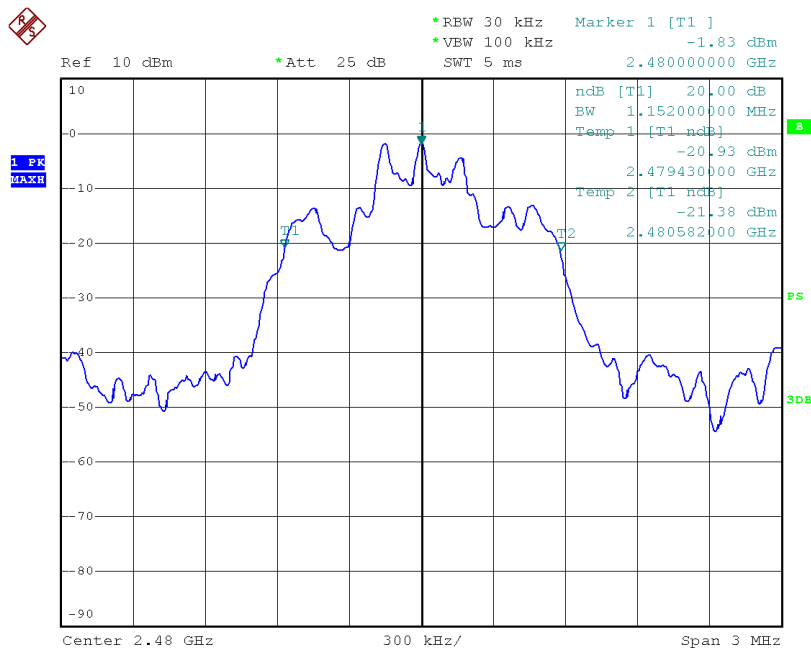
Date: 12.JUL.2013 15:07:23

**2441 MHz(8-DPSK)-20 dB Bandwidth**

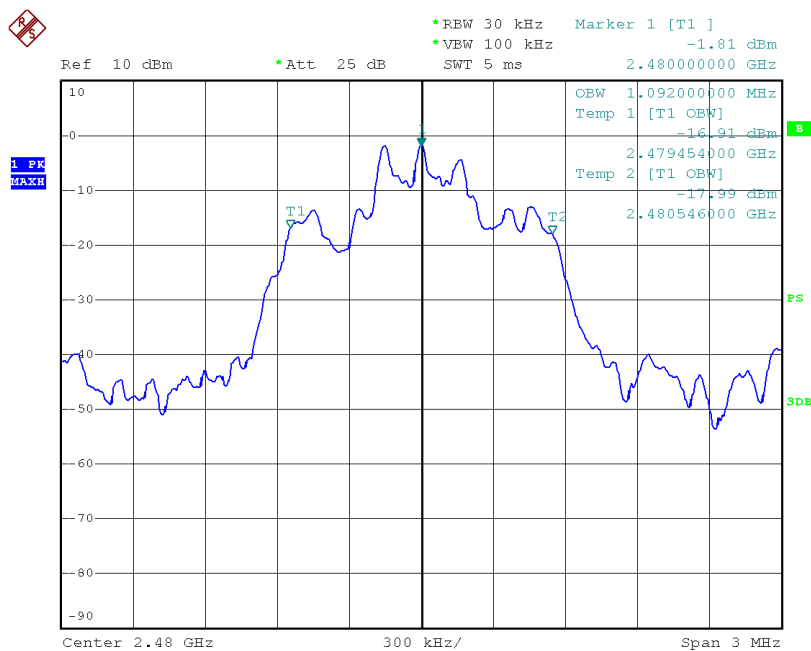
Date: 12.JUL.2013 15:05:59

2441 MHz(8-DPSK)-99% OBW

Date: 12.JUL.2013 15:06:30

**2402 MHz(8-DPSK)-20 dB Bandwidth**

Date: 12.JUL.2013 15:04:09

2402 MHz(8-DPSK)-99% OBW

Date: 12.JUL.2013 15:03:37



7. CARRIER FREQUENCY SEPARATION MEASUREMENT

7.1 LIMITS

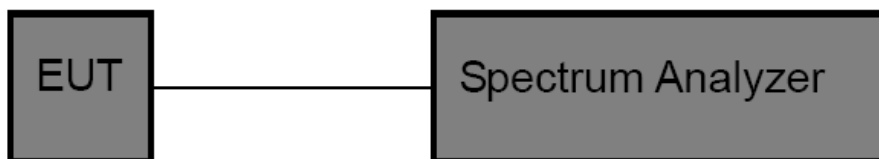
Frequency Separation	The channel spacing shall be a minimum of 25 kHz or two-thirds of the 20 dB Bandwidth

7.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.

- Set span= wide enough to capture the peaks of two adjacent channels.
- Set the RBW $\geq 1\%$ of the span
- Set the VBW ≥ 3 RBW (30kHz/ 100kHz)
- Detector= Peak.
- Sweep time= auto couple
- Trace mode= max hold.
- Allow trace to fully stabilize.
- Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

7.3 TEST SETUP



7.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 06, 2012	Jul. 05. 2014	1 year

7.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.

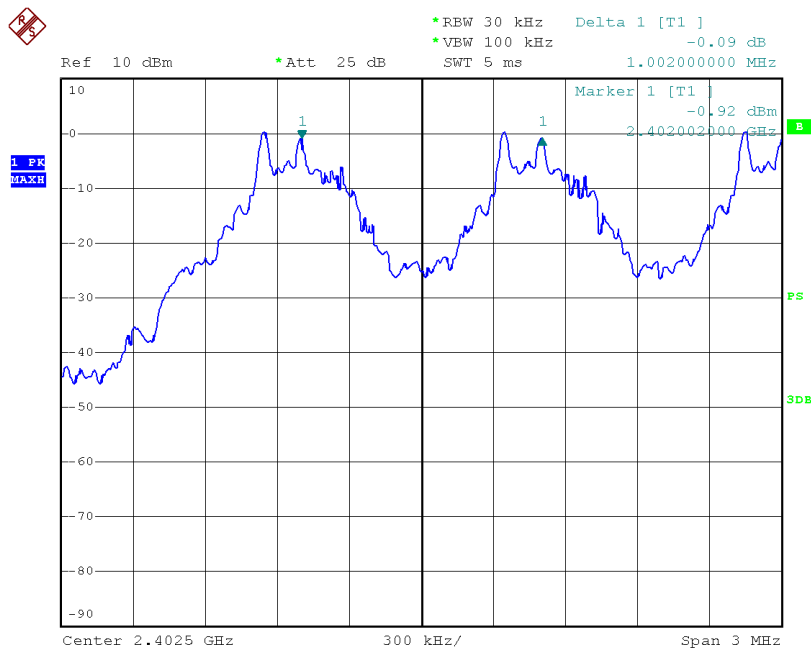
7.6 TEST RESULTS



GFSK Mode (1Mbps)		
Frequency (MHz)	Channel Separation (kHz)	Limit (kHz)
2402	1002.00	>456
2441	1002.00	
2480	1002.00	
GFSK Mode (1Mbps)		
Frequency (MHz)	Frequency (kHz)	Frequency (kHz)
2402	996.00	>768
2441	1002.00	
2480	1002.00	
Note: Test plots please refer following pages.		

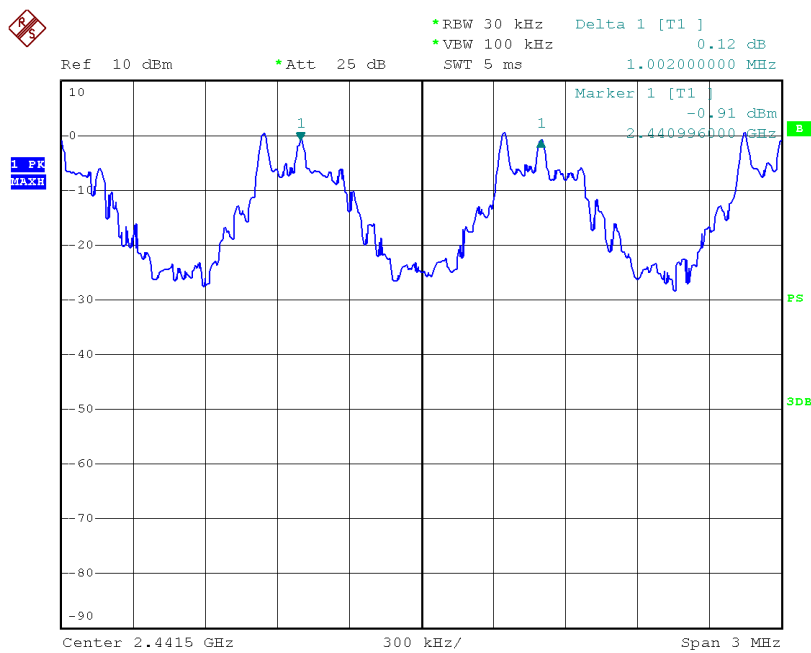


2402 MHz(GFSK)-Channel Separation



Date: 12.JUL.2013 15:44:22

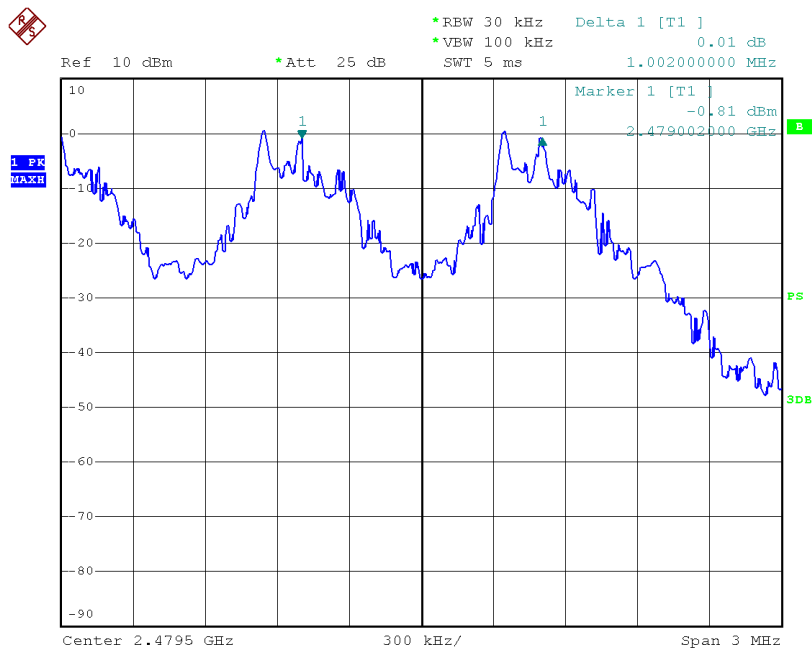
2441 MHz(GFSK)-Channel Separation



Date: 12.JUL.2013 15:36:39



2480 MHz(GFSK)-Channel Separation



Date: 12.JUL.2013 15:33:27

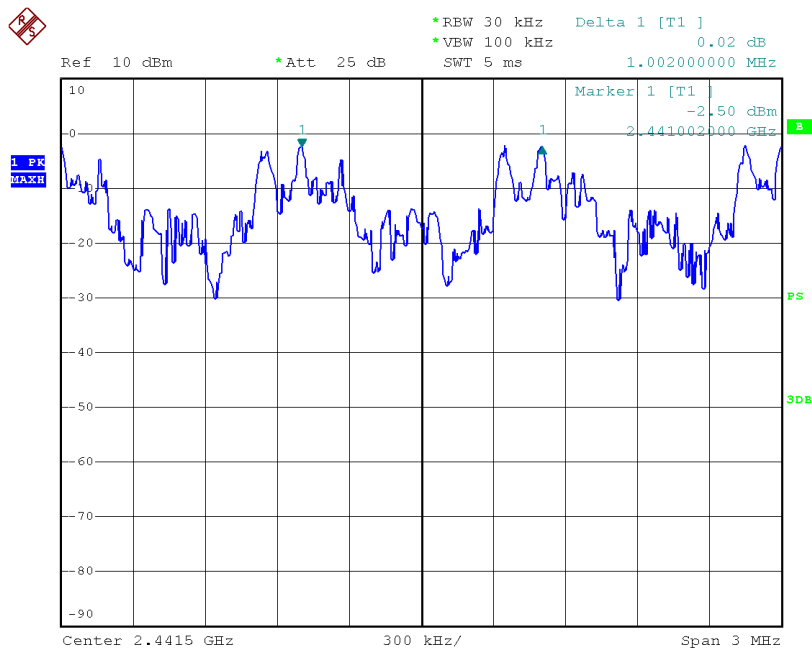
2402 MHz(8-DPSK)-Channel Separation



Date: 12.JUL.2013 15:27:05

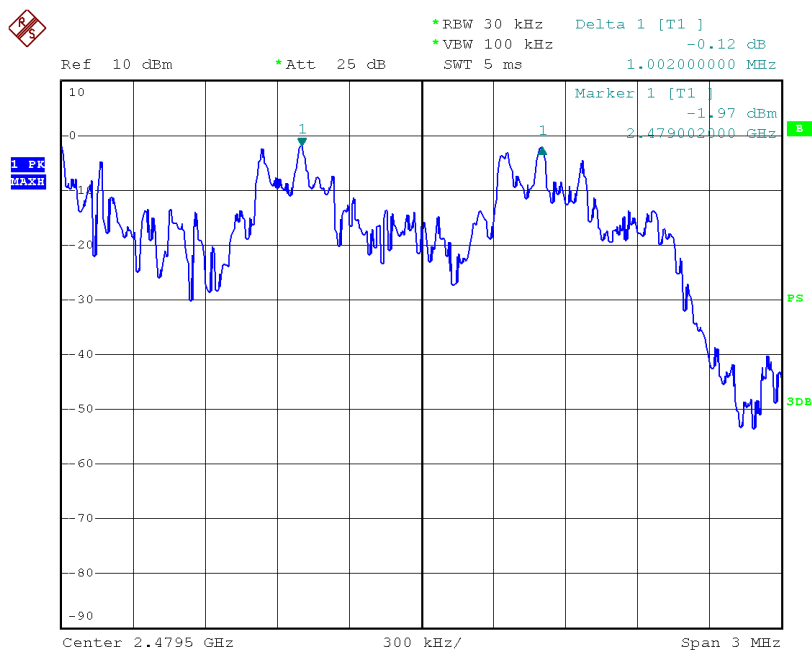


2441 MHz(8-DPSK)-Channel Separation



Date: 12.JUL.2013 15:28:41

2480 MHz(8-DPSK)-Channel Separation



Date: 12.JUL.2013 15:30:07



8. NUMBER OF HOPPING

8.1 LIMITS

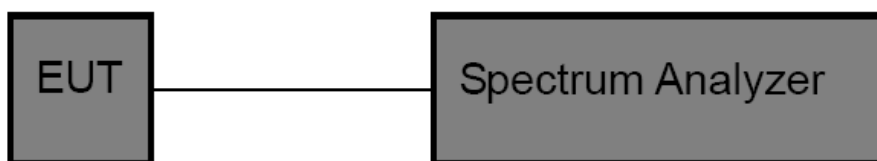
Hopping Number	Frequency hopping systems in 2400-2483.5 MHz band shall use at least 15 channels.
----------------	---

8.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.

- Set span= the frequency band of operation.
- Set the RBW $\geq 1\%$ of the span
- Set the VBW ≥ 3 RBW (100kHz/ 300kHz)
- Detector= Peak.
- Sweep time= auto couple
- Trace mode= max hold.
- Allow trace to fully stabilize.

8.3 TEST SETUP



8.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 06, 2012	Jul. 05. 2014	1 year

8.5 EUT OPERATING CONDITIONS

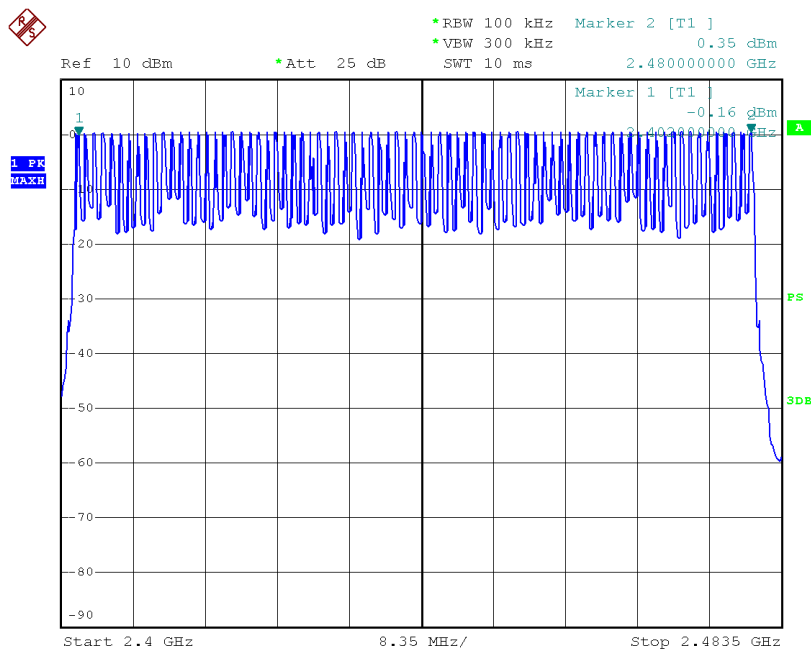
The EUT was set to continuously transmitting in the maximum power during the test.

8.6 TEST RESULTS

**GFSK Mode (1Mbps)****Measurement Number****Limit**

79

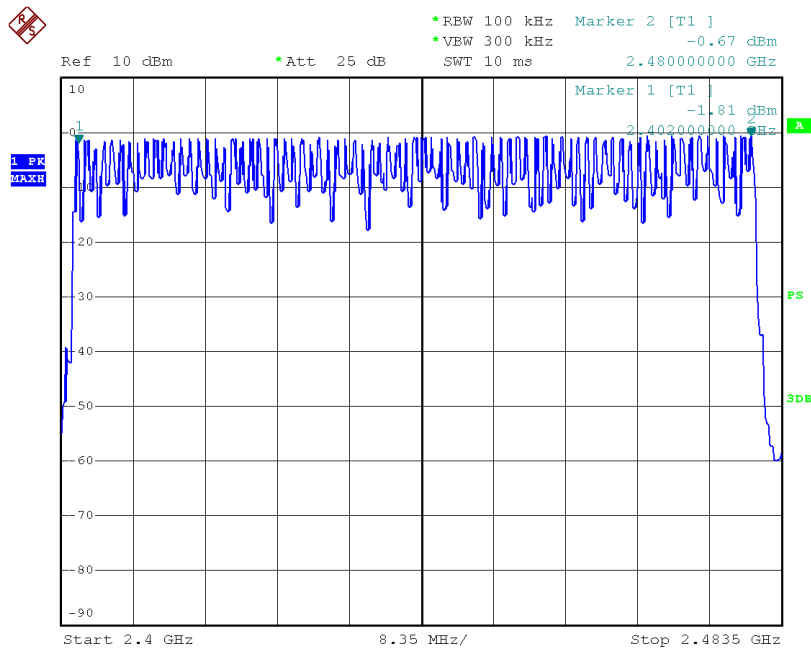
>15



Date: 12.JUL.2013 15:22:04

**8-DPSK Mode (3Mbps)**

Measurement Number	Limit
79	>15



Date: 12.JUL.2013 15:24:08



9. DWELL TIME

9.1 LIMITS

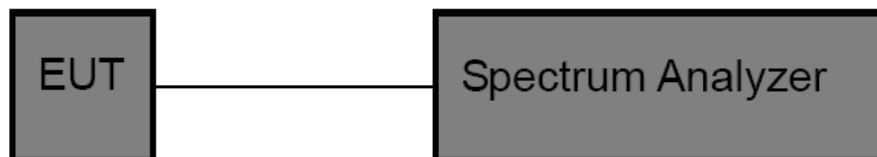
Dwell Time	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied the number of hopping channels employed.
------------	---

9.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.

- Set span= zero
- Set the RBW= 1 MHz
- Set the VBW \geq RBW
- Detector= Peak.
- Sweep time= as necessary to capture the entire dwell time per hopping channel
- Trace mode= max hold
- Use the marker-delta function to determine the dwell time

9.3 TEST SETUP



9.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 06, 2012	Jul. 05. 2014	1 year

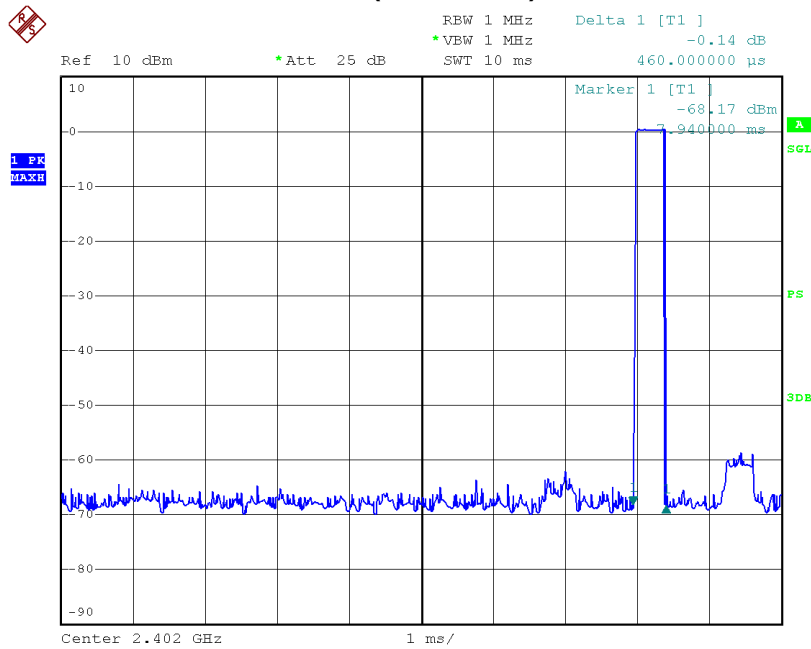
9.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.

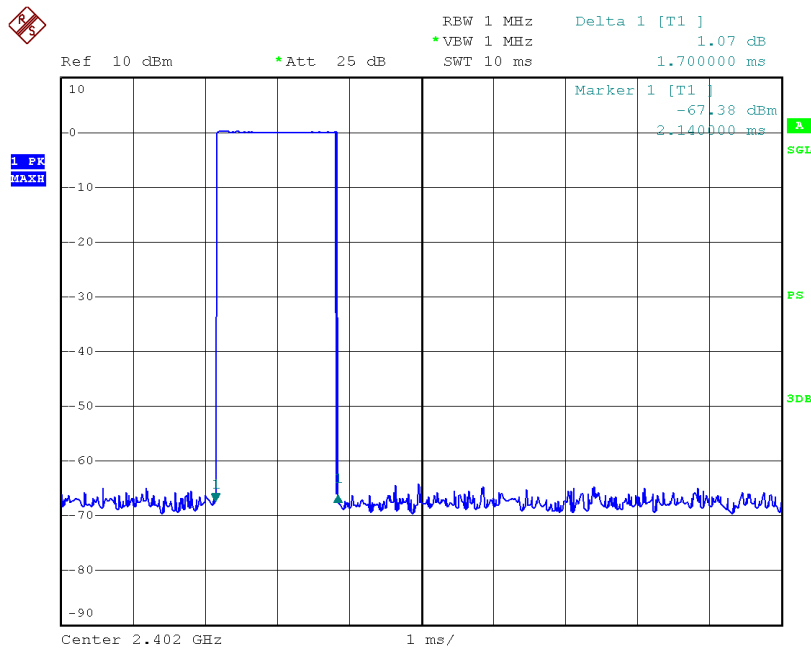
9.6 TEST RESULTS



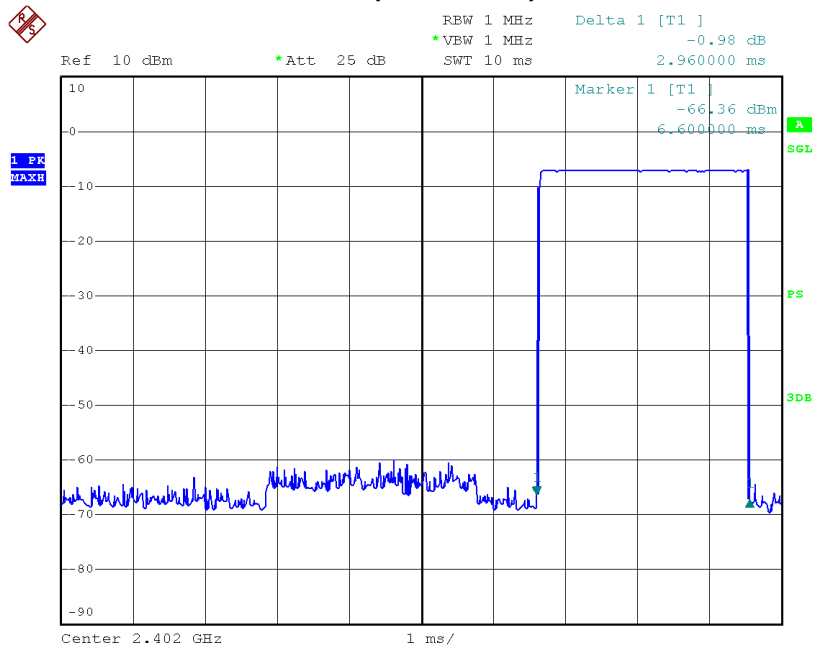
GFSK Mode (1Mbps)				
Frequency: 2402 MHz				
Packet Type	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)
DH1	0.46	147.20	31.60	<400
DH3	1.70	272.00	31.60	
DH5	2.96	315.73	31.60	
Frequency: 2441 MHz				
Packet Type	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)
DH1	0.46	147.20	31.60	<400
DH3	1.70	272.00	31.60	
DH5	2.96	315.73	31.60	
Frequency: 2480 MHz				
Packet Type	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)
DH1	0.46	147.20	31.60	<400
DH3	1.70	272.00	31.60	
DH5	2.96	315.73	31.60	

**2402 MHz (GFSK DH1)- Pulse Time**

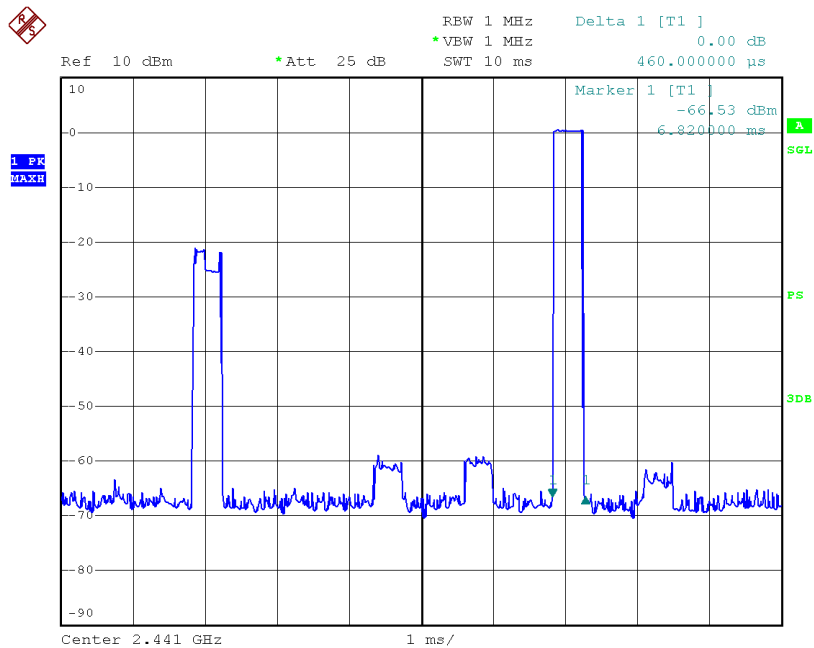
Date: 12.JUL.2013 15:45:33

2402 MHz (GFSK DH3)- Pulse Time

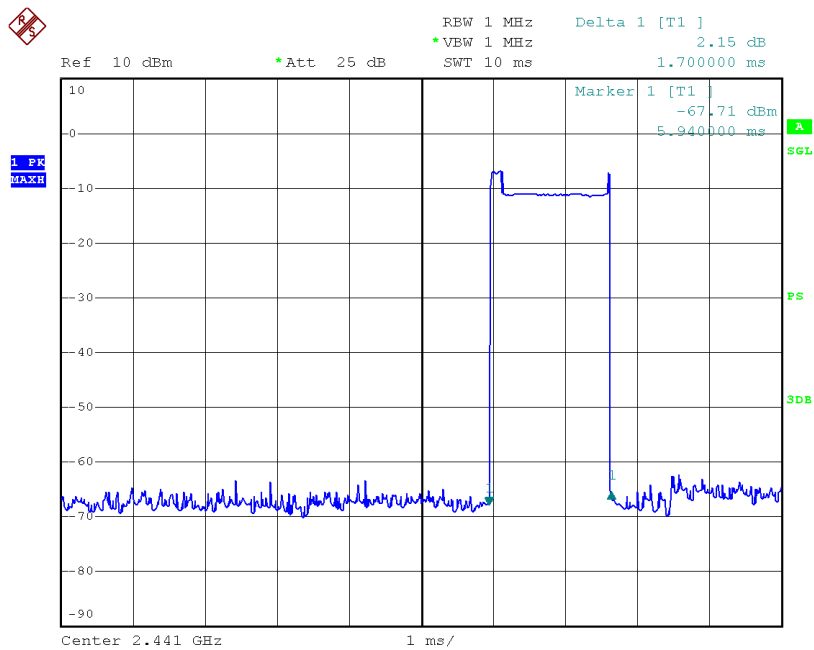
Date: 12.JUL.2013 15:48:36

**2402 MHz (GFSK DH5)- Pulse Time**

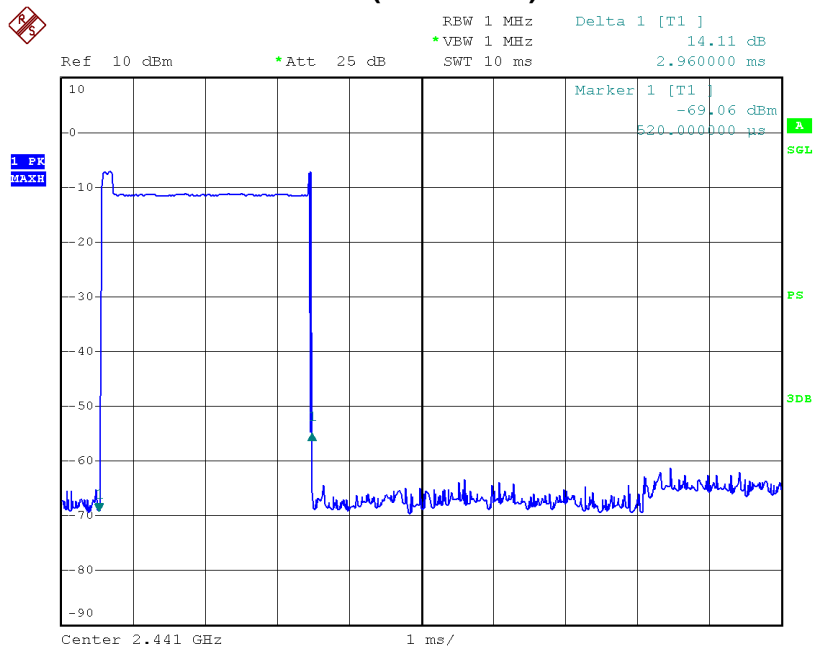
Date: 12.JUL.2013 15:49:23

2441 MHz (GFSK DH1)- Pulse Time

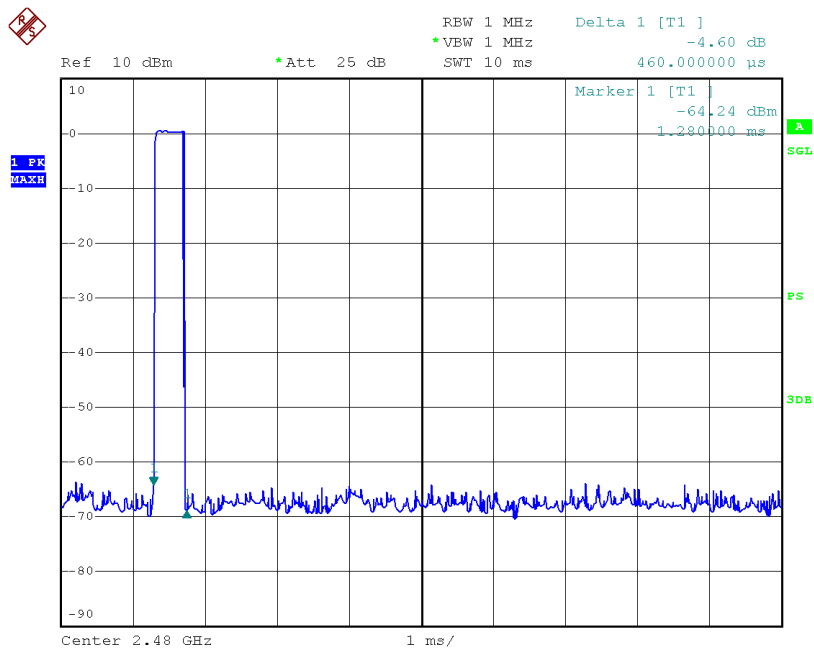
Date: 12.JUL.2013 15:46:08

**2441 MHz (GFSK DH3)- Pulse Time**

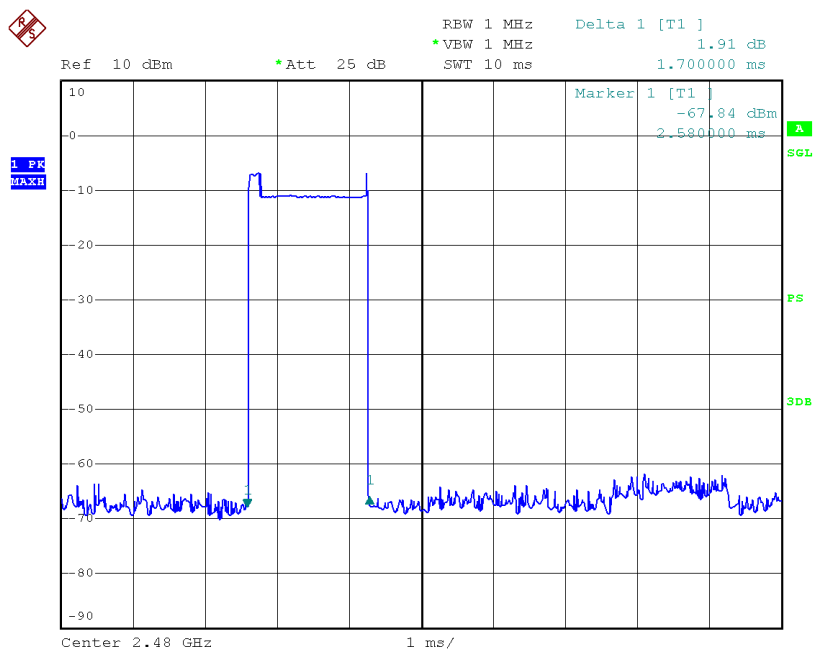
Date: 12.JUL.2013 15:47:46

2441 MHz (GFSK DH5)- Pulse Time

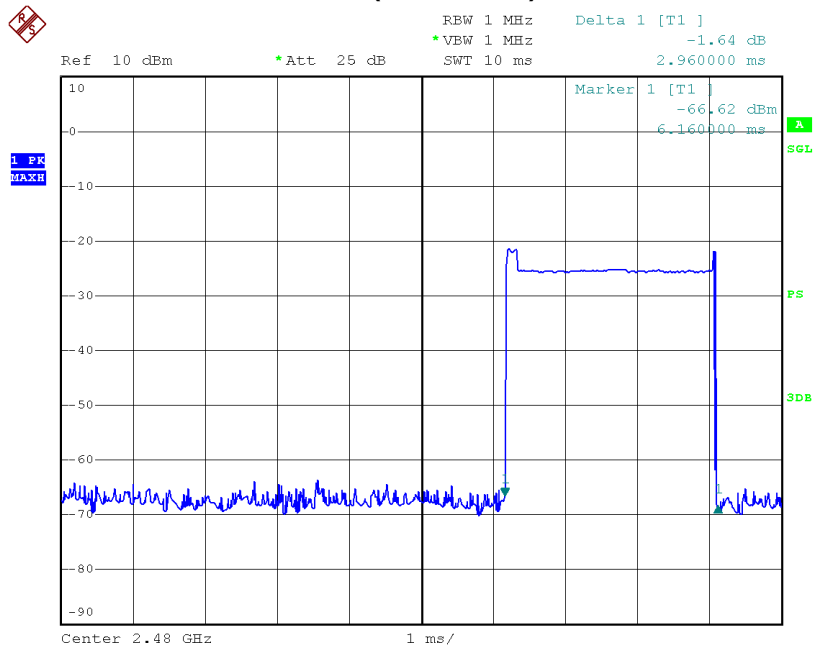
Date: 12.JUL.2013 15:49:55

**2480 MHz (GFSK DH1)- Pulse Time**

Date: 12.JUL.2013 15:46:39

2480 MHz (GFSK DH3)- Pulse Time

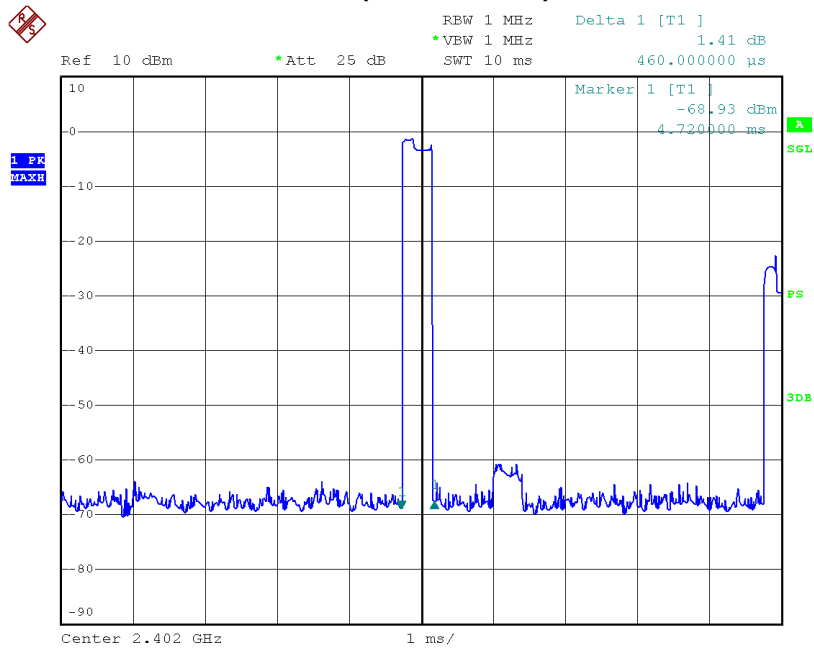
Date: 12.JUL.2013 15:47:12

**2480 MHz (GFSK DH5)- Pulse Time**

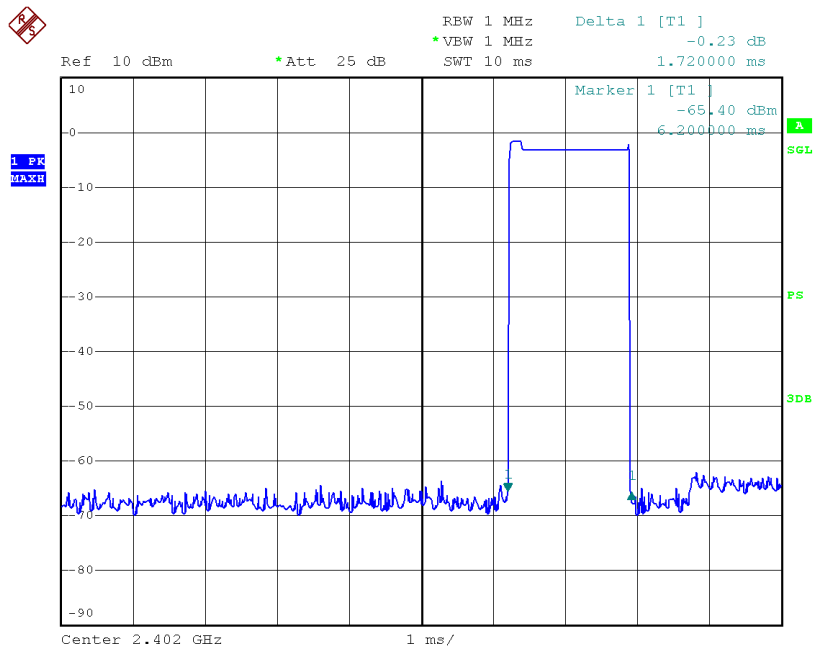
Date: 12.JUL.2013 15:50:27



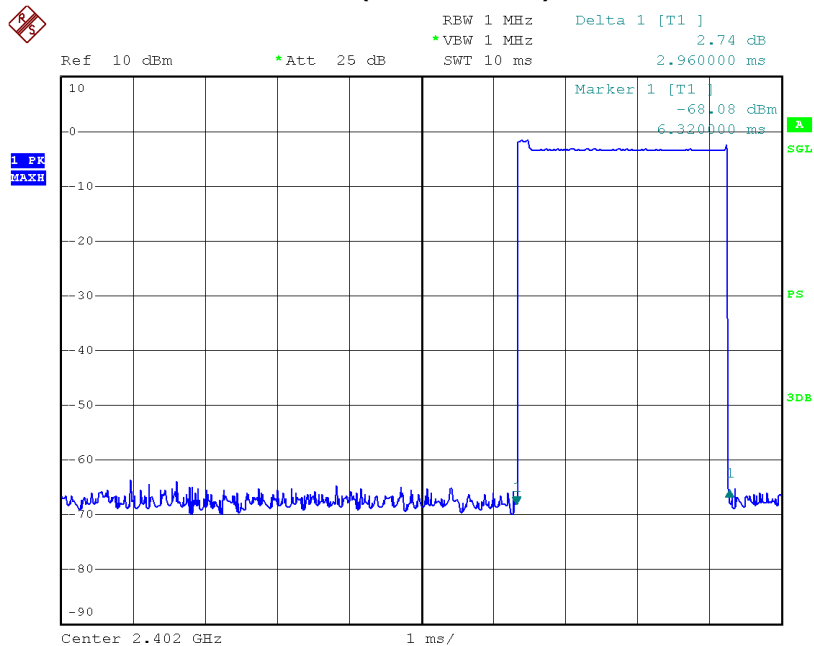
8-DPSK Mode (3Mbps)				
Frequency: 2402 MHz				
Packet Type	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)
DH1	0.46	147.20	31.60	<400
DH3	1.72	275.20	31.60	
DH5	2.96	315.73	31.60	
Frequency: 2441 MHz				
Packet Type	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)
DH1	0.46	147.20	31.60	<400
DH3	1.72	275.20	31.60	
DH5	2.96	315.73	31.60	
Frequency: 2480 MHz				
Packet Type	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)
DH1	0.46	147.20	31.60	<400
DH3	1.72	275.20	31.60	
DH5	2.96	315.73	31.60	

**2402 MHz (8-DPSK DH1)- Pulse Time**

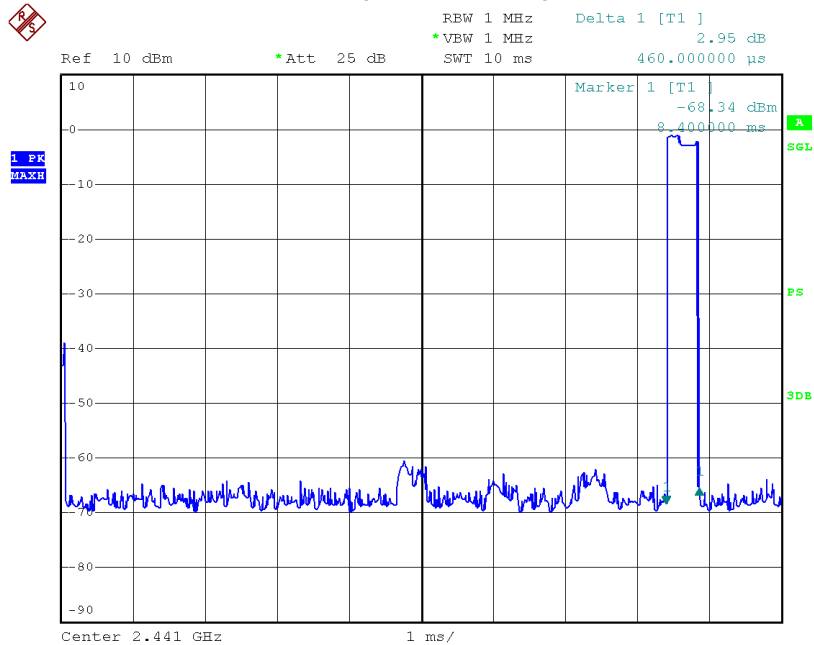
Date: 12.JUL.2013 15:56:23

2402 MHz (8-DPSK DH3)- Pulse Time

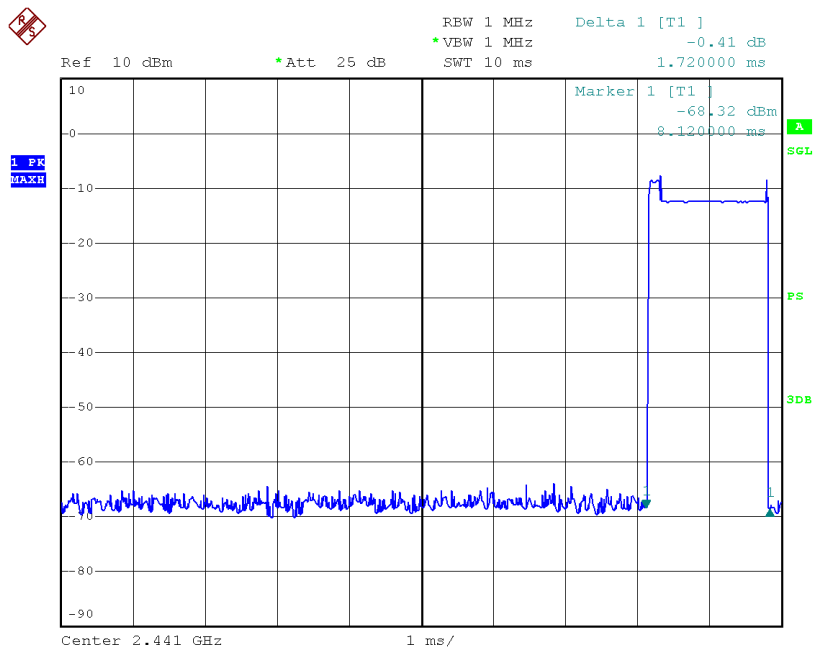
Date: 12.JUL.2013 15:53:52

**2402 MHz (8-DPSK DH5)- Pulse Time**

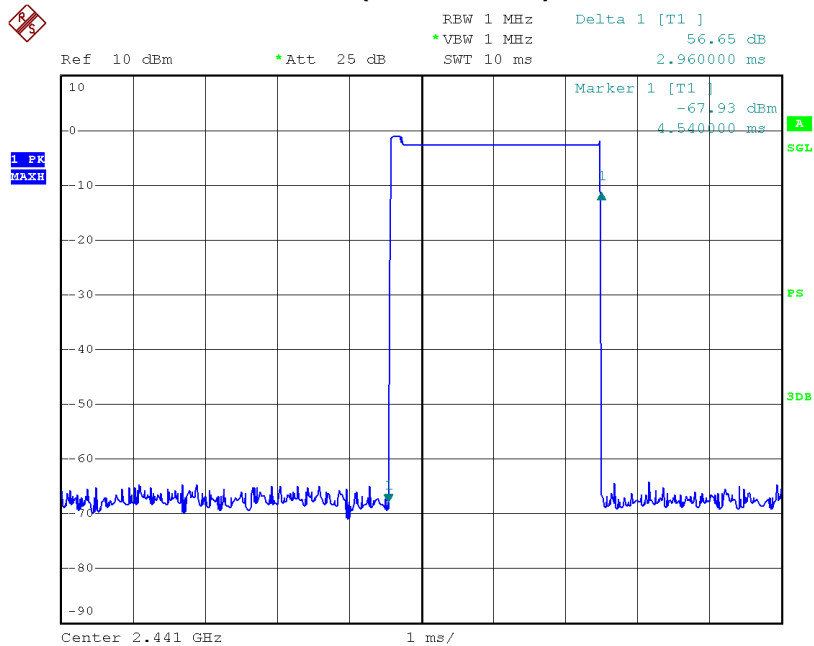
Date: 12.JUL.2013 15:53:11

2441 MHz (8-DPSK DH1)- Pulse Time

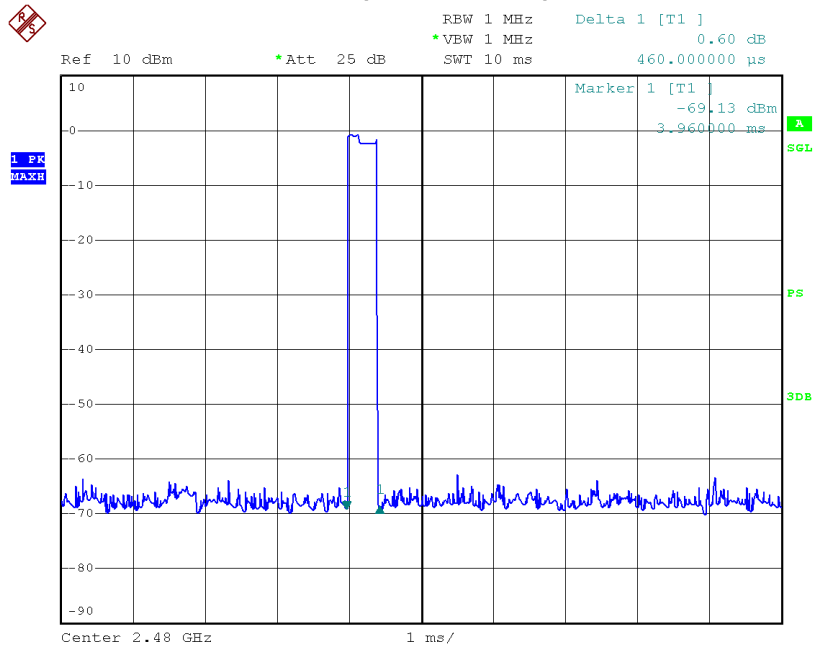
Date: 12.JUL.2013 15:55:55

**2441 MHz (8-DPSK DH3)- Pulse Time**

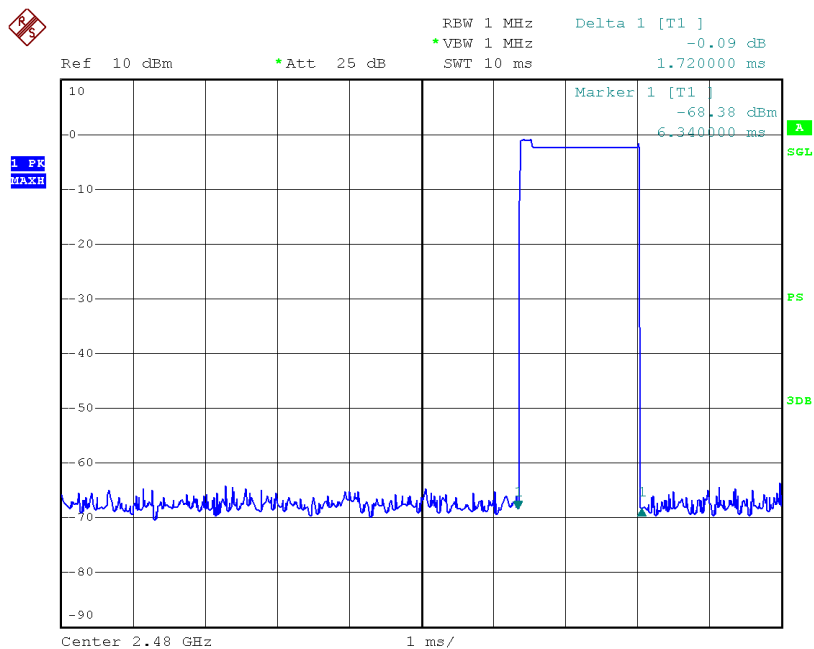
Date: 12.JUL.2013 15:54:27

2441 MHz (8-DPSK DH5)- Pulse Time

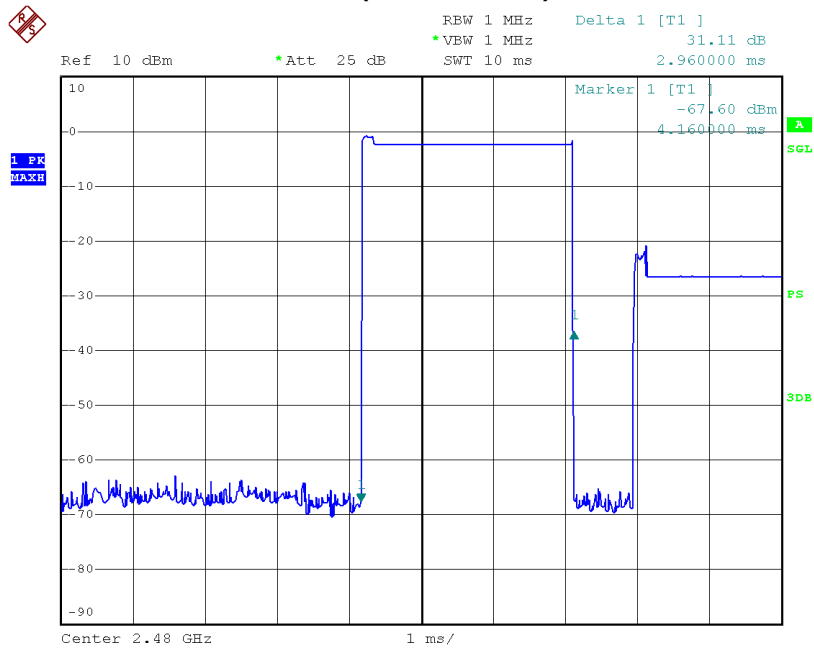
Date: 12.JUL.2013 15:52:45

**2480 MHz (8-DPSK DH1)- Pulse Time**

Date: 12.JUL.2013 15:55:27

2480 MHz (8-DPSK DH3)- Pulse Time

Date: 12.JUL.2013 15:54:56

**2480 MHz (8-DPSK DH5)- Pulse Time**

Date: 12.JUL.2013 15:52:20

10. BAND EDGES MEASUREMENT

10.1 LIMITS

Band Edges Requirement	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
------------------------	--

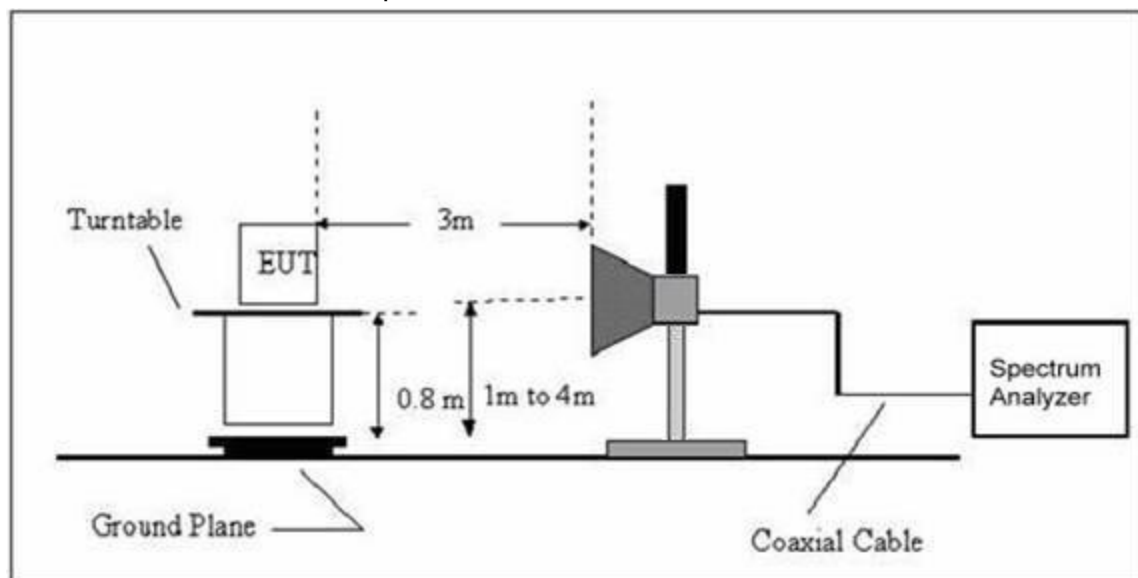
10.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.

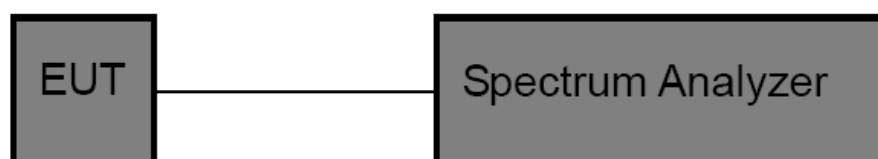
- Set frequency range to capture low band-edge from 2310 MHz up to 2390 MHz, and for up band-edge from 2483.5 MHz up to 2500 MHz
- For low band-edge set the equipment transmit at the lowest channel, and for up band-edge set the equipment transmit at the highest channel
- Set the VBW ≥ 3 RBW (100kHz/ 300kHz) for conducted measurement
- For radiated measurements the RBW set to 1 MHz, and the VBW set to 1 MHz for peak measurements and 10 Hz for average measurement

10.3 TEST SETUP

(A) Radiated Emission Test Set-Up



(B) Conducted Emission Test Setup





10.4 TEST INSTRUMENTS

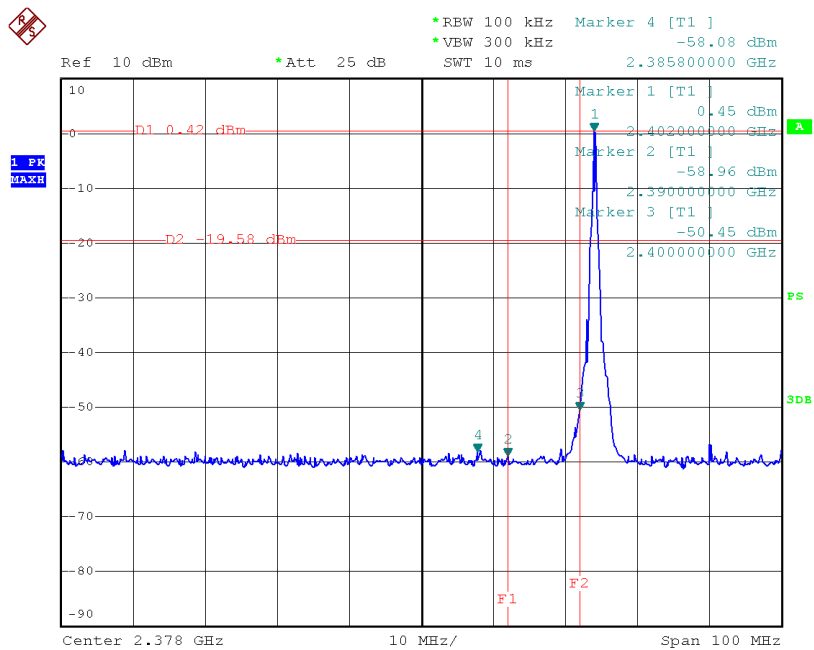
Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 06, 2012	Jul. 05. 2014	1 year

10.5 EUT OPERATING CONDITIONS

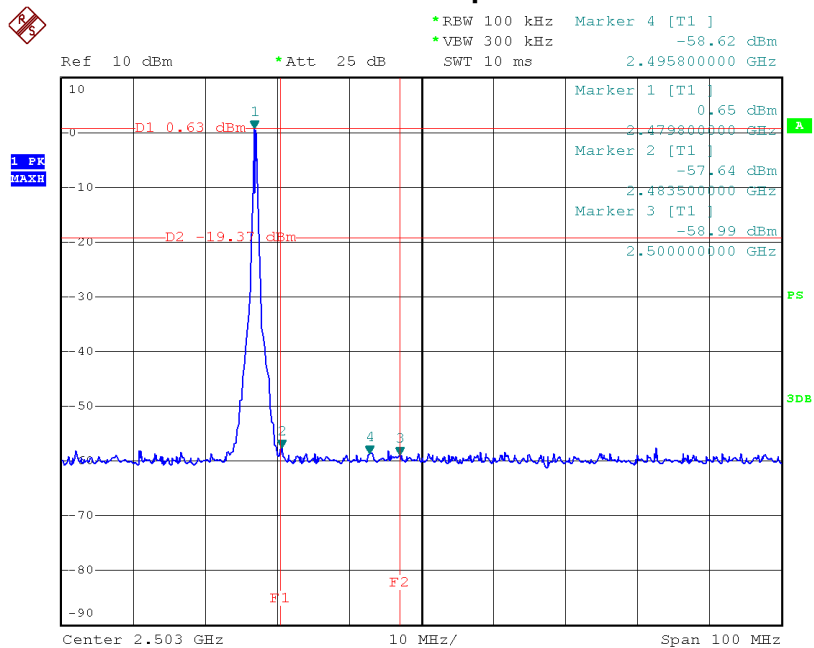
The EUT was set to continuously transmitting in the maximum power during the test.

10.6 TEST RESULTS

GFSK Mode (1Mbps)					
Conducted Emission					
Frequency (MHz)	Peak Power (dBm)	Emission Level (dBm)	Ratio (dBC)	Limit (dBc)	
Bellow 2400	0.42	-58.08	58.50	20	
Up 2483.5	0.63	-58.62	59.25		
Radiated Emission					
Frequency (MHz)	Polarization (H/V)	Emission (dBuV/m)		Limit (dBuV/m)	
		PEAK	AVERAGE	PEAK	AVERAGE
2390	H	52.14	41.76	74	54
	V	52.35	42.17		
2483.5	H	53.04	43.87		
	V	53.79	44.12		

**Low**

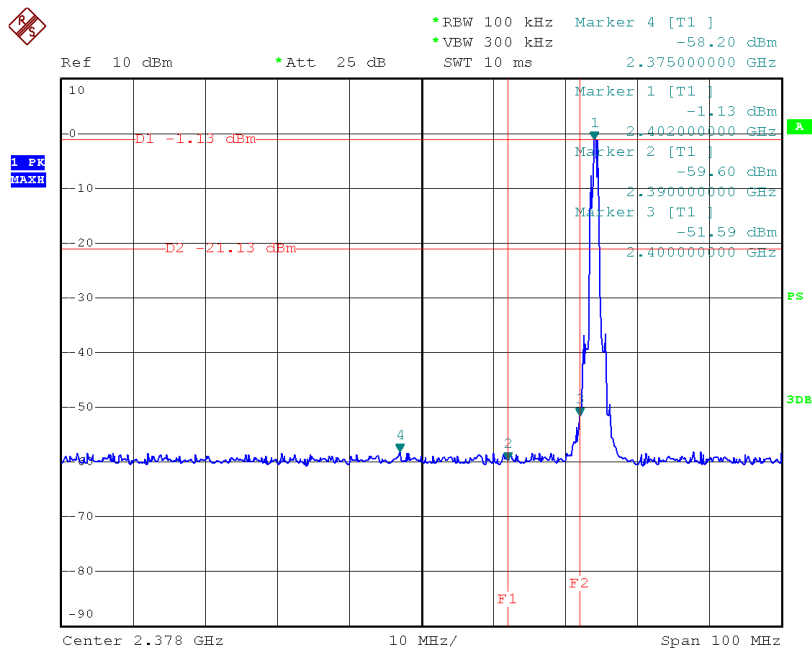
Date: 12.JUL.2013 15:18:18

Up

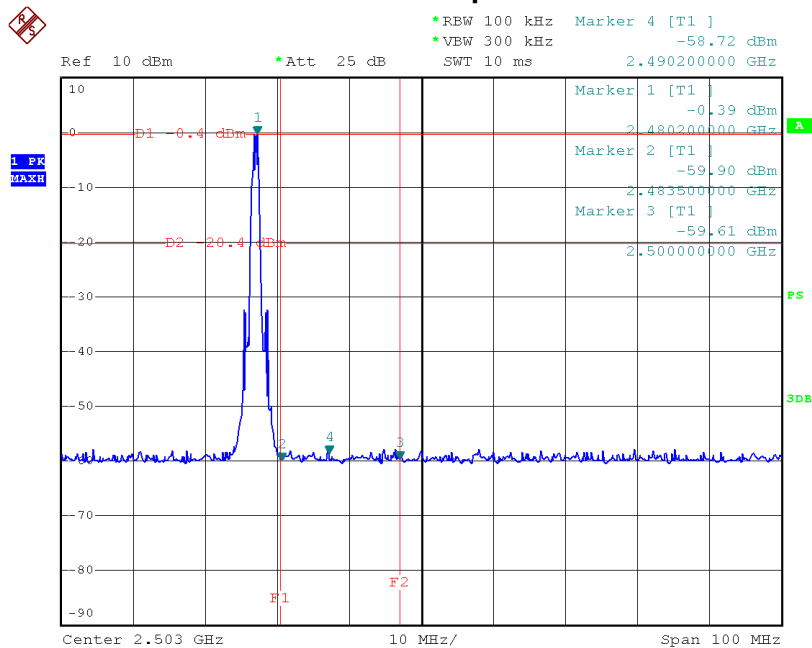
Date: 12.JUL.2013 15:17:00



8-DPSK Mode (3Mbps)					
Conducted Emission					
Frequency (MHz)	Peak Power (dBm)	Emission Level (dBm)	Ratio (dBC)	Limit (dBc)	
Bellow 2400	-1.13	-58.20	57.07	20	
Up 2483.5	-0.40	-58.72	58.32		
Radiated Emission					
Frequency (MHz)	Polarization (H/V)	Emission (dBuV/m)		Limit (dBuV/m)	
		PEAK	AVERAGE	PEAK	AVERAGE
2390	H	53.27	42.79	74	54
	V	53.86	43.04		
2483.5	H	53.86	43.74		
	V	54.25	44.70		

**Low**

Date: 12.JUL.2013 15:13:32

Up

Date: 12.JUL.2013 15:15:44



11. OUT OF BAND CONDUCTED EMISSIONS MEASUREMENT

11.1 LIMITS

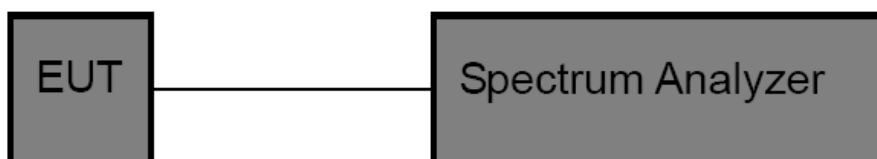
Requirement	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power
-------------	--

11.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.

- Set spectrum frequency range from 30 MHz~26.5 GHz.
- Set spectrum RBW=100 kHz, RBW=300 kHz.
- Detector= Peak.
- Sweep time= auto couple
- Trace mode= maxhold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

11.3 TEST SETUP



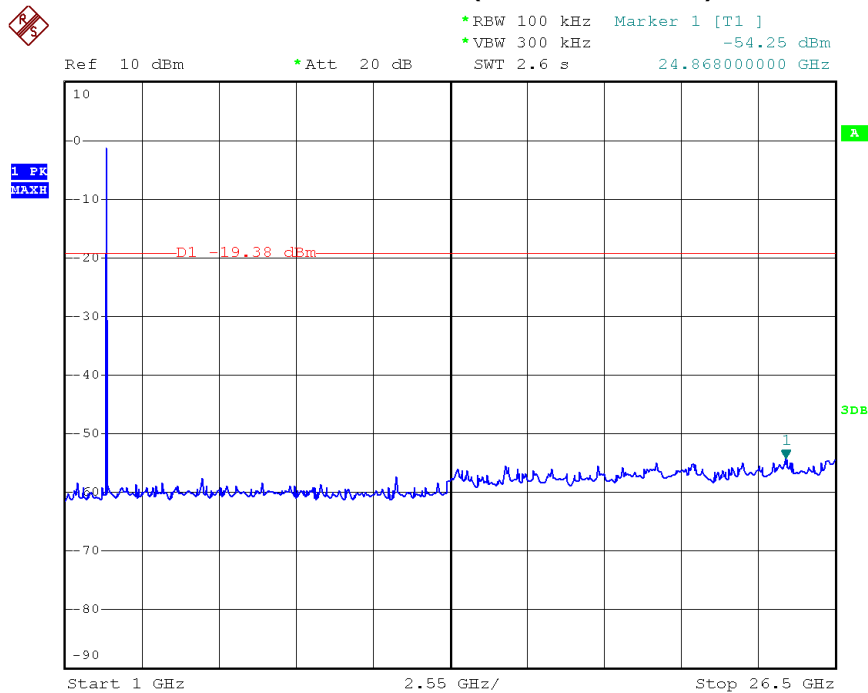
11.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	MY45108040	Jul. 06, 2012	Jul. 05. 2014	1 year

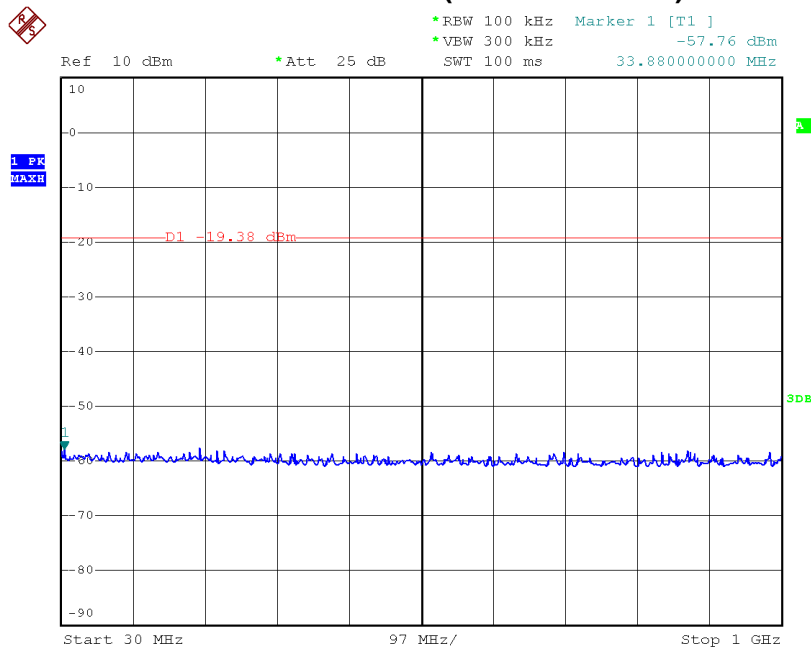
11.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.

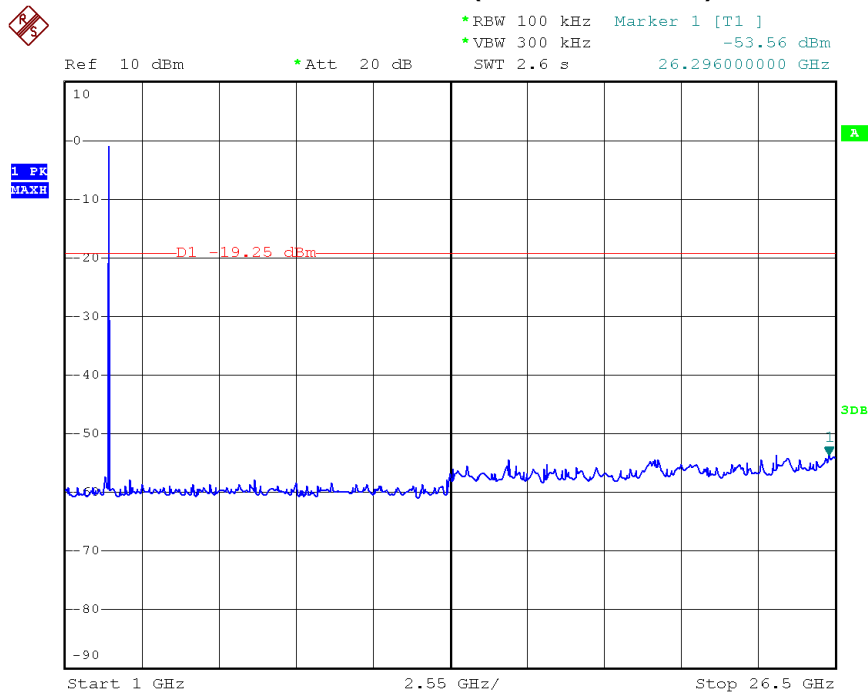
11.6 TEST RESULTS

**Above 1GHz (GFSK 2402 MHz)**

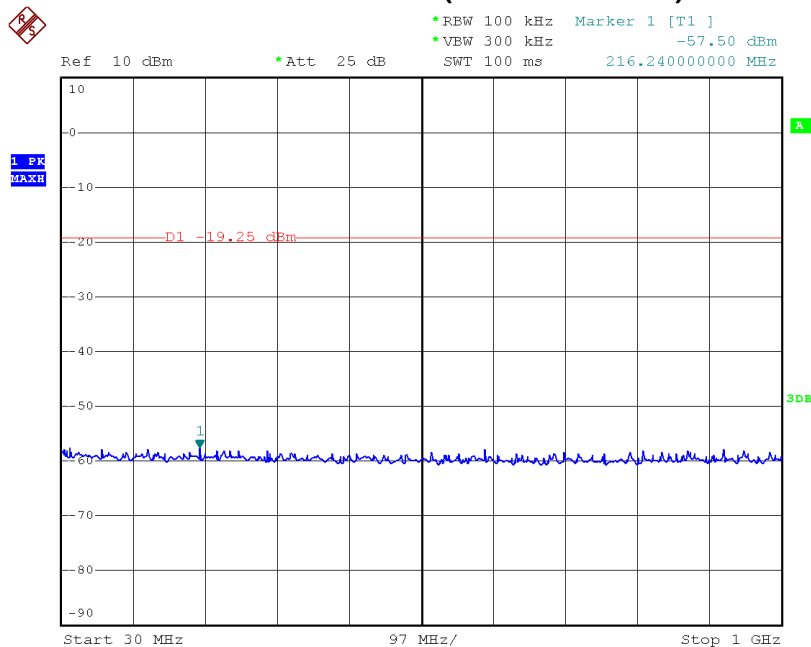
Date: 15.JUL.2013 16:40:20

Bellow 1GHz (GFSK 2402 MHz)

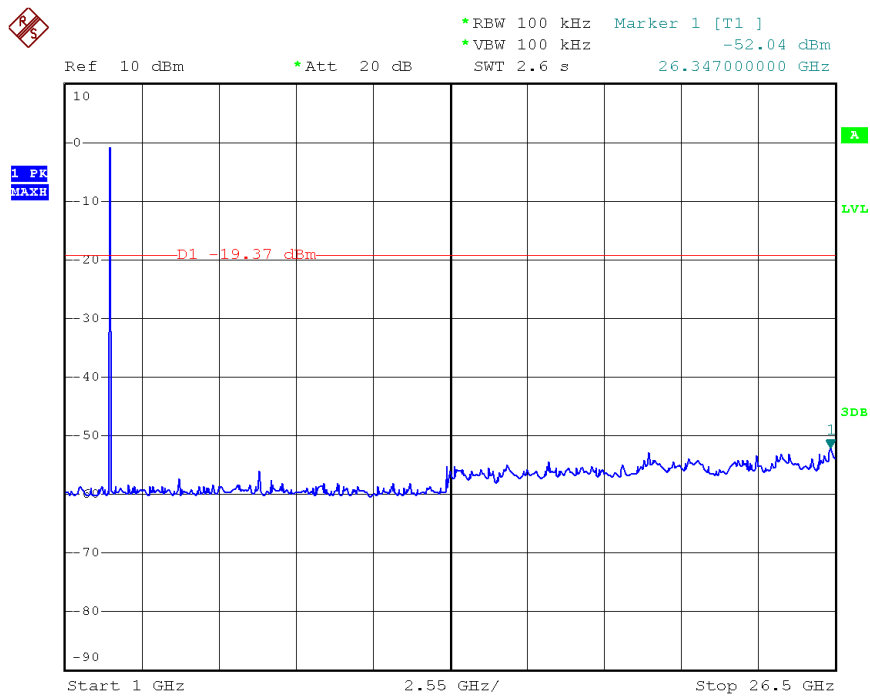
Date: 15.JUL.2013 16:01:28

**Above 1GHz (GFSK 2441 MHz)**

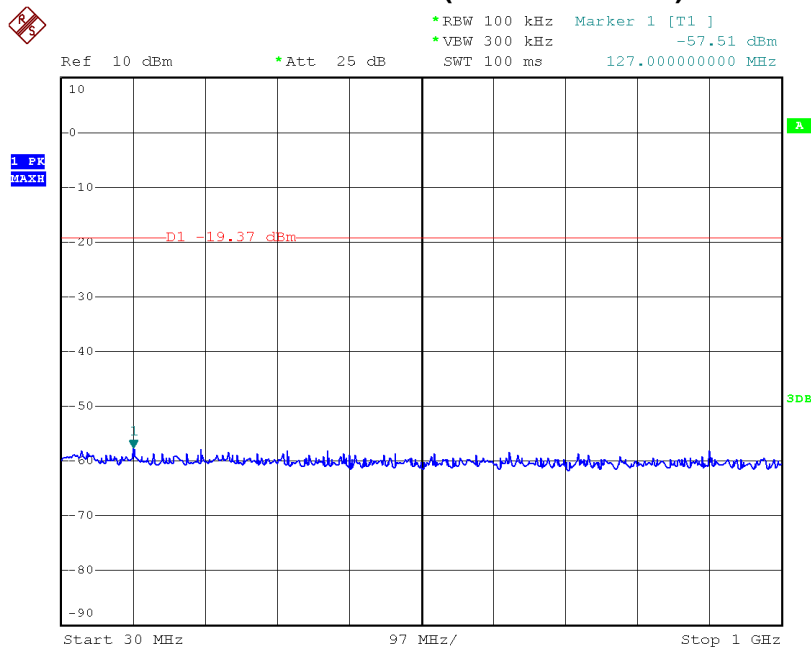
Date: 15.JUL.2013 16:41:38

Bellow 1GHz (GFSK 2441 MHz)

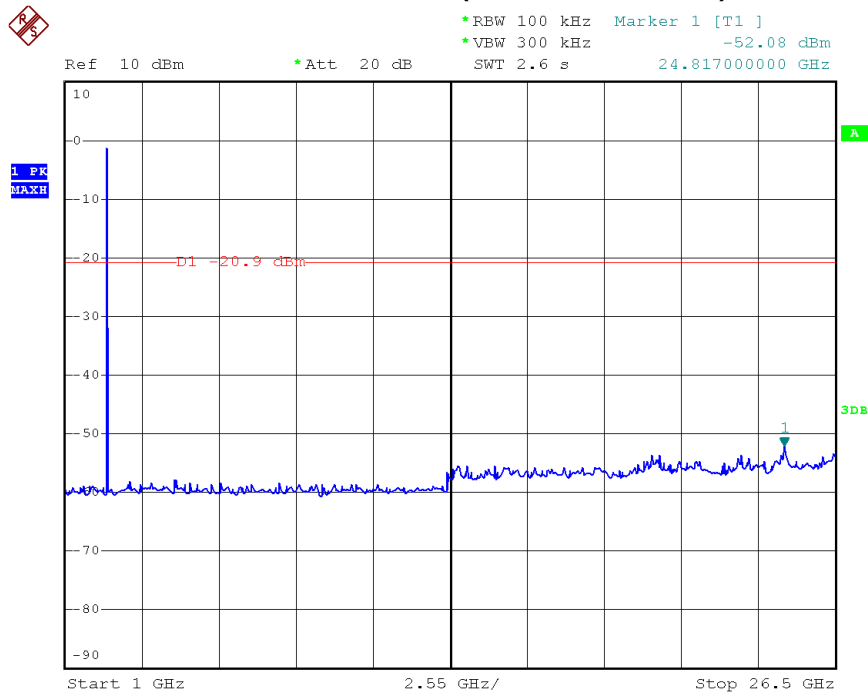
Date: 15.JUL.2013 16:02:01

**Above 1GHz (GFSK 2480 MHz)**

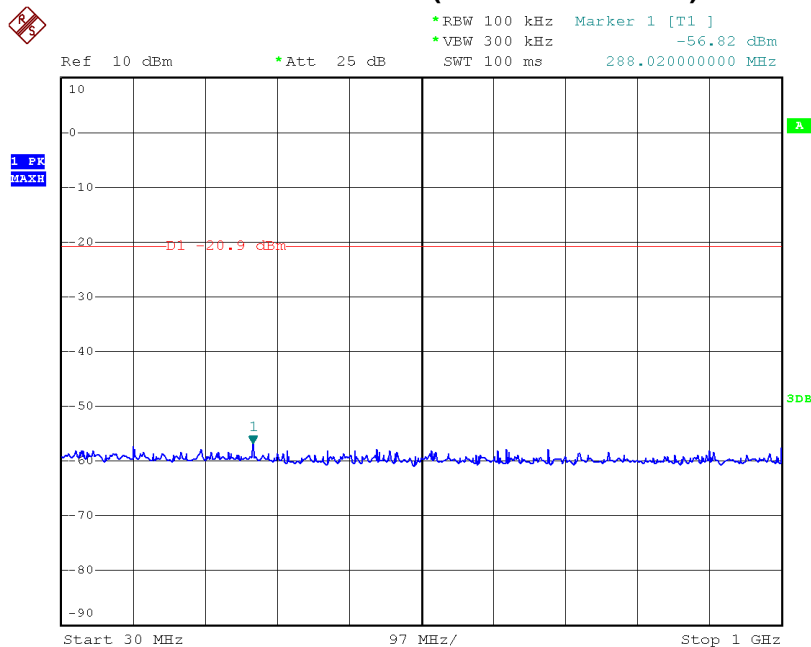
Date: 15.JUL.2013 16:32:30

Bellow 1GHz (GFSK 2480 MHz)

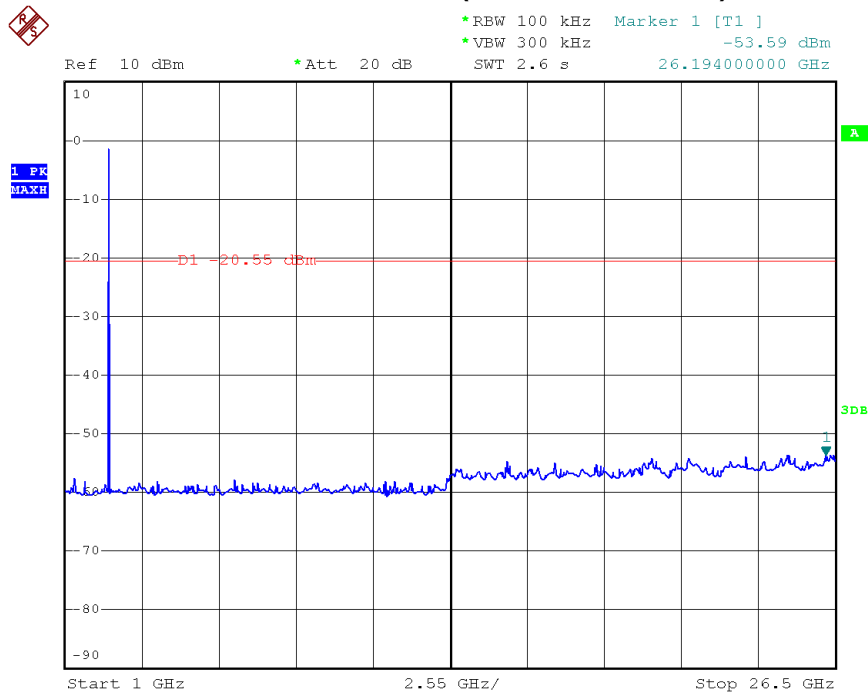
Date: 15.JUL.2013 16:02:39

**Above 1GHz (8-DPSK 2402 MHz)**

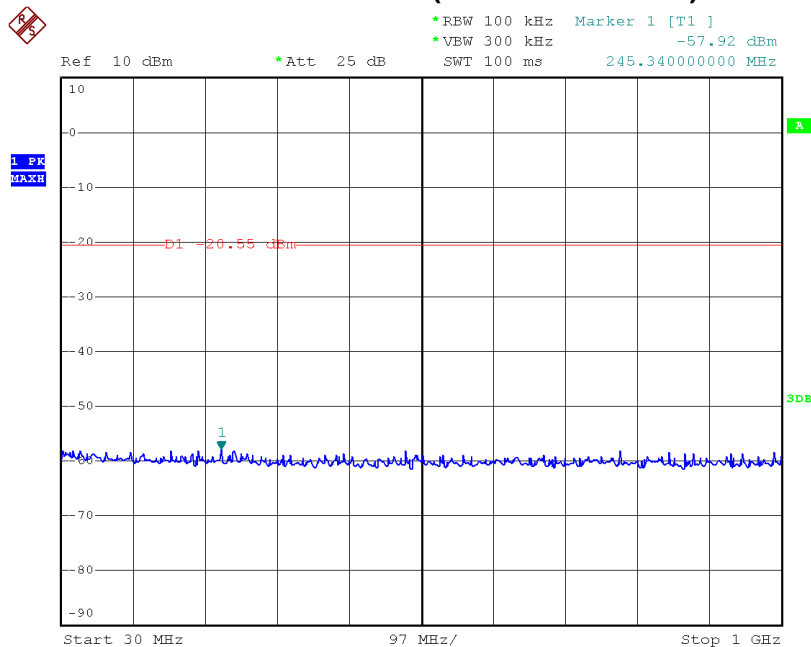
Date: 15.JUL.2013 16:43:31

Bellow 1GHz (8-DPSK 2402 MHz)

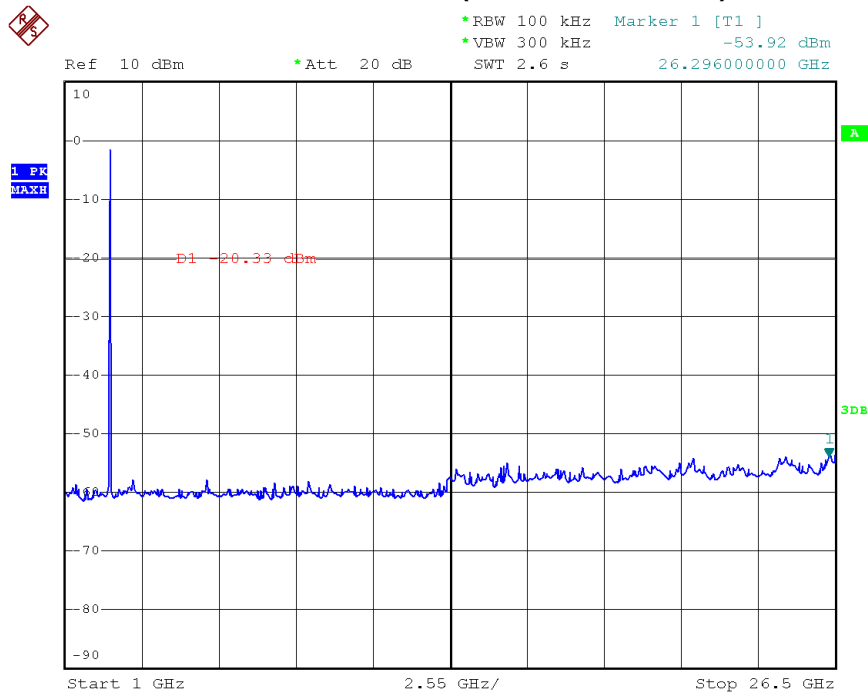
Date: 15.JUL.2013 16:03:13

**Above 1GHz (8-DPSK 2441 MHz)**

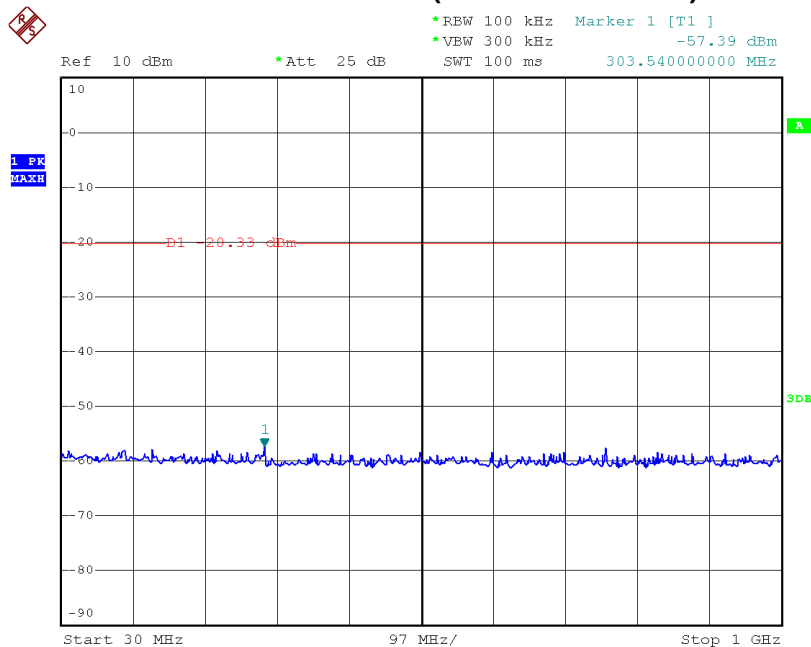
Date: 15.JUL.2013 16:43:55

Bellow 1GHz (8-DPSK 2441 MHz)

Date: 15.JUL.2013 16:03:45

**Above 1GHz (8-DPSK 2480 MHz)**

Date: 15.JUL.2013 16:44:19

Bellow 1GHz (8-DPSK 2480 MHz)

Date: 15.JUL.2013 16:04:25



12. ANTENNA REQUIREMENT

12.1 REQUIREMENT

Antenna Requirement (15.203)	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
Antenna Requirement (15.247)	If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

12.2 ANTENNA CONNECTOR CONSTRUCTION

The EUT antenna is a PIFA Antenna. And the maximum gain of this antenna is 0 dBi. It complies with the standard requirement.