





**BUREAU
VERITAS**

Bureau Veritas Consumer Products Services Inc.

Test Report

Report No	ET2078-1
Client	Ideal Industries, Inc.
Address	Becker Place Sycamore, IL 60178
Phone	(815) 895-1295
Items tested	Audacy Light Sensor (Model: LS1403)
FCC ID	2AAMXLS1403
IC	11250A-LS1403
FRN	0002862225
Equipment Type	Digital Transmission System
Equipment Code	DTS
Emission Designator	754KG1D
FCC/IC Rule Parts	CFR Title 47 FCC Part 15.247, ISSED Canada RSS-247 Issue 2
Test Dates	Sept 16 – Sept 20, 2019
Results	As detailed within this report
Prepared by	 Anna Vancheva – EMC Engineer
Authorized by	 Yunus Faziloglu – Sr. Engineer
Issue Date	10/28/2019
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 27 of this report.

Bureau Veritas Consumer Products Services Inc. accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Contents

Contents.....	2
Summary.....	3
Test Methodology.....	4
Product Tested - Configuration Documentation	5
Statement of Conformity	6
Modifications Required for Compliance	6
Test Results	7
DTS (6dB) Bandwidth	7
99% Occupied Bandwidth	9
Peak Output Power.....	11
Peak Power Spectral Density.....	13
Conducted Bandedge	15
Conducted Spurious Emissions	17
Radiated Spurious Emissions	19
Measurement Uncertainty.....	26
Conditions of Testing.....	27

Form Final Report REV 7-20-07 (DW)



Summary

This test report supports an application for certification of a transmitter operating pursuant to: CFR Title 47 FCC Part 15.247, ISSED Canada RSS-247 Issue 2.

The product is the Audacy Light Sensor (Model: LS1403). It is a digitally modulated transmitter that operates in the 902.7 – 927.3MHz frequency range.

Antenna: Non-detachable PCB antenna with 2.5dBi gain.

We found that the product met the above requirements without modification. Test samples were received in good condition.

Test Methodology

All testing was performed according to the following rules/procedures/documents;

CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2, ISED Canada RSS-Gen Issue 5, FCC KDB 558074 D01 15.247 Measurement Guidance v05r02 and ANSI C63.10-2013.

Radiated emissions were maximized by rotating the device around three orthogonal planes (X, Y and Z) as well as varying the test antenna's height and polarity. X orientation was found to be the worst and all radiated emissions tests were performed in that orientation. AC line conducted emissions testing was not applicable since device is battery powered.

During radiated emissions testing EUT was powered with 3.7VDC using an external power supply.

RF measurements were performed at the antenna port on 3 channels as follows:

Low channel = 902.7MHz

Mid channel = 915MHz

High channel = 927.3MHz

Following bandwidths were used during radiated spurious emissions tests:

Frequency	RBW	VBW
30-1000MHz	120kHz	1MHz
1-10GHz	1MHz	3MHz

Product Tested - Configuration Documentation

EUT Configuration			
Work Order:	ET2078		
Company:	Ideal Industries Inc.		
Company Address:	1375 Park Ave		
	Sycamore, IL, 60178		
Contact:	Tim Tunnell		
	MN	PN	SN
EUT:	LS1403		Test Sample 1
EUT Description:	Audacy Light Sensor		
EUT Max Frequency:	927.3 MHz		
Software Operating Mode Description:			
Client supplied test mode for continuous transmission at low, mid, or high channel. Powered by internal battery.			

Statement of Conformity

RSS-GEN	RSP-100	RSS 247	Part 15	Comments
6.4			15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
	3.1		15.19	The label is shown in the label exhibit.
	3.2		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3.2			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13.2			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
6.13.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
6.8			15.203	The antenna for this device is a non-detachable PCB antenna with 2.5dBi gain
8.10			15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8			15.207	N/A. EUT is not connected to AC mains. Battery powered only.
			15.247	The unit complies with the requirements of 15.247
		RSS 247		The unit complies with the requirements of RSS-247
6.7				Occupied Bandwidth measurements were made.

Modifications Required for Compliance

None.

Test Results

DTS (6dB) Bandwidth

LIMIT

The minimum 6 dB bandwidth shall be at least 500 kHz. [15.247(a) (2)]

MEASUREMENTS / RESULTS

6dB Bandwidth					
Date: 9/20/2019			Work Order: T2078		
Engineer: AV		Operating Voltage/Frequency: Battery			
Temp: 20.8°C		Humidity: 41%		Pressure: 1020mBar	
Measurement Type: Conducted					
		6dB Bandwidth			
Frequency (MHz)		Reading (kHz)	Limit (kHz)	Margin (kHz)	Result (Pass/Fail)
902.7		672.2	≥500	172.2	Pass
915.0		690.4	≥500	190.4	Pass
927.3		691.3	≥500	191.3	Pass
Test Site: CEMI-2		Cable: none		Attenuator: Asset #2121	
Analyzer: 1170725					

Rev. 9/14/2019


Spectrum Analyzers / Receivers / Preselectors
Rental MXE EMI Receiver(1170725)

Range MN Mfr SN Asset Cat Calibration Due Calibrated on
20Hz-26.5GHz N9038A Agilent MY51210151 1170725 I 5/30/2020 5/30/2019


Preamplifiers / Couplers / Attenuators / Filters
API - 30dB 20W Attenuator

Range MN Mfr SN Asset Cat Calibration Due Calibrated on
9KHz-40GHz 89-30-11 API Weinschel 703 2121 I 4/16/2020 4/16/2019


All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

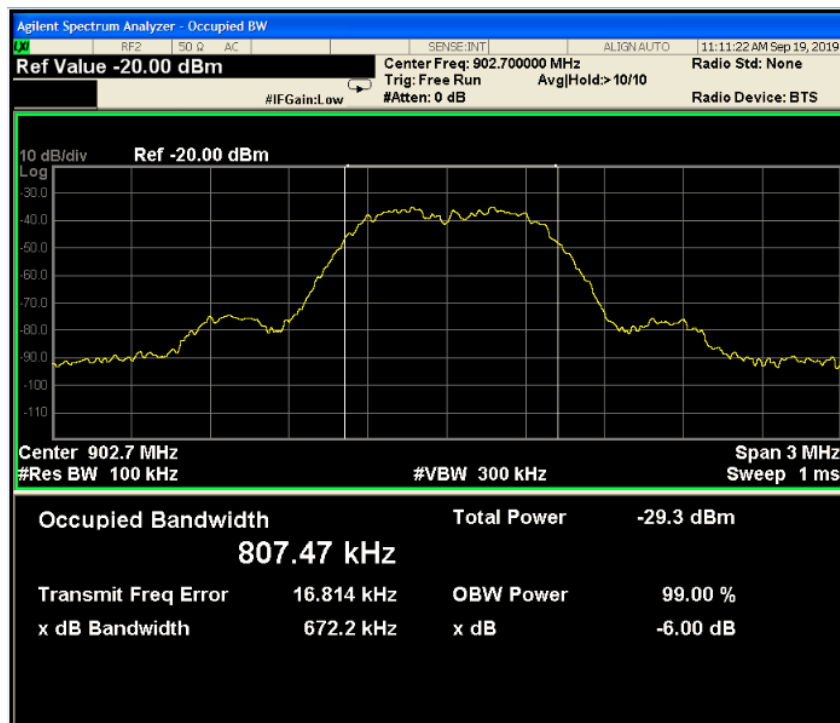

6dB Bandwidth – Low Channel

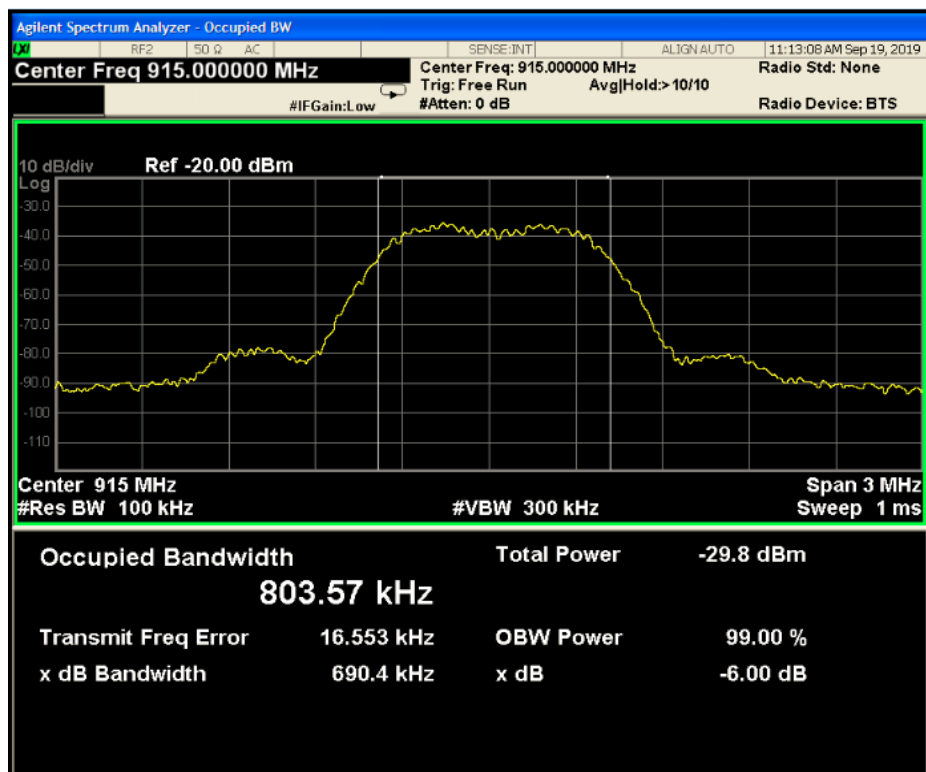

6dB Bandwidth – Mid Channel

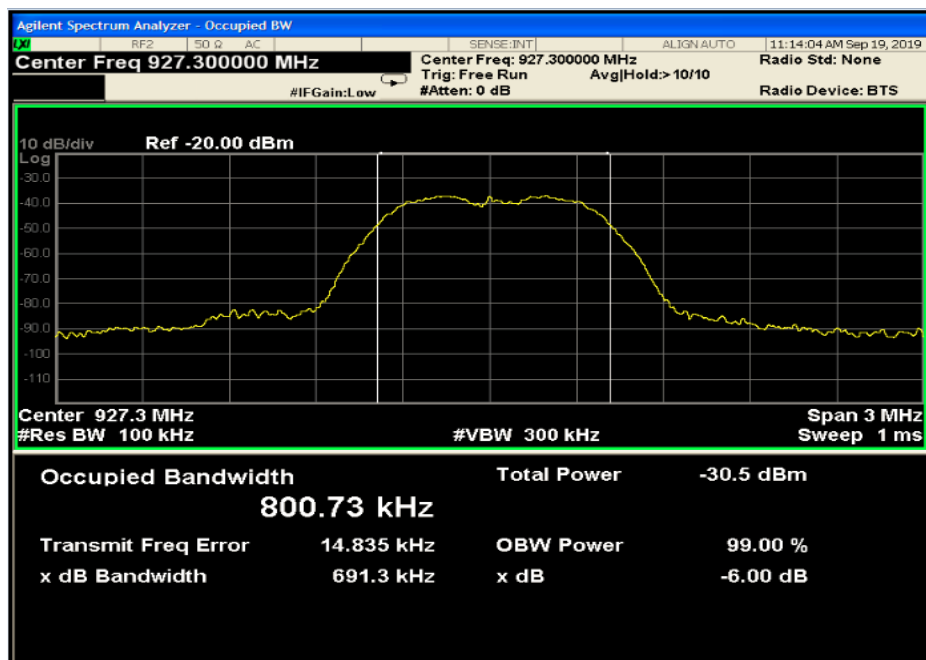

6dB Bandwidth – High Channel

99% Occupied Bandwidth

REQUIREMENT

When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is its 99% emission bandwidth, as calculated or measured.

[RSS-GEN Issue 5 Section 6.7]


MEASUREMENTS / RESULTS

99% Occupied Bandwidth			
Date: 9/20/2019		Work Order: T2078	
Engineer: AV		Operating Voltage/Frequency: Battery	
Temp: 20.8°C	Humidity: 41%	Pressure: 1020mBar	
Measurement Type: Conducted			
Frequency	99% OBW		
(MHz)	(kHz)		
902.7	753.75		
915.0	748.62		
927.3	748.20		
Test Site: CEMI-2	Cable: none	Attenuator: Asset #2121	
Analyzer: 1170725	Copyright Curtis-Straus LLC 2000		

Rev. 9/14/2019


Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Rental MXE EMI Receiver(1170725)	20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	I	5/30/2020	5/30/2019
Preamplifiers / Couplers / Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
API - 30dB 20W Attenuator	9KHz-40GHz	89-30-11	API Weinschel	703	2121	I	4/16/2020	4/16/2019

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

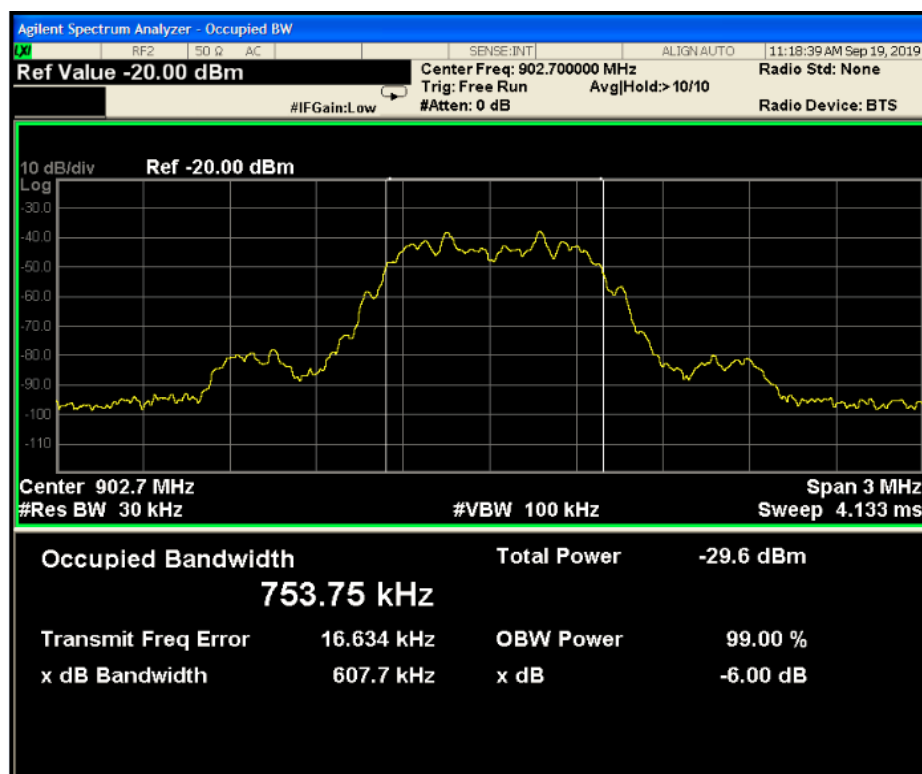


Occupied Bandwidth – Low Channel



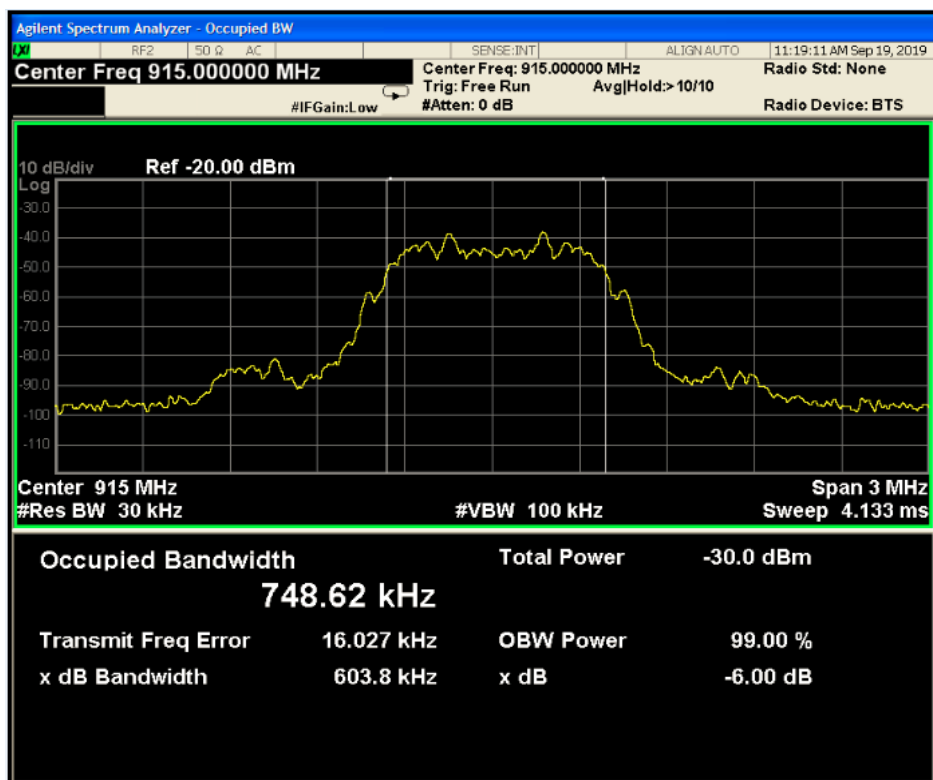


Occupied Bandwidth – Middle Channel

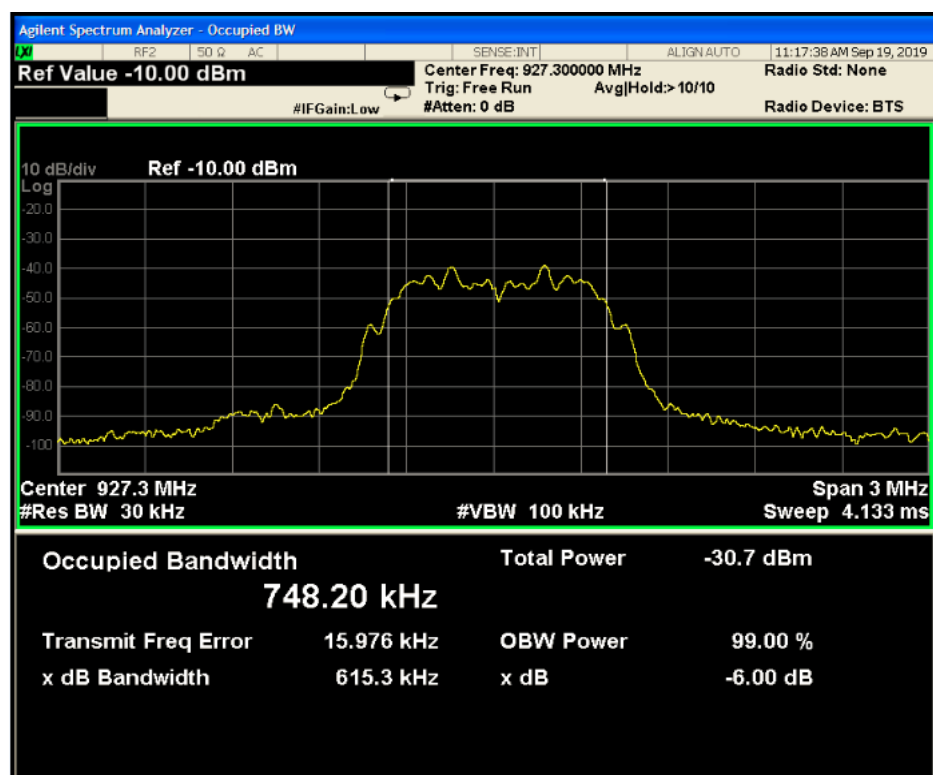


Occupied Bandwidth – High Channel

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.


Peak Output Power – Low Channel

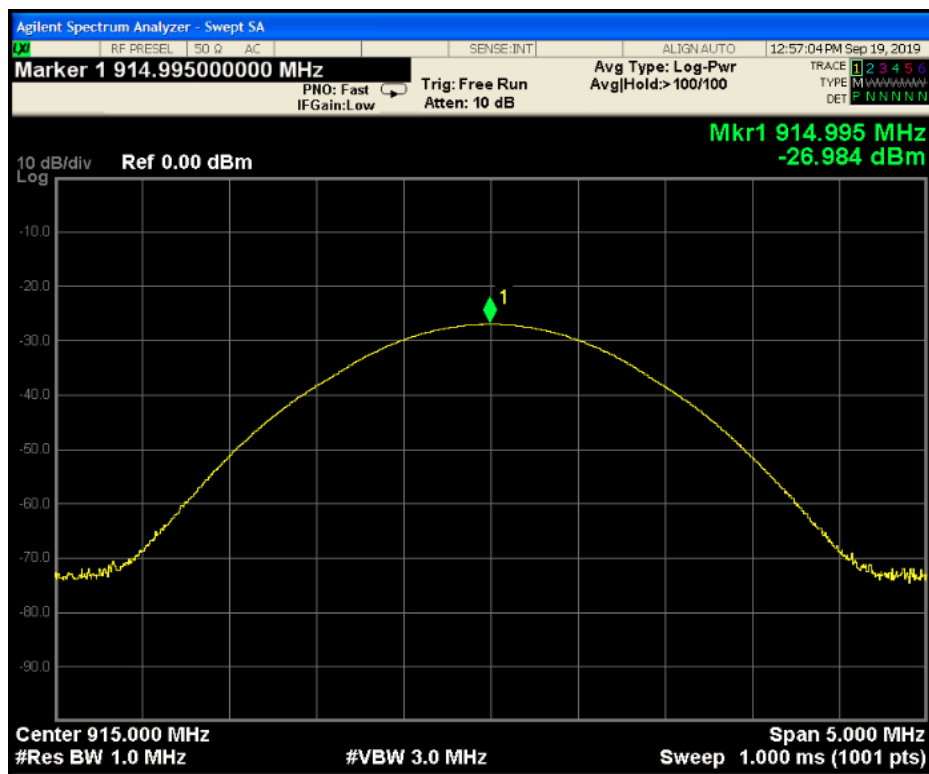


Peak Output Power – Mid Channel

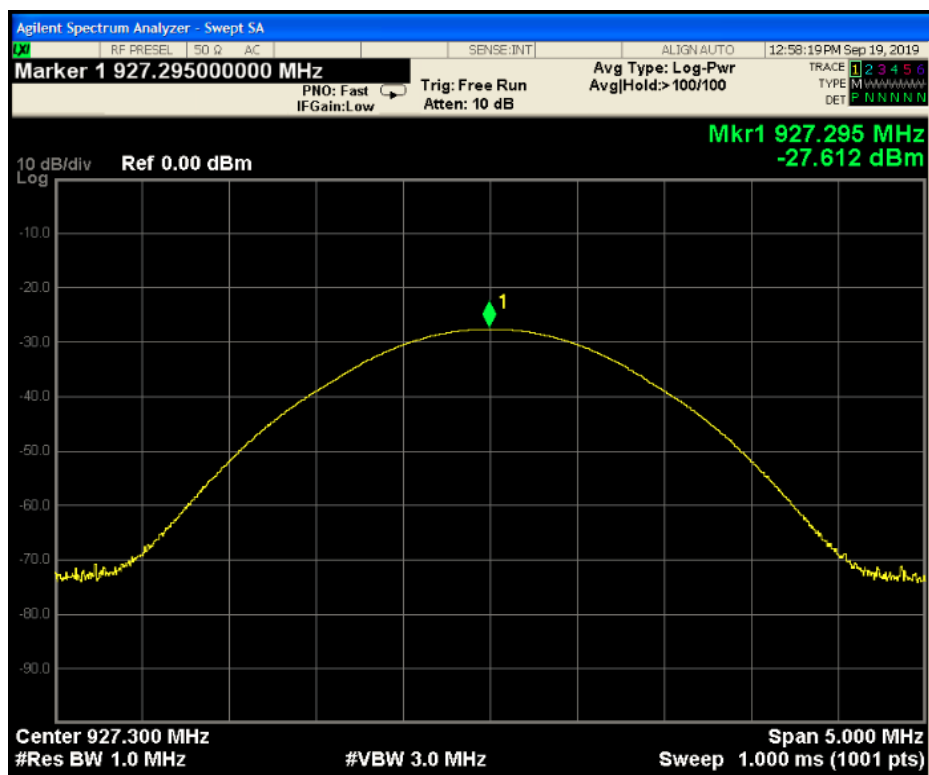

Peak Output Power – High Channel

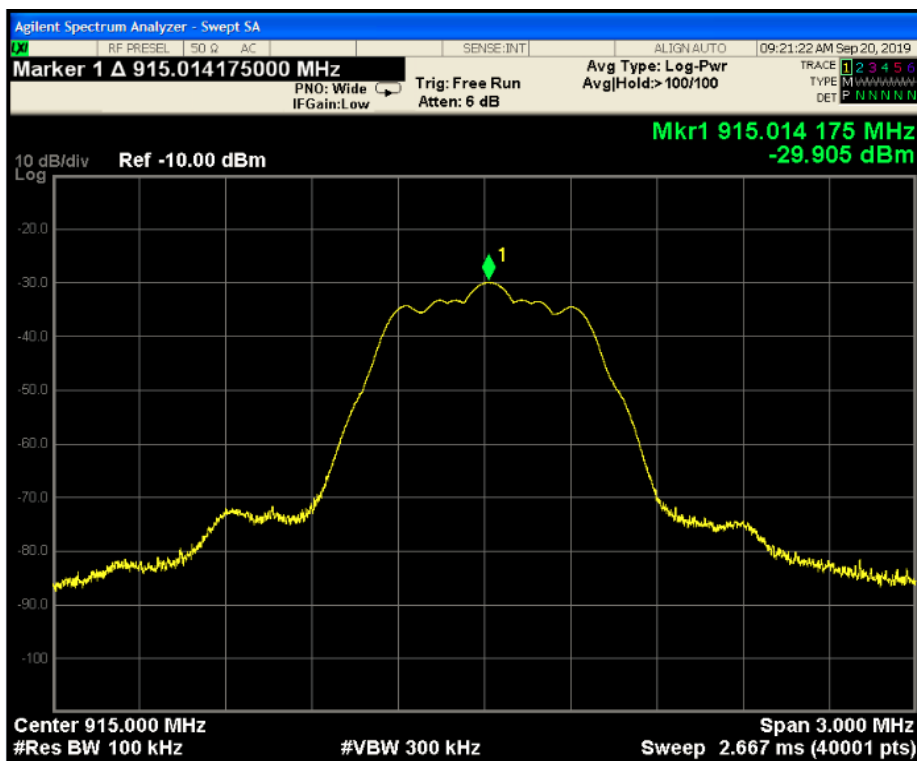

PSD – Mid Channel

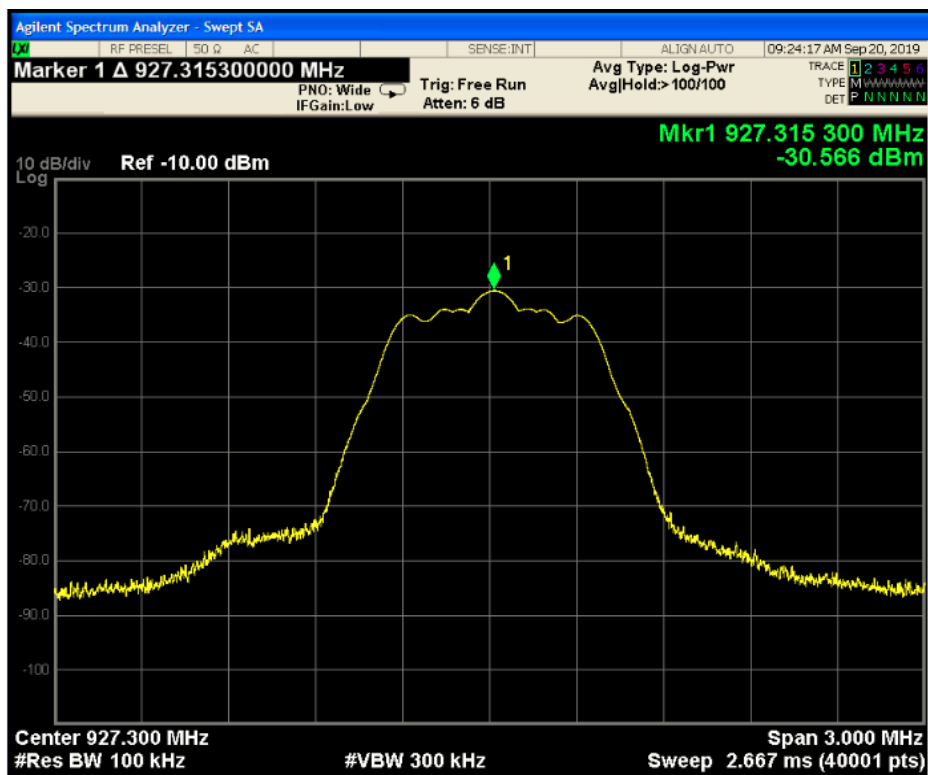

PSD – High Channel

Conducted Bandedge

Band edges must be more than 20dB below fundamental.

MEASUREMENTS / RESULTS

Conducted Bandedge			
Date: 19/20/2019		Work Order: T2078	
Engineer: AV		Operating Voltage/Frequency: Battery	
Temp: 20.8°C	Humidity: 41%	Pressure: 1020mbar	
Measurement Type: Conducted			
	Delta to Peak (dB)	Limit	
		(dB)	(Pass/Fail)
	Low Bandedge	39.867	≥ 20
High Bandedge	45.500	≥ 20	Pass
Test Site: CEMI-2		Attenuator: Asset #2121	
Cable: none		Analyzer: 1170725	
Copyright Curtis-Straus LLC 2000			

Rev. 9/14/2019


Spectrum Analyzers / Receivers / Preselectors
Rental MXE EMI Receiver(1170725)

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	I	5/30/2020	5/30/2019

Preamps / Couplers Attenuators / Filters
API - 30dB 20W Attenuator

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
9KHz-40GHz	89-30-11	API Weinschel	703	2121	I	4/16/2020	4/16/2019

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

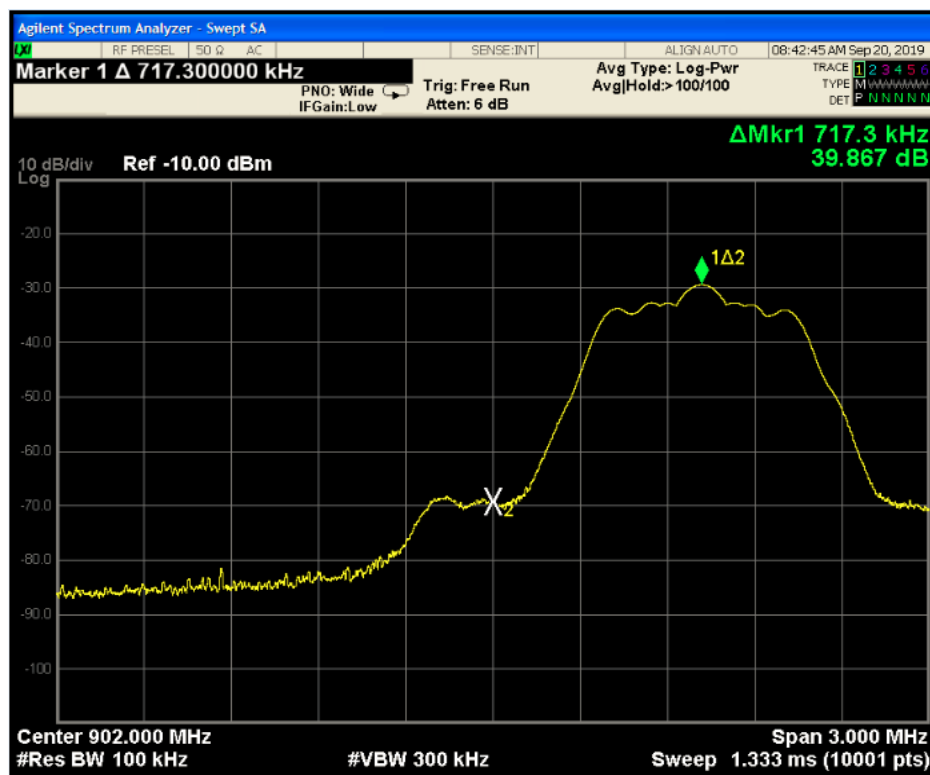


Low Band Edge



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



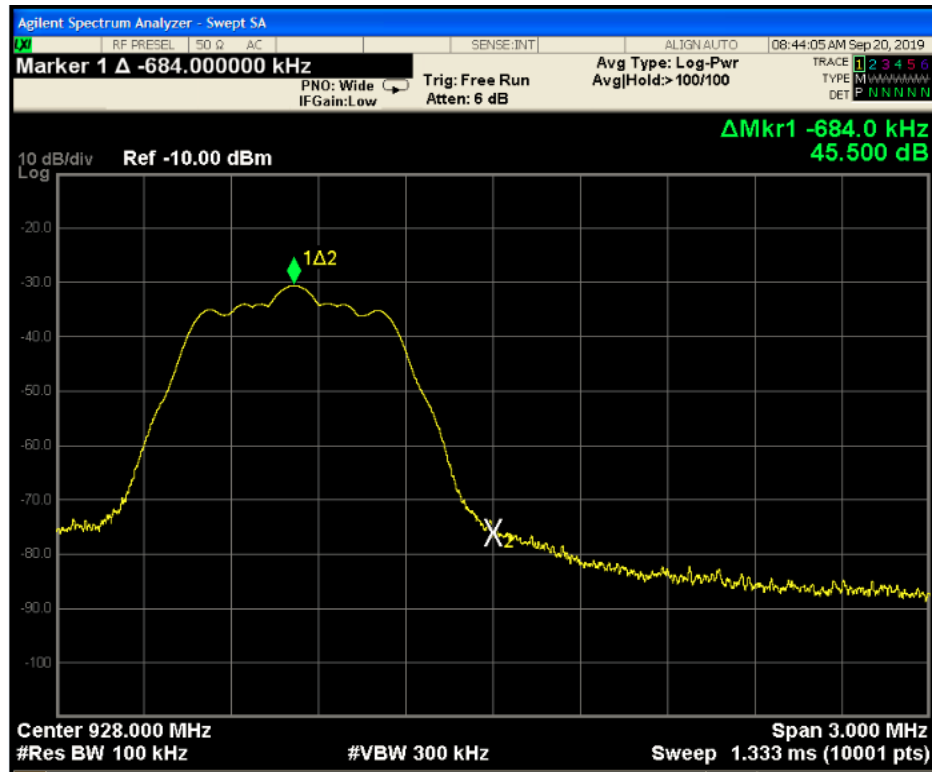

High Band Edge


Conducted Spurious Emissions

LIMITS


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth that contains the highest level of desired power based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.
[15.247(d)]

Conducted spurious emissions at the antenna port were measured in accordance with ANSI C63.10-2013 Section 11.11.


Frequency range up to 10GHz was investigated for all 3 channels (low, middle and high) at the EUT antenna port. No emissions within 20dB of their corresponding fundamental were found.

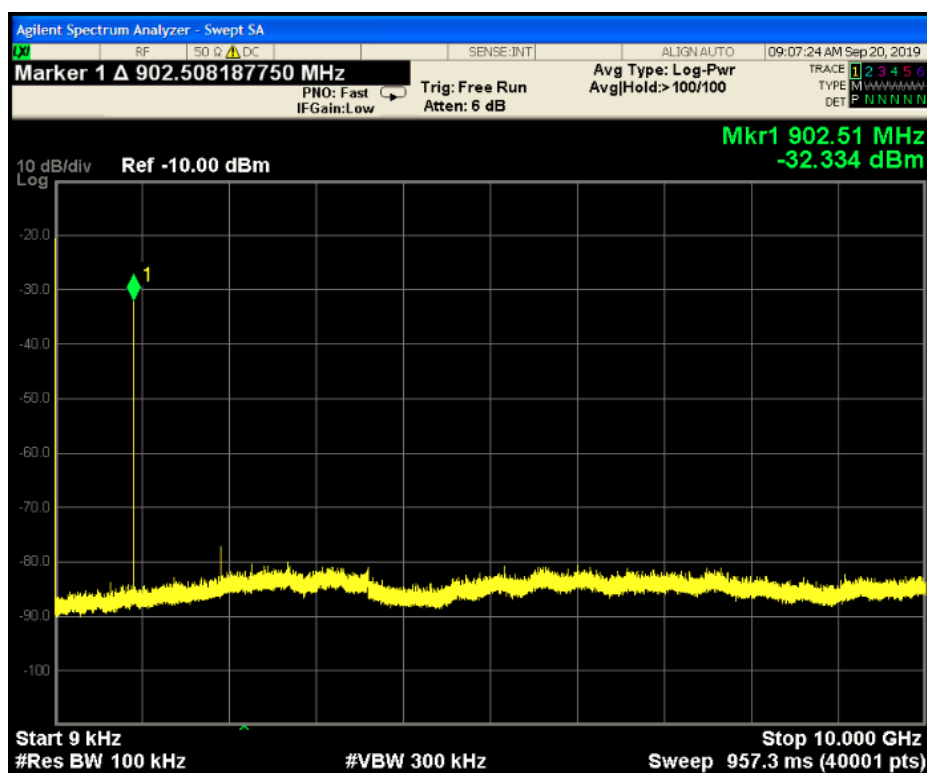

Low Channel

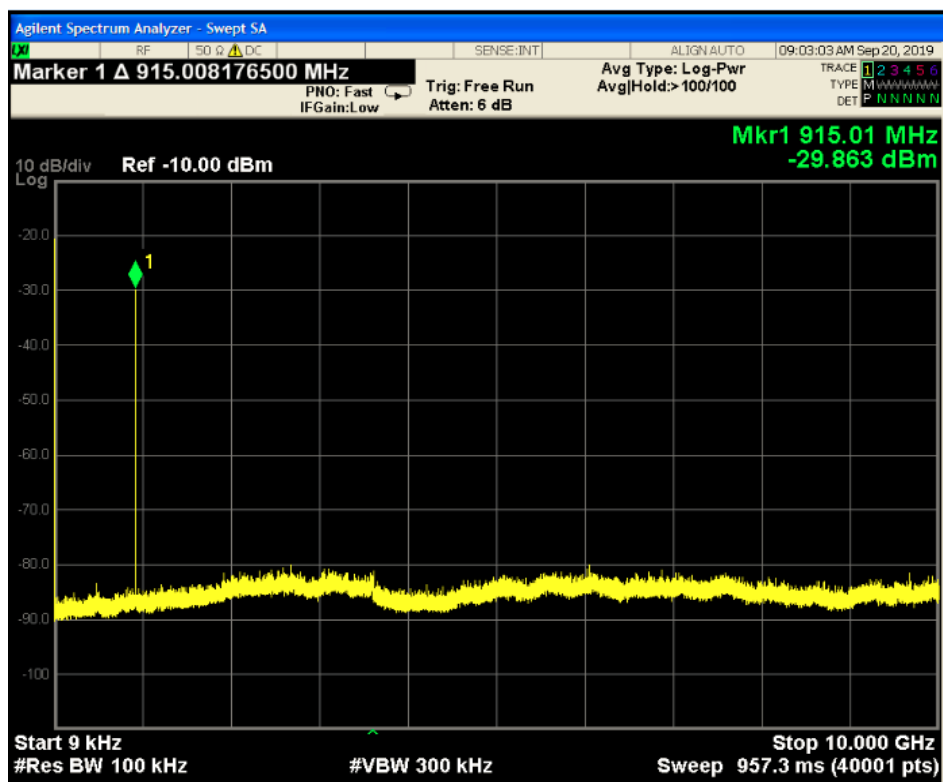

Mid Channel

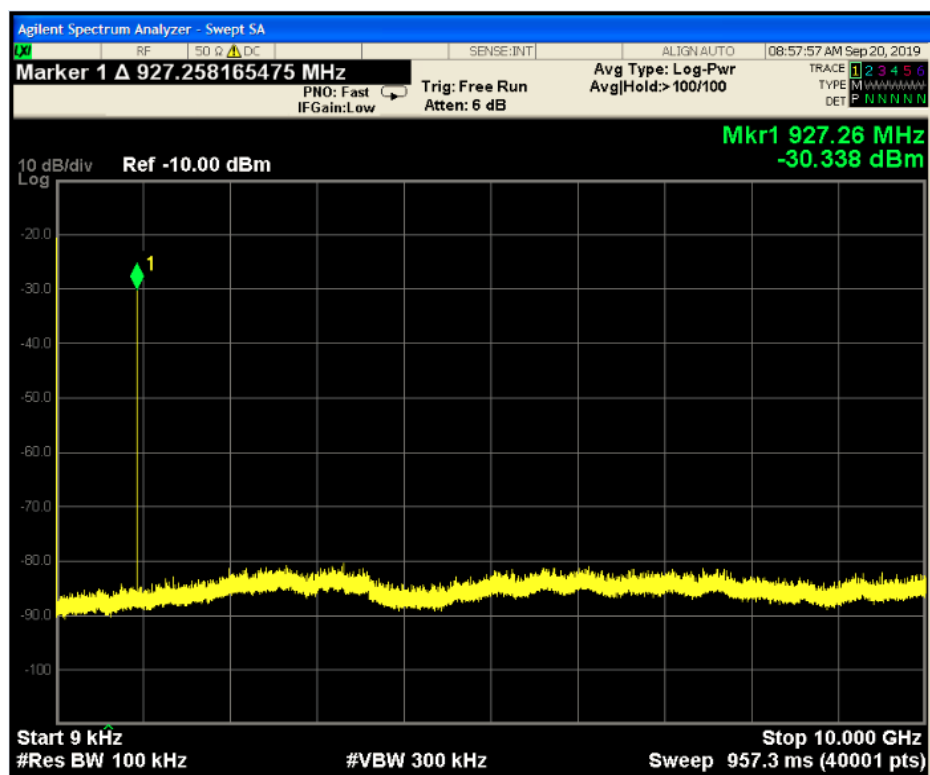

High Channel

Radiated Spurious Emissions

LIMITS

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

[15.247(d)]

Client declares 10ms transmission every 8 seconds. Therefore 10ms worst case in any 100ms.

DCCF = $20 \cdot \log(10/100) = -20\text{dB}$

DCCF was used for harmonics when peak measurements were above the average limits.

MEASUREMENTS / RESULTS

30MHz-1GHz

Bureau Veritas Consumer Product Services Inc. Radiated Emissions Electric Field 3m Distance Top Peaks Horizontal 30-1000MHz Notes: Low Channel						Work Order - T2078 EUT Power Input - Battery Test Site - Ch2 Conditions - 22.2°C; 44.9%RH; 1006mBar Test Engineer - AV							
Data Taken at 04:31:21 PM, Tuesday, September 17, 2019													
Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
30.436	32.1	-7	25	40	-15	PASS	-15	40	-15	PASS	-15	200	315
143.563	38.2	-14.9	23.3	43.5	-20.2	PASS		43.5	-20.2	PASS		150	0
147.928	36.1	-15.2	20.9	43.5	-22.6	PASS		43.5	-22.6	PASS		200	0
161.556	36.4	-15.3	21.1	43.5	-22.4	PASS		43.5	-22.4	PASS		250	45
191.384	37.5	-16	21.5	43.5	-22	PASS		43.5	-22.1	PASS		100	90
796.906	32.3	-2.9	29.4	46	-16.6	PASS		46	-16.7	PASS		200	45

Bureau Veritas Consumer Product Services Inc. Radiated Emissions Electric Field 3m Distance Top Peaks Vertical 30-1000MHz Notes: Low Channel						Work Order - T2078 EUT Power Input - Battery Test Site - Ch2 Conditions - 22.2°C; 44.9%RH; 1006mBar Test Engineer - AV							
Data Taken at 04:31:21 PM, Tuesday, September 17, 2019													
Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
30.509	32.9	-7.1	25.9	40	-14.1	PASS	-14.1	40	-14.1	PASS	-14.1	150	180
76.002	33.2	-19.7	13.5	40	-26.5	PASS		40	-26.5	PASS		150	180
122.683	33.6	-12.9	20.8	43.5	-22.7	PASS		43.5	-22.7	PASS		100	180
193.494	35.4	-15.7	19.7	43.5	-23.8	PASS		43.5	-23.9	PASS		100	270
200.477	34.5	-14.5	20	43.5	-23.5	PASS		43.5	-23.5	PASS		150	225
785.315	32.4	-2.9	29.6	46	-16.4	PASS		46	-16.5	PASS		100	0



BUREAU
VERITAS

Bureau Veritas Consumer Products Services Inc.

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 3m Distance
Top Peaks Vertical 30-1000MHz
Notes:
Mid Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9 %RH; 1006mBar

Data Taken at 08:46:33 AM, Wednesday, September 18, 2019

Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
30.218	32.1	-6.9	25.3	40	-14.7	PASS	-14.7	40	-14.7	PASS	-14.7	150	180
121.689	32.7	-13.1	19.5	43.5	-24	PASS		43.5	-24	PASS		200	90
193.712	35	-15.7	19.3	43.5	-24.2	PASS		43.5	-24.2	PASS		200	180
200.744	35.3	-14.5	20.8	43.5	-22.7	PASS		43.5	-22.7	PASS		150	225
767.903	32.8	-3.4	29.4	46	-16.6	PASS		46	-16.6	PASS		150	225

Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 3m Distance
Top Peaks Horizontal 30-1000MHz
Notes:
Mid Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9 %RH; 1006mBar

Data Taken at 08:54:37 AM, Wednesday, September 18, 2019

Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
30.412	32.4	-7	25.4	40	-14.6	PASS	-14.6	40	-14.6	PASS	-14.6	100	135
122.975	32.6	-12.8	19.8	43.5	-23.7	PASS		43.5	-23.7	PASS		200	0
200.623	35.2	-14.5	20.7	43.5	-22.8	PASS		43.5	-22.8	PASS		250	225
207.583	37	-16.5	20.4	43.5	-23.1	PASS		43.5	-23.1	PASS		250	225
802.654	32.6	-2.7	29.9	46	-16.1	PASS		46	-16.2	PASS		100	225

Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 3m Distance
Top Peaks Vertical 30-1000MHz
Notes:
High Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9 %RH; 1006mBar
Test Engineer - AV

Data Taken at 04:23:07 PM, Tuesday, September 17, 2019

Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
31.867	33.2	-8.2	25	40	-15	PASS	-15	40	-15	PASS	-15	150	0
80.004	36.8	-19.5	17.3	40	-22.7	PASS		40	-22.7	PASS		100	225
84.078	39.5	-20.4	19.2	40	-20.8	PASS		40	-20.8	PASS		100	270
87.472	38.7	-20.6	18	40	-22	PASS		40	-22	PASS		150	270
99.573	42	-18	24	43.5	-19.5	PASS		43.5	-19.5	PASS		150	315
815.288	31.7	-2.6	29.2	46	-16.8	PASS		46	-16.8	PASS		100	0

Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 3m Distance
Top Peaks Horizontal 30-1000MHz
Notes:
High Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9 %RH; 1006mBar
Test Engineer - AV

Data Taken at 04:23:08 PM, Tuesday, September 17, 2019

Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
30.412	32.4	-7	25.4	40	-14.6	PASS	-14.6	40	-14.6	PASS	-14.6	250	0
126.321	33.1	-13.8	19.3	43.5	-24.2	PASS		43.5	-24.2	PASS		100	90
201.933	33.6	-14.5	19.1	43.5	-24.4	PASS		43.5	-24.5	PASS		200	315
228.923	35.1	-16	19.1	46	-26.9	PASS		46	-26.9	PASS		150	45
651.358	34.3	-5.1	29.2	46	-16.8	PASS		46	-16.8	PASS		250	0
776.973	32.3	-3	29.3	46	-16.7	PASS		46	-16.8	PASS		100	90

1-6GHz

Bureau Veritas Consumer Product Services Inc. Radiated Emissions Electric Field 3m Distance Top Peaks Vertical 1-6GHz Notes: Low Channel						Work Order - T2078 EUT Power Input - Battery Test Site - Ch2 Conditions - 22.5°C; 51.8 %RH; 1009mBar Test Engineer - AV							
Data Taken at 03:47:12 PM, Monday, September 16, 2019													
Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Average Limit (dB)	Average Limit Test Result (Pass/Fail)	Average Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1024.25	48.8	-9.5	39.3	74	-34.7	PASS		54	-14.7	PASS		100	297
1360	47.8	-7.3	40.5	74	-33.5	PASS		54	-13.5	PASS		100	260
1805.25	53.1	-5.1	48.1	74	-25.9	PASS		54	-5.9	PASS		100	0
3610.63	52.9	-1.2	51.7	74	-22.3	PASS	-22.3	54	-2.3	PASS	-2.3	200	315
4200.75	46.7	-0.3	46.4	74	-27.6	PASS		54	-7.6	PASS		300	33
5585.13	45.3	1.4	46.7	74	-27.3	PASS		54	-7.3	PASS		200	18

Bureau Veritas Consumer Product Services Inc.						Work Order - T2078							
Radiated E 1-6GHz						EUT Power Input - Battery							
Top Peaks Horizontal 1-6GHz						Test Site - Ch2							
Notes:						Conditions - 22.5°C; 51.8 %RH; 1009mBar							
Low Channel						Test Engineer - AV							
Data Taken at 03:47:12 PM, Monday, September 16, 2019													
Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1368	48.2	-7.3	40.9	74	-33.1	PASS		54	-13.1	PASS		200	170
1805.38	51	-5.1	46	74	-28	PASS		54	-8	PASS		300	0
2754.75	48.1	-2.7	45.4	74	-28.6	PASS		54	-8.6	PASS		200	170
3611.13	49.7	-1.2	48.5	74	-25.5	PASS	-25.5	54	-5.5	PASS	-5.5	100	0
4952	45.7	0.5	46.3	74	-27.7	PASS		54	-7.7	PASS		200	283
5998.13	44.3	2.3	46.6	74	-27.4	PASS		54	-7.4	PASS		100	222

Bureau Veritas Consumer Product Services Inc.

Peak Scan Data, 1MHz RBW, 3MHz VBW

Work Order - T2078



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 3m Distance
Top Peaks Vertical 1-6GHz
Notes:
Mid Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.5°C; 51.8 %RH; 1009mBar
Test Engineer - AV

* Transmit time 10msec every 8 seconds. DCCF = $20 \cdot \log(10/100) = -20$

Data Taken at 10:42:36 AM, Tuesday, September 17, 2019

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Average Limit (dB)	Average Limit Test Result (Pass/Fail)	Average Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1359.75	48.2	-7.2	40.9	74	-33.1	PASS		54	-13.1	PASS		300	145
2401.5	51.9	-3.2	48.6	74	-25.4	PASS	-25.4	54	-5.4	PASS	-5.4	200	94
2845.25	48	-2.6	45.3	74	-28.7	PASS		54	-8.7	PASS		300	32
5617.38	45.9	1.4	47.3	74	-26.7	PASS		54	-6.7	PASS		200	169

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Duty Cycle Correction Factor (dB)	Adjusted Average Amplitude (dBμV/m)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1830.13	50.1	-4.7	45.5	74	-28.5	PASS		-20	25.5	54	-28.5	PASS		100	183
3660.25	59.6	-1	58.6	74	-15.4	PASS	-15.4	-20	38.6	54	-15.4	PASS	-15.4	200	315

Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 3m Distance
Top Peaks Horizontal 1-6GHz
Notes:
Mid Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.5°C; 51.8 %RH; 1009mBar
Test Engineer - AV

Data Taken at 10:42:36 AM, Tuesday, September 17, 2019

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1369.13	48.3	-7.3	41	74	-33	PASS		54	-13	PASS		100	296
2794.13	47.7	-2.5	45.2	74	-28.8	PASS		54	-8.8	PASS		100	31
4929.38	47	0.4	47.4	74	-26.6	PASS		54	-6.6	PASS		100	31
5892.75	45.7	1.8	47.5	74	-26.5	PASS	-26.5	54	-6.5	PASS	-6.5	300	32

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Duty Cycle Correction Factor (dB)	Adjusted Average Amplitude (dBμV/m)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1829.88	51.1	-4.7	46.4	74	-27.6	PASS		-20	26.4	54	-27.6	PASS		100	183
3660	58.5	-1	57.5	74	-16.5	PASS	-16.5	-20	37.5	54	-16.5	PASS	-16.5	200	315

Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 3m Distance
Top Peaks Vertical 1-6GHz
Notes:
High Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9 %RH; 1006mBar
Test Engineer - AV

Data Taken at 01:29:21 PM, Tuesday, September 17, 2019

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Average Limit (dB)	Average Limit Test Result (Pass/Fail)	Average Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1401.88	48.3	-7.4	40.9	74	-33.1	PASS		54	-13.1	PASS		100	183
5676	46.8	1.5	48.3	74	-25.7	PASS	-25.7	54	-5.7	PASS	-5.7	200	315
2799.5	47.6	-2.3	45.3	74	-28.7	PASS		54	-8.7	PASS		100	183

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Duty Cycle Correction Factor (dB)	Adjusted Average Amplitude (dBμV/m)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
3709.25	57.8	-0.1	57.7	74	-16.3	PASS	-16.3	-20	37.7	54	-16.3	PASS	-16.3	200	315



Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 3m Distance
Top Peaks Horizontal 1-6GHz
Notes:
High Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9 %RH; 1006mBar
Test Engineer - AV

Data Taken at 01:29:21 PM, Tuesday, September 17, 2019

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1360	48.5	-6.9	41.7	74	-32.3	PASS		54	-12.3	PASS		100	71
2771	47.4	-2.4	45	74	-29	PASS		54	-9	PASS		200	315
5673.5	45.7	1.5	47.2	74	-26.8	PASS	-26.8	54	-6.8	PASS	-6.8	200	131

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Duty Cycle Correction Factor (dB)	Adjusted Average Amplitude (dBμV/m)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1854.75	49.7	-4.2	45.5	74	-28.5	PASS		-20	25.5	54	-28.5	PASS		100	183
3709.25	56.6	-0.1	56.5	74	-17.5	PASS	-17.5	-20	36.5	54	-17.5	PASS	-17.5	200	315

6-10GHz

Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 1m Distance
Top Peaks Vertical 6-18GHz
Notes:
Low Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9%RH; 1006mBar
Test Engineer - AV

Data Taken at 02:44:25 PM, Tuesday, September 17, 2019

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
9923.4	47.3	6.8	54.1	83.5	-29.4	PASS	-29.4	63.5	-9.4	PASS	-9.4	125	56

Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 1m Distance
Top Peaks Horizontal 6-18GHz
Notes:
Low Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9%RH; 1006mBar
Test Engineer - AV

Data Taken at 02:44:25 PM, Tuesday, September 17, 2019

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
9959.9	47.5	6.8	54.4	83.5	-29.1	PASS	-29.1	63.5	-9.1	PASS	-9.1	150	0



BUREAU
VERITAS



Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 1m Distance
Top Peaks Vertical 6-18GHz
Notes:
Mid Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9 %RH; 1006mBar
Test Engineer - AV

Data Taken at 03:14:18 PM, Tuesday, September 17, 2019

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
9928.5	47.9	6.8	54.7	83.5	-28.8	PASS	-28.8	63.5	-8.8	PASS	-8.8	175	283

Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 1m Distance
Top Peaks Horizontal 6-18GHz
Notes:
Mid Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9 %RH; 1006mBar
Test Engineer - AV

Data Taken at 03:14:18 PM, Tuesday, September 17, 2019

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
9993.3	47.1	6.8	54	83.5	-29.5	PASS	-29.5	63.5	-9.5	PASS	-9.5	125	20

Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 1m Distance
Top Peaks Vertical 6-18GHz
Notes:
High Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9 %RH; 1006mBar
Test Engineer - AV

Data Taken at 02:22:51 PM, Tuesday, September 17, 2019

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
6965.9	46.6	4.1	50.7	83.5	-32.8	PASS		63.5	-12.8	PASS		100	0
9957.7	47.3	6.8	54.2	83.5	-29.3	PASS	-29.3	63.5	-9.3	PASS	-9.3	150	220

Bureau Veritas Consumer Product Services Inc.
Radiated Emissions Electric Field 1m Distance
Top Peaks Horizontal 6-18GHz
Notes:
High Channel

Work Order - T2078
EUT Power Input - Battery
Test Site - Ch2
Conditions - 22.2°C; 44.9 %RH; 1006mBar
Test Engineer - AV

Data Taken at 02:22:51 PM, Tuesday, September 17, 2019

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
9925.8	47.6	6.8	54.4	83.5	-29.1	PASS	-29.1	63.5	-9.1	PASS	-9.1	125	315



Rev. 9/14/2019

Spectrum Analyzers / Receivers / Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Rental MXE EMI Receiver(1170725)		20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	I	5/30/2020	5/30/2019
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on
EMI Chamber 2		719150	2762A-7	A-0015	30-1000MHz	1686	I	12/7/2020	12/7/2018
EMI Chamber 2		719150	2762A-7	A-0015	1-18GHz	1686	I	12/7/2020	12/7/2018
Preamps / Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
8449B HF Preamp		1-18GHz	8449B	Agilent	1149055		II	11/26/2019	11/26/2018
2311 PA		1-1000MHz	PAM-103	COM-POWER	441174	2311	II	10/29/2019	10/29/2018
Antennas		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Blue Horn		1-18Ghz	3117	ETS	157647	1861	I	3/9/2021	3/9/2019
Red-Black Bilog		30-2000MHz	JB1	Sunol	A091604-2	1106	I	4/26/2021	4/26/2019
Meteorological Meters/Chambers			MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)			BA928	Oregon Scientific	C3166-1	831	I	5/15/2020	5/15/2018
Asset #2659			1235C97	Control Company	181683830	2659	I	4/3/2020	4/3/2019
Preamps / Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2130 BRP		9KHz-10GHz	BRM18770	Micro-Tronics	1	2130	II	2/1/2020	2/1/2019
Cables		Range		Mfr			Cat	Calibration Due	Calibrated on
Asset #2455		9KHz-18GHz		MegaPhase			II	10/29/2019	10/29/2018
Asset #2464		9KHz-18GHz		MegaPhase			II	10/31/2019	10/31/2018
Asset #2606		9KHz-18GHz		MegaPhase			II	4/2/2020	4/2/2019

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Test Equipment Used



Bureau Veritas Consumer Products Services Inc.
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz)	5.6dB	N/A
NIST	4.6dB	5.2dB (Ucisp)
CISPR		
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions		
NIST	3.9dB	N/A
CISPR	3.6dB	3.6dB (Ucisp)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	3.23×10^{-8}	1×10^{-7}
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4%	5%
	0.3dB	3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		

Conditions of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.

2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.

3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.

4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.

5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS," "MTL," "ACTS," "MTL-ACTS" and CURTIS-STRAUS (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.

6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.

7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.

8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.

9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.

10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.

11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only where such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.

12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or



different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.

13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.

14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

The complete list of the Approved Subcontractors Curtis-Straus may use to delegate the performance of work can be provided upon request.

