

version 7.0.



FCC PART 15.247 TEST REPORT

For

Hitron Systems Inc.

HITRON B/D 726-5 Suso-dong, Kangnam-gu, SEOUL, KOREA (135-220)

FCC ID: 2AAN4-WL0241

Report Type: **Product Type:** Original Report Wireless N dual-band Moudle **Test Engineer:** Ares Liu Report Number: R2DG130717001-00A **Report Date:** 2013-08-02 from Car Ivan Cao **Reviewed By:** RF Leader Bay Area Compliance Laboratories Corp. (Dongguan) **Test Laboratory:** No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2) This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
ANTENNA INFORMATION	
Objective	4
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT Exercise Software	6
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL CABLE	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	9
APPLICABLE STANDARD	
FCC §15.203 - ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	
Measurement Uncertainty	
EUT Setup	
EMI TEST RECEIVER SETUP	
Test Procedure	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST EQUIPMENT LIST AND DETAILS.	
Test Results Summary	
Test Data	
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTY	
EUT SETUP	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST EQUIPMENT LIST AND DETAILS	
TEST RESULTS SUMMARY	
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH	
APPLICABLE STANDARD	
TEST PROCEDURE	
I LUI I ROCLDURE	

TEST EQUIPMENT LIST AND DETAILS	50
TEST DATA	50
FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER	68
APPLICABLE STANDARD	68
TEST PROCEDURE	68
TEST EQUIPMENT LIST AND DETAILS	68
TEST DATA	
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	102
APPLICABLE STANDARD	102
TEST PROCEDURE	102
TEST EQUIPMENT LIST AND DETAILS	102
TEST DATA	102
FCC §15.247(e) - POWER SPECTRAL DENSITY	114
APPLICABLE STANDARD	114
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	111

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Hitron Systems Inc.*'s product, model number: *WL0241 (FCC ID: 2AAN4-WL0241) or* ("EUT") in this report is a *Wireless N dual-band Moudle*, which was measured approximately: 6.2 cm (L) x2.5 cm (W) x0.7 cm (H), rated input voltage: DC 5V.

Report No.: R2DG130717001-00A

Antenna information

Chain	manufacturer	Model Name	Antenna Type	Max. Antenna Gain
0	huaDeChang	Н001-10089-В	Dipole	2400-2500MHz:2.1dBi 5150-5350MHz:2.2dBi 5725-5850MHz:1.9dBi
1	huaDeChang	Н001-10089-В	Dipole	2400-2500MHz:2.1dBi 5150-5350MHz:2.2dBi 5725-5850MHz:1.9dBi

Objective

This report is prepared on behalf of *Hitron Systems Inc.* accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communications Commission rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: 2AAN4-WL0241.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

FCC Part 15.247 Page 4 of 132

^{*} All measurement and test data in this report was gathered from production sample serial number: 130717001 (Assigned by BACL, Dongguan). The EUT was received on 2013-07-18.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Report No.: R2DG130717001-00A

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at http://ts.nist.gov/standards/scopes/5000690.htm

FCC Part 15.247 Page 5 of 132

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer. For 2.4G band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

Report No.: R2DG130717001-00A

For 802.11b, 802.11g, and 802.11n20 modes were tested with Channel 1, 6 and 11. For 802.11n40 mode were tested with Channel 3, 6 and 9.

For 5725~5850MHz band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
155	5775	/	/
157	5785	/	/

For 802.11a and 802.11n ht20, Channel 149, 157 and 165 was tested, for 802.11n ht40, Channel 151, 159 was tested.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all date rates bandwidths, and modulations.

For802.11a, 802.11b and 802.11g, the EUT can transmit with chain 0 or chain 1, therefore investigated worst case to representative chain 0 in test report.

EUT Exercise Software

The test was performed under "RT5x7xV1.0.4.9" which was provided by the manufacturer.

Equipment Modifications

No modification was made to the EUT tested.

FCC Part 15.247 Page 6 of 132

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017

Report No.: R2DG130717001-00A

External Cable

Cable Description	Length (m)	From Port	То
Shielded Detachable USB Cable	1.0	Laptop	EUT

Block Diagram of Test Setup

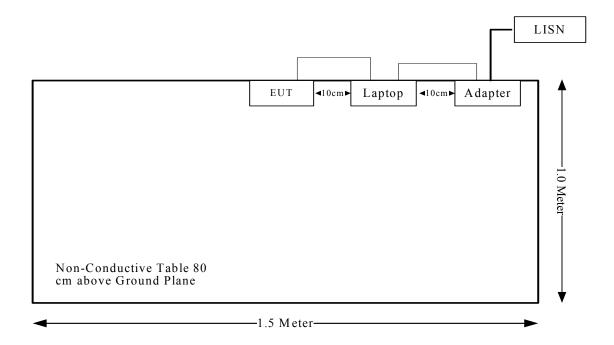

FCC Part 15.247 Page 7 of 132

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

Report No.: R2DG130717001-00A

FCC Part 15.247 Page 8 of 132

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i)and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Report No.: R2DG130717001-00A

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure					
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)	
0.3–1.34	614	1.63	*(100)	30	
1.34–30	824/f	2.19/f	*(180/f²)	30	
30–300	27.5	0.073	0.2	30	
300–1500	/	/	f/1500	30	
1500-100,000	/	/	1.0	30	

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

 $S = PG/4\pi R^2 = power density (in appropriate units, e.g. mW/cm^2);$

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency	Ante	enna Gain	Cond Pov	ucted wer	Evaluation Distance	Power Density	MPE Limit
	(MHz)	(dBi)	(numeric)	(dBm)	(mW)	(cm)	(mW/cm^2)	(mW/cm^2)
2.4G-802.11b	2437	2.1	1.62	17.7	58.88	20.00	0.01901	1.0
2.4G-802.11g	2412	2.1	1.62	14.44	27.80	20.00	0.00897	1.0
2.4G-802.11n HT20	2412	2.1	1.62	14.15	26.00	20.00	0.00839	1.0
2.4G-802.11n HT40	2422	2.1	1.62	13.32	21.48	20.00	0.00693	1.0
802.11a	5745	1.9	1.55	12.53	17.91	20.00	0.00552	1.0
5G-802.11n HT20	5825	1.9	1.55	11.34	13.61	20.00	0.00420	1.0
5G-802.11n HT40	5795	1.9	1.55	10.94	12.42	20.00	0.00383	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC Part 15.247 Page 9 of 132

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

Report No.: R2DG130717001-00A

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has two dipole antennas, which was used a unique type of connector to attach to the EUT, and complied with 15.203, the maximum gain is 2.1 dBi in 2400-2483.5MHz and 1.9dBi in 5725-5850MHz, please refer to the internal photos.

Result: Compliance.

FCC Part 15.247 Page 10 of 132

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

Report No.: R2DG130717001-00A

If $U_{\rm lab}$ is less than or equal to $U_{\rm cispr}$ of Table 1, then:


- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. If U_{lab} is greater than U_{cispr} of Table 1, then:
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} U_{cispr})$, exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} U_{\text{cispr}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	$U_{ m cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

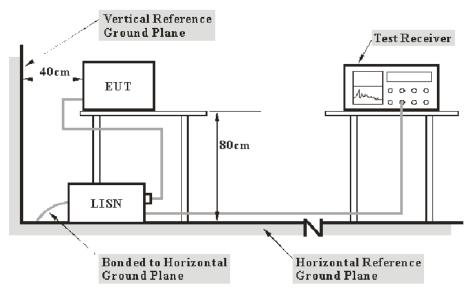

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

FCC Part 15.247 Page 11 of 132

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$
$$C_f = A_C + VDF$$

Herein,

V_C(cord. Reading): corrected voltage amplitude

 V_R : reading voltage amplitude A_c : attenuation caused by cable loss VDF: voltage division factor of AMN C_f : Correction Factor

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part 15.247 Page 12 of 132

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCS 30	830245/006	2013-1-10	2014-1-9
R&S	L.I.S.N	ESH3-Z5 843331/01:		2012-9-17	2013-9-16
R&S	L.I.S.N	ESH3-Z5	100113	2012-11-29	2013-11-28
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

Report No.: R2DG130717001-00A

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

4.47 dB at 0.315 MHz in the Line conducted mode

Test Data

Environmental Conditions

Temperature:	27.1 ° C
Relative Humidity:	63 %
ATM Pressure:	100.3 kPa


The testing was performed by Ares Liu on 2013-07-23.

FCC Part 15.247 Page 13 of 132

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Mode: Transmitting


120 V, 60 Hz, Line:

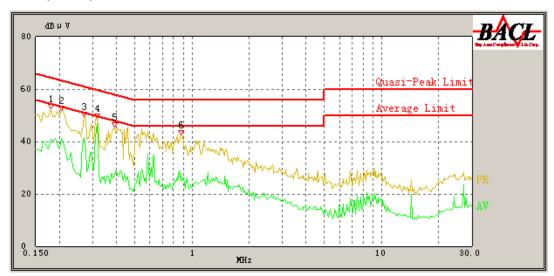

Frequency (MHz)	Cord. Reading (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/AV/QP)
0.180	43.57	0.41	65.14	21.57	QP
0.180	40.75	0.41	55.14	14.39	AV
0.205	44.96	0.42	64.43	19.47	QP
0.205	41.03	0.42	54.43	13.40	AV
0.270	43.69	0.42	62.57	18.88	QP
0.270	41.41	0.42	52.57	11.16	AV
0.315	47.10	0.42	61.29	14.19	QP
0.315	46.82	0.42	51.29	4.47	AV
0.390	38.37	0.42	59.14	20.77	QP
0.390	27.33	0.42	49.14	21.81	AV
0.880	35.18	0.45	56.00	20.82	QP
0.880	27.91	0.45	46.00	18.09	AV

FCC Part 15.247 Page 14 of 132

120 V, 60 Hz, Neutral:

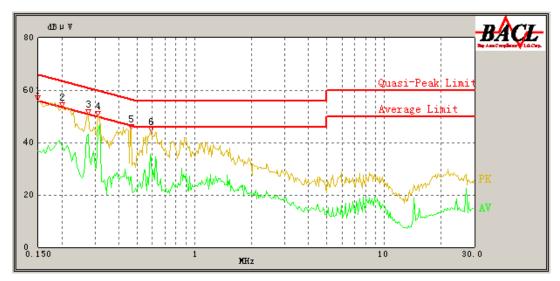

Frequency (MHz)	Cord. Reading (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/AV/QP)
0.150	52.07	0.40	66.00	13.93	QP
0.150	36.73	0.40	56.00	19.27	AV
0.200	49.57	0.42	64.57	15.00	QP
0.200	38.54	0.42	54.57	16.03	AV
0.275	46.06	0.42	62.43	16.37	QP
0.275	43.18	0.42	52.43	9.25	AV
0.310	46.55	0.42	61.43	14.88	QP
0.310	44.22	0.42	51.43	7.21	AV
0.465	38.24	0.42	57.00	18.76	QP
0.465	26.76	0.42	47.00	20.24	AV
0.590	40.24	0.43	56.00	15.76	QP
0.590	34.19	0.43	46.00	11.81	AV

FCC Part 15.247 Page 15 of 132

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

Report No.: R2DG130717001-00A

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. If U_{lab} is greater than U_{cispr} of Table 2, then:
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} U_{cispr})$, exceeds the disturbance limit:
- non compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} U_{\text{cispr}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


30M~200MHz: 5.0 dB 200M~1GHz: 6.2 dB 1G~6GHz: 4.45 dB 6G~18GHz: 5.23 dB

Table 2 – Values of U_{cispr}

Measurement							
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB						
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB						
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB						


EUT Setup

Below 1GHz:

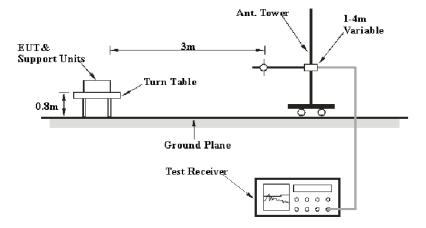

FCC Part 15.247 Page 16 of 132

Above 1GHz:

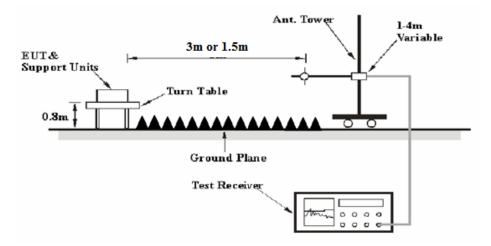

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
AUUVE I UNZ	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

According to C63.4, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor =20 log (3m/1.5m) dB

Extrapolation result = Corrected Amplitude ($dB\mu V/m$) -6dB

FCC Part 15.247 Page 17 of 132

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Report No.: R2DG130717001-00A

Corrected Amplitude = Meter Reading + Antenna Loss + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit –Extrapolation result

Test Equipment List and Details

Manufacturer	Description	Model Serial Number		Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCI	100224	2013-5-6	2014-5-5
Sunol Sciences	Antenna	JB3	A060611-1	2012-9-6	2015-9-5
HP	HP AMPLIFIER	8447E	2434A02181	N/A	N/A
R&S	Spectrum analyzer	FSEM 30	849016/001	2012-9-4	2013-9-3
ETS LINDGREN	horn antenna	3115	000 527 35	2012-9-6	2015-9-5
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	N/A	N/A
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247</u>, with the worst margin reading of:

1.70 dB at 5850 MHz in the Vertical polarization for 802.11n ht20 Mode

Test Data

Environmental Conditions

Temperature:	25.1 °C
Relative Humidity:	63 %
ATM Pressure:	100.3kPa

The testing was performed by Ares Liu on 2013-07-23.

Mode: Transmitting

FCC Part 15.247 Page 18 of 132

Report No.: R2DG130717001-00A

2.4*G band:* 802.11b Mode

	Re	eceiver Rx Antenna C			Cabla	Amplifier	Commented	Commented			
Frequency (MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	Cable loss (dB)	Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)		
Low Channel: 2412 MHz											
2412	74.26	PK	Н	25.67	3.93	0.00	103.86	N/A	N/A		
2412	69.62	AV	Н	25.67	3.93	0.00	99.22	N/A	N/A		
2412	80.97	PK	V	25.67	3.93	0.00	110.57	N/A	N/A		
2412	76.38	AV	V	25.67	3.93	0.00	105.98	N/A	N/A		
2390	29.29	PK	V	25.61	3.84	0.00	58.74	74.00	15.26		
2390	16.9	AV	V	25.61	3.84	0.00	46.35	54.00	7.65		
4824	38.79	PK	V	30.64	4.73	27.26	46.90	74.00	27.10		
4824	33.96	AV	V	30.64	4.73	27.26	42.07	54.00	11.93		
7236	32.23	PK	V	34.17	6.56	26.36	46.60	74.00	27.40		
7236	18.2	AV	V	34.17	6.56	26.36	32.57	54.00	21.43		
9648	31.26	PK	V	36.06	8.70	26.06	49.96	74.00	24.04		
9648	18.13	AV	V	36.06	8.70	26.06	36.83	54.00	17.17		
3349	32.9	PK	V	28.32	4.60	27.34	38.48	74.00	35.52		
3349	18.89	AV	V	28.32	4.60	27.34	24.47	54.00	29.53		
308.1	30.5	QP	V	14.29	2.18	21.54	25.43	46.00	20.57		
				ldle Chanı							
2437	74.22	PK	Н	25.74	3.98	0.00	103.94	N/A	N/A		
2437	69.55	AV	Н	25.74	3.98	0.00	99.27	N/A	N/A		
2437	80.94	PK	V	25.74	3.98	0.00	110.66	N/A	N/A		
2437	76.19	AV	V	25.74	3.98	0.00	105.91	N/A	N/A		
4874	38.7	PK	V	30.77	4.76	27.26	46.97	74.00	27.03		
4874	33.76	AV	V	30.77	4.76	27.26	42.03	54.00	11.97		
7311	32.22	PK	V	34.35	6.70	26.51	46.76	74.00	27.24		
7311	18.04	AV	V	34.35	6.70	26.51	32.58	54.00	21.42		
9748	31.19	PK	V	36.30	8.60	25.68	50.41	74.00	23.59		
9748	18.09	AV	V	36.30	8.60	25.68	37.31	54.00	16.69		
2826	32.86	PK	V	26.75	4.60	27.38	36.83	74.00	37.17		
2826	18.85	AV	V	26.75	4.60	27.38	22.82	54.00	31.18		
3349	32.77	PK	V	28.32	4.60	27.34	38.35	74.00	35.65		
3349	18.75	AV	V	28.32	4.60	27.34	24.33	54.00	29.67		
307.8	31.18	QP	V	14.28 gh Channe	2.18	21.54	26.10	46.00	19.90		
2462	74.07	PK	Н	25.80	3.93	0.00	103.80	N/A	N/A		
2462	69.6	AV	Н	25.80	3.93	0.00	99.33	N/A N/A	N/A N/A		
2462	80.8	PK	V	25.80	3.93	0.00	110.53	N/A N/A	N/A N/A		
2462	76.33	AV	V	25.80	3.93	0.00	106.06	N/A N/A	N/A N/A		
2483.5	29.28	PK	V	25.86	3.80	0.00	58.94	74.00	15.06		
2483.5	16.83	AV	V	25.86	3.80	0.00	46.49	54.00	7.51		
4924	38.61	PK	V	30.90	4.70	27.27	46.94	74.00	27.06		
4924	33.94	AV	V	30.90	4.70	27.27	42.27	54.00	11.73		
7386	32.17	PK	V	34.53	6.84	26.66	46.88	74.00	27.12		
7386	18.09	AV	V	34.53	6.84	26.66	32.80	54.00	21.20		
9848	31.13	PK	V	36.54	8.49	25.49	50.67	74.00	23.33		
9848	17.99	AV	V	36.54	8.49	25.49	37.53	54.00	16.47		
3349	32.75	PK	V	28.32	4.60	27.34	38.33	74.00	35.67		
3349	18.84	AV	V	28.32	4.60	27.34	24.42	54.00	29.58		
306.9	31.47	QP	V	14.26	2.17	21.54	26.36	46.00	19.64		

FCC Part 15.247 Page 19 of 132

Report No.: R2DG130717001-00A

802.11g Mode

E	Re	eceiver	Rx A	Antenna	Cable	Amplifier	Corrected	T * */	M
Frequency (MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	loss (dB)	Gain (dB)	Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
			Lo	ow Channel:	2412 M	Hz			
2412	72.81	PK	Н	25.67	3.93	0.00	102.41	N/A	N/A
2412	62.08	AV	Н	25.67	3.93	0.00	91.68	N/A	N/A
2412	77.15	PK	V	25.67	3.93	0.00	106.75	N/A	N/A
2412	66.61	AV	V	25.67	3.93	0.00	96.21	N/A	N/A
2390	31.39	PK	V	25.61	3.84	0.00	60.84	74.00	13.16
2390	16.05	AV	V	25.61	3.84	0.00	45.50	54.00	8.50
4824	35.45	PK	V	30.64	4.73	27.26	43.56	74.00	30.44
4824	20.07	AV	V	30.64	4.73	27.26	28.18	54.00	25.82
7236	31.57	PK	V	34.17	6.56	26.36	45.94	74.00	28.06
7236	18.11	AV	V	34.17	6.56	26.36	32.48	54.00	21.52
9648	31.57	PK	V	36.06	8.70	26.06	50.27	74.00	23.73
9648	18.12	AV	V	36.06	8.70	26.06	36.82	54.00	17.18
3349	32.31	PK	V	28.32	4.60	27.34	37.89	74.00	36.11
3349	18.86	AV	V	28.32	4.60	27.34	24.44	54.00	29.56
308.1	30.64	QP	V	14.29	2.18	21.54	25.57	46.00	20.43
	ı		Mic	ddle Channe	1: 2437 N	ИHz			
2437	72.63	PK	Н	25.74	3.98	0.00	102.35	N/A	N/A
2437	62.07	AV	Н	25.74	3.98	0.00	91.79	N/A	N/A
2437	76.96	PK	V	25.74	3.98	0.00	106.68	N/A	N/A
2437	66.43	AV	V	25.74	3.98	0.00	96.15	N/A	N/A
4874	35.38	PK	V	30.77	4.76	27.26	43.65	74.00	30.35
4874	19.91	AV	V	30.77	4.76	27.26	28.18	54.00	25.82
7311	31.42	PK	V	34.35	6.70	26.51	45.96	74.00	28.04
7311	17.93	AV	V	34.35	6.70	26.51	32.47	54.00	21.53
9748	31.56	PK	V	36.30	8.60	25.68	50.78	74.00	23.22
9748	17.96	AV	V	36.30	8.60	25.68	37.18	54.00	16.82
2826	32.2	PK	V	26.75	4.60	27.38	36.17	74.00	37.83
2826	18.78	AV	V	26.75	4.60	27.38	22.75	54.00	31.25
3349	32.25	PK	V	28.32	4.60	27.34	37.83	74.00	36.17
3349	18.73	AV	V	28.32	4.60	27.34	24.31	54.00	29.69
307.8	32.94	QP	V	14.28	2.18	21.54	27.86	46.00	18.14
	•	-	Hi	gh Channel	2462 M	Hz			
2462	72.69	PK	Н	25.80	3.93	0.00	102.42	N/A	N/A
2462	62	AV	Н	25.80	3.93	0.00	91.73	N/A	N/A
2462	77.02	PK	V	25.80	3.93	0.00	106.75	N/A	N/A
2462	66.59	AV	V	25.80	3.93	0.00	96.32	N/A	N/A
2483.5	31.3	PK	V	25.86	3.80	0.00	60.96	74.00	13.04
2483.5	16	AV	V	25.86	3.80	0.00	45.66	54.00	8.34
4924	35.44	PK	V	30.90	4.70	27.27	43.77	74.00	30.23
4924	19.9	AV	V	30.90	4.70	27.27	28.23	54.00	25.77
7386	31.51	PK	V	34.53	6.84	26.66	46.22	74.00	27.78
7386	17.95	AV	V	34.53	6.84	26.66	32.66	54.00	21.34
9848	31.54	PK	V	36.54	8.49	25.49	51.08	74.00	22.92
9848	18.03	AV	V	36.54	8.49	25.49	37.57	54.00	16.43
3349	32.24	PK	V	28.32	4.60	27.34	37.82	74.00	36.18
3349	18.73	AV	V	28.32	4.60	27.34	24.31	54.00	29.69
306.9	29.67	QP	V	14.26	2.17	21.54	24.56	46.00	21.44

FCC Part 15.247 Page 20 of 132

Report No.: R2DG130717001-00A

802.11 n20 Mode

E	Re	eceiver	Rx A	ntenna	Cable	Amplifier	Corrected	T :!4	M				
Frequency (MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	loss (dB)	Gain (dB)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)				
	Low Channel: 2412 MHz												
2412	72.27	PK	Н	25.67	3.93	0.00	101.87	N/A	N/A				
2412	61.59	AV	Н	25.67	3.93	0.00	91.19	N/A	N/A				
2412	76.72	PK	V	25.67	3.93	0.00	106.32	N/A	N/A				
2412	66.22	AV	V	25.67	3.93	0.00	95.82	N/A	N/A				
2390	30.94	PK	V	25.61	3.84	0.00	60.39	74.00	13.61				
2390	15.68	AV	V	25.61	3.84	0.00	45.13	54.00	8.87				
4824	35.04	PK	V	30.64	4.73	27.26	43.15	74.00	30.85				
4824	19.34	AV	V	30.64	4.73	27.26	27.45	54.00	26.55				
7236	30.94	PK	V	34.17	6.56	26.36	45.31	74.00	28.69				
7236	17.46	AV	V	34.17	6.56	26.36	31.83	54.00	22.17				
9648	31.06	PK	V	36.06	8.70	26.06	49.76	74.00	24.24				
9648	17.69	AV	V	36.06	8.70	26.06	36.39	54.00	17.61				
3349	31.85	PK	V	28.32	4.60	27.34	37.43	74.00	36.57				
3349	18.43	AV	V	28.32	4.60	27.34	24.01	54.00	29.99				
308.1	31.25	QP	V	14.29	2.18	21.54	26.18	46.00	19.82				
				ldle Chanı									
2437	72.36	PK	Н	25.74	3.98	0.00	102.08	N/A	N/A				
2437	61.55	AV	Н	25.74	3.98	0.00	91.27	N/A	N/A				
2437	76.61	PK	V	25.74	3.98	0.00	106.33	N/A	N/A				
2437	66.27	AV	V	25.74	3.98	0.00	95.99	N/A	N/A				
4874	35.1	PK	V	30.77	4.76	27.26	43.37	74.00	30.63				
4874	19.39	AV	V	30.77	4.76	27.26	27.66	54.00	26.34				
7311	31.06	PK	V	34.35	6.70	26.51	45.60	74.00	28.40				
7311	17.49	AV	V	34.35	6.70	26.51	32.03	54.00	21.97				
9748	31	PK	V	36.30	8.60	25.68	50.22	74.00	23.78				
9748	17.61	AV	V	36.30	8.60	25.68	36.83	54.00	17.17				
2826	31.89	PK	V	26.75	4.60	27.38	35.86	74.00	38.14				
2826	18.27	AV	V	26.75	4.60	27.38	22.24	54.00	31.76				
3349	31.79	PK	V	28.32	4.60	27.34	37.37	74.00	36.63				
3349	18.3	AV	V	28.32	4.60	27.34	23.88	54.00	30.12				
307.8	32.71	QP	V	14.28	2.18	21.54	27.63	46.00	18.37				
2462		DV		gh Chann			102.10	37/4	37/1				
2462	72.45	PK	Н	25.80	3.93	0.00	102.18	N/A	N/A				
2462	61.74	AV	H	25.80	3.93	0.00	91.47	N/A	N/A				
2462	76.76	PK	V	25.80	3.93	0.00	106.49	N/A	N/A				
2462	66.29	AV	V	25.80	3.93	0.00	96.02	N/A	N/A				
2483.5	30.96	PK	V	25.86	3.80	0.00	60.62	74.00	13.38				
2483.5	15.84	AV	V	25.86	3.80	0.00	45.50	54.00	8.50				
4924	35.18	PK	V	30.90	4.70	27.27	43.51	74.00	30.49				
4924	19.44	AV	V	30.90	4.70	27.27	27.77	54.00	26.23				
7386	31.12	PK	V	34.53	6.84	26.66	45.83	74.00	28.17				
7386	17.61	AV	V	34.53	6.84	26.66	32.32	54.00	21.68				
9848	31.11	PK	V	36.54	8.49	25.49	50.65	74.00	23.35				
9848	17.78	AV	V	36.54	8.49	25.49	37.32	54.00 74.00	16.68				
3349	31.89	PK		28.32	4.60	27.34	37.47		36.53				
3349	18.46	AV	V	28.32	4.60	27.34	24.04	54.00	29.96				
306.9	33.05	QP	V	14.26	2.17	21.54	27.94	46.00	18.06				

FCC Part 15.247 Page 21 of 132

802.11 n40 Mode

T	Re	eceiver	Rx A	ntenna	Cable	Amplifier	Corrected	T **4	M			
Frequency (MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	loss (dB)	Gain (dB)	Amplitude (dBμV/m)	Limit (dBµV/m)	Margin (dB)			
	Low Channel: 2422 MHz											
2422	72.33	PK	Н	25.70	3.95	0.00	101.98	N/A	N/A			
2422	61.67	AV	Н	25.70	3.95	0.00	91.32	N/A	N/A			
2422	76.62	PK	V	25.70	3.95	0.00	106.27	N/A	N/A			
2422	66.09	AV	V	25.70	3.95	0.00	95.74	N/A	N/A			
2390	30.87	PK	V	25.61	3.84	0.00	60.32	74.00	13.68			
2390	15.67	AV	V	25.61	3.84	0.00	45.12	54.00	8.88			
4844	35.02	PK	V	30.69	4.78	27.26	43.23	74.00	30.77			
4844	19.29	AV	V	30.69	4.78	27.26	27.50	54.00	26.50			
7266	31.1	PK	V	34.24	6.62	26.42	45.54	74.00	28.46			
7266	17.41	AV	V	34.24	6.62	26.42	31.85	54.00	22.15			
9688	31.01	PK	V	36.15	8.66	25.91	49.91	74.00	24.09			
9688	17.58	AV	V	36.15	8.66	25.91	36.48	54.00	17.52			
3349	31.76	PK	V	28.32	4.60	27.34	37.34	74.00	36.66			
3349	18.43	AV	V	28.32	4.60	27.34	24.01	54.00	29.99			
308.1	31.83	QP	V	14.29	2.18	21.54	26.76	46.00	19.24			
			Mid	dle Chann		MHz						
2437	72.31	PK	Н	25.74	3.98	0.00	102.03	N/A	N/A			
2437	61.67	AV	Н	25.74	3.98	0.00	91.39	N/A	N/A			
2437	76.64	PK	V	25.74	3.98	0.00	106.36	N/A	N/A			
2437	66.17	AV	V	25.74	3.98	0.00	95.89	N/A	N/A			
4874	35.12	PK	V	30.77	4.76	27.26	43.39	74.00	30.61			
4874	19.44	AV	V	30.77	4.76	27.26	27.71	54.00	26.29			
7311	31.06	PK	V	34.35	6.70	26.51	45.60	74.00	28.40			
7311	17.6	AV	V	34.35	6.70	26.51	32.14	54.00	21.86			
9748	30.96	PK	V	36.30	8.60	25.68	50.18	74.00	23.82			
9748	17.63	AV	V	36.30	8.60	25.68	36.85	54.00	17.15			
2826	31.74	PK	V	26.75	4.60	27.38	35.71	74.00	38.29			
2826	18.38	AV	V	26.75	4.60	27.38	22.35	54.00	31.65			
3349	31.85	PK	V	28.32	4.60	27.34	37.43	74.00	36.57			
3349	18.4	AV	V	28.32	4.60	27.34	23.98	54.00	30.02			
307.8	31.96	QP	V	14.28	2.18	21.54	26.88	46.00	19.12			
		`	Hig	sh Channe								
2452	72.3	PK	Н	25.78	4.00	0.00	102.07	N/A	N/A			
2452	61.55	AV	Н	25.78	4.00	0.00	91.32	N/A	N/A			
2452	76.61	PK	V	25.78	4.00	0.00	106.38	N/A	N/A			
2452	66.29	AV	V	25.78	4.00	0.00	96.06	N/A	N/A			
2483.5	30.95	PK	V	25.86	3.80	0.00	60.61	74.00	13.39			
2483.5	15.72	AV	V	25.86	3.80	0.00	45.38	54.00	8.62			
4904	35.07	PK	V	30.85	4.72	27.27	43.37	74.00	30.63			
4904	19.43	AV	V	30.85	4.72	27.27	27.73	54.00	26.27			
7356	31.1	PK	V	34.45	6.79	26.60	45.74	74.00	28.26			
7356	17.46	AV	V	34.45	6.79	26.60	32.10	54.00	21.90			
9808	30.94	PK	V	36.44	8.53	25.48	50.43	74.00	23.57			
9808	17.59	AV	V	36.44	8.53	25.48	37.08	54.00	16.92			
3349	31.82	PK	V	28.32	4.60	27.34	37.40	74.00	36.60			
3349	18.45	AV	V	28.32	4.60	27.34	24.03	54.00	29.97			
306.9	29.15	QP	V	14.26	2.17	21.54	24.04	46.00	21.96			

FCC Part 15.247 Page 22 of 132

5725-5850MHz band: 802.11a Mode:

Frequency	Re	Receiver		ntenna	Cable	Amplifier	Corrected	Extrapolation	.	
(MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	loss (dB)	Gain (dB)	Amplitude (dBμV/m)	result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
				Low	Channe	1:5745 MHz				
5745.00	68.27	PK	Н	32.15	5.10	0.00	105.52	99.52	N/A	N/A
5745.00	56.87	AV	Н	32.15	5.10	0.00	94.12	88.12	N/A	N/A
5745.00	77.32	PK	V	32.15	5.10	0.00	114.57	108.57	N/A	N/A
5745.00	66.83	AV	V	32.15	5.10	0.00	104.08	98.08	N/A	N/A
5725.00	40.53	PK	V	32.15	4.83	0.00	77.51	71.51	74.00	2.49
5725.00	20.98	AV	V	32.15	4.83	0.00	57.96	51.96	54.00	2.04
11490.00	47.71	PK	V	37.89	7.85	25.92	67.53	61.53	74.00	12.47
11490.00	32.05	AV	V	37.89	7.85	25.92	51.87	45.87	54.00	8.13
17235.00	32.47	PK	V	40.91	12.63	24.94	61.07	55.07	74.00	18.93
17235.00	18.64	AV	V	40.91	12.63	24.94	47.24	41.24	54.00	12.76
2783.00	32.22	PK	V	26.64	4.19	27.36	35.69	29.69	74.00	44.31
2783.00	19.43	AV	V	26.64	4.19	27.36	22.90	16.90	54.00	37.10
3748.10	30.02	PK	V	29.35	4.66	27.44	36.59	30.59	74.00	43.41
3748.10	16.80	AV	V	29.35	4.66	27.44	23.37	17.37	54.00	36.63
267.50	31.27	QP	V	13.55	2.02	21.50	25.34	25.34	46.00	20.66
				Midd	le Chann	el:5785 MH	Z			
5785.00	68.46	PK	Н	32.16	5.15	0.00	105.77	99.77	N/A	N/A
5785.00	56.99	AV	Н	32.16	5.15	0.00	94.30	88.30	N/A	N/A
5785.00	77.50	PK	V	32.16	5.15	0.00	114.81	108.81	N/A	N/A
5785.00	66.89	AV	V	32.16	5.15	0.00	104.20	98.20	N/A	N/A
11570.00	47.81	PK	V	37.90	7.97	25.91	67.77	61.77	74.00	12.23
11570.00	32.09	AV	V	37.90	7.97	25.91	52.05	46.05	54.00	7.95
17355.00	32.63	PK	V	41.63	12.26	24.68	61.84	55.84	74.00	18.16
17355.00	18.72	AV	V	41.63	12.26	24.68	47.93	41.93	54.00	12.07
2783.00	32.39	PK	V	26.64	4.19	27.36	35.86	29.86	74.00	44.14
2783.00	19.55	AV	V	26.64	4.19	27.36	23.02	17.02	54.00	36.98
2215.00	30.06	PK	V	25.16	3.52	27.25	31.49	25.49	74.00	48.51
2215.00	16.89	AV	V	25.16	3.52	27.25	18.32	12.32	54.00	41.68
3748.00	32.37	PK	V	29.35	4.66	27.44	38.94	32.94	74.00	41.06
3748.00	19.58	AV	V	29.35	4.66	27.44	26.15	20.15	54.00	33.85
268.20	30.85	QP	V	13.59	2.03	21.50	24.97	24.97	46.00	21.03

Report No.: R2DG130717001-00A

FCC Part 15.247 Page 23 of 132

				Hig	gh Channel:	5825 MHz				
5825.00	68.43	PK	Н	32.17	5.35	0.00	105.95	99.95	N/A	N/A
5825.00	56.97	AV	Н	32.17	5.35	0.00	94.49	88.49	N/A	N/A
5825.00	77.38	PK	V	32.17	5.35	0.00	114.90	108.90	N/A	N/A
5825.00	67.02	AV	V	32.17	5.35	0.00	104.54	98.54	N/A	N/A
5850.00	40.57	PK	V	32.17	5.56	0.00	78.30	72.30	74.00	1.70
5850.00	20.07	AV	V	32.17	5.56	0.00	57.80	51.80	54.00	2.20
11650.00	47.78	PK	V	37.90	8.14	25.78	68.04	62.04	74.00	11.96
11650.00	32.20	AV	V	37.90	8.14	25.78	52.46	46.46	54.00	7.54
17475.00	32.56	PK	V	42.35	11.89	24.27	62.53	56.53	74.00	17.47
17475.00	18.69	AV	V	42.35	11.89	24.27	48.66	42.66	54.00	11.34
2783.00	32.40	PK	V	26.64	4.19	27.36	35.87	29.87	74.00	44.13
2783.00	19.49	AV	V	26.64	4.19	27.36	22.96	16.96	54.00	37.04
3748.00	30.10	PK	V	29.35	4.66	27.44	36.67	30.67	74.00	43.33
3748.00	16.92	AV	V	29.35	4.66	27.44	23.49	17.49	54.00	36.51
267.50	31.46	OP	V	13.55	2.02	21.50	25.53	25.53	46.00	20.47

FCC Part 15.247 Page 24 of 132

802.11n ht20 Mode:

Frequency	Re	eceiver	Rx A	ntenna	Cable	Amplifier	Corrected	Extrapolation		Margin (dB)
(MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	loss (dB)	Gain (dB)	Amplitude (dBμV/m)	result (dBμV/m)	Limit (dBμV/m)	
				Low	Channe	1:5745 MHz			•	
5745.00	65.86	PK	Н	32.15	5.10	0.00	103.11	97.11	N/A	N/A
5745.00	56.22	AV	Н	32.15	5.10	0.00	93.47	87.47	N/A	N/A
5745.00	77.00	PK	V	32.15	5.10	0.00	114.25	108.25	N/A	N/A
5745.00	66.03	AV	V	32.15	5.10	0.00	103.28	97.28	N/A	N/A
5725.00	31.71	PK	V	32.15	4.83	0.00	68.69	62.69	74.00	11.31
5725.00	17.41	AV	V	32.15	4.83	0.00	54.39	48.39	54.00	5.61
11490.00	51.30	PK	V	37.89	7.85	25.92	71.12	65.12	74.00	8.88
11490.00	34.59	AV	V	37.89	7.85	25.92	54.41	48.41	54.00	5.59
17235.00	32.57	PK	V	40.91	12.63	24.94	61.17	55.17	74.00	18.83
17235.00	18.54	AV	V	40.91	12.63	24.94	47.14	41.14	54.00	12.86
2783.00	32.07	PK	V	26.64	4.19	27.36	35.54	29.54	74.00	44.46
2783.00	19.49	AV	V	26.64	4.19	27.36	22.96	16.96	54.00	37.04
3748.10	29.92	PK	V	29.35	4.66	27.44	36.49	30.49	74.00	43.51
3748.10	16.71	AV	V	29.35	4.66	27.44	23.28	17.28	54.00	36.72
267.50	31.41	QP	V	13.55	2.02	21.50	25.48	25.48	46.00	20.52
				Midd	le Chann	el:5785 MH	Z		•	
5785.00	66.02	PK	Н	32.16	5.15	0.00	103.33	97.33	N/A	N/A
5785.00	56.29	AV	Н	32.16	5.15	0.00	93.60	87.60	N/A	N/A
5785.00	76.97	PK	V	32.16	5.15	0.00	114.28	108.28	N/A	N/A
5785.00	66.15	AV	V	32.16	5.15	0.00	103.46	97.46	N/A	N/A
11570.00	51.43	PK	V	37.90	7.97	25.91	71.39	65.39	74.00	8.61
11570.00	34.64	AV	V	37.90	7.97	25.91	54.60	48.60	54.00	5.40
17355.00	32.55	PK	V	41.63	12.26	24.68	61.76	55.76	74.00	18.24
17355.00	18.40	AV	V	41.63	12.26	24.68	47.61	41.61	54.00	12.39
2783.00	32.07	PK	V	26.64	4.19	27.36	35.54	29.54	74.00	44.46
2783.00	19.37	AV	V	26.64	4.19	27.36	22.84	16.84	54.00	37.16
2215.00	29.93	PK	V	25.16	3.52	27.25	31.36	25.36	74.00	48.64
2215.00	16.74	AV	V	25.16	3.52	27.25	18.17	12.17	54.00	41.83
3748.00	32.06	PK	V	29.35	4.66	27.44	38.63	32.63	74.00	41.37
3748.00	19.44	AV	V	29.35	4.66	27.44	26.01	20.01	54.00	33.99
268.20	30.29	QP	V	13.59	2.03	21.50	24.41	24.41	46.00	21.59

FCC Part 15.247 Page 25 of 132

				MC 1	11. Cl	.5025 MII				
			•	Mia	die Channei	:5825 MHz		,		
5825.00	66.03	PK	Н	32.17	5.35	0.00	103.55	97.55	N/A	N/A
5825.00	56.41	AV	Н	32.17	5.35	0.00	93.93	87.93	N/A	N/A
5825.00	77.15	PK	V	32.17	5.35	0.00	114.67	108.67	N/A	N/A
5825.00	66.20	AV	V	32.17	5.35	0.00	103.72	97.72	N/A	N/A
5850.00	31.86	PK	V	32.17	5.56	0.00	69.59	63.59	74.00	10.41
5850.00	17.57	AV	V	32.17	5.56	0.00	55.30	49.30	54.00	4.70
11650.00	51.46	PK	V	37.90	8.14	25.78	71.72	65.72	74.00	8.28
11650.00	34.78	AV	V	37.90	8.14	25.78	55.04	49.04	54.00	4.96
17475.00	32.69	PK	V	42.35	11.89	24.27	62.66	56.66	74.00	17.34
17475.00	18.58	AV	V	42.35	11.89	24.27	48.55	42.55	54.00	11.45
2783.00	32.23	PK	V	26.64	4.19	27.36	35.70	29.70	74.00	44.30
2783.00	19.56	AV	V	26.64	4.19	27.36	23.03	17.03	54.00	36.97
3748.00	30.04	PK	V	29.35	4.66	27.44	36.61	30.61	74.00	43.39
3748.00	16.86	AV	V	29.35	4.66	27.44	23.43	17.43	54.00	36.57
267.50	30.57	QP	V	13.55	2.02	21.50	24.64	24.64	46.00	21.36

FCC Part 15.247 Page 26 of 132

802.11n ht40 Mode:

Frequency	Re	eceiver Rx Antenna		ntenna	Cable	Amplifier	Corrected	Extrapolation			
(MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	loss (dB)	Gain (dB)	Amplitude (dBμV/m)	result (dBμV/m)	Limit (dBµV/m)	Margin (dB)	
	Low Channel:5755 MHz										
5755.00	65.85	PK	Н	32.15	5.17	0.00	103.17	97.17	N/A	N/A	
5755.00	56.30	AV	Н	32.15	5.17	0.00	93.62	87.62	N/A	N/A	
5755.00	76.99	PK	V	32.15	5.17	0.00	114.31	108.31	N/A	N/A	
5755.00	66.16	AV	V	32.15	5.17	0.00	103.48	97.48	N/A	N/A	
5725.00	31.74	PK	V	32.15	4.83	0.00	68.72	62.72	74.00	11.28	
5725.00	17.41	AV	V	32.15	4.83	0.00	54.39	48.39	54.00	5.61	
11510.00	51.28	PK	V	37.90	7.84	25.92	71.10	65.10	74.00	8.90	
11510.00	34.74	AV	V	37.90	7.84	25.92	54.56	48.56	54.00	5.44	
17265.00	32.67	PK	V	41.09	12.54	24.88	61.42	55.42	74.00	18.58	
17265.00	18.43	AV	V	41.09	12.54	24.88	47.18	41.18	54.00	12.82	
2783.00	32.16	PK	V	26.64	4.19	27.36	35.63	29.63	74.00	44.37	
2783.00	19.40	AV	V	26.64	4.19	27.36	22.87	16.87	54.00	37.13	
3748.10	30.04	PK	V	29.35	4.66	27.44	36.61	30.61	74.00	43.39	
3748.10	16.81	AV	V	29.35	4.66	27.44	23.38	17.38	54.00	36.62	
267.50	29.45	QP	V	13.55	2.02	21.50	23.52	23.52	46.00	22.48	
				Midd	le Chann	el:5795 MH	Z				
5795.00	65.98	PK	Н	32.16	5.14	0.00	103.28	97.28	N/A	N/A	
5795.00	56.38	AV	Н	32.16	5.14	0.00	93.68	87.68	N/A	N/A	
5795.00	76.96	PK	V	32.16	5.14	0.00	114.26	108.26	N/A	N/A	
5795.00	66.12	AV	V	32.16	5.14	0.00	103.42	97.42	N/A	N/A	
5850.00	31.84	PK	V	32.17	5.56	0.00	69.57	63.57	74.00	10.43	
5850.00	17.55	AV	V	32.17	5.56	0.00	55.28	49.28	54.00	4.72	
11590.00	51.29	PK	V	37.90	8.01	25.91	71.29	65.29	74.00	8.71	
11590.00	34.60	AV	V	37.90	8.01	25.91	54.60	48.60	54.00	5.40	
17385.00	32.65	PK	V	41.81	12.17	24.61	62.02	56.02	74.00	17.98	
17385.00	18.39	AV	V	41.81	12.17	24.61	47.76	41.76	54.00	12.24	
2783.00	32.04	PK	V	26.64	4.19	27.36	35.51	29.51	74.00	44.49	
2783.00	19.56	AV	V	26.64	4.19	27.36	23.03	17.03	54.00	36.97	
3748.00	29.99	PK	V	29.35	4.66	27.44	36.56	30.56	74.00	43.44	
3748.00	16.74	AV	V	29.35	4.66	27.44	23.31	17.31	54.00	36.69	
267.50	29.72	QP	V	13.55	2.02	21.50	23.79	23.79	46.00	22.21	


FCC Part 15.247 Page 27 of 132

Conducted Spurious Emissions at Antenna Port

Report No.: R2DG130717001-00A


2.4G band:

802.11b Low Channel

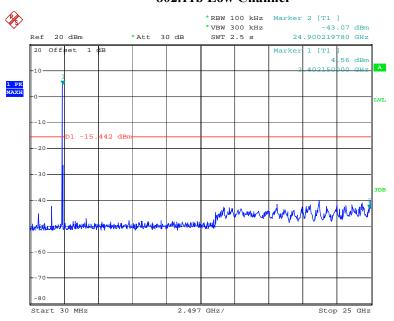

Date: 23.JUL.2013 10:12:01

802.11b Middle Channel

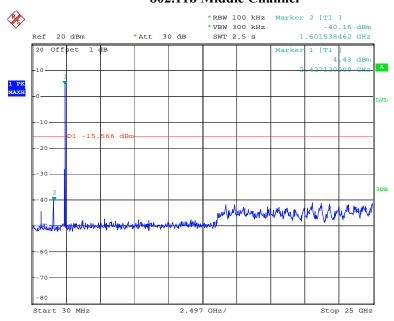


Date: 23.JUL.2013 10:06:57

FCC Part 15.247 Page 28 of 132


802.11b High Channel

Report No.: R2DG130717001-00A

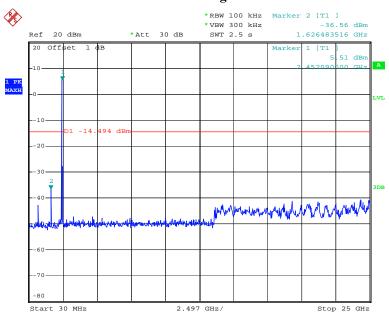

Date: 23.JUL.2013 10:08:39

802.11g Low Channel

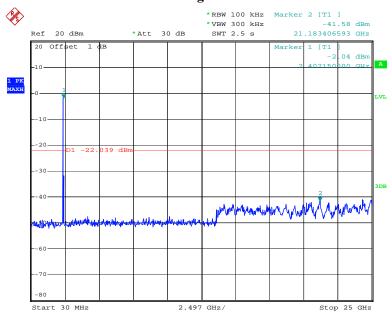


Date: 23.JUL.2013 10:28:21

FCC Part 15.247 Page 29 of 132


802.11g Middle Channel

Report No.: R2DG130717001-00A

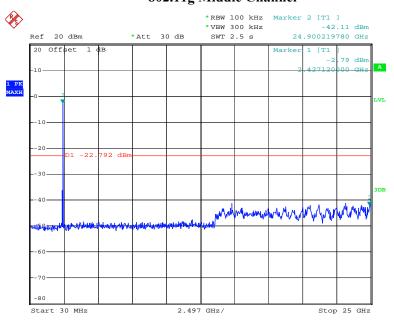

Date: 23.JUL.2013 10:30:30

802.11g High Channel

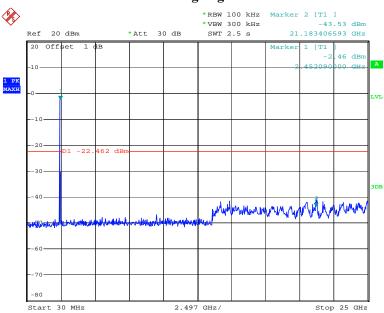


Date: 23.JUL.2013 10:40:08

FCC Part 15.247 Page 30 of 132


Chain 0: 802.11n20 Low Channel

Report No.: R2DG130717001-00A

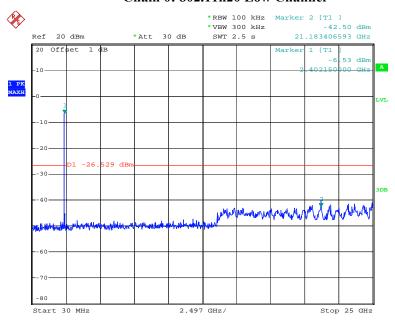

Date: 23.JUL.2013 12:37:23


Chain 0: 802.11n20 Middle Channel

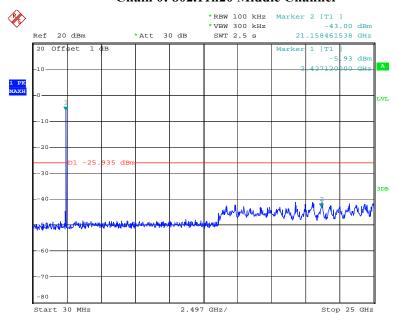

Date: 23.JUL.2013 12:51:24


FCC Part 15.247 Page 31 of 132

Chain 0: 802.11n20 High Channel

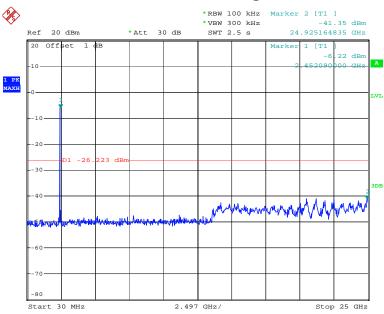


Date: 23.JUL.2013 12:53:32

Chain 1: 802.11n20 Low Channel

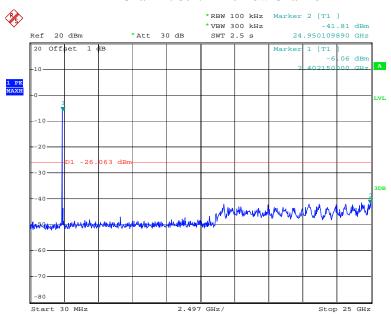


Date: 23.JUL.2013 12:41:28

FCC Part 15.247 Page 32 of 132

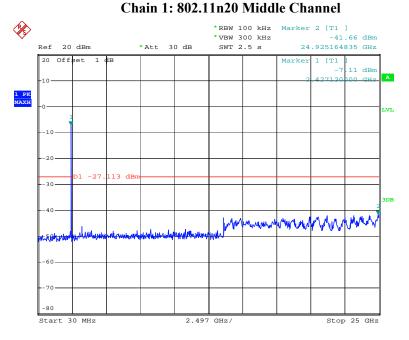

Date: 23.JUL.2013 12:49:10

Chain 1: 802.11n20 High Channel

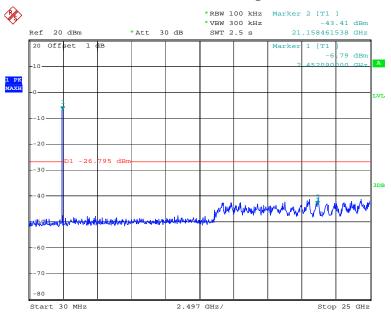


Date: 23.JUL.2013 14:20:56

FCC Part 15.247 Page 33 of 132


Chain 0: 802.11n40 Low Channel

Report No.: R2DG130717001-00A

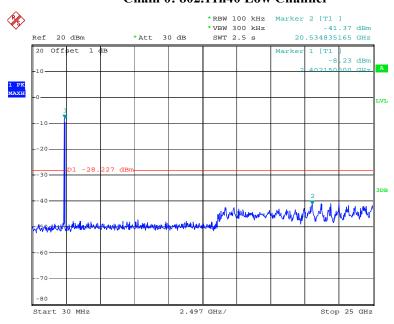

Date: 23.JUL.2013 14:26:07


Chain 0: 802.11n40 Middle Channel

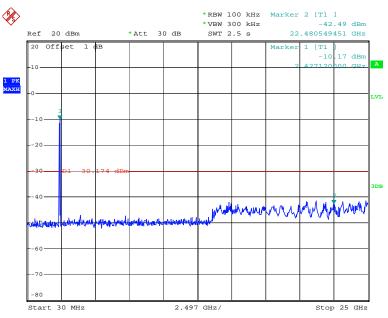

Date: 23.JUL.2013 14:28:30


FCC Part 15.247 Page 34 of 132

Chain 0: 802.11n40 High Channel

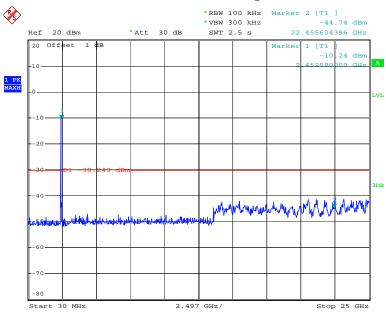

Date: 23.JUL.2013 14:34:39


Chain 1: 802.11n40 Low Channel

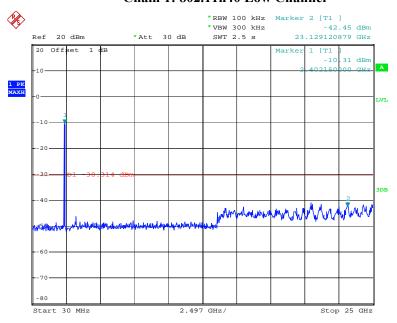

Date: 23.JUL.2013 14:23:24


FCC Part 15.247 Page 35 of 132

Chain 1: 802.11n40 Middle Channel

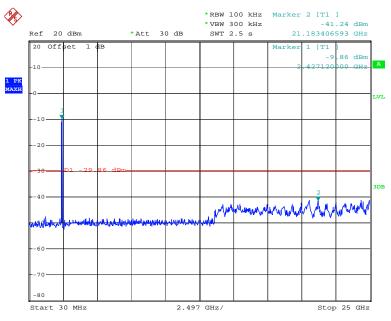

Date: 23.JUL.2013 14:30:01

Chain 1: 802.11n40 High Channel

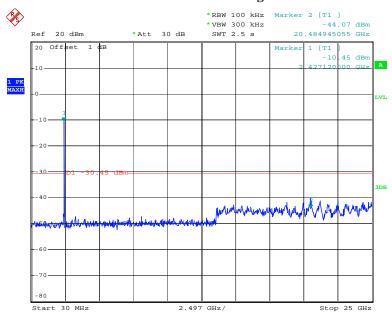


Date: 23.JUL.2013 14:32:41

FCC Part 15.247 Page 36 of 132

5725-5850MHz band:


802.11a Low Channel 30M-26.5G

Report No.: R2DG130717001-00A

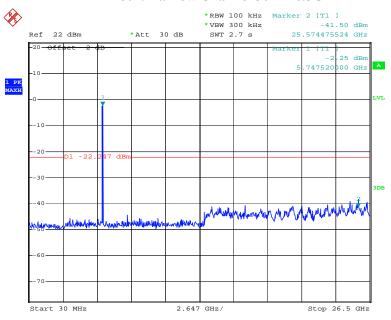

Date: 23.JUL.2013 15:08:26

802.11a Low Channel 26.5-40G

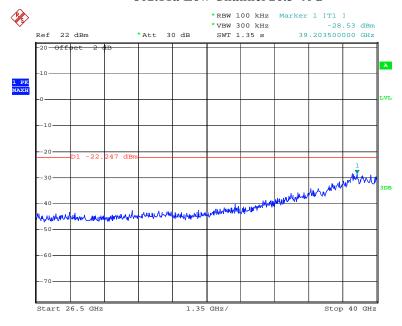


Date: 23.JUL.2013 15:52:18

FCC Part 15.247 Page 37 of 132


802.11a Middle Channel 30M-26.5G

Report No.: R2DG130717001-00A

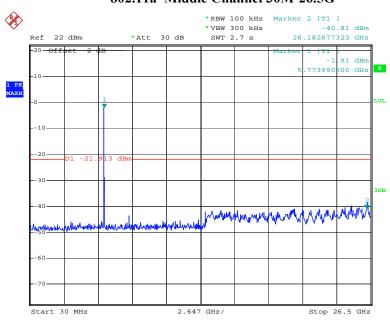

Date: 23.JUL.2013 15:06:40

802.11a Middle Channel 26.5-40G

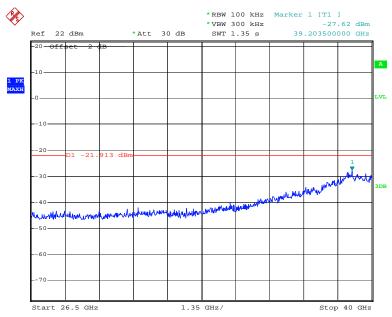


Date: 23.JUL.2013 15:52:34

FCC Part 15.247 Page 38 of 132


802.11a High Channel 30M-26.5G

Report No.: R2DG130717001-00A

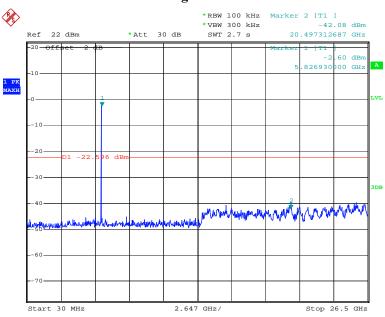

Date: 23.JUL.2013 15:10:14


802.11a High Channel 26.5-40G

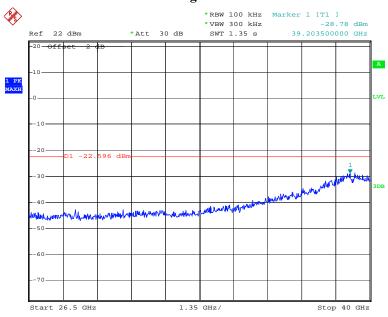

Date: 23.JUL.2013 15:51:04


FCC Part 15.247 Page 39 of 132

Chain 0: 802.11n ht20 Low Channel 30M-26.5G

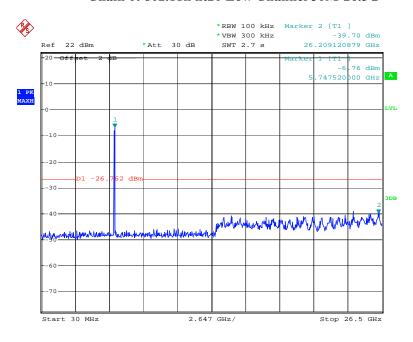


Date: 23.JUL.2013 15:18:56

Chain 0: 802.11n ht20 Low Channel 26.5-40G

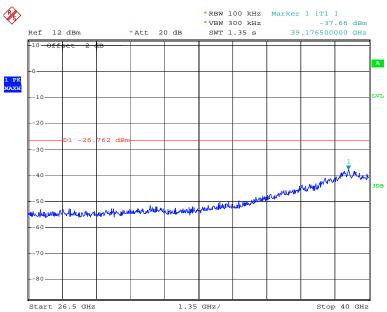


FCC Part 15.247 Page 40 of 132

Chain 0: 802.11n ht20 Middle Channel 30M-26.5G

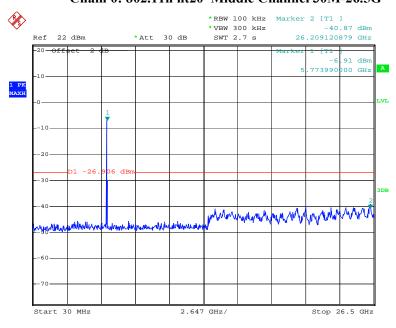

Date: 23.JUL.2013 15:29:53


Chain 0: 802.11n ht20 Middle Channel 26.5-40G

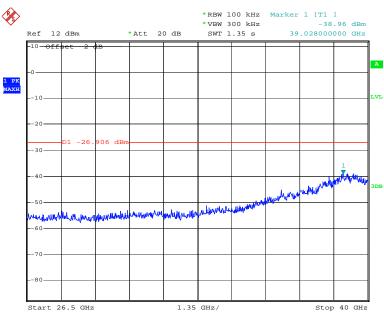

Date: 23.JUL.2013 15:57:25


FCC Part 15.247 Page 41 of 132

Chain 0: 802.11n ht20 High Channel 30M-26.5G

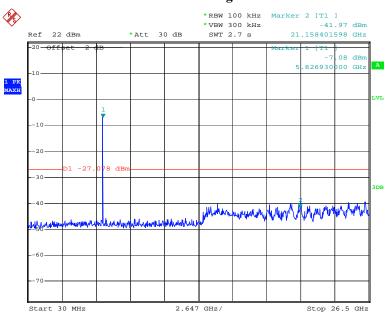

Date: 23.JUL.2013 15:31:43


Chain 0: 802.11n ht20 High Channel 26.5-40G

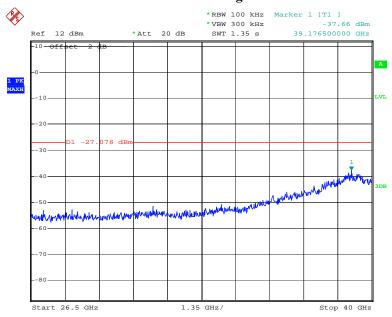

Date: 23.JUL.2013 15:56:07


FCC Part 15.247 Page 42 of 132

Chain 1: 802.11n ht20 Low Channel 30M-26.5G

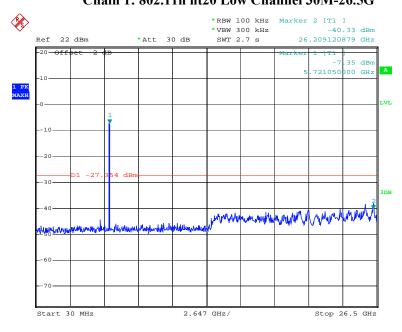

Date: 23.JUL.2013 15:24:04


Chain 1: 802.11n ht20 Low Channel 26.5-40G

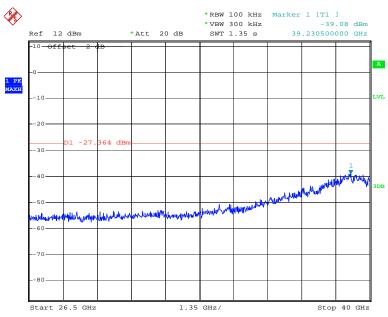

Date: 23.JUL.2013 16:01:05


FCC Part 15.247 Page 43 of 132

Chain 1: 802.11n ht20 Middle Channel 30M-26.5G

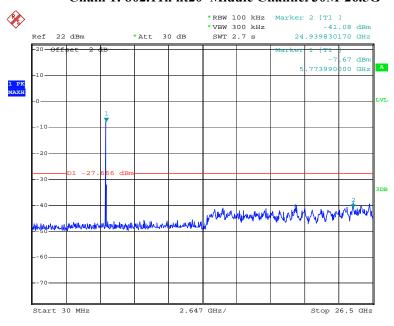

Date: 23.JUL.2013 15:27:01


Chain 1: 802.11n ht20 Middle Channel 26.5-40G

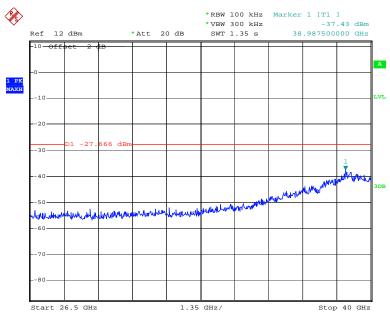

Date: 23.JUL.2013 16:01:20


FCC Part 15.247 Page 44 of 132

Chain 1: 802.11n ht20 High Channel 30M-26.5G

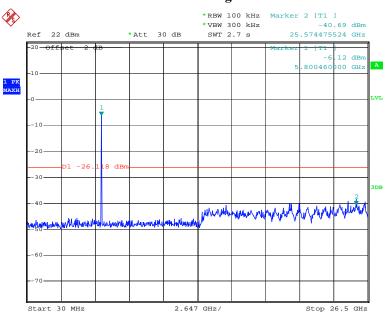

Date: 23.JUL.2013 15:33:42


Chain 1: 802.11n ht20 High Channel 26.5-40G

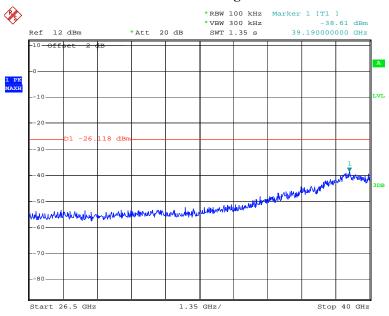

Date: 23.JUL.2013 16:00:45


FCC Part 15.247 Page 45 of 132

Chain 0: 802.11n ht40 Low Channel 30M-26.5G

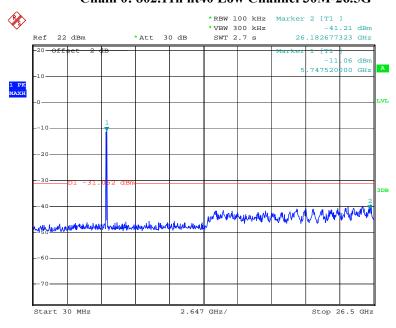


Date: 23.JUL.2013 15:40:59

Chain 0: 802.11n ht40 Low Channel 26.5-40G

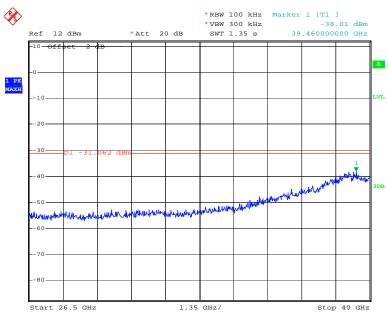


Date: 23.JUL.2013 15:59:41

FCC Part 15.247 Page 46 of 132

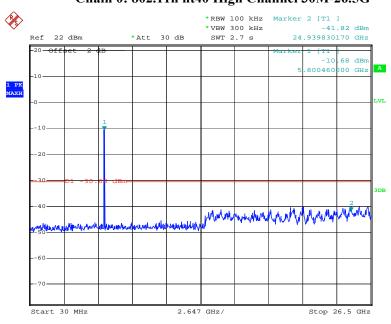

Date: 23.JUL.2013 15:44:38


Chain 0: 802.11n ht40 High Channel 26.5-40G

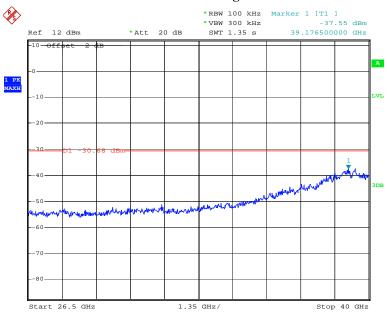

Date: 23.JUL.2013 15:59:02


FCC Part 15.247 Page 47 of 132

Chain 1: 802.11n ht40 Low Channel 30M-26.5G

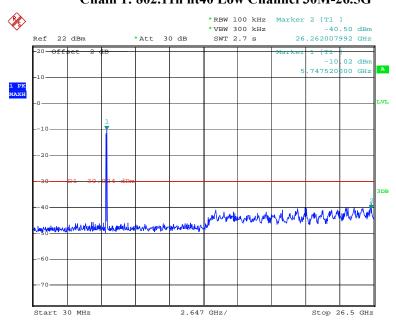

Date: 23.JUL.2013 15:38:46


Chain 1: 802.11n ht40 Low Channel 26.5-40G

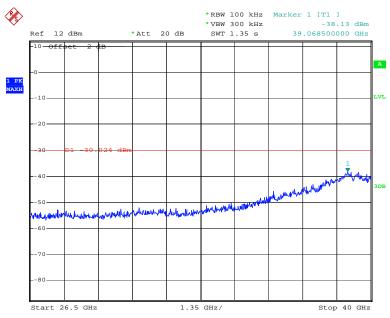

Date: 23.JUL.2013 16:02:38


FCC Part 15.247 Page 48 of 132

Chain 1: 802.11n ht40 High Channel 30M-26.5G

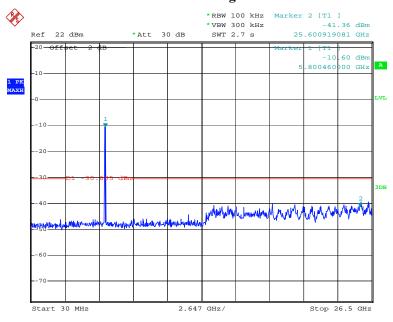

Date: 23.JUL.2013 15:46:28

Chain 1: 802.11n ht40 High Channel 26.5-40G

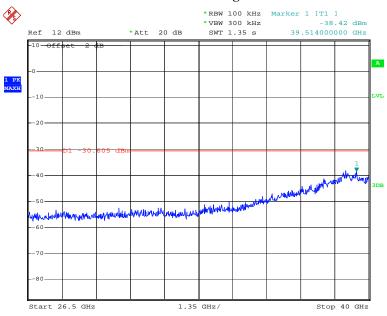

Date: 23.JUL.2013 16:02:17

FCC Part 15.247 Page 49 of 132

FCC $\S15.247(a)$ (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Report No.: R2DG130717001-00A

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.2 °C	
Relative Humidity:	67 %	
ATM Pressure:	100.3kPa	

The testing was performed by Ares Liu on 2013-07-23.

Test Result: Pass.

Please refer to the following tables and plots.

FCC Part 15.247 Page 50 of 132


Channel	Frequency	6 dB Bandwidth	Limit				
Channel	(MHz)	(MHz)	(kHz)				
2.4G band-802.11b mode							
Low	2412	12.11	>500				
Middle	2437	11.19	>500				
High	2462	11.19	>500				
	2.4G band-802.11g mode						
Low	2412	16.46	>500				
Middle	2437	16.50	>500				
High	2462	16.54	>500				
		hain 0: 802.11n20 mode					
Low	2412	17.66	>500				
Middle	2437	17.62	>500				
High	2462	17.38	>500				
		hain 1: 802.11n20 mode					
Low	2412	17.34	>500				
Middle	2437	17.70	>500				
High	2462	17.42	>500				
	2.4G band-chain 0: 802.11n40 mode						
Low	2422	36.44	>500				
Middle	2437	36.44	>500				
High	2452	36.44	>500				
	+	hain 1: 802.11n40 mode					
Low	2422	36.20	>500				
Middle	2437	36.44	>500				
High	2452	36.04	>500				
		IHz band-802.11a mode					
Low	5745	16.46	>500				
Middle	5785	16.54	>500				
High	5825	16.50	>500				
5725-5850MHz band-chain 0:802.11n ht20 mode							
Low	5745	17.38	>500				
Middle	5785	17.38	>500				
High	5825	17.38	>500				
5725-5850MHz band-chain 1:802.11n ht20 mode							
Low	5745	17.62	>500				
Middle	5785	17.38	>500				
High	5825	17.38	>500				
5725-5850MHz band-chain 0:802.11n ht40 mode							
Low	5755	36.44 >500					
High	5795	36.44	>500				
111511		nd-chain 1:802.11n ht40					
Low	5755	36.44	>500				
	+	36.44					
High	5795	30.44	>500				

FCC Part 15.247 Page 51 of 132

2.4G band:


802.11b Low Channel

Report No.: R2DG130717001-00A

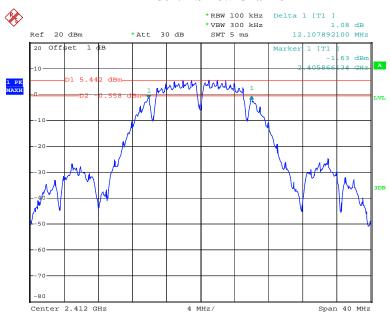

Date: 23.JUL.2013 10:11:20


802.11b Middle Channel

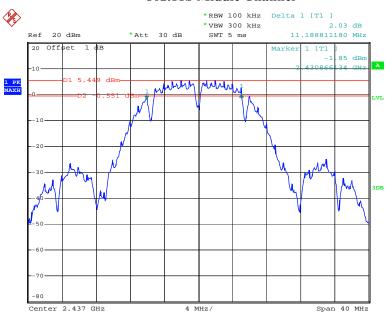

Date: 23.JUL.2013 10:06:00


FCC Part 15.247 Page 52 of 132

802.11b High Channel

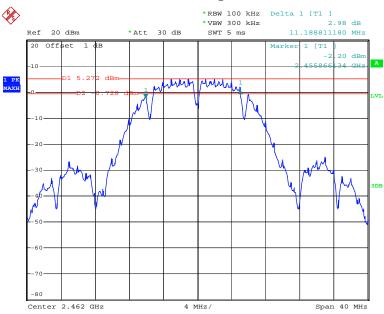

Date: 23.JUL.2013 10:07:46


802.11g Low Channel

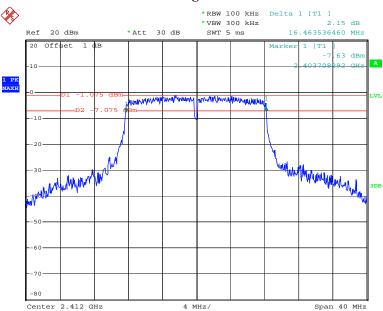

Date: 23.JUL.2013 10:27:39


FCC Part 15.247 Page 53 of 132



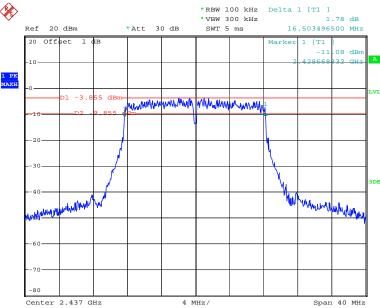

Date: 23.JUL.2013 10:29:04

802.11g High Channel

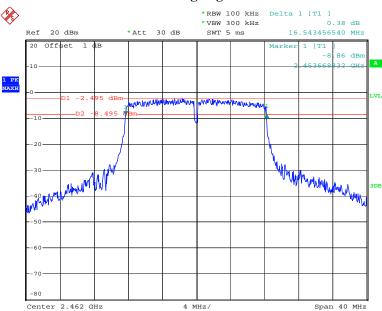


Date: 23.JUL.2013 10:39:10

FCC Part 15.247 Page 54 of 132


Chain 0: 802.11n20 Low Channel

Report No.: R2DG130717001-00A

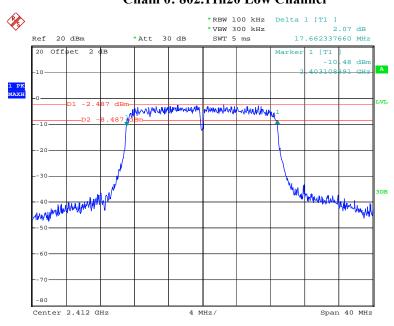

Date: 23.JUL.2013 16:25:32


Chain 0: 802.11n20 Middle Channel

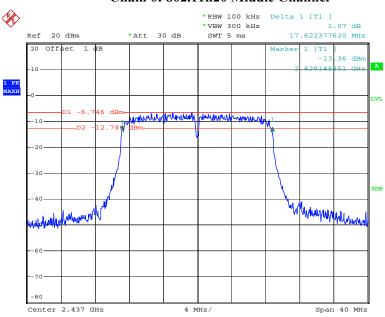

Date: 23.JUL.2013 12:50:13


FCC Part 15.247 Page 55 of 132

Chain 0: 802.11n20 High Channel

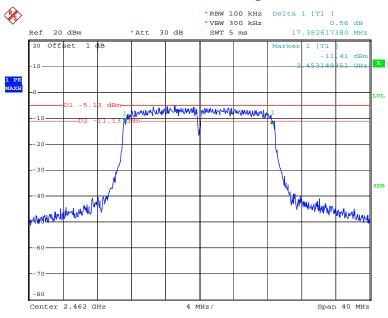


Date: 23.JUL.2013 12:52:49

Chain 1: 802.11n20 Low Channel

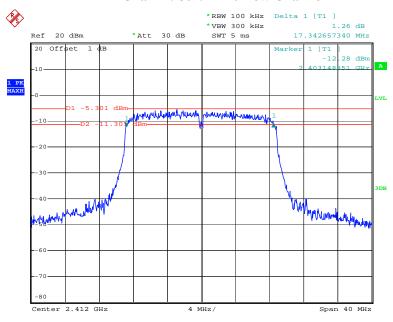


Date: 23.JUL.2013 12:42:37

FCC Part 15.247 Page 56 of 132

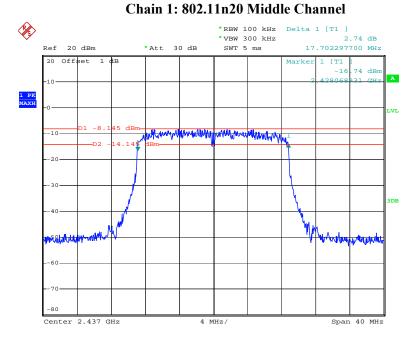

Date: 23.JUL.2013 16:49:26

Chain 1: 802.11n20 High Channel

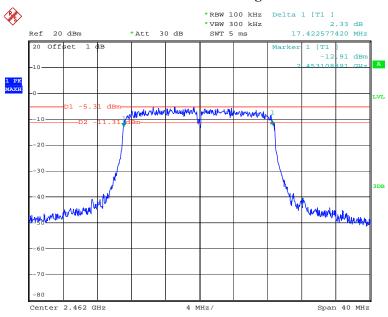


Date: 23.JUL.2013 14:20:13

FCC Part 15.247 Page 57 of 132


Chain 0: 802.11n40 Low Channel

Report No.: R2DG130717001-00A

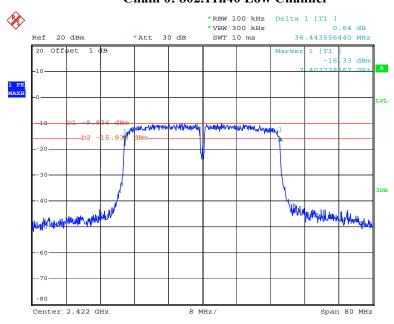

Date: 23.JUL.2013 14:24:48

Chain 0: 802.11n40 Middle Channel

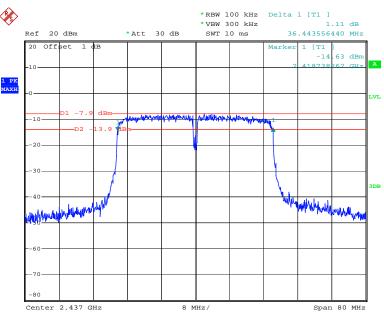


Date: 23.JUL.2013 14:27:16

FCC Part 15.247 Page 58 of 132


Chain 0: 802.11n40 High Channel

Report No.: R2DG130717001-00A

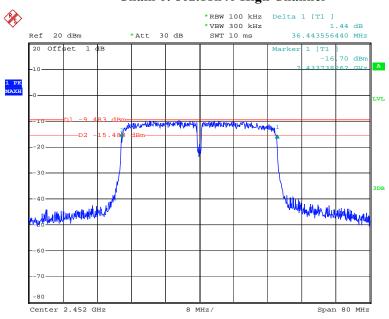

Date: 23.JUL.2013 14:33:38


Chain 1: 802.11n40 Low Channel

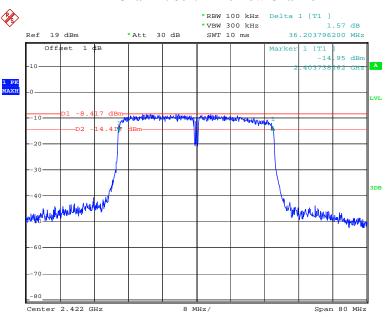

Date: 23.JUL.2013 16:47:14


FCC Part 15.247 Page 59 of 132

Chain 1: 802.11n40 Middle Channel

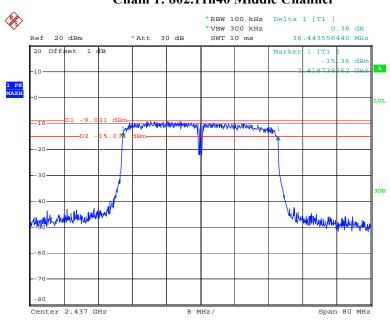

Date: 23.JUL.2013 14:29:08

Chain 1: 802.11n40 High Channel

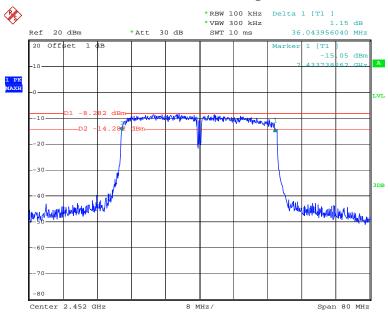


Date: 23.JUL.2013 14:31:09

5725-5850MHz band:


FCC Part 15.247 Page 60 of 132

802.11a Low Channel

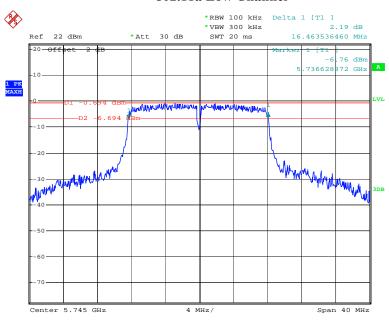

Date: 23.JUL.2013 15:07:18

802.11a Middle Channel

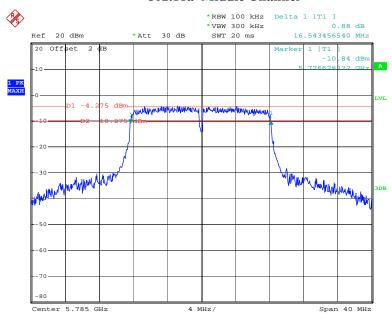


Date: 23.JUL.2013 16:36:57

FCC Part 15.247 Page 61 of 132


802.11a High Channel

Report No.: R2DG130717001-00A

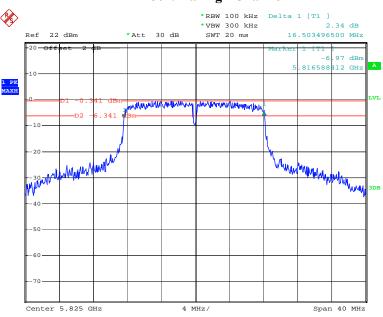

Date: 23.JUL.2013 15:09:21

Chain 0:802.11n ht20 Low Channel

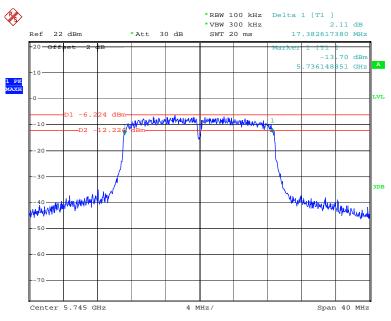


Date: 23.JUL.2013 15:18:07

FCC Part 15.247 Page 62 of 132


Chain 0:802.11n ht20 Middle Channel

Report No.: R2DG130717001-00A

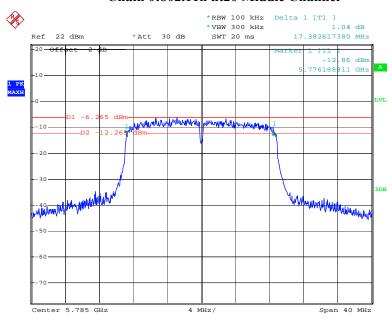

Date: 23.JUL.2013 15:28:39

Chain 0:802.11n ht20 High Channel

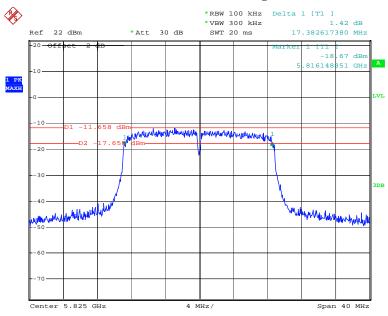


Date: 23.JUL.2013 15:30:36

FCC Part 15.247 Page 63 of 132


Chain 1:802.11n ht20 Low Channel

Report No.: R2DG130717001-00A

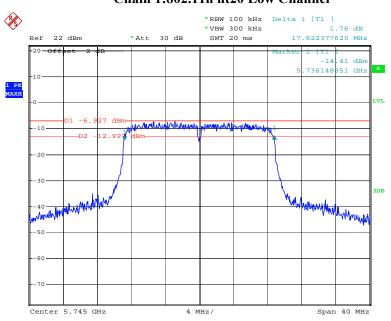

Date: 23.JUL.2013 15:22:53

Chain 1:802.11n ht20 Middle Channel

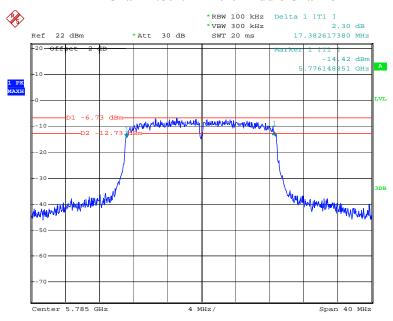


Date: 23.JUL.2013 15:25:31

FCC Part 15.247 Page 64 of 132


Chain 1:802.11n ht20 High Channel

Report No.: R2DG130717001-00A

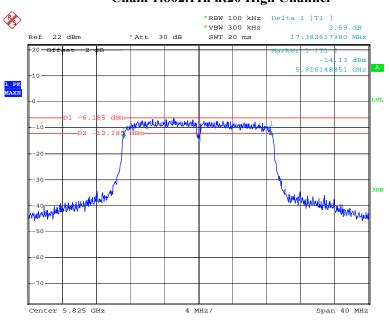

Date: 23.JUL.2013 15:32:33

Chain 0:802.11n ht40 Low Channel

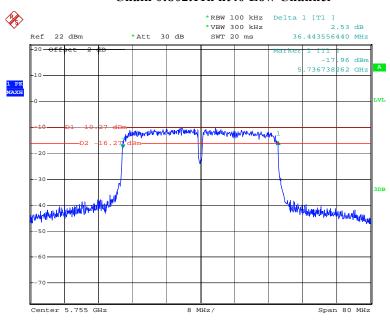


Date: 23.JUL.2013 15:39:51

FCC Part 15.247 Page 65 of 132


Chain 0:802.11n ht40 High Channel

Report No.: R2DG130717001-00A

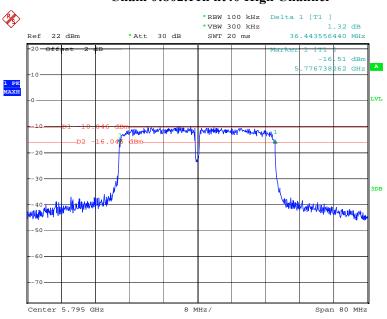

Date: 23.JUL.2013 15:43:38


Chain 1:802.11n ht40 Low Channel

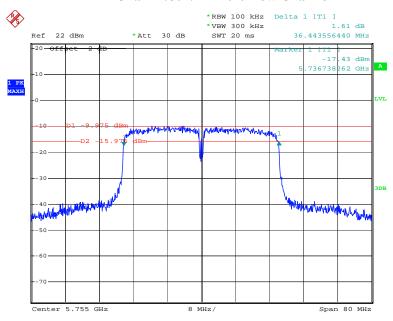

Date: 23.JUL.2013 15:37:38

FCC Part 15.247 Page 66 of 132

Chain 1:802.11n ht40 High Channel

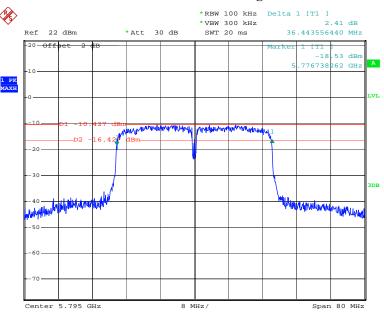

Date: 23.JUL.2013 15:45:29

FCC Part 15.247 Page 67 of 132

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Report No.: R2DG130717001-00A

Test Procedure

- 1. Place the EUT on a bench and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
- 3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.2 °C	
Relative Humidity:	67 %	
ATM Pressure:	100.3kPa	

The testing was performed by Ares Liu on 2013-07-23.

FCC Part 15.247 Page 68 of 132

Test Mode: Transmitting

		Conducted				
Channel	Frequency	Output Power	Limit	Result		
	(MHz) (dBm)		(dBm)			
2.4G band-802.11b mode						
Low	2412	17.38	30	PASS		
Middle	2437	17.70	30	PASS		
High	2462	17.55	30	PASS		
	2.4G ba	ind-802.11g mode				
Low	2412	14.44	30	PASS		
Middle	2437	14.30	30	PASS		
High	2462	14.31	30	PASS		
	2.4G band-ch	nain 0: 802.11n20 n	node			
Low	2412	12.27	30	PASS		
Middle	2437	10.26	30	PASS		
High	2462	10.02	30	PASS		
	2.4G band-ch	nain 1: 802.11n20 n	node			
Low	2412	9.62	30	PASS		
Middle	2437	10.35	30	PASS		
High	2462	9.69	30	PASS		
	2.4G band-ch	nain 0: 802.11n40 n	node			
Low	2422	10.16	30	PASS		
Middle	2437	9.54	30	PASS		
High	2452	9.24	30	PASS		
2.4G band-chain 1: 802.11n40 mode						
Low	2422	10.46	30	PASS		
Middle	2437	9.50	30	PASS		
High	2452	9.44	30	PASS		
5725-5850MHz band-802.11a mode						
Low	5745	12.53	30	PASS		
Middle	5785	10.24	30	PASS		
High	5825	12.36	30	PASS		
5725-5850MHz band-chain 0: 802.11n ht20 mode						
Low	5745	8.24	30	PASS		
Middle	5785	8.17	30	PASS		
High	5825	8.32	30	PASS		
5725-5850MHz band-chain 1: 802.11n ht20 mode						
Low	5745	7.83	30	PASS		
Middle	5785	8.28	30	PASS		
High	5825	8.34	30	PASS		
5725-5850MHz band-chain 0: 802.11n ht40 mode						
Low	5755	7.67	30	PASS		
High	5795	7.86	30	PASS		
5725-5850MHz band-chain 1: 802.11n ht40 mode						
Low	5755	8.17	30	PASS		
High	5795	8.00	30	PASS		

FCC Part 15.247 Page 69 of 132

Channel	Frequency	Conducted Output Power	Limit	Result		
	(MHz)	(dBm)	(dBm)			
	2.4G band-T	Гotal:802.11n20 m	ode			
Low	2412	14.15	30	PASS		
Middle	2437	13.32	30	PASS		
High	2462	12.87	30	PASS		
	2.4G band-Total:802.11n40 mode					
Low	2422	13.32	30	PASS		
Middle	2437	12.53	30	PASS		
High	2452	12.35	30	PASS		
5725-5850MHz band-Total:802.11n ht20 mode						
Low	5745	11.05	30	PASS		
Middle	5785	11.24	30	PASS		
High	5825	11.34	30	PASS		
5725-5850MHz band-Total:802.11n ht40 mode						
Low	5755	10.94	30	PASS		
High	5795	10.94	30	PASS		


Please refer to the following plots

FCC Part 15.247 Page 70 of 132

2.4G band:


802.11b RF Output Power, Low Channel

Report No.: R2DG130717001-00A

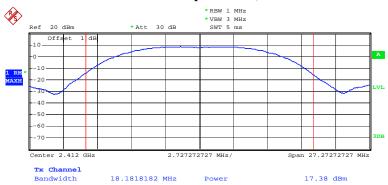

Date: 23.JUL.2013 10:11:40

802.11b 26dB Bandwidth, Low Channel

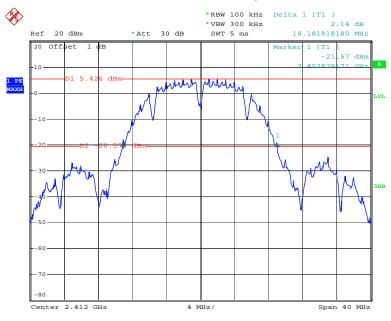


Date: 23.JUL.2013 10:11:33

FCC Part 15.247 Page 71 of 132


802.11b RF Output Power, Middle Channel

Report No.: R2DG130717001-00A

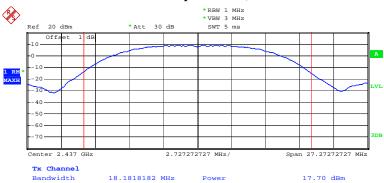

Date: 23.JUL.2013 10:06:36

802.11b 26dB Bandwidth, Middle Channel

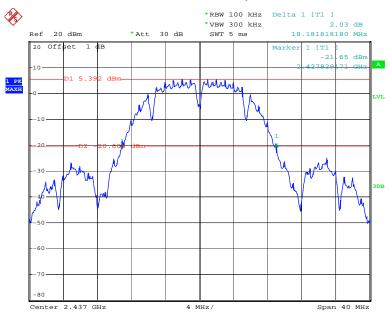

Date: 23.JUL.2013 10:06:13

FCC Part 15.247 Page 72 of 132


802.11b RF Output Power, High Channel

Report No.: R2DG130717001-00A



Date: 23.JUL.2013 10:08:18

802.11b 26dB Bandwidth, High Channel

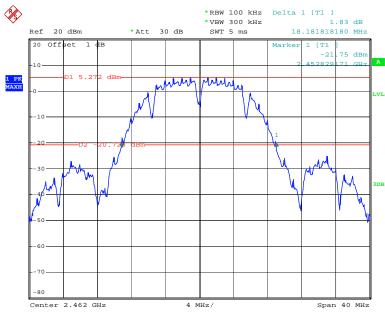

Date: 23.JUL.2013 10:07:59

FCC Part 15.247 Page 73 of 132


802.11g RF Output Power, Low Channel

Report No.: R2DG130717001-00A



Date: 23.JUL.2013 10:27:58

802.11g 26dB Bandwidth, Low Channel

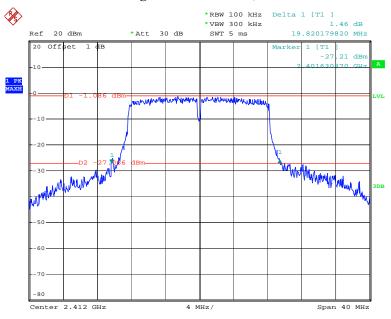


Date: 23.JUL.2013 10:27:52

FCC Part 15.247 Page 74 of 132


802.11g RF Output Power, Middle Channel

Report No.: R2DG130717001-00A

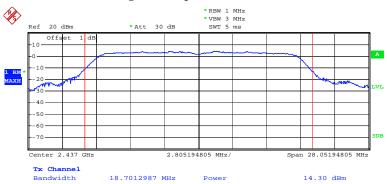

Date: 23.JUL.2013 10:30:07

802.11g 26dB Bandwidth, Middle Channel

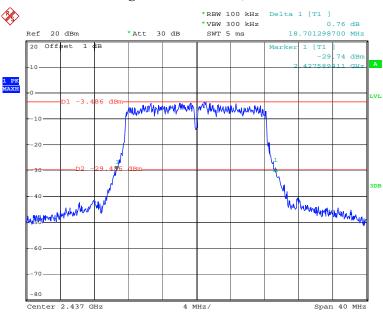


Date: 23.JUL.2013 10:29:17

FCC Part 15.247 Page 75 of 132


802.11g RF Output Power, High Channel

Report No.: R2DG130717001-00A

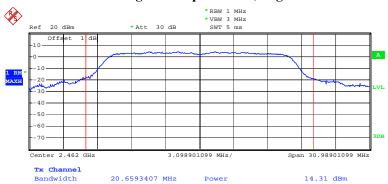

Date: 23.JUL.2013 10:39:45


802.11g 26dB Bandwidth, High Channel

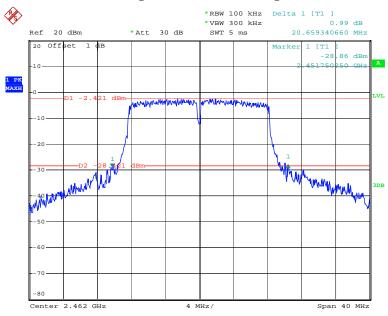

Date: 23.JUL.2013 10:39:23


FCC Part 15.247 Page 76 of 132

Chain 0: 802.11n20 RF Output Power, Low Channel

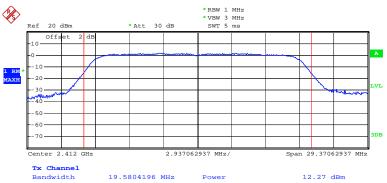

Date: 23.JUL.2013 16:25:50


Chain 0: 802.11n20 26dB Bandwidth, Low Channel

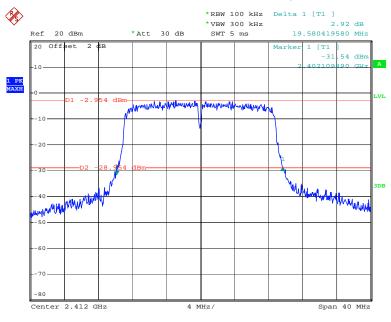

Date: 23.JUL.2013 16:25:44


FCC Part 15.247 Page 77 of 132

Chain 0: 802.11n20 RF Output Power, Middle Channel

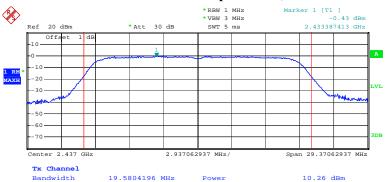

Date: 23.JUL.2013 12:51:00

Chain 0: 802.11n20 26dB Bandwidth, Middle Channel

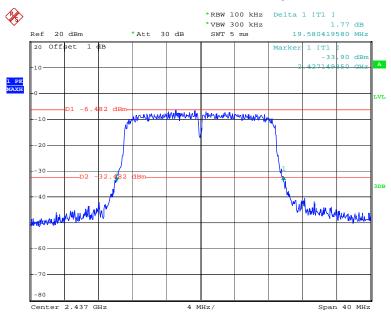


Date: 23.JUL.2013 12:50:26

FCC Part 15.247 Page 78 of 132


Report No.: R2DG130717001-00A

Chain 0: 802.11n20 RF Output Power, High Channel

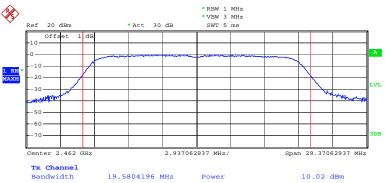

Date: 23.JUL.2013 12:53:09


Chain 0: 802.11n20 26dB Bandwidth, High Channel

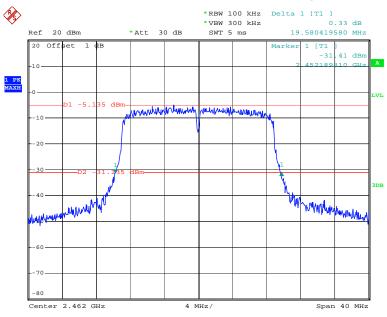

Date: 23.JUL.2013 12:53:02


FCC Part 15.247 Page 79 of 132

Chain 1: 802.11n20 RF Output Power, Low Channel

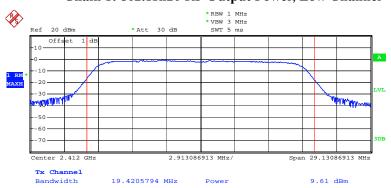

Date: 23.JUL.2013 12:42:56


Chain 1: 802.11n20 26dB Bandwidth, Low Channel

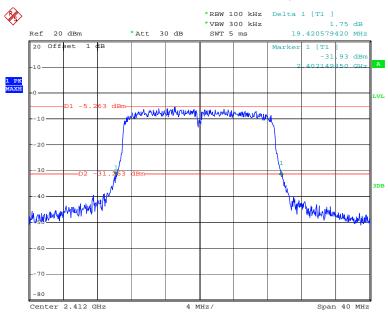

Date: 23.JUL.2013 12:42:50


FCC Part 15.247 Page 80 of 132

Chain 1: 802.11n20 RF Output Power, Middle Channel

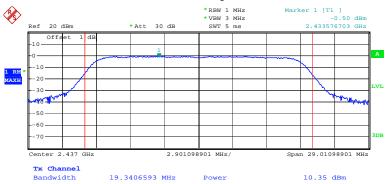

Date: 23.JUL.2013 16:50:18


Chain 1: 802.11n20 26dB Bandwidth, Middle Channel

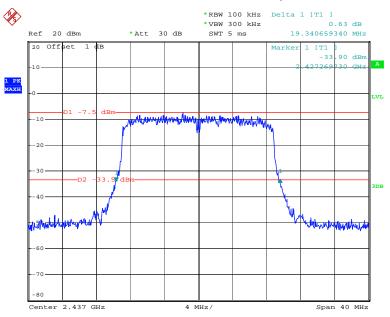

Date: 23.JUL.2013 16:49:39


FCC Part 15.247 Page 81 of 132

Chain 1: 802.11n20 RF Output Power, High Channel

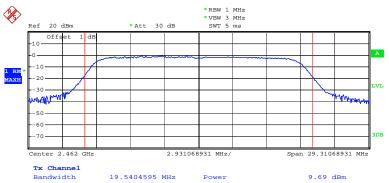

Date: 23.JUL.2013 14:20:32

Chain 1: 802.11n20 26dB Bandwidth, High Channel

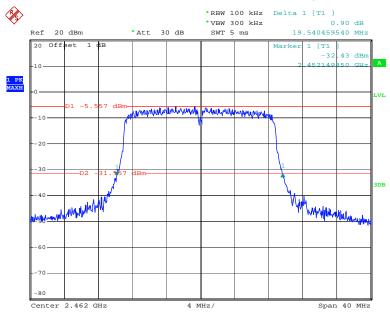


Date: 23.JUL.2013 14:20:26

FCC Part 15.247 Page 82 of 132


Report No.: R2DG130717001-00A

Chain 0: 802.11n40 RF Output Power, Low Channel

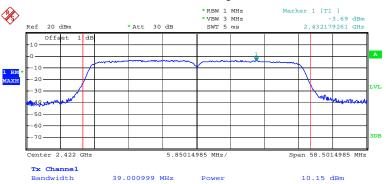

Date: 23.JUL.2013 14:25:34

Chain 0: 802.11n40 26dB Bandwidth, Low Channel

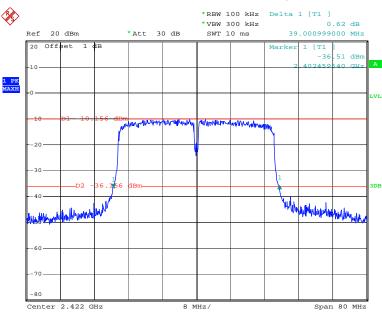


Date: 23.JUL.2013 14:25:01

FCC Part 15.247 Page 83 of 132


Report No.: R2DG130717001-00A

Chain 0: 802.11n40 RF Output Power, Middle Channel

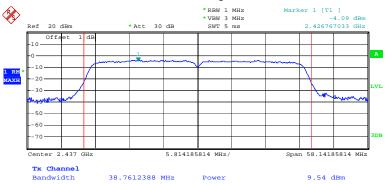

Date: 23.JUL.2013 14:27:57


Chain 0: 802.11n40 26dB Bandwidth, Middle Channel

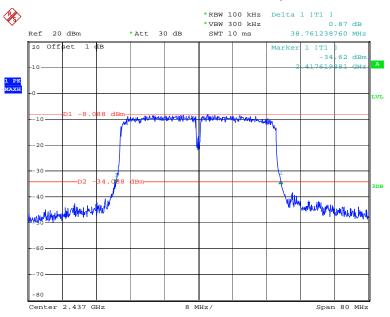

Date: 23.JUL.2013 14:27:29


FCC Part 15.247 Page 84 of 132

Chain 0: 802.11n40 RF Output Power, High Channel

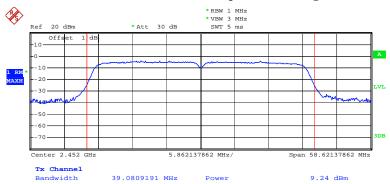

Date: 23.JUL.2013 14:34:06


Chain 0: 802.11n40 26dB Bandwidth, High Channel

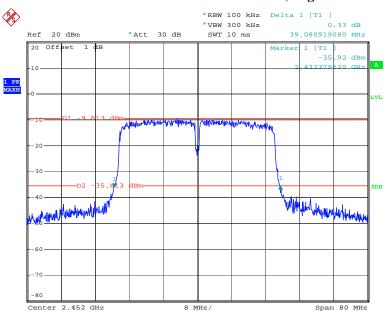

Date: 23.JUL.2013 14:33:51


FCC Part 15.247 Page 85 of 132

Report No.: R2DG130717001-00A

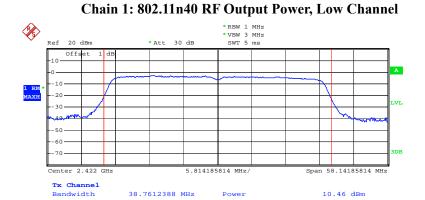

Date: 23.JUL.2013 16:47:38


Chain 1: 802.11n40 26dB Bandwidth, Low Channel

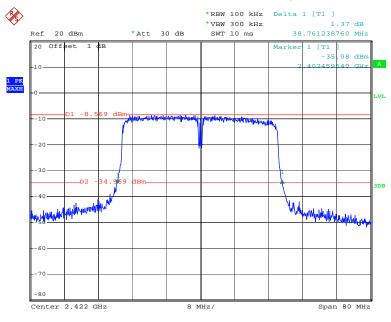

Date: 23.JUL.2013 16:47:27


FCC Part 15.247 Page 86 of 132

Chain 1: 802.11n40 RF Output Power, Middle Channel

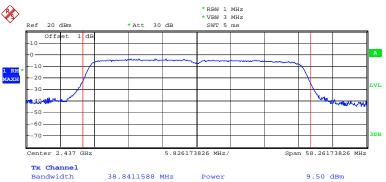

Date: 23.JUL.2013 14:29:27

Chain 1: 802.11n40 26dB Bandwidth, Middle Channel

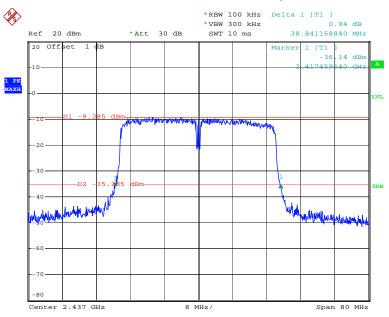


Date: 23.JUL.2013 14:29:21

FCC Part 15.247 Page 87 of 132


Report No.: R2DG130717001-00A

Chain 1: 802.11n40 RF Output Power, High Channel

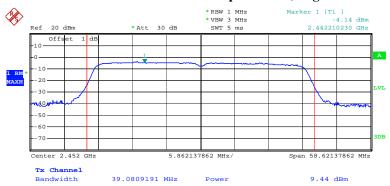

Date: 23.JUL.2013 14:32:08

Chain 1: 802.11n40 26dB Bandwidth, High Channel

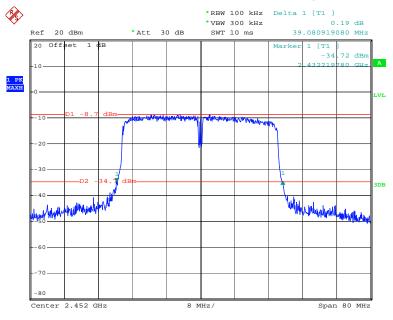


Date: 23.JUL.2013 14:31:22

FCC Part 15.247 Page 88 of 132

5725-5850MHz:


802.11a RF Output Power, Low Channel

Report No.: R2DG130717001-00A

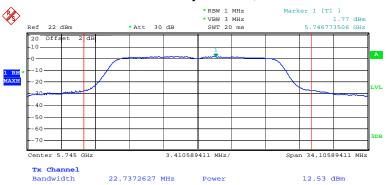

Date: 23.JUL.2013 15:08:03

802.11a 26dB Bandwidth, Low Channel

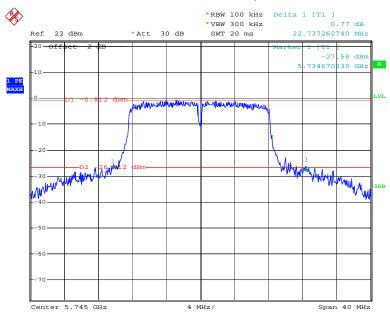


Date: 23.JUL.2013 15:07:31

FCC Part 15.247 Page 89 of 132


802.11a RF Output Power, Middle Channel

Report No.: R2DG130717001-00A

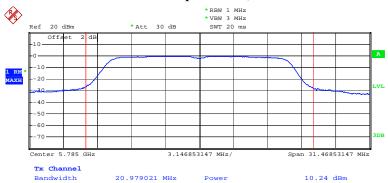

Date: 23.JUL.2013 16:37:17

802.11a 26dB Bandwidth, Middle Channel

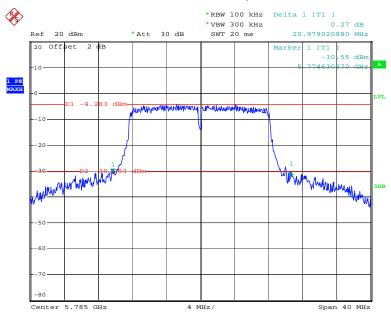

Date: 23.JUL.2013 16:37:10

FCC Part 15.247 Page 90 of 132


802.11a RF Output Power, High Channel

Report No.: R2DG130717001-00A



Date: 23.JUL.2013 15:09:51

802.11a 26dB Bandwidth, High Channel

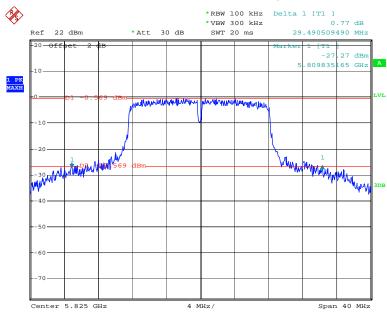


Date: 23.JUL.2013 15:09:34

FCC Part 15.247 Page 91 of 132


Chain 0:802.11n ht20 RF Output Power, Low Channel

Report No.: R2DG130717001-00A

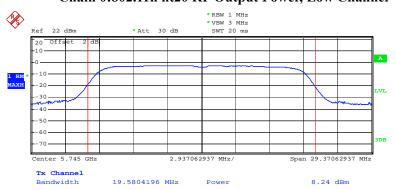

Date: 23.JUL.2013 15:18:33

Chain 0:802.11n ht20 26dB Bandwidth, Low Channel

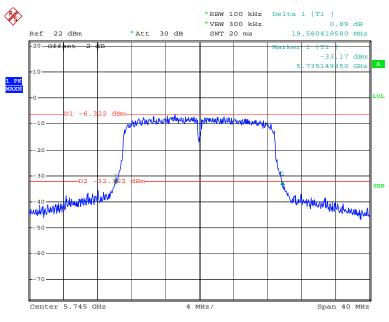


Date: 23.JUL.2013 15:18:20

FCC Part 15.247 Page 92 of 132


Chain 0:802.11n ht20 RF Output Power, Middle Channel

Report No.: R2DG130717001-00A

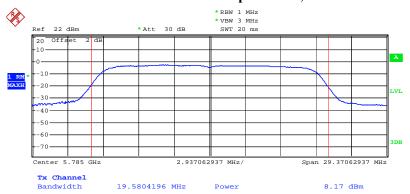

Date: 23.JUL.2013 15:29:29

Chain 0:802.11n ht20 26dB Bandwidth, Middle Channel

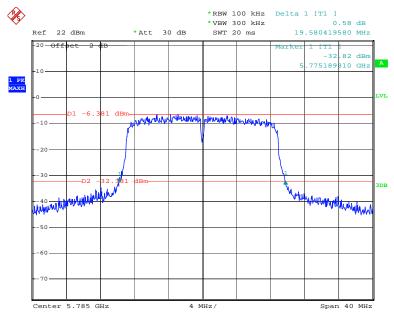


Date: 23.JUL.2013 15:28:53

FCC Part 15.247 Page 93 of 132


Chain 0:802.11n ht20 RF Output Power, High Channel

Report No.: R2DG130717001-00A

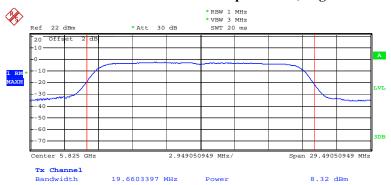

Date: 23.JUL.2013 15:31:19


Chain 0:802.11n ht20 26dB Bandwidth, High Channel

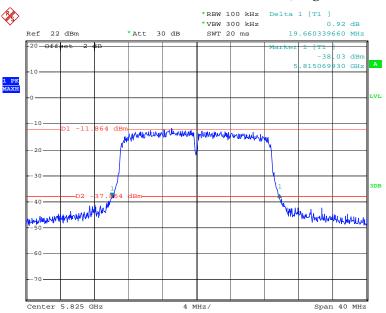

Date: 23.JUL.2013 15:30:49


FCC Part 15.247 Page 94 of 132

Chain 1:802.11n ht20 RF Output Power, Low Channel

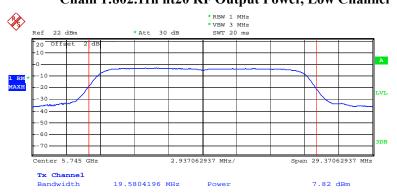

Date: 23.JUL.2013 15:23:40

Chain 1:802.11n ht20 26dB Bandwidth, Low Channel

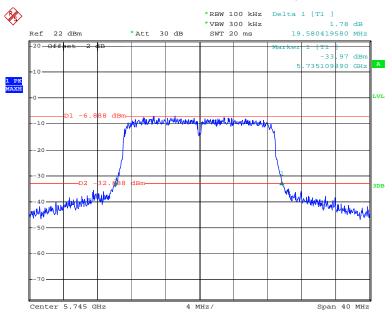


Date: 23.JUL.2013 15:23:06

FCC Part 15.247 Page 95 of 132


Chain 1:802.11n ht20 RF Output Power, Middle Channel

Report No.: R2DG130717001-00A

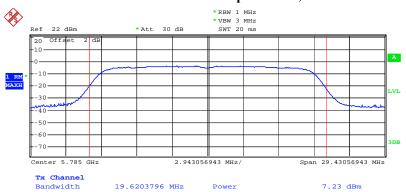

Date: 23.JUL.2013 15:25:50


Chain 1:802.11n ht20 26dB Bandwidth, Middle Channel

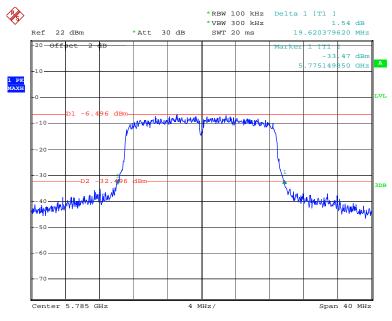

Date: 23.JUL.2013 15:25:44


FCC Part 15.247 Page 96 of 132

Chain 1:802.11n ht20 RF Output Power, High Channel

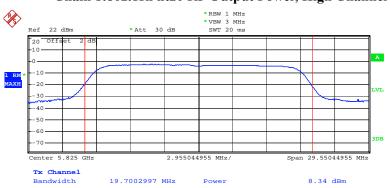

Date: 23.JUL.2013 15:33:19

Chain 1:802.11n ht20 26dB Bandwidth, High Channel

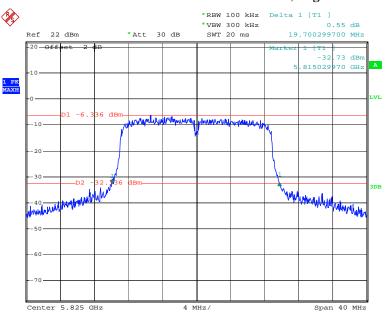

Date: 23.JUL.2013 15:32:46


FCC Part 15.247 Page 97 of 132

Chain 0:802.11n ht40 RF Output Power, Low Channel



Date: 23.JUL.2013 15:40:26

Chain 0:802.11n ht40 26dB Bandwidth, Low Channel

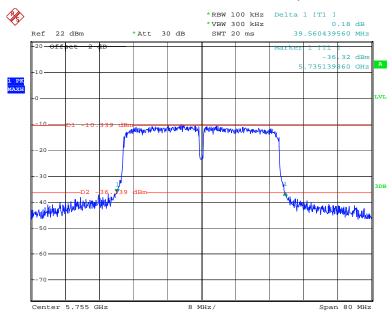


Date: 23.JUL.2013 15:40:04

FCC Part 15.247 Page 98 of 132


Chain 0:802.11n ht40 RF Output Power, High Channel

Report No.: R2DG130717001-00A

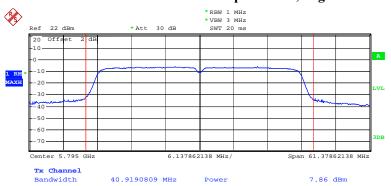

Date: 23.JUL.2013 15:44:04


Chain 0:802.11n ht40 26dB Bandwidth, High Channel

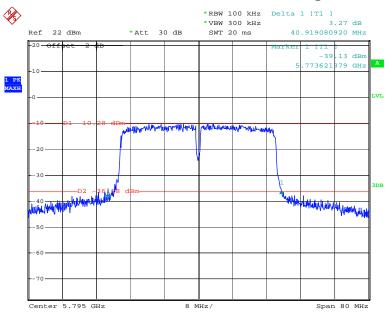

Date: 23.JUL.2013 15:43:51


FCC Part 15.247 Page 99 of 132

Chain 1:802.11n ht40 RF Output Power, Low Channel

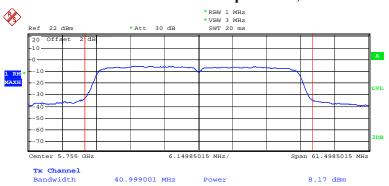

Date: 23.JUL.2013 15:38:13


Chain 1:802.11n ht40 26dB Bandwidth, Low Channel

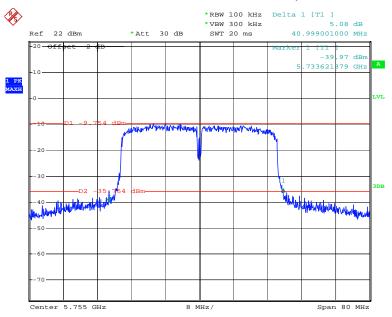

Date: 23.JUL.2013 15:37:51


FCC Part 15.247 Page 100 of 132

Chain 1:802.11n ht40 RF Output Power, High Channel

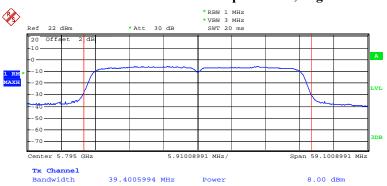

Date: 23.JUL.2013 15:45:55

Chain 1:802.11n ht40 26dB Bandwidth, High Channel

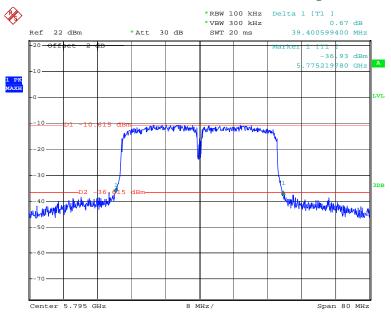

Date: 23.JUL.2013 15:45:43

FCC Part 15.247 Page 101 of 132

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Report No.: R2DG130717001-00A

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.2 °C	
Relative Humidity:	67 %	
ATM Pressure:	100.3kPa	

The testing was performed by Ares Liu on 2013-07-23.

Test Result: Compliance


Test mode: Transmitting

FCC Part 15.247 Page 102 of 132

Please refer to following table and plots.


2.4G band:

802.11b: Band Edge, Left Side

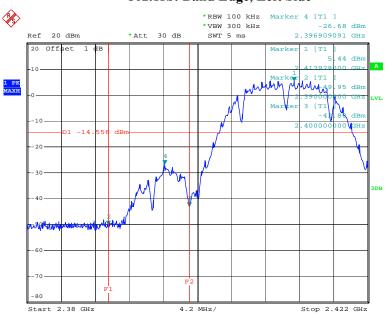

Date: 23.JUL.2013 10:12:13

802.11b: Band Edge, Right Side

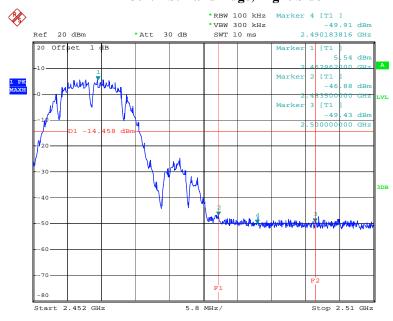


Date: 23.JUL.2013 10:08:51

FCC Part 15.247 Page 103 of 132


802.11g: Band Edge, Left Side

Report No.: R2DG130717001-00A

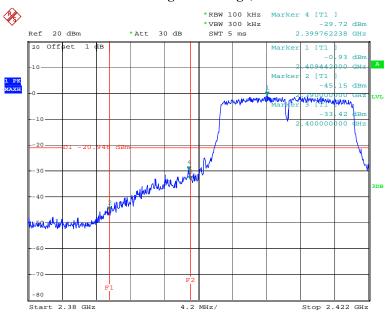

Date: 23.JUL.2013 10:28:33


802.11g: Band Edge, Right Side

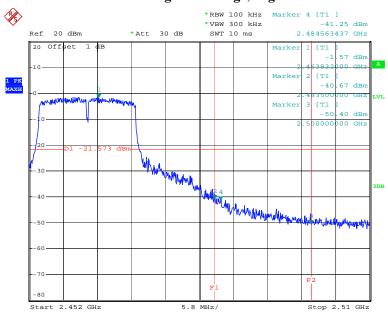

Date: 23.JUL.2013 10:40:20


FCC Part 15.247 Page 104 of 132

Chain 0: 802.11n20 Band Edge, Left Side

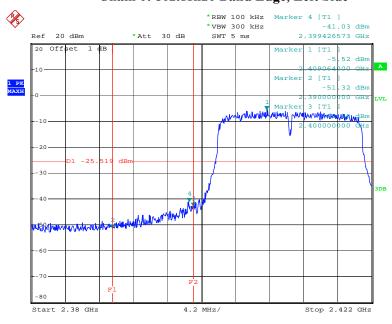

Date: 23.JUL.2013 12:37:35


Chain 0: 802.11n20 Band Edge, Right Side

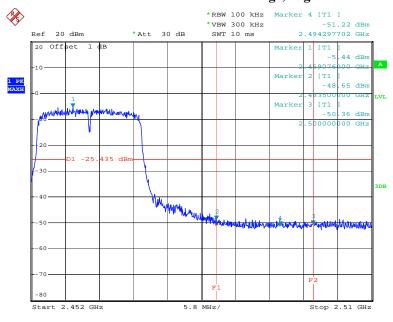

Date: 23.JUL.2013 12:53:44


FCC Part 15.247 Page 105 of 132

Chain 1: 802.11n20 Band Edge, Left Side

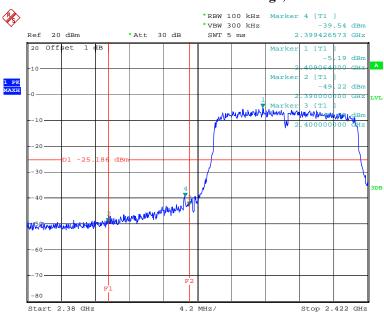

Date: 23.JUL.2013 12:41:40


Chain 1: 802.11n20 Band Edge, Right Side

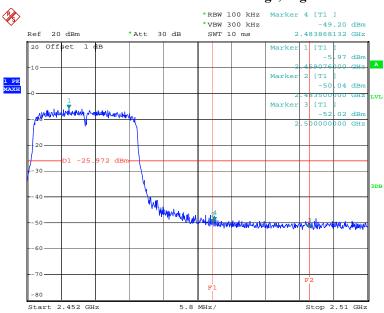

Date: 23.JUL.2013 14:21:08


FCC Part 15.247 Page 106 of 132

Chain 0: 802.11n40 Band Edge, Left Side

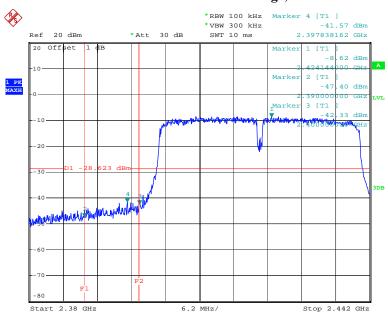

Date: 23.JUL.2013 14:26:19


Chain 0: 802.11n40 Band Edge, Right Side

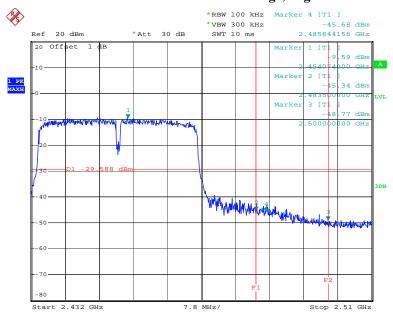

Date: 23.JUL.2013 14:34:51


FCC Part 15.247 Page 107 of 132

Chain 1: 802.11n40 Band Edge, Left Side

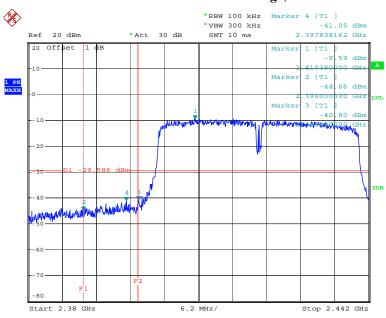

Date: 23.JUL.2013 14:23:36

Chain 1: 802.11n40 Band Edge, Right Side

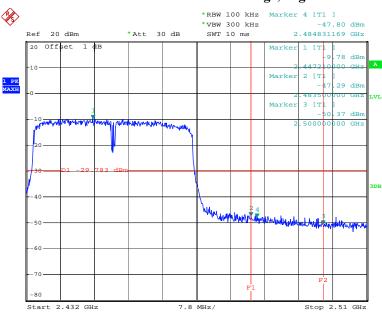


Date: 23.JUL.2013 14:32:54

FCC Part 15.247 Page 108 of 132

5725-5850MHz band:


Left Band Edge (802.11a mode)

Report No.: R2DG130717001-00A

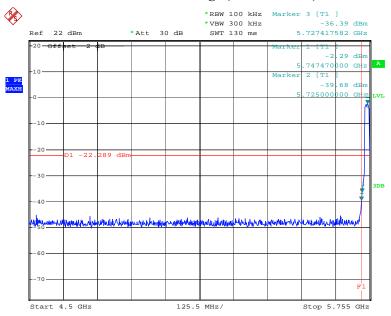

Date: 23.JUL.2013 15:08:38

Right Band Edge (802.11a mode)

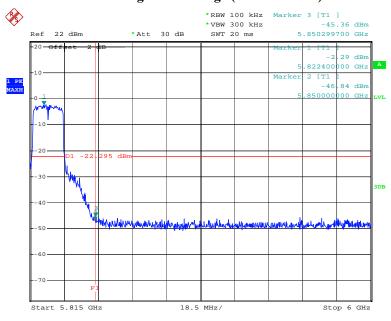


Date: 23.JUL.2013 15:10:26

FCC Part 15.247 Page 109 of 132


Chain 0:Left Band Edge (802.11n ht20 mode)

Report No.: R2DG130717001-00A

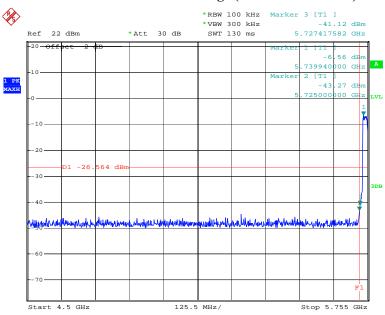

Date: 23.JUL.2013 15:19:08


Chain 0:Right Band Edge (802.11n ht20 mode)

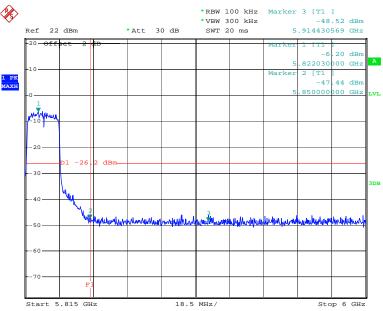

Date: 23.JUL.2013 15:31:55


FCC Part 15.247 Page 110 of 132

Chain 1:Left Band Edge (802.11n ht20 mode)

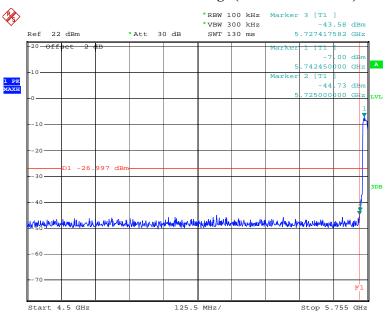

Date: 23.JUL.2013 15:24:16

Chain 1:Right Band Edge (802.11n ht20 mode)

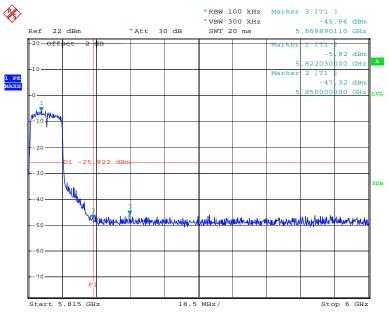


Date: 23.JUL.2013 15:33:54

FCC Part 15.247 Page 111 of 132


Chain 0:Left Band Edge (802.11n ht40 mode)

Report No.: R2DG130717001-00A

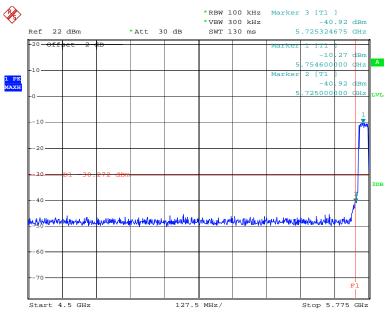

Date: 23.JUL.2013 15:41:11


Chain 0:Right Band Edge (802.11n ht40 mode)

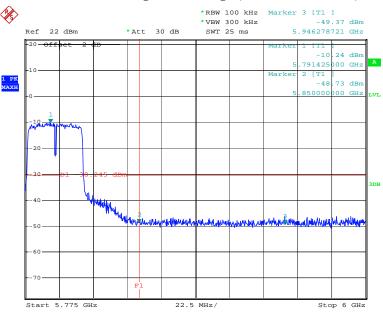

Date: 23.JUL.2013 15:44:50


FCC Part 15.247 Page 112 of 132

Chain 1:Left Band Edge (802.11n ht40 mode)

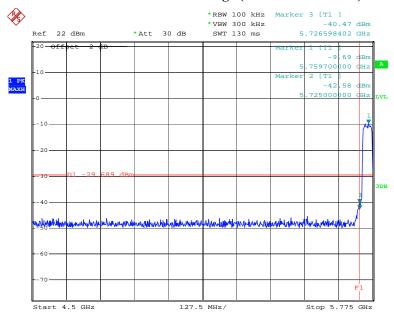

Date: 23.JUL.2013 15:38:59

Chain 1:Right Band Edge (802.11n ht40 mode)

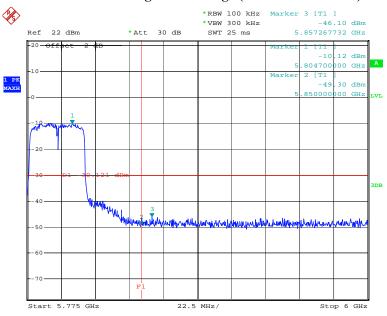

Date: 23.JUL.2013 15:46:40

FCC Part 15.247 Page 113 of 132

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Report No.: R2DG130717001-00A

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. According to KDB 558074 D01 DTS Meas Guidance v02, set the RBW = 3 kHz, VBW = 30 kHz, Set the span to 1.5 times the DTS channel bandwidth.
- 4. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.2 °C	
Relative Humidity:	67 %	
ATM Pressure:	100.3kPa	

The testing was performed by Ares Liu on 2013-07-23.

FCC Part 15.247 Page 114 of 132

Test Mode: Transmitting

Test Result: Pass

	PSD	Limit				
Channel	(dBm/3kHz)	(dBm/3kHz)	Result			
2.4G band-802.11b mode						
Low	-12.73	8	PASS			
Middle	-12.48	8	PASS			
High	-12.57	8	PASS			
	2.4G band-802.11g mode					
Low	-16.01	8	PASS			
Middle	-15.92	8	PASS			
High	-15.91	8	PASS			
_	2.4G band-chain 0: 802.	11n20 mode	•			
Low	-16.97	8	PASS			
Middle	-18.73	8	PASS			
High	-19.60	8	PASS			
	2.4G band-chain 1: 802.	11n20 mode				
Low	-14.33	8	PASS			
Middle	-12.98	8	PASS			
High	-14.26	8	PASS			
	2.4G band-chain 0: 802.	11n40 mode				
Low	-20.42	8	PASS			
Middle	-23.44	8	PASS			
High	-22.08	8	PASS			
	2.4G band-chain 1: 802.	11n40 mode				
Low	-11.21	8	PASS			
Middle	-12.47	8	PASS			
High	-12.87	8	PASS			
	5725-5850MHz band-80)2.11a mode				
Low	-15.92	8	PASS			
Middle	-18.66	8	PASS			
High	-16.91	8	PASS			
	5725-5850MHz band-Chain 0:	802.11n ht20 mode				
Low	-20.43	8	PASS			
Middle	-20.10	8	PASS			
High	-17.44	8	PASS			
	5725-5850MHz band-Chain 1:		·			
Low	-18.19	8	PASS			
Middle	-16.32	8	PASS			
High	-17.44	8	PASS			
	5725-5850MHz band-Chain 0:802.11n ht40 mode					
Low	-21.24	8	PASS			
High	-23.05	8	PASS			
5725-5850MHz band-Chain 1:802.11n ht40 mode						
Low	-17.55	8	PASS			
High	-16.93	8	PASS			

Report No.: R2DG130717001-00A

FCC Part 15.247 Page 115 of 132


Channel	PSD (dBm/3kHz) PSD	Limit (dBm/3kHz) Limit	Result			
	2.4G band-Total: 802.11n20 mode					
Low	-12.44	8	PASS			
Middle	-11.96	8	PASS			
High	-13.14	8	PASS			
	2.4G band-Total: 802.11n40 mode					
Low	-10.71	8	PASS			
Middle	-12.13	8	PASS			
High	-12.38	8	PASS			
5725-5850MHz band-Total:802.11n ht20 mode						
Low	-16.16	8	PASS			
Middle	-14.80	8	PASS			
High	-15.43	8	PASS			
5725-5850MHz band-Total:802.11n ht40 mode						
Low	-16.01	8	PASS			
High	-15.98	8	PASS			

Please refer to the following plots

FCC Part 15.247 Page 116 of 132


2.4G band:

Power Spectral Density, 802.11b Low Channel

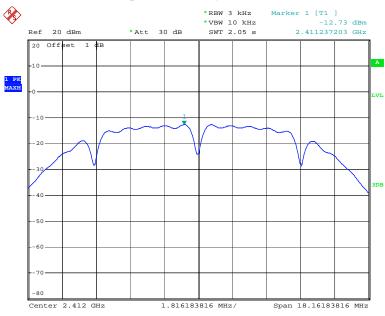

Date: 23.JUL.2013 10:11:49


Power Spectral Density, 802.11b Middle Channel

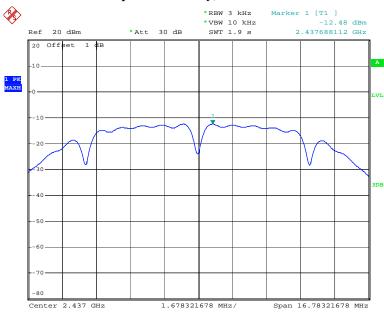

Date: 23.JUL.2013 10:06:45


FCC Part 15.247 Page 117 of 132

Power Spectral Density, 802.11b High Channel

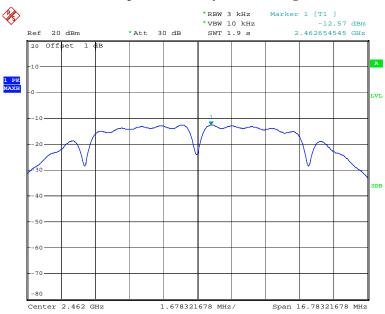

Date: 23.JUL.2013 10:08:27

Power Spectral Density, 802.11g Low Channel

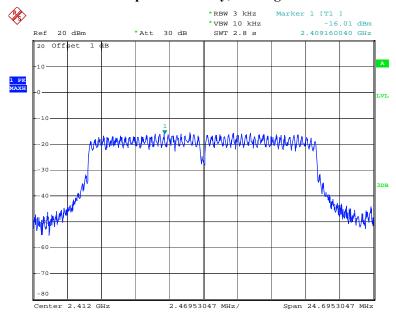


Date: 23.JUL.2013 10:28:08

FCC Part 15.247 Page 118 of 132


Power Spectral Density, 802.11g Middle Channel

Report No.: R2DG130717001-00A

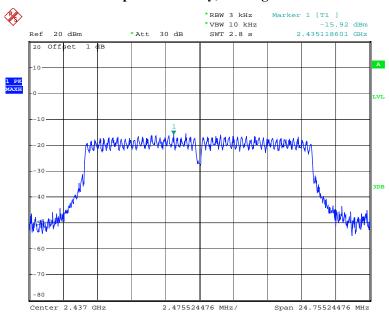

Date: 23.JUL.2013 10:30:17


Power Spectral Density, 802.11g High Channel

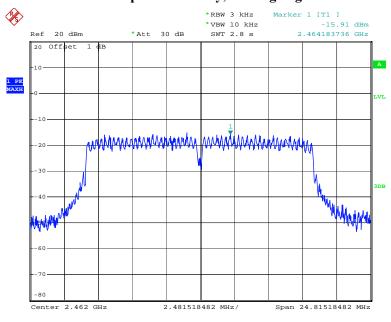

Date: 23.JUL.2013 10:39:55


FCC Part 15.247 Page 119 of 132

Chain 0: Power Spectral Density, 802.11n20 Low Channel

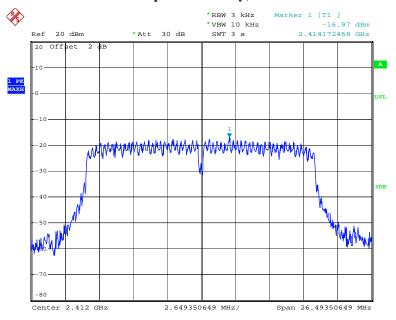

Date: 23.JUL.2013 16:26:04


Chain 0: Power Spectral Density, 802.11n20 Middle Channel

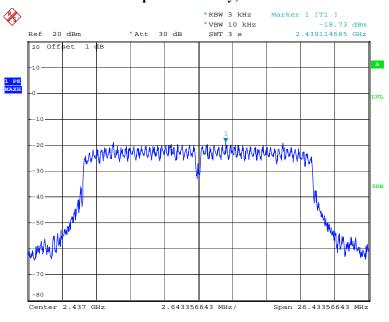

Date: 23.JUL.2013 12:51:11


FCC Part 15.247 Page 120 of 132

Chain 0: Power Spectral Density, 802.11n20 High Channel

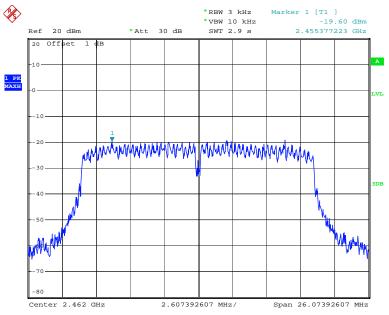

Date: 23.JUL.2013 12:53:19


Chain 1: Power Spectral Density, 802.11n20 Low Channel

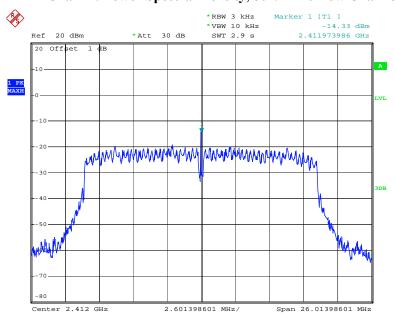

Date: 23.JUL.2013 12:43:41


FCC Part 15.247 Page 121 of 132

Chain 1: Power Spectral Density, 802.11n20 Middle Channel

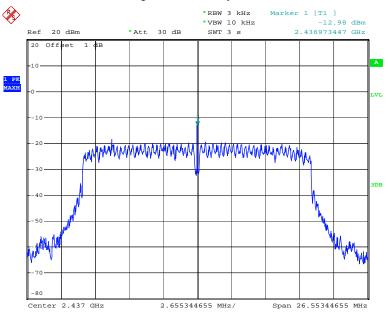

Date: 23.JUL.2013 16:50:29


Chain 1: Power Spectral Density, 802.11n20 High Channel

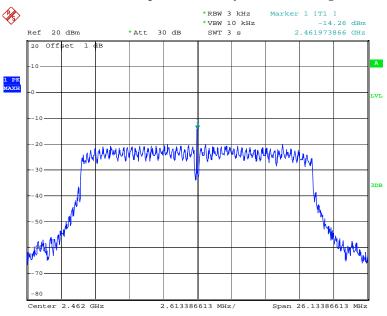

Date: 23.JUL.2013 14:20:43


FCC Part 15.247 Page 122 of 132

Chain 0: Power Spectral Density, 802.11n40 Low Channel

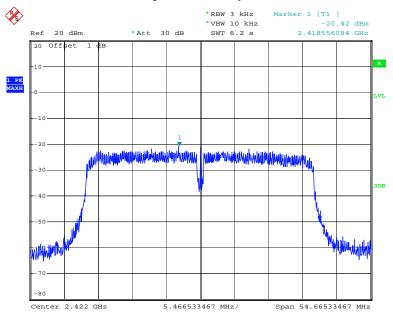

Date: 23.JUL.2013 14:25:54


Chain 0: Power Spectral Density, 802.11n40 Middle Channel

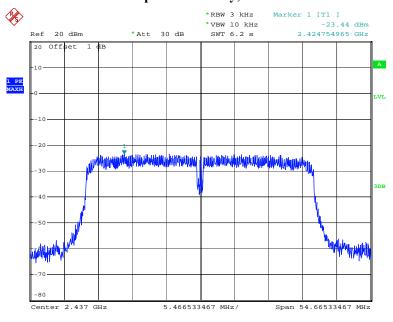

Date: 23.JUL.2013 14:28:17


FCC Part 15.247 Page 123 of 132

Chain 0: Power Spectral Density, 802.11n40 High Channel

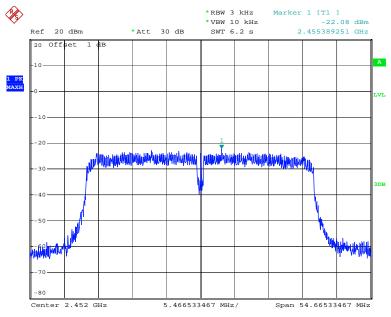

Date: 23.JUL.2013 14:34:26


Chain 1: Power Spectral Density, 802.11n40 Low Channel

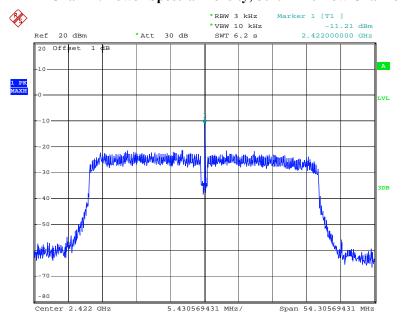

Date: 23.JUL.2013 16:47:58


FCC Part 15.247 Page 124 of 132

Chain 1: Power Spectral Density, 802.11n40 Middle Channel

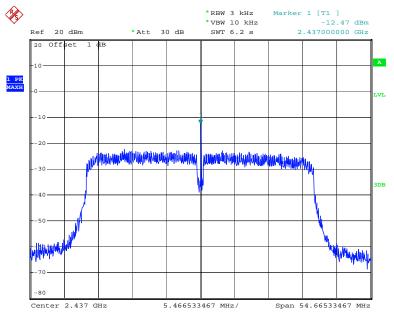

Date: 23.JUL.2013 14:29:48

Chain 1: Power Spectral Density, 802.11n40 High Channel

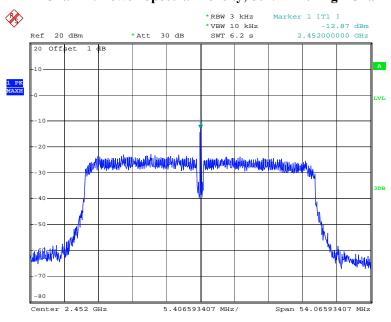


Date: 23.JUL.2013 14:32:28

FCC Part 15.247 Page 125 of 132

5725-5850MHz band:


Power Spectral Density, 802.11a Low Channel

Report No.: R2DG130717001-00A

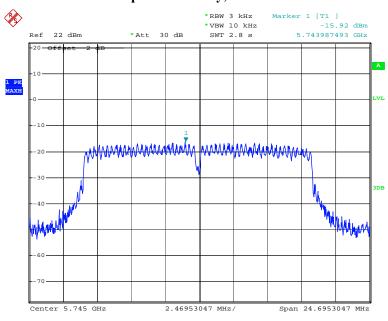

Date: 23.JUL.2013 15:08:13

Power Spectral Density, 802.11a Middle Channel

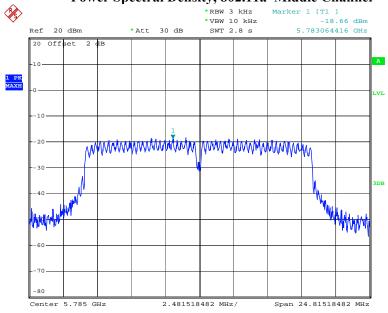


Date: 23.JUL.2013 16:37:27

FCC Part 15.247 Page 126 of 132


Power Spectral Density, 802.11a High Channel

Report No.: R2DG130717001-00A

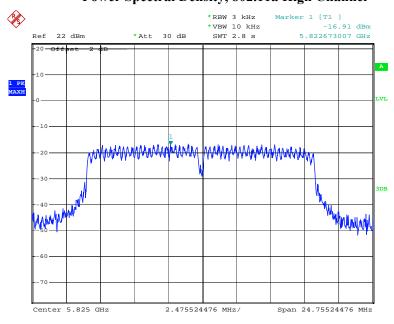

Date: 23.JUL.2013 15:10:01

Chain 0:Power Spectral Density, 802.11 n ht20 Low Channel

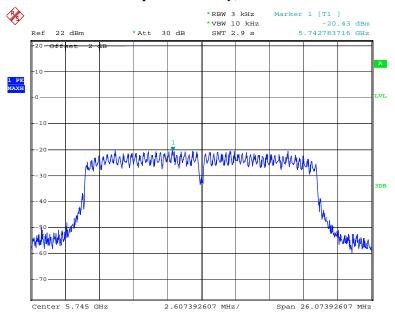


Date: 23.JUL.2013 15:18:43

FCC Part 15.247 Page 127 of 132


Chain 0:Power Spectral Density, 802.11n ht20 Middle Channel

Report No.: R2DG130717001-00A

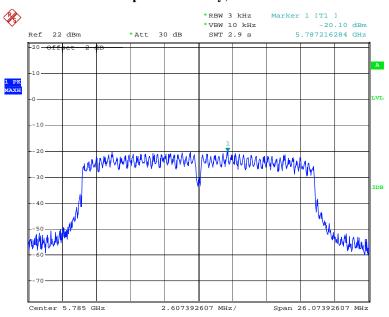

Date: 23.JUL.2013 15:29:40


Chain 0:Power Spectral Density, 802.11n ht20 High Channel

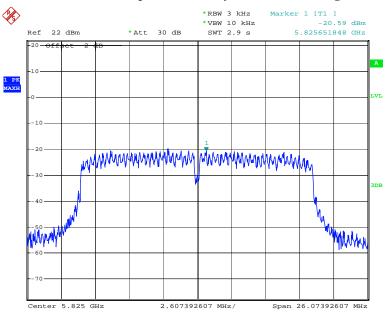

Date: 23.JUL.2013 15:31:30


FCC Part 15.247 Page 128 of 132

Chain 1: Power Spectral Density, 802.11 n ht20 Low Channel

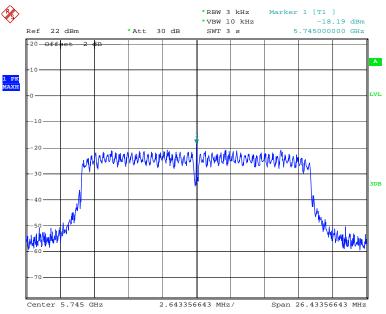

Date: 23.JUL.2013 15:23:51


Chain 1: Power Spectral Density, 802.11n ht20 Middle Channel

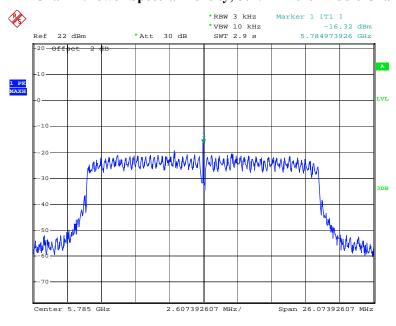

Date: 23.JUL.2013 15:26:48


FCC Part 15.247 Page 129 of 132

Chain 1: Power Spectral Density, 802.11n ht20 High Channel

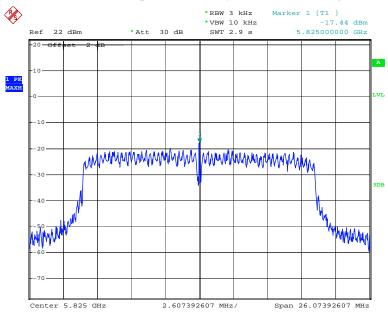

Date: 23.JUL.2013 15:33:29

Chain 0: Power Spectral Density, 802.11n ht40 Low Channel

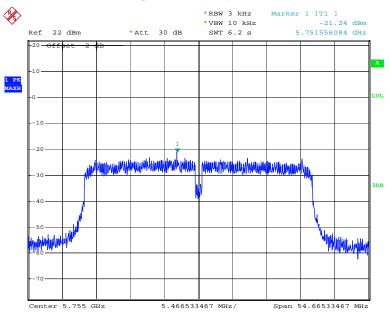


Date: 23.JUL.2013 15:40:46

FCC Part 15.247 Page 130 of 132


Chain 0:Power Spectral Density, 802.11n ht40 High Channel

Report No.: R2DG130717001-00A

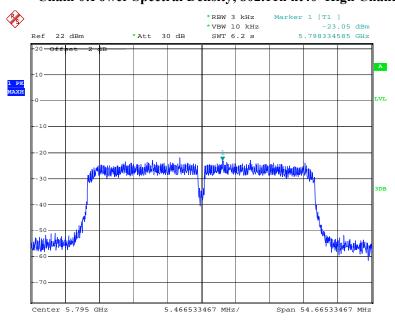

Date: 23.JUL.2013 15:44:24


Chain 1: Power Spectral Density, 802.11n ht40 Low Channel

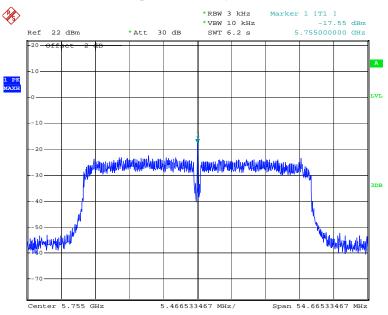

Date: 23.JUL.2013 15:38:33

FCC Part 15.247 Page 131 of 132

Chain 1: Power Spectral Density, 802.11n ht40 High Channel

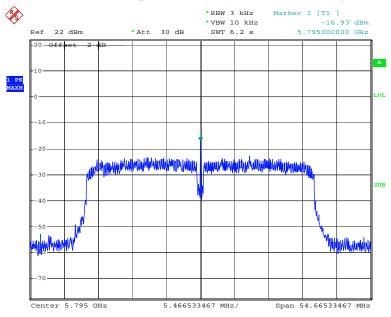

Date: 23.JUL.2013 15:46:15

***** END OF REPORT *****

FCC Part 15.247 Page 132 of 132