FCC Test Report

FCC ID : 2AAO2DOGSTICK

Equipment : dogStick

Model No. : DHQAR-W03

Brand Name : dog hunter

Applicant : dog hunter LLC

Address : 3F, 8 Faneuil Hall, Boston, MA 02109, USA

Standard : 47 CFR FCC Part 15.247

Received Date : Jun. 10, 2013

Tested Date : Jun. 10 ~ Jul. 04, 2013

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

ilac MRA



Page: 1 of 63

Report No.: FR362603 Report Version: Rev. 01 Tel: 886-3-271-8666

2

Table of Contents

Fax: 886-3-318-0155

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Test Standards	10
1.6	Measurement Uncertainty	11

2.1	Testing Condition	12
	The Worst Test Modes and Channel Details	

TEST CONFIGURATION.....12

3	TRANSMITTER TEST RESULTS	13
3.1	Conducted Emissions	13
3.2	6dB and Occupied Bandwidth	18
3.3	RF Output Power	21
3.4	Power Spectral Density	23
3.5	Unwanted Emissions into Restricted Frequency Bands	25
3.6	Unwanted Emissions into Non-Restricted Frequency Bands	55

Report No.: FR362603 Page : 2 of 63



Tel: 886-3-271-8666 Fax: 886-3-318-0155

Release Record

Report No.	Version	Description	Issued Date
FR362603	Rev. 01	Initial issue	Jul. 29, 2013

Report No.: FR362603 Page: 3 of 63

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 14.152MHz 45.08 (Margin -4.92dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2483.50MHz 72.98 (Margin -1.02dB) - PK	Pass
15.247(b)(3)	Fundamental Emission Output Power	Power [dBm]: 11b: 17.15 11g: 21.53 HT20: 21.52 HT40: 18.62	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR362603 Page: 4 of 63

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS	
2400-2483.5	b	2412-2462	1-11 [11]	1	1-11 Mbps	
2400-2483.5	g	2412-2462	1-11 [11]	1	6-54 Mbps	
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	MCS 0-7	
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	1	MCS 0-7	

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.

Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Туре	Gain (dBi)	Connector	Remark
1	Chip antenna	1.67		

1.1.3 EUT Operational Condition

Supply Voltage	☐ AC mains	□ DC	
Type of DC Source	☐ Internal DC supply	☐ External DC adapter	5Vdc from host (USB mode) 48Vdc from POE (POE mode)

1.1.4 Accessories

N/A

Report No.: FR362603 Page: 5 of 63

Tel: 886-3-271-8666 Fax: 886-3-318-0155

1.1.5 Channel List

Frequenc	y band (MHz)	2400~2483.5		
802.11 b	802.11 b / g / n HT20		In HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	
1	2412	3	2422	
2	2417	4	2427	
3	2422	5	2432	
4	2427	6	2437	
5	2432	7	2442	
6	2437	8	2447	
7	2442	9	2452	
8	2447			
9	2452			
10	2457			
11	2462			

1.1.6 Test Tool and Duty Cycle

Test tool	ART2-GUI, V2.3
Duty Cycle Of Test Signal (%)	100.00% - IEEE 802.11b 98.27% - IEEE 802.11g 98.13% - IEEE 802.11n (HT20) 97.75% - IEEE 802.11n (HT40)
Duty Factor	0.00 - IEEE 802.11b 0.08 - IEEE 802.11g 0.08 - IEEE 802.11n (HT20) 0.10 - IEEE 802.11n (HT40)

Report No.: FR362603 Page : 6 of 63



Tel: 886-3-271-8666 Fax: 886-3-318-0155

1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	22.5
11b	2437	19.5
11b	2462	18.5
11g	2412	21.5
11g	2437	25.0
11g	2462	14.5
HT20	2412	21.0
HT20	2437	25.0
HT20	2462	14.0
HT40	2422	18.5
HT40	2437	18.5
HT40	2452	13.5


Local Support Equipment List 1.2


Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	E6430		DoC	RJ45, 1.5m non-shielded cable w/o core. USB, 1m non-shielded cable w/o core.
2	Flash	Transcend	JetFlash V85		DoC	
3	POE		PD-3001/AC			RJ45, 10m non-shielded cable w/o core.

Report No.: FR362603 Page: 7 of 63

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

1.3 **Test Setup Chart**

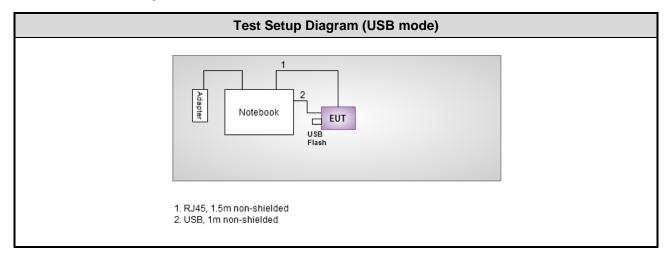

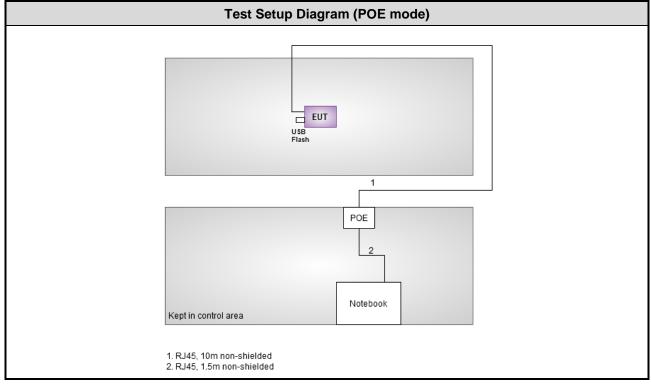

Report No.: FR362603 Page: 8 of 63

Tel: 886-3-271-8666 Fax: 886-3-318-0155

The Equipment List 1.4

Test Item	Conducted Emission							
Test Site	Conduction room 1 / (C	O01-WS)						
Instrument	Manufacturer	Manufacturer Model No. Serial No. Calibration Date Ca						
EMC Receiver	R&S	ESCS 30	100169	Oct. 02, 2012	Oct. 01, 2013			
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Dec. 04, 2012	Dec. 03, 2013			
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2012	Dec. 03, 2013			
ISN	TESEQ	ISN T800	34406	Apr. 08, 2013	Apr. 07, 2014			
ISN	TESEQ	ISN T200A	30494	Apr. 09, 2013	Apr. 08, 2014			
ISN	TESEQ	ISN T8-Cat6	27262	Sep. 17, 2012	Sep. 16, 2013			
ISN	TESEQ	ISN ST08	22589	Jan. 24, 2013	Jan. 23, 2014			
RF Current Probe	FCC	F-33-4	121630	Dec. 04, 2012	Dec. 03, 2013			
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 25, 2012	Dec. 24, 2013			
ESH3-Z6 V-Network(+)	R&S	ESH3-Z6	100920	Nov. 21, 2012	Nov. 20, 2013			
ESH3-Z6 V-Network(-)	R&S	ESH3-Z6	100951	Jan. 30, 2013	Jan. 29, 2014			
Two-Line V-Network	R&S	ENV216	101579	Jan. 07, 2013	Jan. 06, 2014			
50 ohm terminal	NA	50	01	Apr. 22, 2013	Apr. 21, 2014			
50 ohm terminal	NA	50	02	Apr. 22, 2013	Apr. 21, 2014			
50 ohm terminal	NA	50	03	Apr. 22, 2013	Apr. 21, 2014			
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014			

Report No.: FR362603 Page: 9 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Test Item	Radiated Emission ab	ove 1GHz			
Test Site	966 chamber1 / (03Ch	H01-WS)			
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
3m semi-anechoic chamber	CHAMPRO	SAC-03	03CH01-WS	Jan. 04, 2013	Jan. 03, 2014
Spectrum Analyzer	R&S	FSV40	101498	Jan. 24, 2013	Jan. 23, 2014
Receiver	ROHDE&SCHWARZ	ESR3	101658	Jan. 28, 2013	Jan. 27, 2014
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 11, 2013	Jan. 10, 2014
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 18, 2013	Feb. 17, 2014
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014
Amplifier	Burgeon	BPA-530	100219	Nov. 28, 2012	Nov. 27, 2013
Amplifier	Agilent	83017A	MY39501308	Dec. 18, 2012	Dec. 17, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-001	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-002	Dec. 25, 2012	Dec. 24, 2013
control	EM Electronics	EM1000	60612	N/A	N/A

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014		
Amplifier	MITEQ AMF-6F-260400 9121372 Apr. 19, 2		Apr. 19, 2013	Apr. 18, 2015			
Note: Calibration Interval of instruments listed above is two year.							

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2009

FCC KDB 558074 D01 DTS Meas Guidance v03

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

Report No.: FR362603 Page: 10 of 63

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty						
Parameters	Uncertainty					
Bandwidth	±35.286 Hz					
Conducted power	±0.536 dB					
Frequency error	±35.286 Hz					
Temperature	±0.3 °C					
Conducted emission	±2.946 dB					
AC conducted emission	±2.43 dB					
Radiated emission	±2.49 dB					

Report No.: FR362603 Page: 11 of 63

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 68%	Peter Lin
Radiated Emissions	03CH01-WS	25°C / 65%	Aska Huang Haru Yang
RF Conducted	TH01-WS	25°C / 60%	Felix Sung

FCC site registration No.: 657002IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data rate (Mbps)	Test Configuration
Conducted Emissions	11g	2437	6	1, 2
Radiated Emissions (below 1GHz)	11g	2437	6	1, 2
Radiated Emissions (above 1GHz)	11b 11g HT20 HT40	2412 / 2437 / 2462 2412 / 2437 / 2462 2412 / 2437 / 2462 2422 / 2437 / 2452	1 6 MCS 0 MCS 0	2
Fundamental Emission Output Power 6dB bandwidth Power spectral density	11b 11g HT20 HT40	2412 / 2437 / 2462 2412 / 2437 / 2462 2412 / 2437 / 2462 2422 / 2437 / 2452	1 6 MCS 0 MCS 0	2

NOTE:

- 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
- 2. The EUT supports two kinds of power supply modes, USB and POE mode. Both options were tested and was recorded in this report.

Configuration 1 : USB mode
 Configuration 2 : POE mode

Report No.: FR362603 Page: 12 of 63

Tel: 886-3-271-8666 Fax: 886-3-318-0155

3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit							
Frequency Emission (MHz) Quasi-Peak Average							
0.15-0.5	66 - 56 *	56 - 46 *					
0.5-5	56	46					
5-30	60	50					
Note 1: * Decreases with the logarithm of the frequency.							

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

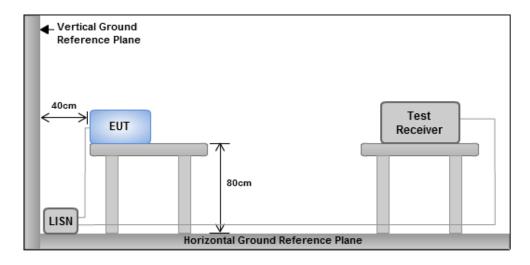


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


Report No.: FR362603 Page: 13 of 63

Tel: 886-3-271-8666 Fax: 886-3-318-0155


3.1.4 Test Result of Conducted Emissions

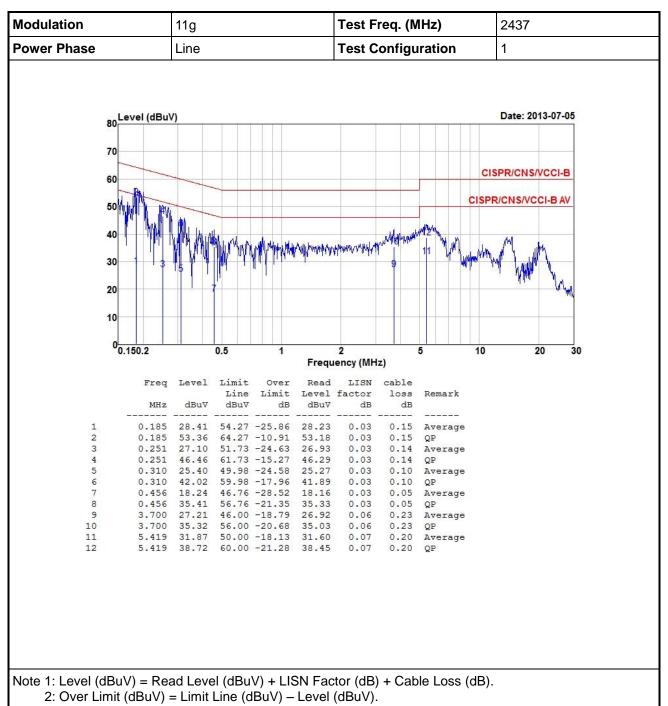


Report No.: FR362603 Page: 14 of 63




Tel: 886-3-271-8666 Fax: 886-3-318-0155

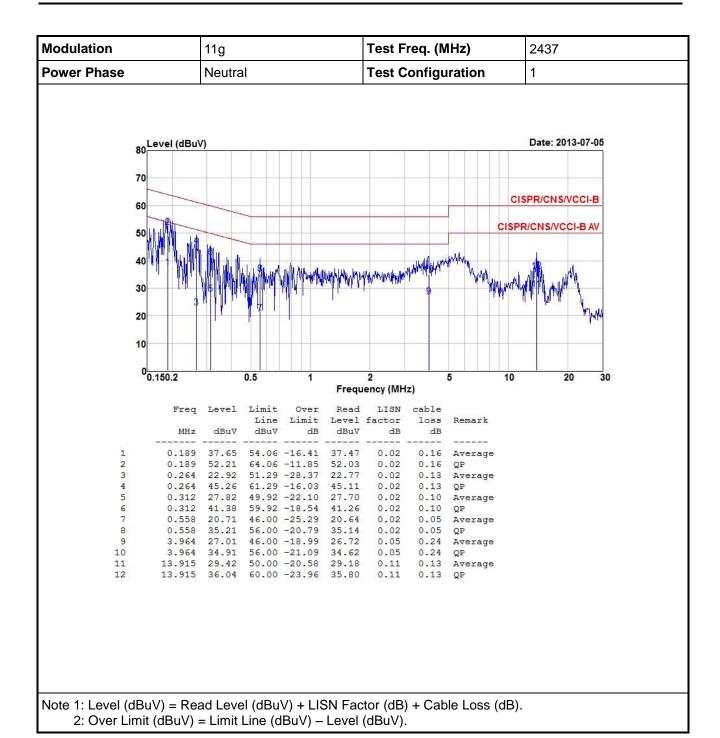

Report No.: FR362603 Page: 15 of 63



Tel: 886-3-271-8666 Fax: 886-3-318-0155

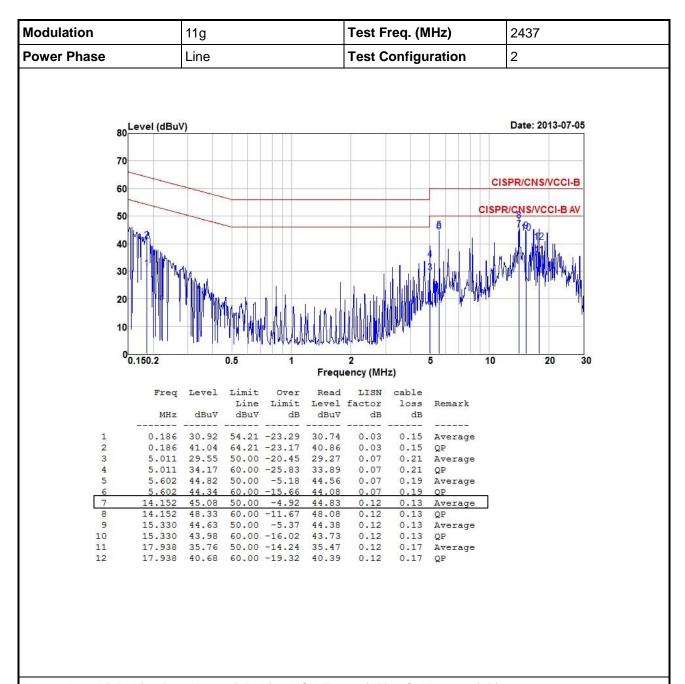


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).

2: Over Limit (dBuV) = Limit Line (dBuV) - Level (dBuV).

Report No.: FR362603 Page: 16 of 63



Tel: 886-3-271-8666 Fax: 886-3-318-0155

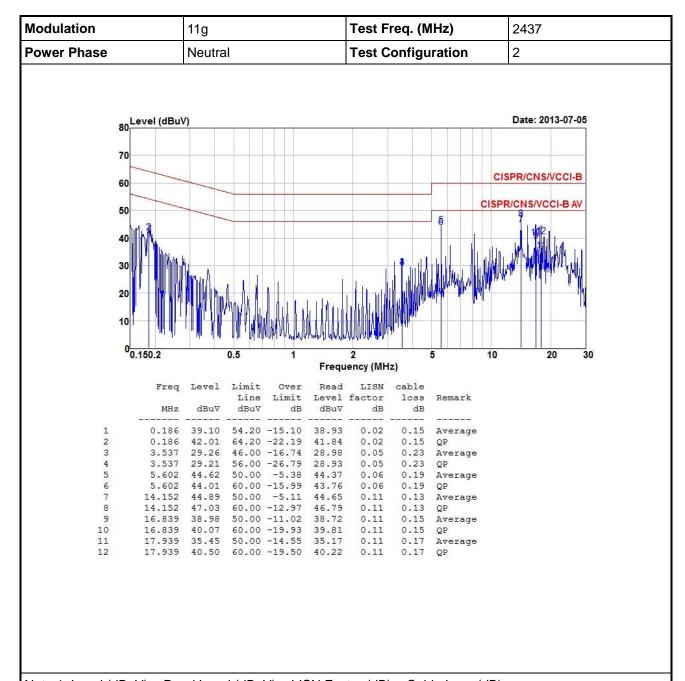

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).

2: Over Limit (dBuV) = Limit Line (dBuV) - Level (dBuV).

Report No.: FR362603 Page: 17 of 63

3.2 6dB and Occupied Bandwidth


3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

3.2.3 Test Setup



Report No.: FR362603 Page: 18 of 63

Tel: 886-3-271-8666 Fax: 886-3-318-0155

3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation	N.	Eros (MU=)		Limit (kU=)			
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Limit (kHz)
11b	1	2412	10.09				500
11b	1	2437	10.03				500
11b	1	2462	10.09				500
11g	1	2412	16.35				500
11g	1	2437	16.35				500
11g	1	2462	16.35				500
HT20	1	2412	17.57				500
HT20	1	2437	17.28				500
HT20	1	2462	17.28				500
HT40	1	2422	36.29				500
HT40	1	2437	36.41				500
HT40	1	2452	36.06				500




Report No.: FR362603 Page: 19 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation	N	Freq.		99% Occupied E	Bandwidth (MHz)	
Mode	N _{TX}	(MHz)	Chain 0	Chain 1	Chain 2	Chain 3
11b	1	2412	14.30			
11b	1	2437	14.30			
11b	1	2462	14.24			
11g	1	2412	18.18			
11g	1	2437	27.50			
11g	1	2462	17.60			
HT20	1	2412	19.16			
HT20	1	2437	26.92			
HT20	1	2462	18.58			
HT40	1	2422	38.44			
HT40	1	2437	39.02			
HT40	1	2452	38.44			

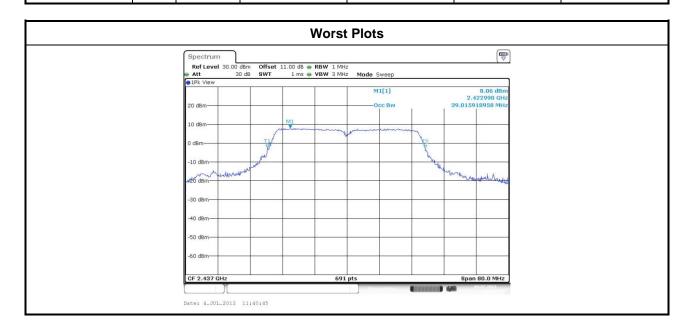

Report No.: FR362603 Page: 20 of 63

International Certification Corp. No. 3-1. Lane 6. Wen San 3rd St., Kwei Shan F

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Cor	duct	ed power shall not exceed 1Watt.
\boxtimes	Ante	enna gain <= 6dBi, no any corresponding reduction is in output power limit.
	Ante	enna gain > 6dBi
		Non Fixed, point to point operations. The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
		Fixed, point to point operations Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
		Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

Nower meter

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power (For reference only)

Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



Report No.: FR362603 Page: 21 of 63



3.3.4 Test Result of Maximum Output Power

Modulation Mode	N _{TX}	Freq.	Peak	Peak conducted output power (dBm)			Total Power	Total Power	Limit
Wiode		(MHz)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	W) (dBm)	(dBm)
11b	1	2412	16.96				49.66	16.96	30
11b	1	2437	16.81				47.97	16.81	30
11b	1	2462	17.15				51.88	17.15	30
11g	1	2412	19.55				90.16	19.55	30
11g	1	2437	21.53				142.23	21.53	30
11g	1	2462	18.84				76.56	18.84	30
HT20	1	2412	19.41				87.30	19.41	30
HT20	1	2437	21.52				141.91	21.52	30
HT20	1	2462	18.64				73.11	18.64	30
HT40	1	2422	17.92				61.94	17.92	30
HT40	1	2437	18.62				72.78	18.62	30
HT40	1	2452	16.73				47.10	16.73	30

Modulation Mode	N _{TX} Freq.		Conducted (average) output power (dBm)				Total Power	Total Power	Limit (dBm)
Wiode		(MHz)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(dBiii)
11b	1	2412	15.27				33.65	15.27	30
11b	1	2437	15.06				32.06	15.06	30
11b	1	2462	15.43				34.91	15.43	30
11g	1	2412	14.81				30.27	14.81	30
11g	1	2437	18.45				69.98	18.45	30
11g	1	2462	13.11				20.46	13.11	30
HT20	1	2412	14.52				28.31	14.52	30
HT20	1	2437	18.44				69.82	18.44	30
HT20	1	2462	12.77				18.92	12.77	30
HT40	1	2422	12.28				16.90	12.28	30
HT40	1	2437	13.65				23.17	13.65	30
HT40	1	2452	10.69				11.72	10.69	30

Note: Conducted average output power is for reference only.

Report No.: FR362603 Page: 22 of 63

3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.


3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 30kHz, VBW = 100kHz.
 - Detector = Peak, Sweep time = auto couple.
 - 3. Trace mode = max hold, allow trace to fully stabilize.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 100kHz, VBW = 300 kHz.
 - 2. Detector = RMS, Sweep time = auto couple.
 - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
 - 4. Perform the measurement over a single sweep.
 - 5. Use the peak marker function to determine the maximum amplitude level.\

3.4.3 Test Setup




Report No.: FR362603 Page: 23 of 63



3.4.4 Test Result of Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/30kHz)	Limit (dBm/3kHz)
11b	1	2412	1.48	8
11b	1	2437	1.69	8
11b	1	2462	1.81	8
11g	1	2412	-0.83	8
11g	1	2437	2.87	8
11g	1	2462	-1.95	8
HT20	1	2412	-1.11	8
HT20	1	2437	3.13	8
HT20	1	2462	-1.83	8
HT40	1	2422	-6.79	8
HT40	1	2437	-5.40	8
HT40	1	2452	-7.85	8

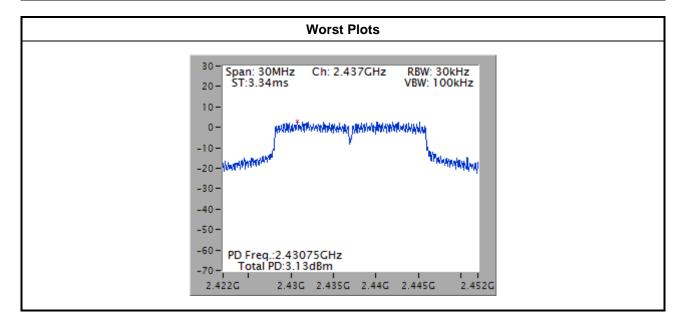

Report No.: FR362603 Page: 24 of 63

3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit									
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)						
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300						
0.490~1.705	24000/F(kHz)	33.8 - 23	30						
1.705~30.0	30	29	30						
30~88	100	40	3						
88~216	150	43.5	3						
216~960	200	46	3						
Above 960	500	54	3						

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR362603 Page: 25 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

3.5.3 Test Setup

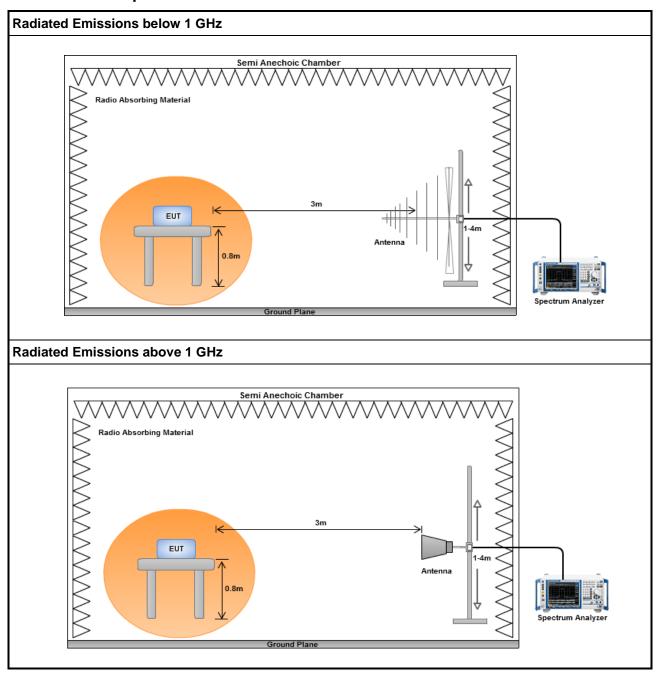


Report No.: FR362603 Page: 26 of 63



Tel: 886-3-271-8666 Fax: 886-3-318-0155

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

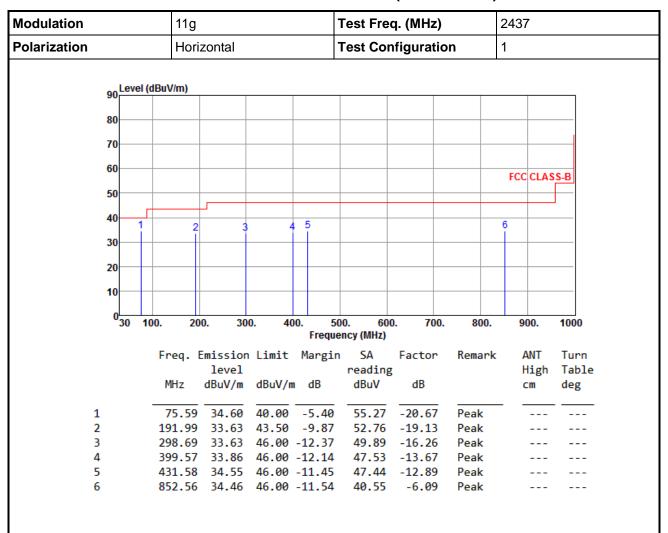

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Report No.: FR362603 Page: 27 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical	Test Configuration	1

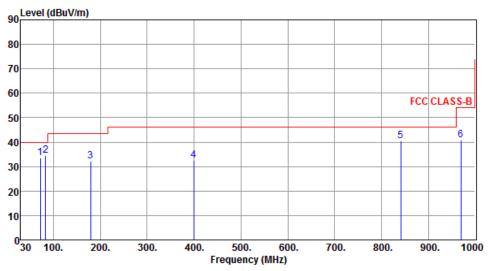

		Emission level		Ū	reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	ав	dBuV	dB		cm	deg
1	71.71	33.51	40.00	-6.49	53.17	-19.66	Peak		
2	83.35	34.45	40.00	-5.55	56.62	-22.17	Peak		
3	179.38	32.35	43.50	-11.15	50.63	-18.28	Peak		
4	399.57	32.46	46.00	-13.54	46.13	-13.67	Peak		
5	840.92	40.62	46.00	-5.38	46.87	-6.25	Peak		
6	968.96	40.75	54.00	-13.25	45.45	-4.70	Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR362603 Page: 28 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal	Test Configuration	2

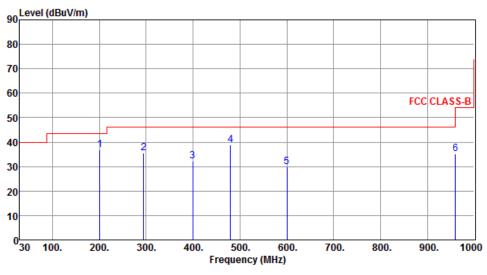

	Freq.	Emission level	Limit	Margin	SA reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	200.72	36.79	43.50	-6.71	56.05	-19.26	Peak		
2	294.81	35.70	46.00	-10.30	52.00	-16.30	Peak		
3	399.57	32.34	46.00	-13.66	46.01	-13.67	Peak		
4	480.08	38.72	46.00	-7.28	50.70	-11.98	Peak		
5	600.36	29.91	46.00	-16.09	39.65	-9.74	Peak		
6	960.23	35.12	54.00	-18.88	39.88	-4.76	Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).


Report No.: FR362603 Page: 29 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical	Test Configuration	2

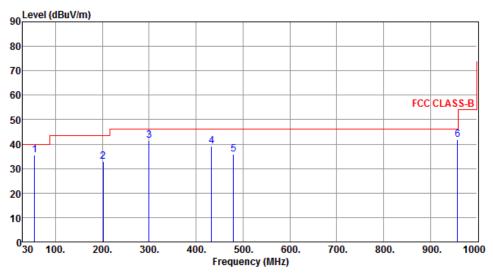

	Freq.	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV		Remark	ANT High cm	Turn Table deg
1	55.22	35.50	40.00	-4.50	52.42	-16.92	Peak		
2	201.69	32.91	43.50	-10.59	52.18	-19.27	Peak		
3	299.66	41.38	46.00	-4.62	57.63	-16.25	Peak		
4	433.52	39.25	46.00	-6.75	52.09	-12.84	Peak		
5	480.08	35.90	46.00	-10.10	47.88	-11.98	Peak		
6	958.29	41.68	46.00	-4.32	46.45	-4.77	Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR362603 Page: 30 of 63

Tel: 886-3-271-8666 Fax: 886-3-318-0155

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

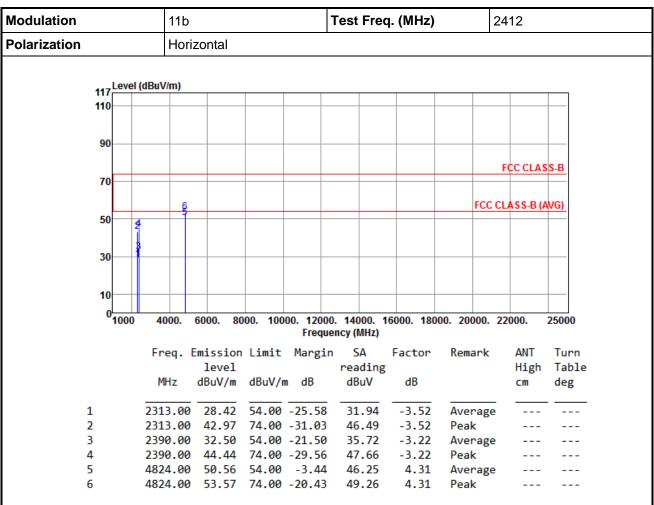

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 31 of 63


Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

 Modulation
 11b
 Test Freq. (MHz)
 2412

 Polarization
 Vertical

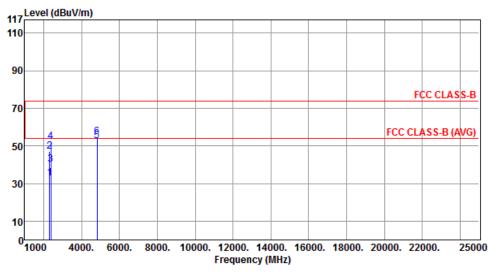

	Freq.	Emission level	Limit	Margin	SA reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2313.00	32.66	54.00	-21.34	36.18	-3.52	Average		
2	2313.00	47.02	74.00	-26.98	50.54	-3.52	Peak		
3	2390.00	40.32	54.00	-13.68	43.54	-3.22	Average		
4	2390.00	52.16	74.00	-21.84	55.38	-3.22	Peak		
5	4824.00	52.64	54.00	-1.36	48.33	4.31	Average		
6	4824.00	54.90	74.00	-19.10	50.59	4.31	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 32 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation	11b	Test Freq. (MHz)	2437
Polarization	Horizontal		

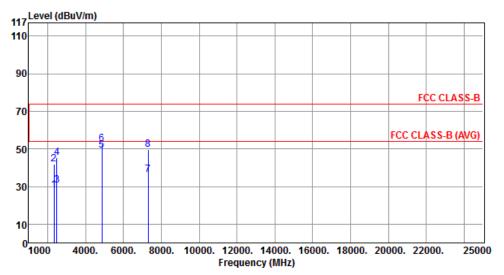

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2335.00	28.20	54.00	-25.80	31.63	-3.43	Average		
2	2335.00	41.76	74.00	-32.24	45.19	-3.43	Peak		
3	2483.50	30.86	54.00	-23.14	33.69	-2.83	Average		
4	2483.50	45.22	74.00	-28.78	48.05	-2.83	Peak		
5	4874.00	49.27	54.00	-4.73	44.88	4.39	Average		
6	4874.00	52.48	74.00	-21.52	48.09	4.39	Peak		
7	7311.00	36.39	54.00	-17.61	27.47	8.92	Average		
8	7311.00	49.79	74.00	-24.21	40.87	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 33 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation11bTest Freq. (MHz)2437PolarizationVertical

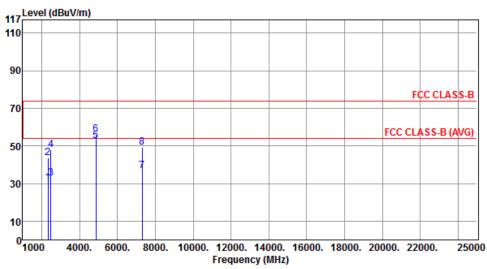

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2335.00	30.14	54.00	-23.86	33.57	-3.43	Average		
2	2335.00	43.62	74.00	-30.38	47.05	-3.43	Peak		
3	2483.50	32.67	54.00	-21.33	35.50	-2.83	Average		
4	2483.50	47.72	74.00	-26.28	50.55	-2.83	Peak		
5	4874.00	52.76	54.00	-1.24	48.37	4.39	Average		
6	4874.00	55.93	74.00	-18.07	51.54	4.39	Peak		
7	7311.00	36.85	54.00	-17.15	27.93	8.92	Average		
8	7311.00	49.24	74.00	-24.76	40.32	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 34 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation11bTest Freq. (MHz)2462PolarizationHorizontal

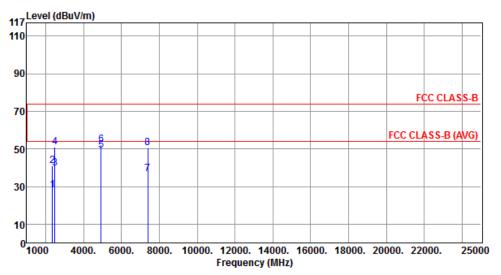

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2359.00	28.07	54.00	-25.93	31.41	-3.34	Average		
2	2359.00	41.00	74.00	-33.00	44.34	-3.34	Peak		
3	2483.50	39.73	54.00	-14.27	42.56	-2.83	Average		
4	2483.50	51.06	74.00	-22.94	53.89	-2.83	Peak		
5	4924.00	49.31	54.00	-4.69	44.83	4.48	Average		
6	4924.00	52.29	74.00	-21.71	47.81	4.48	Peak		
7	7386.00	36.77	54.00	-17.23	27.79	8.98	Average		
8	7386.00	50.30	74.00	-23.70	41.32	8.98	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 35 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation	11b	Test Freq. (MHz)	2462	
Polarization	Vertical			

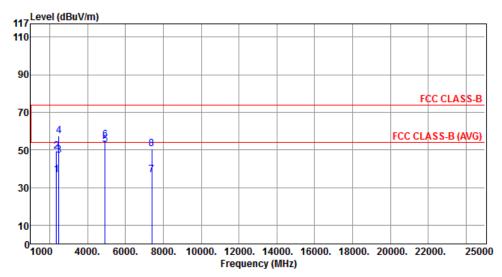

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2359.00	36.55	54.00	-17.45	39.89	-3.34	Average		
2	2359.00	49.16	74.00	-24.84	52.50	-3.34	Peak		
3	2483.50	46.98	54.00	-7.02	49.81	-2.83	Average		
4	2483.50	57.42	74.00	-16.58	60.25	-2.83	Peak		
5	4924.00	52.62	54.00	-1.38	48.14	4.48	Average		
6	4924.00	55.34	74.00	-18.66	50.86	4.48	Peak		
7	7386.00	36.63	54.00	-17.37	27.65	8.98	Average		
8	7386.00	50.38	74.00	-23.62	41.40	8.98	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 36 of 63

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

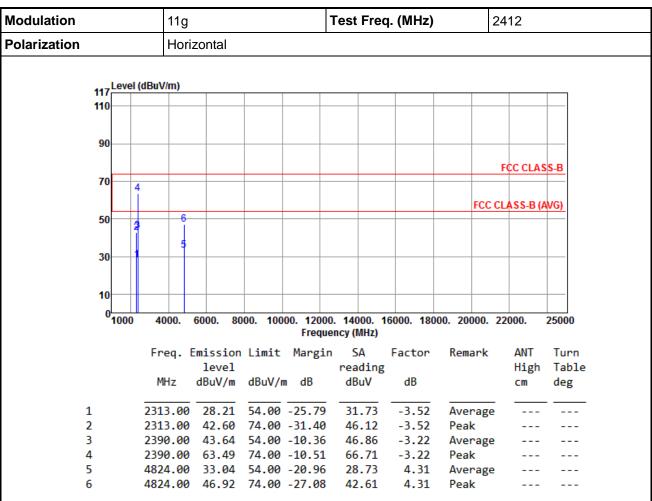

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 37 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

ation 11g Test Freq. (MHz) 2412

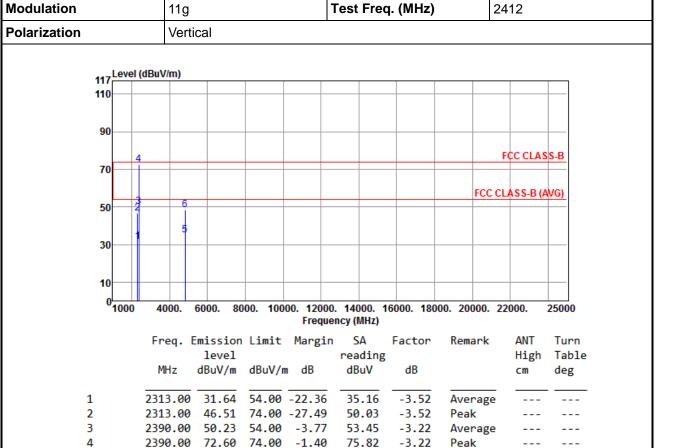

30.86

43.87

4.31

4.31

Average

Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 38 of 63

Report Version: Rev. 01

5

4824.00

35.17

4824.00 48.18 74.00 -25.82


54.00 -18.83

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal		

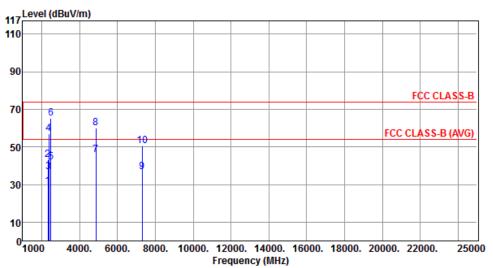

				_					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2335.00	29.06	54.00	-24.94	32.49	-3.43	Average		
2	2335.00	43.28	74.00	-30.72	46.71	-3.43	Peak		
3	2390.00	36.67	54.00	-17.33	39.89	-3.22	Average		
4	2390.00	57.16	74.00	-16.84	60.38	-3.22	Peak		
5	2483.50	41.95	54.00	-12.05	44.78	-2.83	Average		
6	2483.50	65.39	74.00	-8.61	68.22	-2.83	Peak		
7	4874.00	45.75	54.00	-8.25	41.36	4.39	Average		
8	4874.00	60.02	74.00	-13.98	55.63	4.39	Peak		
9	7311.00	36.86	54.00	-17.14	27.94	8.92	Average		
10	7311.00	50.40	74.00	-23.60	41.48	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 39 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation11gTest Freq. (MHz)2437PolarizationVertical

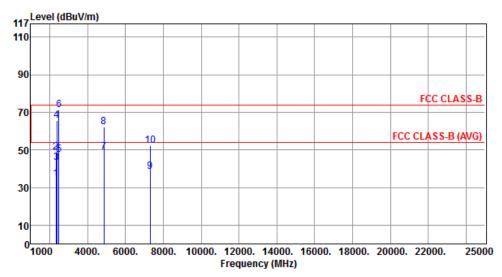

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2335.00	34.49	54.00	10 51	37.92	2 42	A		
_						-3.43	Average		
2	2335.00	48.71	74.00	-25.29	52.14	-3.43	Peak		
3	2390.00	43.14	54.00	-10.86	46.36	-3.22	Average		
4	2390.00	65.72	74.00	-8.28	68.94	-3.22	Peak		
5	2483.50	47.36	54.00	-6.64	50.19	-2.83	Average		
6	2483.50	71.25	74.00	-2.75	74.08	-2.83	Peak		
7	4874.00	48.91	54.00	-5.09	44.52	4.39	Average		
8	4874.00	62.32	74.00	-11.68	57.93	4.39	Peak		
9	7311.00	38.42	54.00	-15.58	29.50	8.92	Average		
10	7311.00	52.28	74.00	-21.72	43.36	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 40 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation	11g	Test Freq. (MHz)	2462
Polarization	Horizontal		

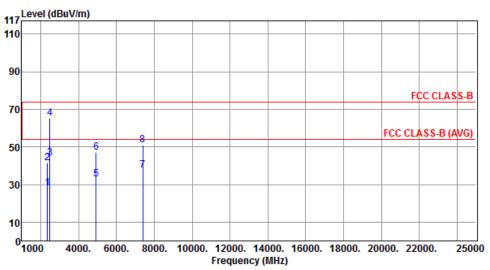

				_					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2359.00	28.13	54.00	-25.87	31.47	-3.34	Average		
2	2359.00	41.44	74.00	-32.56	44.78	-3.34	Peak		
3	2483.50	43.89	54.00	-10.11	46.72	-2.83	Average		
4	2483.50	65.29	74.00	-8.71	68.12	-2.83	Peak		
5	4924.00	32.79	54.00	-21.21	28.31	4.48	Average		
6	4924.00	47.05	74.00	-26.95	42.57	4.48	Peak		
7	7386.00	37.55	54.00	-16.45	28.57	8.98	Average		
8	7386.00	50.94	74.00	-23.06	41.96	8.98	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 41 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation11gTest Freq. (MHz)2462PolarizationVertical

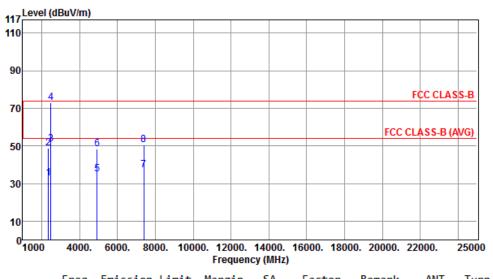

				_						
	Freq. Em	ission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	
	MHz d	BuV/m	dBuV/m	dB	dBuV	dB		cm	deg	
1	2359.00	32.72	54.00	-21.28	36.06	-3.34	Average			
2	2359.00	48.61	74.00	-25.39	51.95	-3.34	Peak			
3	2483.50	51.07	54.00	-2.93	53.90	-2.83	Average			
4	2483.50	72.98	74.00	-1.02	75.81	-2.83	Peak			
5	4924.00	35.12	54.00	-18.88	30.64	4.48	Average			
6	4924.00	48.29	74.00	-25.71	43.81	4.48	Peak			
7	7386.00	37.23	54.00	-16.77	28.25	8.98	Average			
8	7386.00	50.64	74.00	-23.36	41.66	8.98	Peak			

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 42 of 63

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

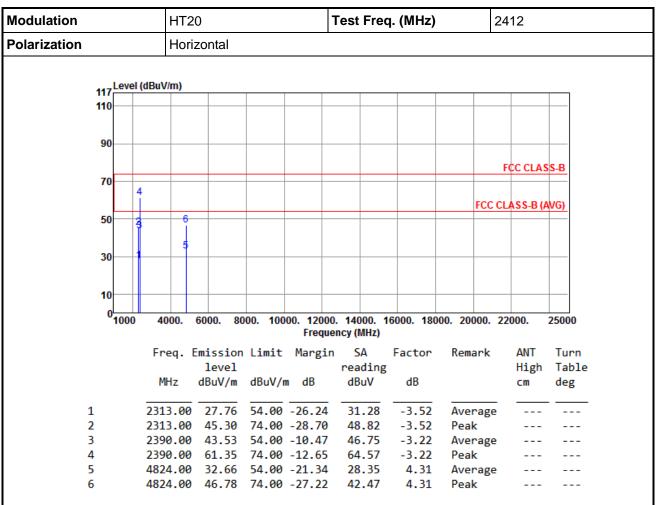

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.


Report No.: FR362603 Page: 43 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666 Fax: 886-3-318-0155



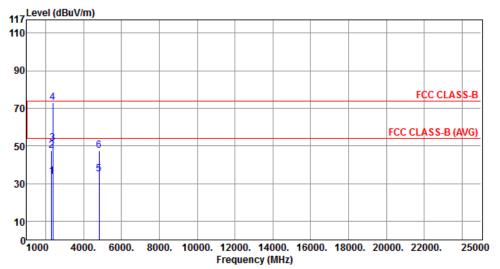

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		CM	deg
1	2313.00	33.61	54.00	-20.39	37.13	-3.52	Average		
2	2313.00	47.68	74.00	-26.32	51.20	-3.52	Peak		
3	2390.00	51.31	54.00	-2.69	54.53	-3.22	Average		
4	2390.00	72.89	74.00	-1.11	76.11	-3.22	Peak		
5	4824.00	34.89	54.00	-19.11	30.58	4.31	Average		
6	4824.00	47.48	74.00	-26.52	43.17	4.31	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 44 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Fax: 886-3-318-0155

Modulation	HT2	0		٦	Test Fred	q. (MHz)	24	137	
Polarization	Hori	zontal		1			1		
117 Level	(dBuV/m)								
110									_
90									
								CC CLASS	В
70	6								<u>-</u>
	8								
50		10					FCC CL	ASS-B (AV	<u>i)</u>
50	a 7								
	1	9							
30	1								-
10									
01000	4000.	6000. 80	00. 100		. 14000. 1 ncy (MHz)	6000. 180	00. 20000. 22	2000. 25	0000
	Eneg	Emiccion	limi+	Margin		Factor	Remark	ANT	Turn
	11 Eq. 1	level	CIMIC	nar gill	reading		IVEIII A		Table
	MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		_	deg
			,						
1	2335.00	28.73	54.00	-25.27	32.16	-3.43	Average		
2	2335.00	42.59	74.00	-31.41	46.02	-3.43	Peak		
3	2390.00	36.09	54.00	-17.91	39.31	-3.22	Average		
4	2390.00	55.26	74.00	-18.74	58.48	-3.22	Peak		
5		42.25			45.08	-2.83	Average		
6		67.79			70.62	-2.83	Peak		
7		45.66			41.27	4.39	Average		
8		59.77			55.38	4.39	Peak		
Q	7211 00	26 60	E4 00	17 40	27 60	രവാ	Auconogo		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

7311.00 36.60 54.00 -17.40 27.68 8.92 Average

7311.00 50.64 74.00 -23.36 41.72 8.92 Peak

Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 45 of 63

Report Version: Rev. 01

9


10

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Fax: 886-3-318-0155

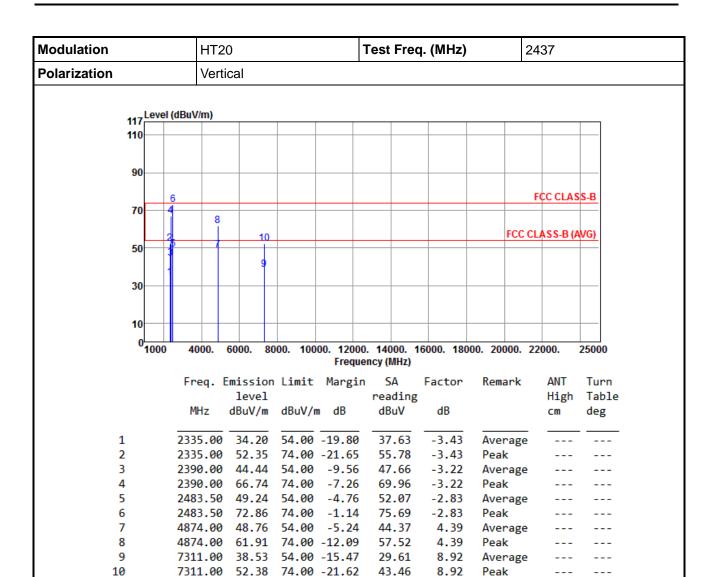

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 46 of 63


Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

 Modulation
 HT20
 Test Freq. (MHz)
 2462

 Polarization
 Horizontal

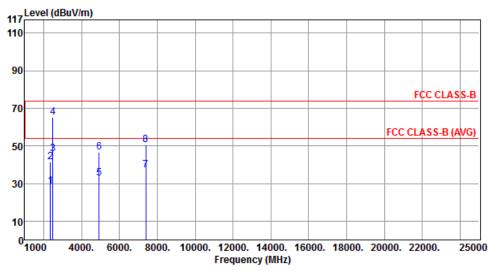

			_					
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
2359.00	28.52	54.00	-25.48	31.86	-3.34	Average		
2359.00	41.64	74.00	-32.36	44.98	-3.34	Peak		
2483.50	45.87	54.00	-8.13	48.70	-2.83	Average		
2483.50	65.26	74.00	-8.74	68.09	-2.83	Peak		
4924.00	32.76	54.00	-21.24	28.28	4.48	Average		
4924.00	46.77	74.00	-27.23	42.29	4.48	Peak		
7386.00	37.24	54.00	-16.76	28.26	8.98	Average		
7386.00	50.53	74.00	-23.47	41.55	8.98	Peak		
	MHz 2359.00 2359.00 2483.50 2483.50 4924.00 4924.00 7386.00	1evel MHz dBuV/m 2359.00 28.52 2359.00 41.64 2483.50 45.87 2483.50 65.26 4924.00 32.76 4924.00 46.77 7386.00 37.24	1evel dBuV/m dBuV/m 2359.00 28.52 54.00 2359.00 41.64 74.00 2483.50 45.87 54.00 2483.50 65.26 74.00 4924.00 32.76 54.00 4924.00 46.77 74.00 7386.00 37.24 54.00	MHz dBuV/m dBuV/m dB 2359.00 28.52 54.00 -25.48 2359.00 41.64 74.00 -32.36 2483.50 45.87 54.00 -8.13 2483.50 65.26 74.00 -8.74 4924.00 32.76 54.00 -21.24 4924.00 46.77 74.00 -27.23 7386.00 37.24 54.00 -16.76	1evel dBuV/m dBuV/m dB dBuV 2359.00 28.52 54.00 -25.48 31.86 2359.00 41.64 74.00 -32.36 44.98 2483.50 45.87 54.00 -8.13 48.70 2483.50 65.26 74.00 -8.74 68.09 4924.00 32.76 54.00 -21.24 28.28 4924.00 46.77 74.00 -27.23 42.29 7386.00 37.24 54.00 -16.76 28.26	1evel dBuV/m dB dBuV dB 2359.00 28.52 54.00 -25.48 31.86 -3.34 2359.00 41.64 74.00 -32.36 44.98 -3.34 2483.50 45.87 54.00 -8.13 48.70 -2.83 2483.50 65.26 74.00 -8.74 68.09 -2.83 4924.00 32.76 54.00 -21.24 28.28 4.48 4924.00 46.77 74.00 -27.23 42.29 4.48 7386.00 37.24 54.00 -16.76 28.26 8.98	level MHz dBuV/m dBuV/m dB uV dB 2359.00 28.52 54.00 -25.48 31.86 -3.34 Average 2359.00 41.64 74.00 -32.36 44.98 -3.34 Peak 2483.50 45.87 54.00 -8.13 48.70 -2.83 Average 2483.50 65.26 74.00 -8.74 68.09 -2.83 Peak 4924.00 32.76 54.00 -21.24 28.28 4.48 Average 4924.00 46.77 74.00 -27.23 42.29 4.48 Peak 7386.00 37.24 54.00 -16.76 28.26 8.98 Average	level MHz reading dBuV/m dBuV/m dBuV/m dBuV dBuV dBuV High cm 2359.00 28.52 54.00 -25.48 31.86 -3.34 Average 2359.00 41.64 74.00 -32.36 44.98 -3.34 Peak 2483.50 45.87 54.00 -8.13 48.70 -2.83 Average 2483.50 65.26 74.00 -8.74 68.09 -2.83 Peak 4924.00 32.76 54.00 -21.24 28.28 4.48 Average 4924.00 46.77 74.00 -27.23 42.29 4.48 Peak 7386.00 37.24 54.00 -16.76 28.26 8.98 Average

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 47 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

ModulationHT20Test Freq. (MHz)2462PolarizationVertical

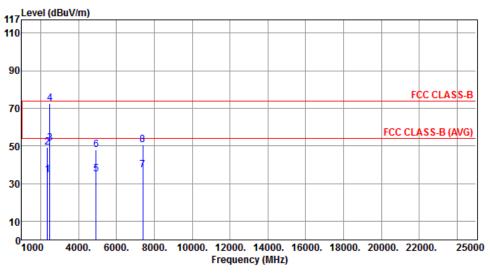

	Freq.	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2359.00	34.34	54.00	-19.66	37.68	-3.34	Average		
2	2359.00	49.08	74.00	-24.92	52.42	-3.34	Peak		
3	2483.50	51.44	54.00	-2.56	54.27	-2.83	Average		
4	2483.50	72.68	74.00	-1.32	75.51	-2.83	Peak		
5	4924.00	34.94	54.00	-19.06	30.46	4.48	Average		
6	4924.00	48.12	74.00	-25.88	43.64	4.48	Peak		
7	7386.00	37.11	54.00	-16.89	28.13	8.98	Average		
8	7386.00	50.46	74.00	-23.54	41.48	8.98	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 48 of 63




0<mark>1000</mark>

4000.

6000.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

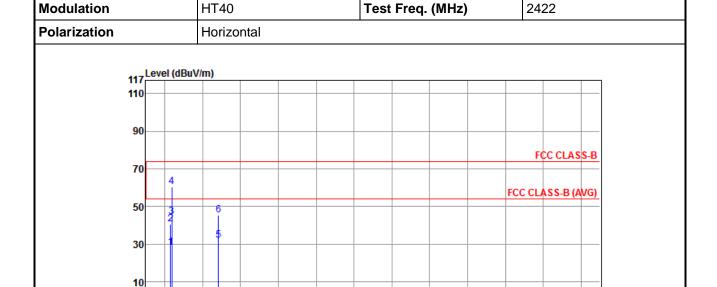

					, , , , , ,				
	Freq. l	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2326.00	27.88	54.00	-26.12	31.35	-3.47	Average		
2	2326.00	40.66	74.00	-33.34	44.13	-3.47	Peak		
3	2390.00	44.54	54.00	-9.46	47.76	-3.22	Average		
4	2390.00	60.43	74.00	-13.57	63.65	-3.22	Peak		
5	4844.00	31.93	54.00	-22.07	27.59	4.34	Average		
6	4844.00	45.18	74.00	-28.82	40.84	4.34	Peak		

Frequency (MHz)

8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000.

25000

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.


Report No.: FR362603 Page: 49 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666 Fax: 886-3-318-0155



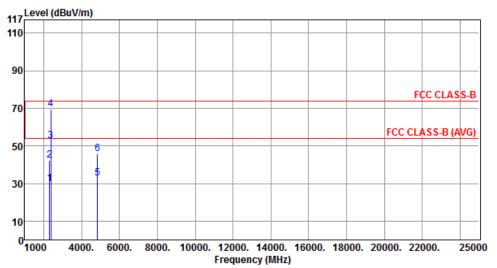

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2326.00	29.68	54.00	-24.32	33.15	-3.47	Average		
2	2326.00	42.16	74.00	-31.84	45.63	-3.47	Peak		
3	2390.00	52.75	54.00	-1.25	55.97	-3.22	Average		
4	2390.00	69.44	74.00	-4.56	72.66	-3.22	Peak		
5	4844.00	33.01	54.00	-20.99	28.67	4.34	Average		
6	4844.00	45.56	74.00	-28.44	41.22	4.34	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page : 50 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation	HT40	Test Freq. (MHz)	2437
Polarization	Horizontal		

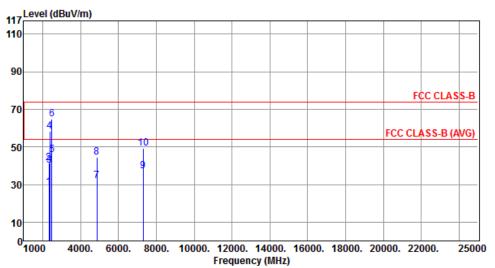

	Freq. 6	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2335.00	28.68	54.00	-25.32	32.11	-3.43	Average		
2	2335.00	41.62	74.00	-32.38	45.05	-3.43	Peak		
3	2390.00	40.13	54.00	-13.87	43.35	-3.22	Average		
4	2390.00	58.47	74.00	-15.53	61.69	-3.22	Peak		
5	2483.50	45.87	54.00	-8.13	48.70	-2.83	Average		
6	2483.50	64.58	74.00	-9.42	67.41	-2.83	Peak		
7	4874.00	31.91	54.00	-22.09	27.52	4.39	Average		
8	4874.00	44.54	74.00	-29.46	40.15	4.39	Peak		
9	7311.00	37.15	54.00	-16.85	28.23	8.92	Average		
10	7311.00	49.41	74.00	-24.59	40.49	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 51 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation	HT40	Test Freq. (MHz)	2437
Polarization	Vertical		

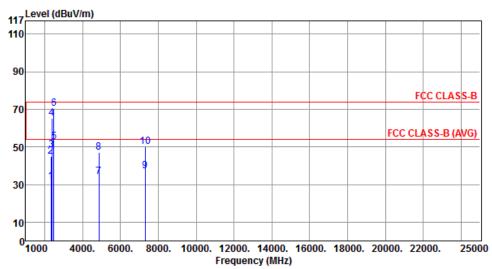

	Freq.	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2335.00	31.46	54.00	-22.54	34.89	-3.43	Average		
2	2335.00	44.79	74.00	-29.21	48.22	-3.43	Peak		
3	2390.00	48.40	54.00	-5.60	51.62	-3.22	Average		
4	2390.00	65.37	74.00	-8.63	68.59	-3.22	Peak		
5	2483.50	52.87	54.00	-1.13	55.70	-2.83	Average		
6	2483.50	70.27	74.00	-3.73	73.10	-2.83	Peak		
7	4874.00	33.90	54.00	-20.10	29.51	4.39	Average		
8	4874.00	46.94	74.00	-27.06	42.55	4.39	Peak		
9	7311.00	37.06	54.00	-16.94	28.14	8.92	Average		
10	7311 00	49 89	74 00	-24 11	40 97	8 92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 52 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

Modulation	HT40	Test Freq. (MHz)	2452
Polarization	Horizontal		

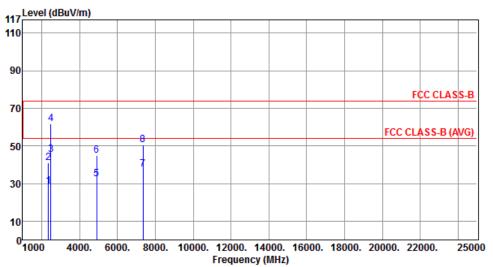

				_					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2364.00	28.70	54.00	-25.30	32.02	-3.32	Average		
2	2364.00	40.84	74.00	-33.16	44.16	-3.32	Peak		
3	2483.50	45.50	54.00	-8.50	48.33	-2.83	Average		
4	2483.50	61.66	74.00	-12.34	64.49	-2.83	Peak		
5	4904.00	32.34	54.00	-21.66	27.89	4.45	Average		
6	4904.00	44.93	74.00	-29.07	40.48	4.45	Peak		
7	7356.00	37.39	54.00	-16.61	28.43	8.96	Average		
8	7356.00	50.43	74.00	-23.57	41.47	8.96	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 53 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

ModulationHT40Test Freq. (MHz)2452PolarizationVertical

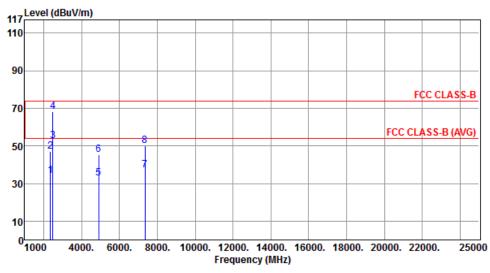

	Freq.	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2364.00	34.07	54.00	-19.93	37.39	-3.32	Average		
2	2364.00	46.98	74.00	-27.02	50.30	-3.32	Peak		
3	2483.50	52.79	54.00	-1.21	55.62	-2.83	Average		
4	2483.50	68.32	74.00	-5.68	71.15	-2.83	Peak		
5	4904.00	32.97	54.00	-21.03	28.52	4.45	Average		
6	4904.00	45.31	74.00	-28.69	40.86	4.45	Peak		
7	7356.00	37.08	54.00	-16.92	28.12	8.96	Average		
8	7356.00	50.26	74.00	-23.74	41.30	8.96	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR362603 Page: 54 of 63

3.6 Unwanted Emissions into Non-Restricted Frequency Bands

3.6.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

\boxtimes	The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band
	shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.
	The peak power is any 100 kHz handwidth outside of the outberized frequency hand shall be

The peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference Level Measurement

- Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- 4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

3.6.3 Test Setup




3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands

This test item is performed on each TX output individually without summing or adding 10 $log(N_{ANT})$ since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.

Report No.: FR362603 Page: 55 of 63

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Fax: 886-3-318-0155


802.11b

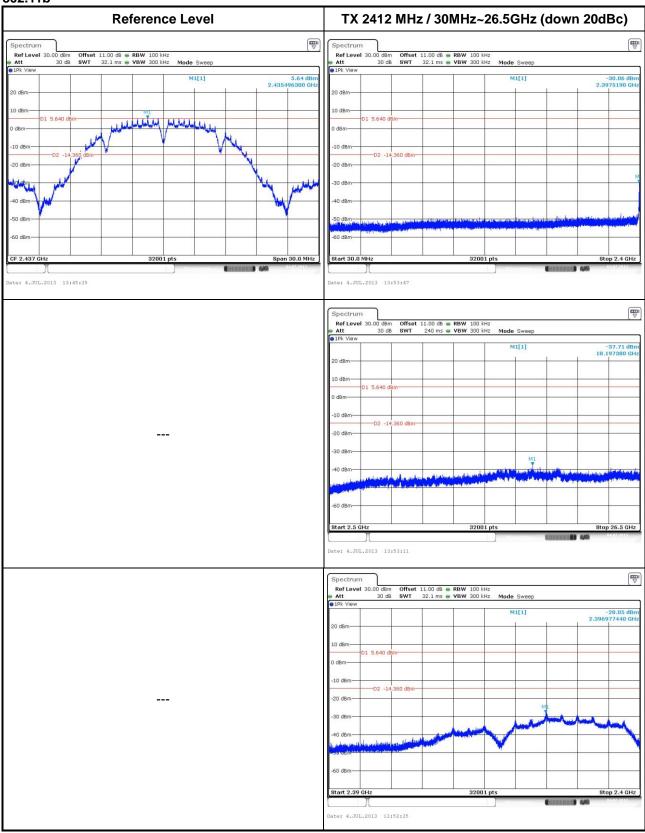

Report No.: FR362603 Page: 56 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Fax: 886-3-318-0155

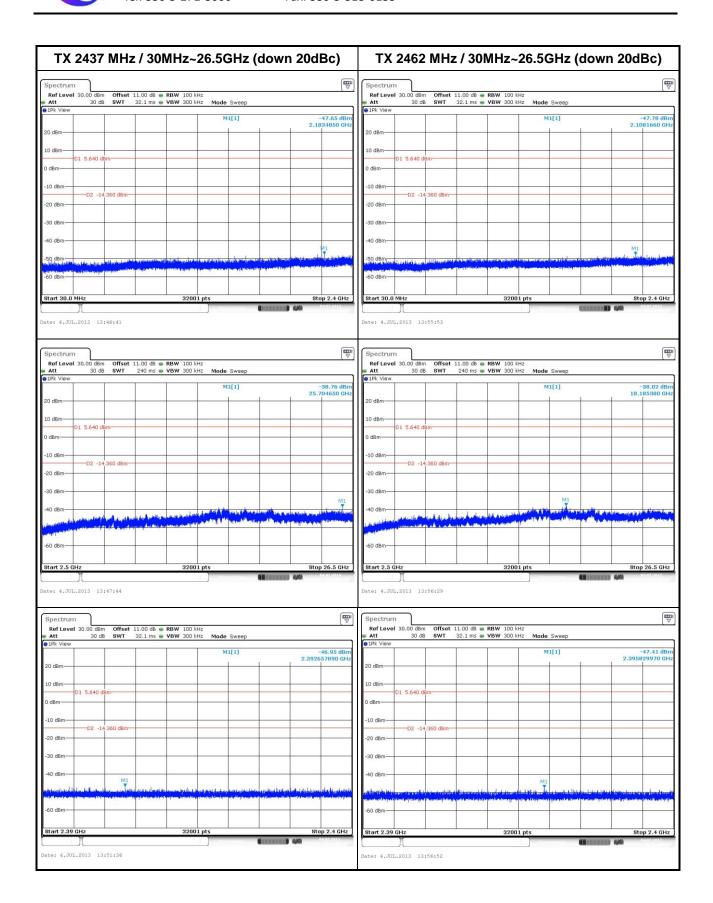


Report No.: FR362603 Page: 57 of 63

International Certification Corp. Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Fax: 886-3-318-0155


802.11g

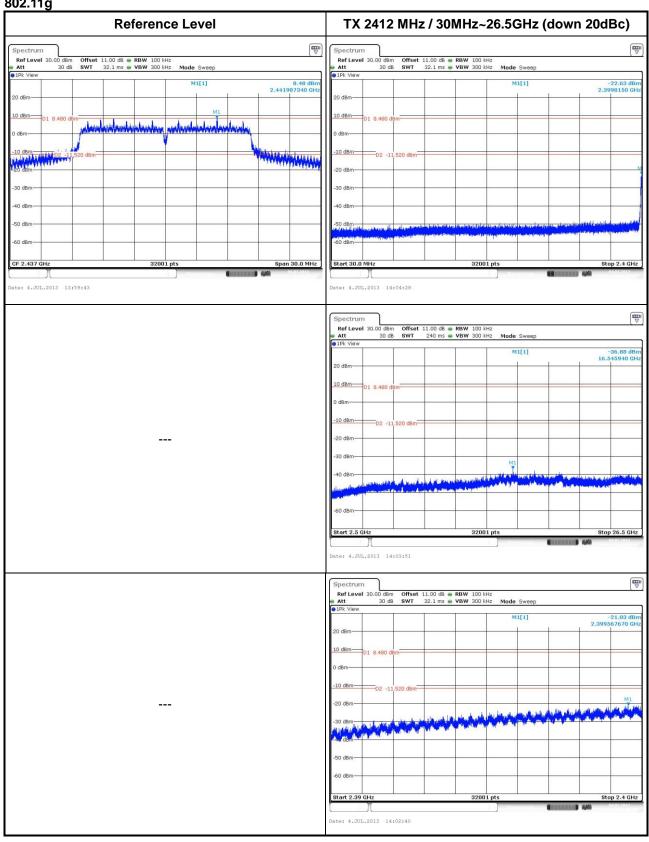

Report No.: FR362603 Page: 58 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Fax: 886-3-318-0155

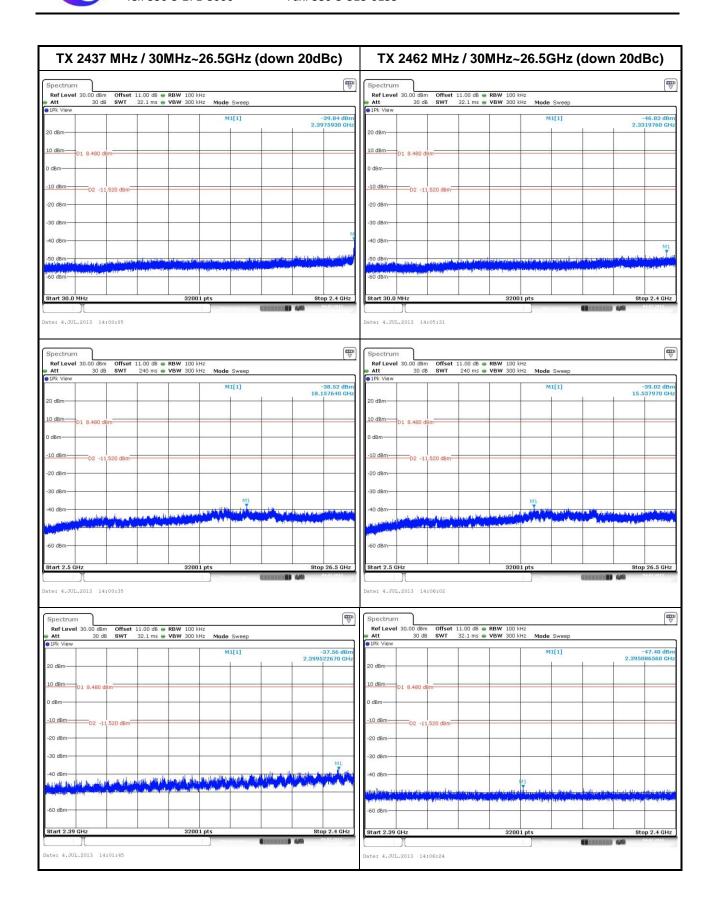


Report No.: FR362603 Page: 59 of 63

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666 Fax: 886-3-318-0155


802.11n HT20

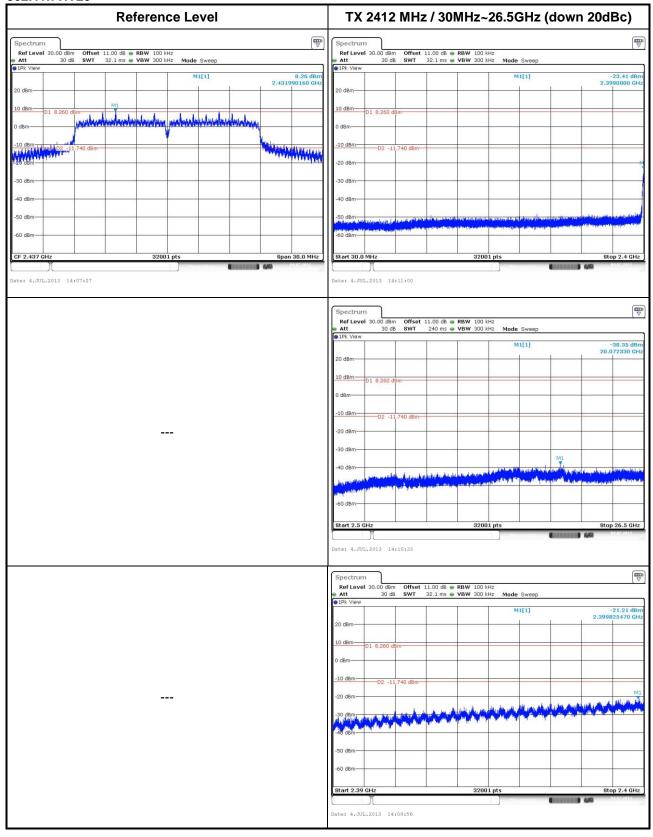

Report No.: FR362603 Page: 60 of 63




No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Fax: 886-3-318-0155

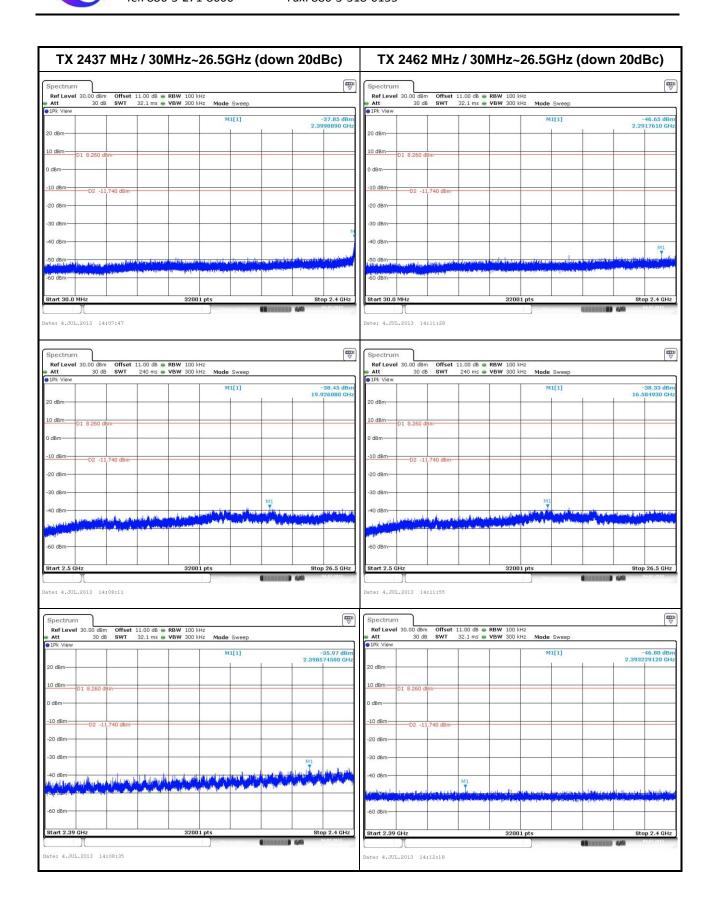

Report No.: FR362603 Page: 61 of 63

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Tel: 886-3-271-8666 Fax: 886-3-318-0155

802.11n HT40

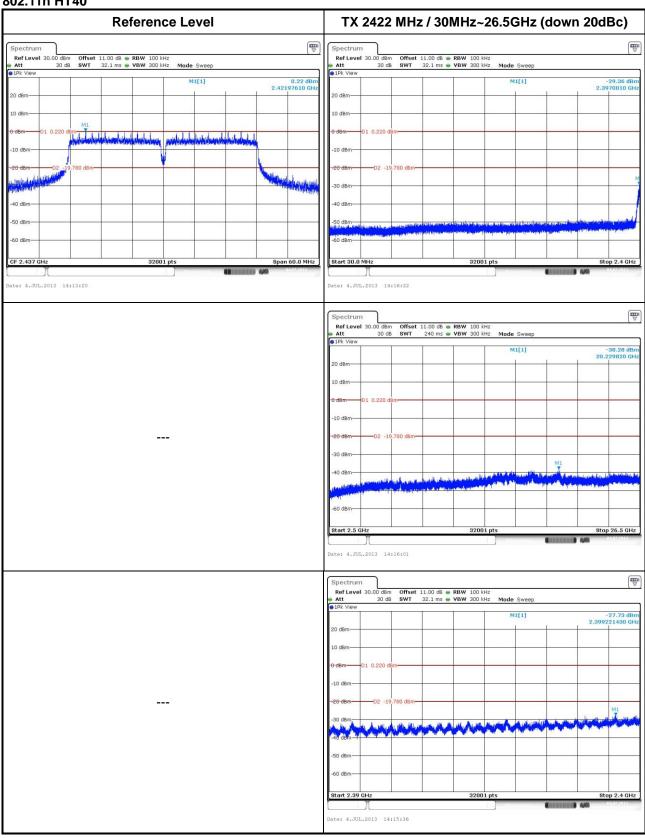


Report No.: FR362603 Page: 62 of 63



No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

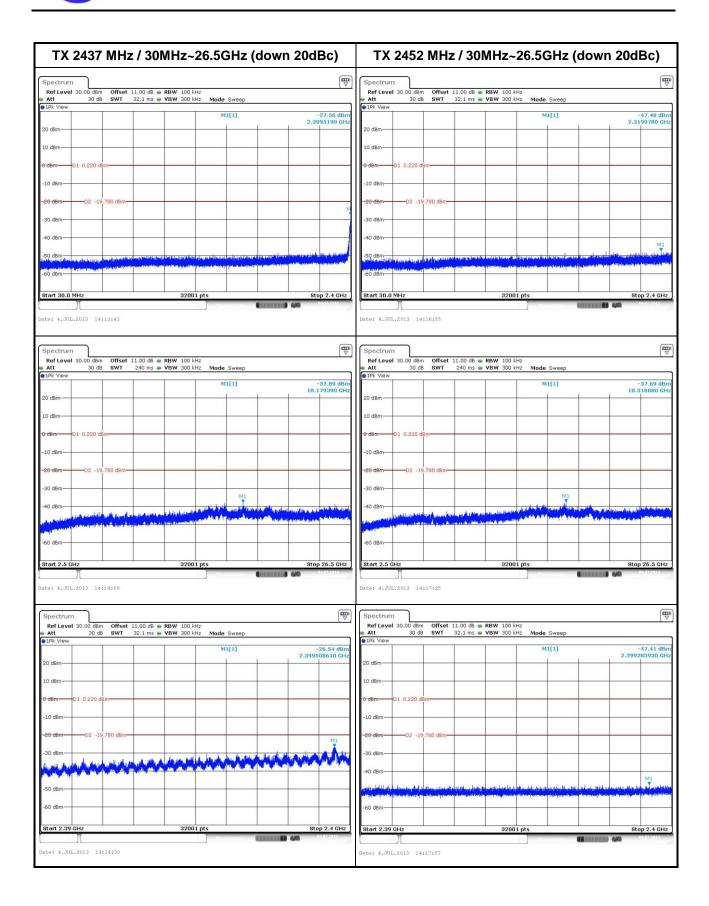

Report No.: FR362603 Page: 63 of 63