Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



# FCC PART 15 SUBPART C MEASURMENT AND TEST REPORT

For

Hopeful Electric Co., Ltd.

22 Floor, Changhong Buildig, Hi-Tech Park, Nanshan District, Shenzhen City, P.R.China

E.U.T.: MID

Model Name: MID773-MTK27, STJR700, MID773, MID773-MT27, MID773A-MTK27, MID773A

**Brand Name: N/A** 

FCC ID: 2AAQZMID773-MTK27

Report Number: NTC1507099F

Test Date(s): July 13, 2015 to August 19, 2015

Report Date(s): August 19, 2015

Prepared by

Dongguan Nore Testing Center Co., Ltd.

Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong, China

Tel: +86-769-22022444

Fax: +86-769-22022799

**Prepared By** 

Approved & Authorized Signer

Rose Hu / Engineer

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



# **Table of Contents**

1. GENERAL INFORMATION	
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	4
1.3 TEST METHODOLOGY	
1.4 EQUIPMENT MODIFICATIONS	
1.5 SUPPORT DEVICE	
1.6 TEST FACILITY AND LOCATION	
1.7 SUMMARY OF TEST RESULTS	
2. SYSTEM TEST CONFIGURATION	9
2.1 EUT CONFIGURATION	
2.2 SPECIAL ACCESSORIES	
2.3 DESCRIPTION OF TEST MODES	
2.4 EUT EXERCISE	
3. CONDUCTED EMISSIONS TEST	10
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
3.2 TEST CONDITION	
3.3 MEASUREMENT RESULTS	10
4. RADIATED EMISSION TEST	13
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
4.2 MEASUREMENT PROCEDURE	14
4.3 LIMIT	
4.4 MEASUREMENT RESULTS	
5. CHANNEL SEPARATION TEST	19
5.1 MEASUREMENT PROCEDURE	19
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
5.3 MEASUREMENT RESULTS	
6. 20DB BANDWIDTH	25
6.1 MEASUREMENT PROCEDURE	25
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	25
6.3 MEASUREMENT RESULTS	
7. HOPPING CHANNEL NUMBER	26
7.1 MEASUREMENT PROCEDURE	31
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	31
7.3 MEASUREMENT RESULTS	31

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



8. TIME OF OCCUPANCY (DWELL TIME)	33
8.1 MEASUREMENT PROCEDURE	33
8.2 MEASUREMENT RESULTS	33
9. MAXIMUM PEAK OUTPUT POWER	33
9.1 MEASUREMENT PROCEDURE	39
9.2 MEASUREMENT RESULTS	
10. BAND EDGE	39
10.1 MEASUREMENT PROCEDURE	
10.2 LIMIT	
10.3 MEASUREMENT RESULTS	45
11. ANTENNA APPLICATION	45
11.1 ANTENNA REQUIREMENT	52
11.2 MEASUREMENT RESULTS	
12. CONDUCTED SPURIOUS EMISSIONS	53
12.1 MEASUREMENT PROCEDURE	53
12.2. MEASUREMENT RESULTS	
13. TEST EQUIPMENT LIST	56

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test

This device is a MID, it's powered by DC 5V come from USB port or DC 3.7V li-ion battery. For more details features, please refer to User's Manual.

Manufacturer : Hopeful Electric Co., Ltd.

Address : 148, Ronggui Road(Mid), Ronggui Town, Shunde

District, Foshan City, Guangdong Prov., China

Factory : Foshan City Shunde Area Associate Electronic Co.,

Ltd.

Address : 4, Guixin East Road, Ronggui Town, Shunde Area

Foshan City, Guangdong Province, China

Power Supply : DC 5V Come from USB Port

Adapter M/N: KA23-0501500USU

Input: AC100-240V 50/60Hz 0.35A

Output: DC 5V 1500mA

DC 3.7V li-ion battery

Test voltage : AC 120V 60Hz, AC 240V 60Hz

(Only the worst case were recorded in the report.)

Model name : MID773-MTK27, STJR700, MID773, MID773-MT27,

MID773A-MTK27, MID773A

Model difference : These models have the same circuit schematic,

construction PCB Layout and critical components. Their difference in model number due to trading

purpose.

Hardware version : RC-8127-705-240

Software version : 001 Serial number : N/A

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



Technical parameters For WIFI Function

Frequency Range : 2412-2462MHz for 802.11b/g/n(HT20)

2422-2452MHz for 802.11n(HT40)

Modulation : CCK, DQPSK, DBPSK for 802.11b

OFDM for 802.11g/n

Number of Channel : 11 for 802.11b/g/n(HT20)

7 for 802.11n(HT40)

Channel space : 5MHz

Date Rate : 802.11b:1~11Mbps, 802.11g:6~54Mbps

802.11n: 6.5~135Mbps

Antenna Type : Integral antenna

Antenna Gain : 2 dBi (declared by manufacturer)

### For BT function

BT Version:

BLE(V4.0) and backward compatible 3.0HS, 2.1+EDR version.

We prepare version BLE(V4.0) and 2.1+EDR for RF test.

Item	BT2.1+EDR	BLE(V4.0)				
Frequency	2402-2480MHz	2402-2480MHz				
Modulation	GFSK, π/4-DQPSK, 8DPSK	GFSK				
Number of Channel	79	40				
Channel space	1MHz	2MHz				
Antenna Type	Integral antenna	Integral antenna				
Antenna Gain	2 dBi (declared by	2 dBi (declared by				
	manufacturer)	manufacturer)				



# BT 2.1+EDR Channel List

Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49 2450		69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461		

**Note:** According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency see below:

Channel	Frequency MHz
1	2402
40	2441
79	2480

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AAQZMID773-MTK27** filing to comply with Section 15.247 of the FCC Part 15 (2014), Subpart C Rule.

### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013) and DA 00-705. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

### 1.4 Equipment Modifications

Not available for this EUT intended for grant.

### 1.5 Support Device

None

### 1.6 Test Facility and Location

Listed by FCC, August 02, 2011 The Certificate Registration Number is 665078. Listed by Industry Canada, July 01, 2011 The Certificate Registration Number is 9743A.

Dongguan NTC Co., Ltd. (Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong, China (Full Name: Building D, Gaosheng Science & Technology Park, Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



# 1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Hopping Channel Number	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.207 (a)	AC Power Conducted Emission	Compliant
§15.247(d),§15.209, §15.205	Radiated Emission	Compliant
§15.203	Antenna Requirement	Compliant
§15.247(d)	Conducted Spurious Emission	Compliant

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 Special Accessories

Not available for this EUT intended for grant.

### 2.3 Description of test modes

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3 and DH5 mode in all modulation type GFSK,  $\pi/4$ -DQPSK, 8DPSK were tested.

### 2.4 EUT Exercise


The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### 3. Conducted Emissions Test

### 3.1 Test SET-UP (Block Diagram of Configuration)

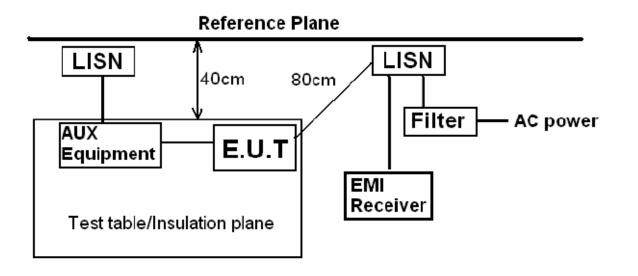

### 3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

**Detector: RBW 9KHz, VBW 30KHz** 

**Operation Mode: Charging+BT Mode** 

### 3.3 Measurement Results

Please refer to following plots.

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27






# Dongguan NTC Co., Ltd. Tel: +86-769-22022444 Fax: +86-769-22022799

Center Web: Http://www.ntc-c.com

Site: Conduction

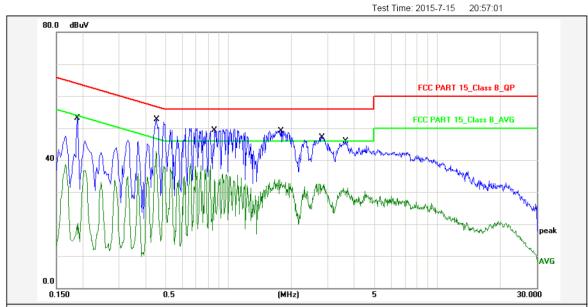

Report No.: MID773-MTK27

Test Standard: FCC PART 15\_Class B\_QP

Test item: **Conducted Emission** 

Applicant: 24(C) / 58 % Hopeful Temp.( )/Hum.(%): Product: MID Power Rating: AC 120V 60Hz Model No.: MID773-MTK27 Test Engineer: Stan

Phase:

Test Mode: Charging+ BT Mode

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1882	10.80	40.40	51.20	64.11	-12.91	QP	Р	
2	0.1882	10.80	7.50	18.30	54.11	-35.81	AVG	Р	
3	0.4500	10.80	39.80	50.60	56.87	-6.27	QP	Р	
4	0.4500	10.80	29.40	40.20	46.87	-6.67	AVG	Ρ	
5	0.8580	10.80	36.30	47.10	56.00	-8.90	QP	Р	
6	0.8580	10.80	25.60	36.40	46.00	-9.60	AVG	Ρ	
7	1.7860	10.80	36.70	47.50	56.00	-8.50	QP	Ъ	
8	1.7860	10.80	21.10	31.90	46.00	-14.10	AVG	Р	
9	2.8140	10.80	34.30	45.10	56.00	-10.90	QP	Р	
10	2.8140	10.80	19.50	30.30	46.00	-15.70	AVG	Ρ	
11	3.6500	10.80	33.70	44.50	56.00	-11.50	QP	Р	
12	3.6500	10.80	18.90	29.70	46.00	-16.30	AVG	Р	_

Note: Level=Reading+Factor. Margin=Limit-Level.

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




Site: Conduction



Dongguan NTC Co., Ltd. Tel: +86-769-22022444 Fax: +86-769-22022799

gCenter Web: Http://www.ntc-c.com

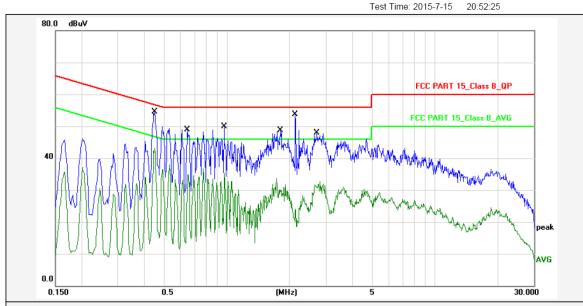

Report No.: MID773-MTK27

Test Standard: FCC PART 15\_Class B\_QP

Test item: **Conducted Emission** 

24(C) / 58 % Applicant: Hopeful Temp.( )/Hum.(%): Product: Power Rating: AC 120V 60Hz Model No.: MID773-MTK27

Test Mode: Charging+ BT Mode

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4500	10.80	41.60	52.40	56.87	-4.47	QP	Р	
2	0.4500	10.80	30.30	41.10	46.87	-5.77	AVG	Р	
3	0.6460	10.80	36.00	46.80	56.00	-9.20	QP	Р	
4	0.6460	10.80	22.10	32.90	46.00	-13.10	AVG	Р	
5	0.9700	10.80	37.00	47.80	56.00	-8.20	QP	Р	
6	0.9700	10.80	22.40	33.20	46.00	-12.80	AVG	Р	
7	1.8180	10.80	35.90	46.70	56.00	-9.30	QP	Р	
8	1.8180	10.80	17.60	28.40	46.00	-17.60	AVG	Р	
9	2.1339	10.80	40.40	51.20	56.00	-4.80	QP	Р	
10	2.1339	10.80	11.50	22.30	46.00	-23.70	AVG	Р	
11	2.7179	10.80	35.00	45.80	56.00	-10.20	QP	Р	
12	2.7179	10.80	19.10	29.90	46.00	-16.10	AVG	Ρ	

Test Engineer:

Stan


Note: Level=Reading+Factor. Margin=Limit-Level.




# 4. Radiated Emission Test

# **4.1 Test SET-UP (Block Diagram of Configuration)**

# 4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

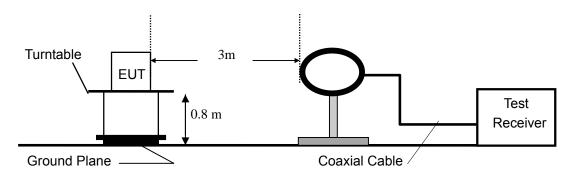


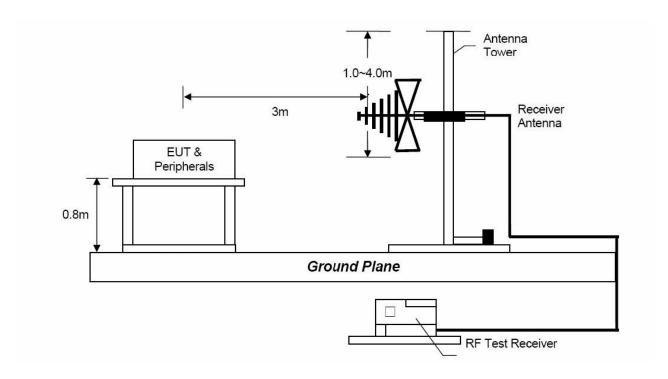

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### 4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

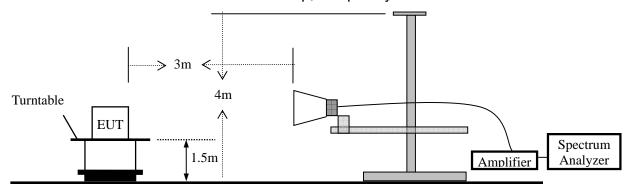

#### 4.2 Measurement Procedure

- a. Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room. Above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi- anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- e. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

For 30MHz to 1GHz:

Sept the spectrum analyzer as: RBW=120kHz, VBW=300kHz, Detector=Quasi-Peak

For Above 1GHz:

Set the spectrum analyzer as: RBW=1MHz, VBW=3MHz, Detector=Peak. Set the spectrum analyzer as: RBW=1MHz, VBW=10Hz, Detector=Peak.

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band	Level	Resolution Bandwidth	Video Bondwidth		
(MHz)	Levei	Resolution Bandwidth	Video Bandwidth		
30 to 1000	QP	120 kHz	300 kHz		
Above 1000	Peak	1 MHz	3 MHz		
Above 1000	Average	1 MHz	10 Hz		

### 4.3 Limit

Frequency range	Distance Meters	Field Strengths Limit (15.209)
MHz		μV/m
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

Remark : (1) Emission level (dB) $\mu$ V = 20 log Emission level  $\mu$ V/m

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
- (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

### 4.4 Measurement Results


Please refer to following plots.

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27





Site: Radiation

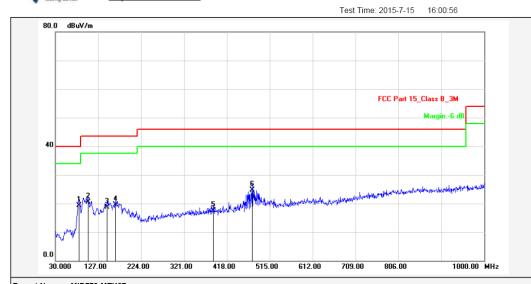

Report No.: MID773-MTK27

Test Standard: FCC Part 15\_Class B\_3M

 Test item:
 Radiation Emission
 Ant. Polarization:
 Horizontal

 Applicant:
 Hopeful
 Temp.(C)/Hum.(%):
 21(C) / 55 %

 Product:
 MID
 Power Rating:
 AC 120V 60Hz

 Model No.:
 MID773-MTK27
 Test Engineer:
 Gavin

Test Mode: Charging + BT Mode
Remark: GFSK Highest channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	83.3499	-15.50	34.81	19.31	40.00	-20.69	QP			J	
2	104.6900	-11.96	32.47	20.51	43.50	-22.99	QP			Р	
3	147.3700	-15.55	34.31	18.76	43.50	-24.74	QP			Ъ	
4	166.7700	-14.92	34.39	19.47	43.50	-24.03	QP			Р	
5	387.9300	-9.16	26.65	17.49	46.00	-28.51	QP			Р	
6	475.2300	-7.34	31.99	24.65	46.00	-21.35	QP			Ъ	

Test Distance:

Note: Level=Reading+Factor.

Margin=Limit-Level.

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.


Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27





### Dongguan NTC Co., Ltd. Tel:+86-769-22022444 Fax:+86-769-22022799

Nore Testing Center Web: <u>Http://www.ntc-c.com</u> Site: Radiation

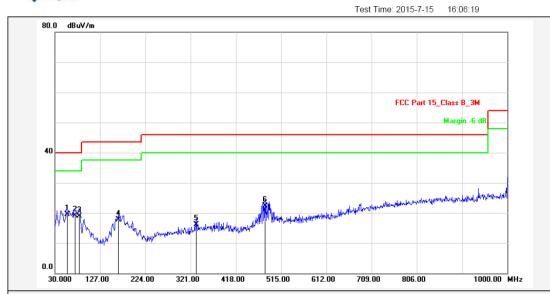

Report No.: MID773-MTK27

Test Standard: FCC Part 15\_Class B\_3M

 Test item:
 Radiation Emission
 Ant. Polarization:
 Vertical

 Applicant:
 Hopeful
 Temp.(C)/Hum.(%):
 21(C) / 55 %

 Product:
 MID
 Power Rating:
 AC 120V 60Hz

 Model No.:
 MID773-MTK27
 Test Engineer:
 Gavin

Test Mode: Charging + BT Mode
Remark: GFSK Highest channel

٨	lo.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
	1	56.1900	-13.85	33.35	19.50	40.00	-20.50	QP			Р	
	2	73.6500	-18.58	37.78	19.20	40.00	-20.80	QP			Р	
	3	82.3800	-18.68	37.68	19.00	40.00	-21.00	QP			Р	
	4	165.8000	-17.95	35.65	17.70	43.50	-25.80	QP			Ρ	
	5	333.6099	-11.49	27.69	16.20	46.00	-29.80	QP			Р	
	6	481.0500	-9.19	31.59	22.40	46.00	-23.60	QP			Р	

Test Distance:

Note: Level=Reading+Factor.

Margin=Limit-Level.

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



Modulation: GFSK (the worst case)

Frequency Range: 1-25GHz Test Date: July 23, 2015

Test Result: PASS Temperature : 20 ℃ Measured Distance: 3m Humidity : 50 %

Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV	(dB/m)	PK	AV	PK	AV	PK	AV
	Operation Mode: TX Mode (Low)									
4804	V	39.26	24.49	14.63	53.89	39.12	74.00	54.00	-20.11	-14.88
7206	V	38.61	24.77	20.68	59.29	45.45	74.00	54.00	-14.71	-8.55
4804	Н	38.52	24.49	14.63	53.15	39.12	74.00	54.00	-20.85	-14.88
7206	Н	38.89	24.78	20.68	59.57	45.46	74.00	54.00	-14.43	-8.54
Operation Mode: TX Mode (Mid)										
4882	V	38.46	24.60	14.97	53.43	39.57	74.00	54.00	-20.57	-14.43
7323	V	39.28	25.21	20.91	60.19	46.12	74.00	54.00	-13.81	-7.88
4882	Н	37.77	24.51	14.97	52.74	39.48	74.00	54.00	-21.26	-14.52
7323	Н	38.66	25.20	20.91	59.57	46.11	74.00	54.00	-14.43	-7.89
Operation Mode: TX Mode (High)										
4960	V	37.54	24.45	15.30	52.84	39.75	74.00	54.00	-21.16	-14.25
7440	V	39.04	25.10	21.16	60.20	46.26	74.00	54.00	-13.80	-7.74
4960	Н	38.22	25.90	15.30	53.52	41.20	74.00	54.00	-20.48	-12.80
7440	Н	39.02	25.15	21.16	60.18	46.31	74.00	54.00	-13.82	-7.69

**Note:** (1) All Readings are Peak Value and AV.

- (2) Emission Level= Reading Level + Factor
- (3) Factor= Antenna Gain + Cable Loss Amplifier Gain
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
- (5) Measurement uncertainty: ±3.7dB.
- (6) Horn antenna used for the emission over 1000MHz.

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




# 5. Channel Separation test

### **5.1 Measurement Procedure**

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the MARKER and Max-Hold function to record the separation of two adjacent channels.

### 5.2 Test SET-UP (Block Diagram of Configuration)



### 5.3 Measurement Results

Modulation: GFSK,  $\pi/4$ -DQPSK, 8DPSK

RBW: 100KHz VBW: 300KHz

Packet: DH5 Spectrum Detector: PK

Test By: Sance Test Date: July 22, 2015

Temperature: 24 °C Humidity: 50 %


Test Result: PASS

Channel number	Channel	Separation Read	Separation Limit			
	frequency (MHz)	Value (KHz)	(KHz)			
GFSK						
Lowest	2402	1005	>764			
Middle	2441	1000	>764			
Highest	2480	1000	>769			
π/4-DQPSK						
Lowest	2402	1000	>759.3			
Middle	2441	1000	>759.3			
Highest	2480	1000	>759.3			
8DPSK						
Lowest	2402	1000	>923			
Middle	2441	1005	>933			
Highest	2480	1000	>933			

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




### **GFSK Lowest Channel**

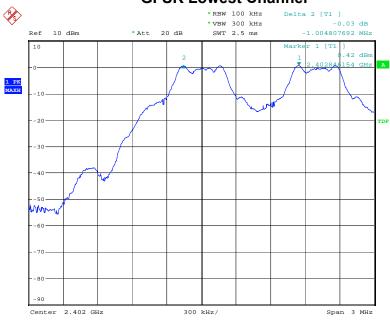

Date: 22.JUL.2015 15:32:43

### **GFSK Middle Channel**

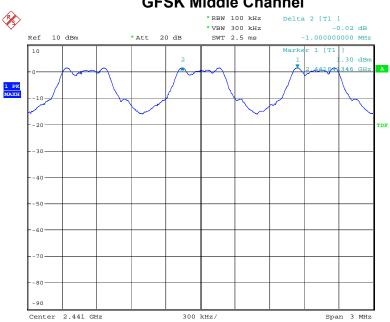


Date: 22.JUL.2015 15:34:47

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




# **GFSK Highest Channel**

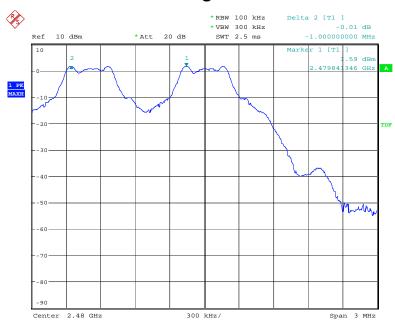

Date: 22.JUL.2015 15:36:11


### π/4-DQPSK Lowest Channel

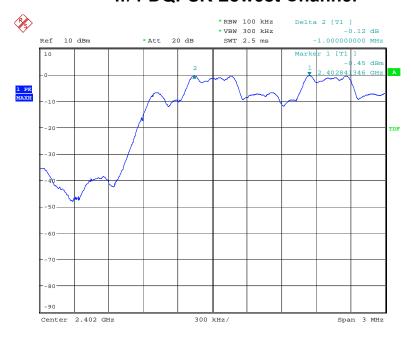

Date: 22.JUL.2015 15:38:29




# π/4-DQPSK Middle Channel

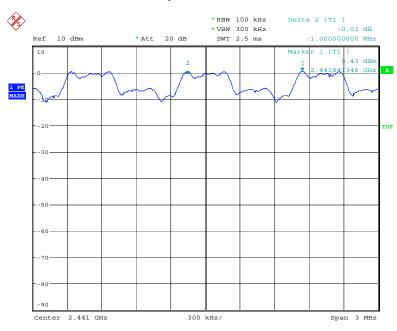

Date: 22.JUL.2015 15:41:06

# π/4-DQPSK Highest Channel

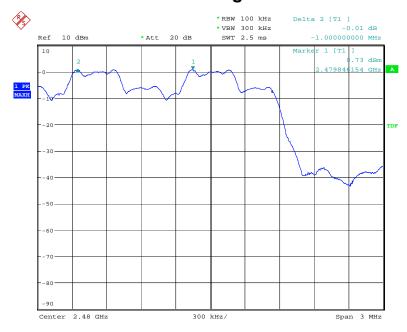

Date: 22.JUL.2015 15:43:22




### **8DPSK Lowest Channel**



Date: 22.JUL.2015 15:46:17

### **8DPSK Middle Channel**

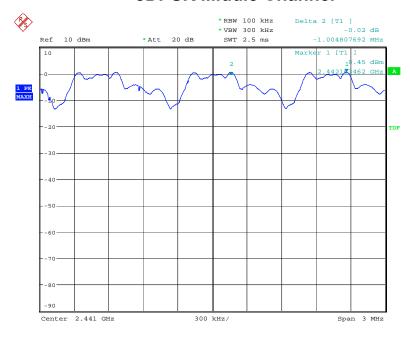

Date: 22.JUL.2015 15:53:09

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1507099F

FCC ID: 2AAQZMID773-MTK27



# **8DPSK Highest Channel**



Date: 22.JUL.2015 15:55:43

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### 6. 20dB Bandwidth

### **6.1 Measurement Procedure**

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

### **6.2 Test SET-UP (Block Diagram of Configuration)**



#### 6.3 Measurement Results

Refer to attached data chart.

Modulation: GFSK,  $\pi/4$ -DQPSK, 8DPSK

RBW: 30KHz VBW: 100KHz Packet: DH5 Spectrum Detector: PK

Test By: Sance Test Date: July 22, 2015

Temperature : 24  $^{\circ}$ C Humidity : 50  $^{\circ}$ %


Test Result: PASS

Channel frequency (MHz)	20dB Down BW(kHz)				
GFSK					
2402	764				
2441	764				
2480	769				
π/4-DQPSK					
2402	1139				
2441	1139				
2480	1139				
8DPSK					
2402	923				
2441	933				
2480	933				

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




### **GFSK Lowest Channel**

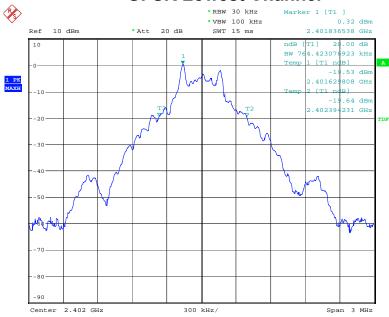

Date: 22.JUL.2015 15:23:48


# **GFSK Middle Channel**

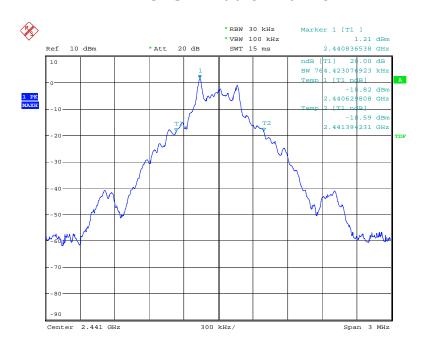

Date: 22.JUL.2015 15:24:29



# **GFSK Highest Channel**

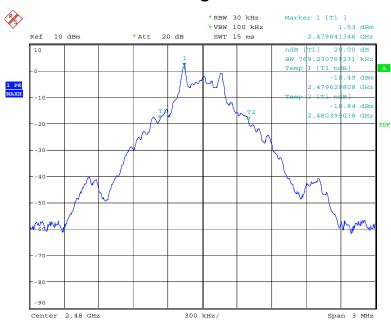

Date: 22.JUL.2015 15:25:23

# π/4-DQPSK Lowest Channel





### π/4-DQPSK Middle Channel



Date: 22.JUL.2015 15:27:10


# $\pi/4\text{-DQPSK}$ Highest Channel



Date: 22.JUL.2015 15:28:07




### **8DPSK Lowest Channel**

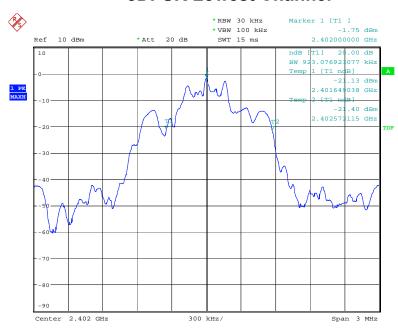

Date: 22.JUL.2015 15:28:57

### **8DPSK Middle Channel**

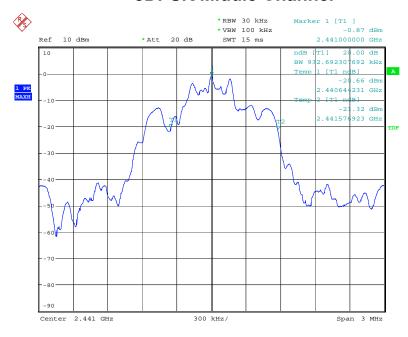


Date: 22.JUL.2015 15:30:05

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1507099F

FCC ID: 2AAQZMID773-MTK27



# **8DPSK Highest Channel**

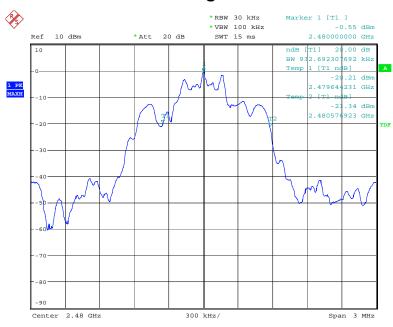

Date: 22.JUL.2015 15:31:00

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### 7. Hopping Channel Number

### 7.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

### 7.2 Test SET-UP (Block Diagram of Configuration)

EUT Spectrum Analyzer

### 7.3 Measurement Results

Modulation GFSK,  $\pi/4$ -DQPSK, 8DPSK

RBW: 100KHz VBW: 300KHz

Packet: DH5 Spectrum Detector: PK

Test By: Sance Test Date: July 22, 2015

Temperature : 24  $^{\circ}$  Humidity : 50  $^{\circ}$ 

Test Result: PASS


Hopping Channel Frequency Range	Number of Hopping Channels	Limit
2402-2480	79	≥15

The worst case: GFSK

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1507099F

FCC ID: 2AAQZMID773-MTK27



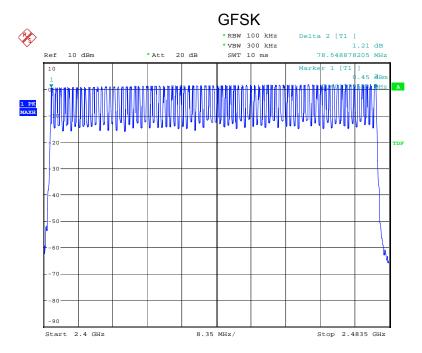

Date: 22.JUL.2015 17:01:28

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### 8. Time of Occupancy (Dwell Time)

### 8.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable. The spectrum analyzer center frequency was set to one of the known hopping channels. The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

### 8.2 Measurement Results

The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)

Refer to attached data chart.

Modulation : GFSK,  $\pi/4$ -DQPSK, 8DPSK


RBW: 1MHz VBW: 3MHz Spectrum Detector: PK Test By: Sance Test Date: July 22, 2015 Temperature:  $24^{\circ}$ C Test Result: PASS Humidity: 50 %

Packet	Frequency (MHz)	Result (msec)	Limit (msec)			
	GFSK (mess)					
DH1	2441	0.413 (ms)*(1600/(2*79))*31.6=132.2	400			
DH3	2441	1.659 (ms)*(1600/(4*79))*31.6=265.4	400			
DH5	2441	2.921 (ms)*(1600/(6*79))*31.6=311.6	400			
	π/4-DQPSK					
2-DH1	2441	0.409 (ms)*(1600/(2*79))*31.6=130.9	400			
2-DH3	2441	1.370 (ms)*(1600/(4*79))*31.6=219.2	400			
2-DH5	2441	2.175 (ms)*(1600/(6*79))*31.6=232.0	400			
8DPSK						
3-DH1	2441	0.409 (ms)*(1600/(2*79))*31.6=130.9	400			
3-DH3	2441	1.506 (ms)*(1600/(4*79))*31.6=241.0	400			
3-DH5	2441	2.837 (ms)*(1600/(6*79))*31.6=302.6	400			

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27






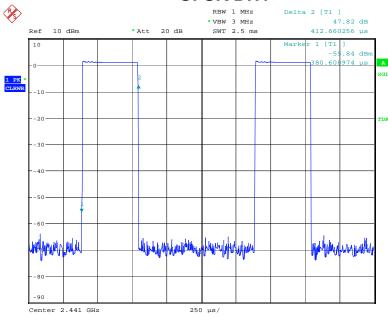

Date: 22.JUL.2015 14:56:23

# **GFSK DH3**

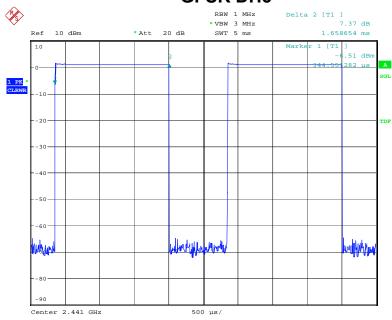


Date: 22.JUL.2015 14:57:58

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27






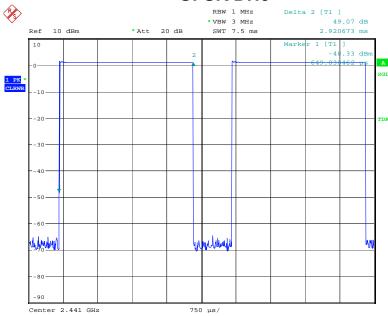

Date: 22.JUL.2015 14:59:36

# π/4-DQPSK 2-DH1

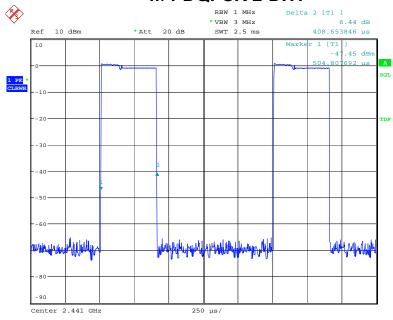


Date: 22.JUL.2015 15:00:45

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




### $\pi/4$ -DQPSK 2-DH3

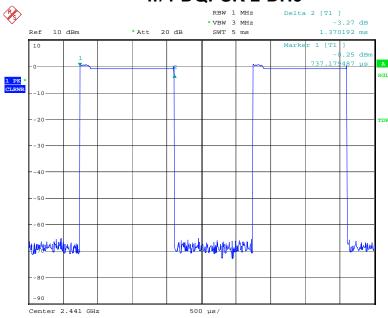

Date: 22.JUL.2015 15:01:53

# π/4-DQPSK 2-DH5

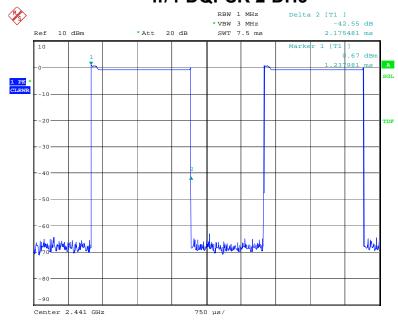


Date: 22.JUL.2015 15:02:53

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




#### **8DPSK 3-DH1**

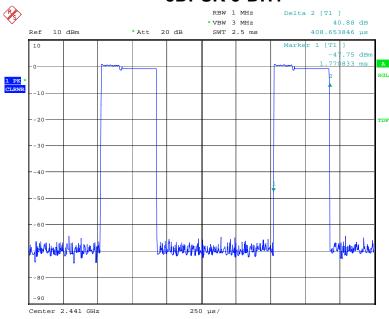

Date: 22.JUL.2015 15:03:25

#### **8DPSK 3-DH3**

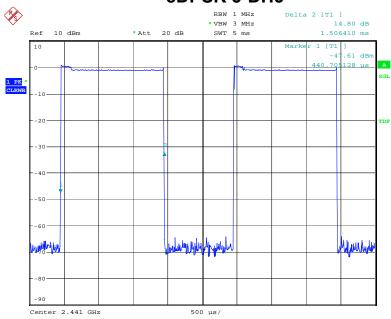


Date: 22.JUL.2015 15:04:39

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1507099F

FCC ID: 2AAQZMID773-MTK27



### **8DPSK 3-DH5**

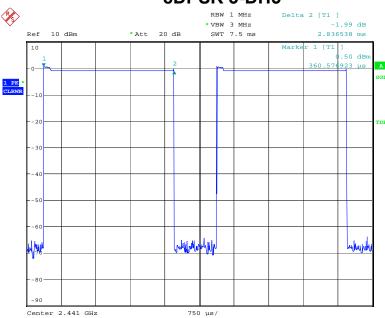

Date: 22.JUL.2015 15:05:28

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



#### 9. MAXIMUM PEAK OUTPUT POWER

#### 9.1 Measurement Procedure

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.

#### 9.2 Measurement Results

Refer to attached data chart.

Modulation : GFSK,  $\pi/4$ -DQPSK, 8DPSK

RBW: 3MHz VBW: 3MHz

Spectrum Detector: PK Test Date: July 23, 2015


Test By: Sance Temperature :  $24 \,^{\circ}\mathbb{C}$  Test Result: PASS Humidity :  $50 \,^{\circ}\mathbb{C}$ 

Channel Frequency	Cable Loss	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(dBm)	Pass/Fail			
(MHz)	dB	output(IIIV)	output(ubiii)	Limit(abin)				
GFSK								
2402.00	1.5	1.16	0.66	30	PASS			
2441.00	1.5	1.43	1.55	30	PASS			
2480.00	1.5	1.53	1.85	30	PASS			
π/4-DQPSK								
2402.00	1.5	0.96	-0.16	21	PASS			
2441.00	1.5	1.19	0.75	21	PASS			
2480.00	1.5	1.27	1.04	21	PASS			
8DPSK								
2402.00	1.5	0.97	-0.14	21	PASS			
2441.00	1.5	1.19	0.76	21	PASS			
2480.00	1.5	1.27	1.05	21	PASS			

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




#### **GFSK Lowest Channel**

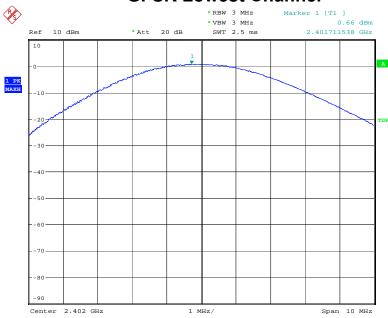

Date: 22.JUL.2015 15:06:49

#### **GFSK Middle Channel**

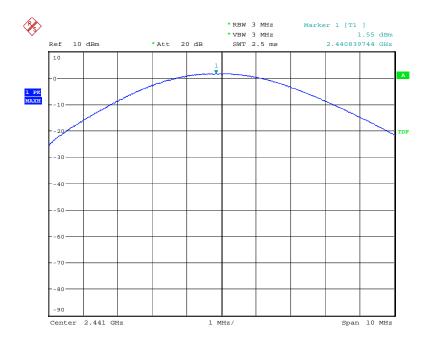


Date: 22.JUL.2015 15:07:29

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




### **GFSK Highest Channel**

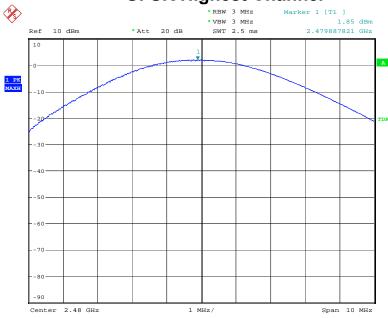

Date: 22.JUL.2015 15:07:58

#### π/4-DQPSK Lowest Channel

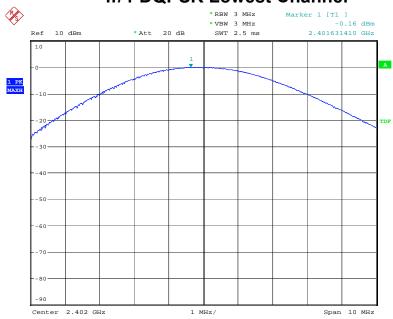


Date: 22.JUL.2015 15:08:33

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



#### π/4-DQPSK Middle Channel

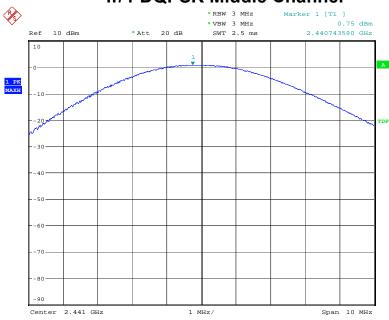

Date: 22.JUL.2015 15:08:59

### $\pi/4\text{-DQPSK}$ Highest Channel




Date: 22.JUL.2015 15:09:24

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




#### **8DPSK Lowest Channel**

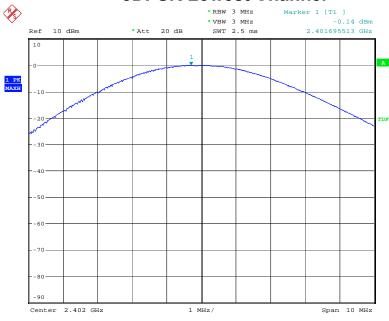

Date: 22.JUL.2015 15:09:49

#### **8DPSK Middle Channel**

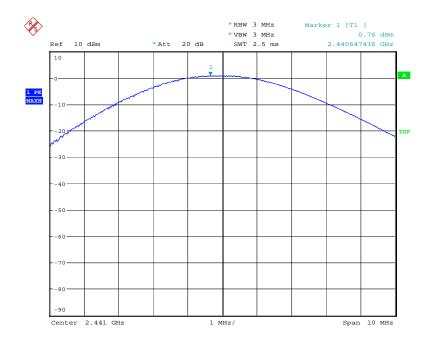


Date: 22.JUL.2015 15:10:12

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1507099F

FCC ID: 2AAQZMID773-MTK27



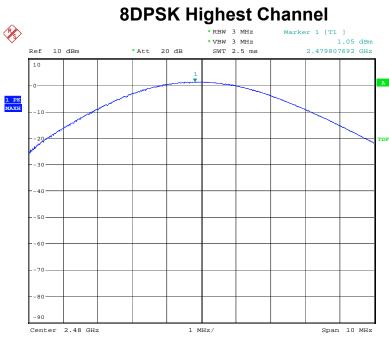

Date: 22.JUL.2015 15:10:36

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



#### 10. Band Edge

#### 10.1 Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.

#### **10.2** Limit

15.247(d)In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### 10.3 Measurement Results

Please see below test table and plots.

For Radiated Emission The worst case: GFSK

Hopping-on mode

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV	(ub/III)	PK	AV	PK	AV	PK	AV
2389.628	Н	42.17	23.28	8.08	50.25	31.36	74.00	54.00	-23.75	-22.64
2389.628	V	42.84	22.31	8.08	50.92	30.39	74.00	54.00	-23.08	-23.61
2399.990	Н	51.21	30.32	8.09	59.30	38.41	74.00	54.00	-14.70	-15.59
2399.990	V	49.11	31.83	8.09	57.20	39.92	74.00	54.00	-16.80	-14.08
2483.501	Н	45.33	27.60	8.35	53.68	35.95	74.00	54.00	-20.32	-18.05
2483.501	V	50.06	28.96	8.35	58.41	37.31	74.00	54.00	-15.59	-16.69

Note: (1) Emission Level= Reading Level + Factor

(2) Factor= Antenna Gain + Cable Loss – Amplifier Gain


(3) Horn antenna used for the emission over 1000MHz.

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




#### For RF Conducted

#### **GFSK Lowest Channel**

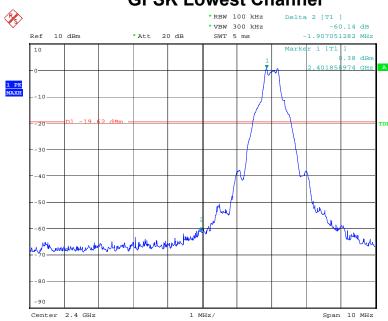

Date: 22.JUL.2015 15:57:07

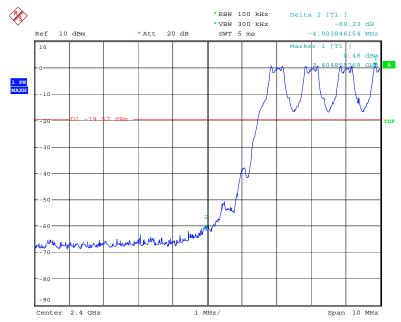


Date: 22.JUL.2015 15:58:22


Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### **GFSK Highest Channel**

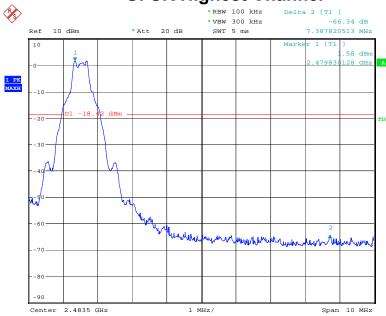

Date: 22.JUL.2015 15:59:33

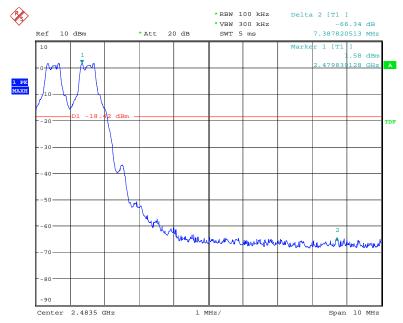


Date: 22.JUL.2015 16:00:14


Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



#### π/4-DQPSK Lowest Channel

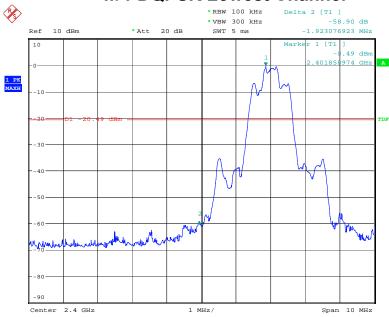

Date: 22.JUL.2015 16:01:21

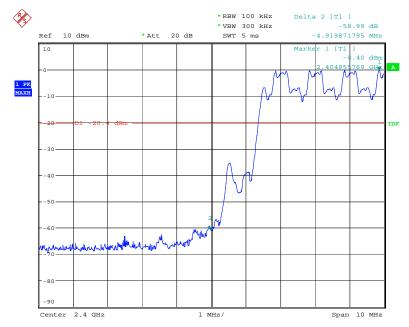


Date: 22.JUL.2015 16:03:10


Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



## $\pi/4\text{-DQPSK}$ Highest Channel

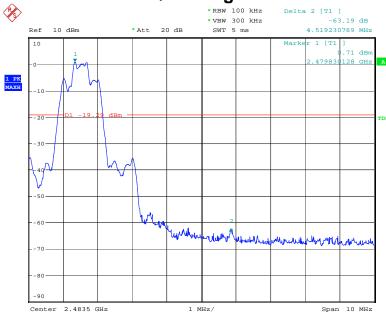

Date: 22.JUL.2015 16:04:30

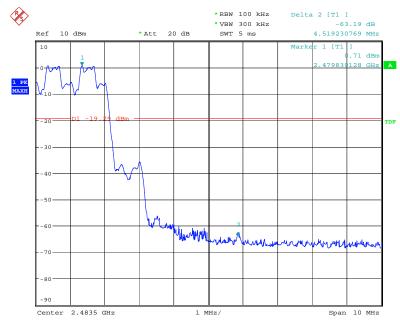


Date: 22.JUL.2015 16:05:41


Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



#### **8DPSK Lowest Channel**

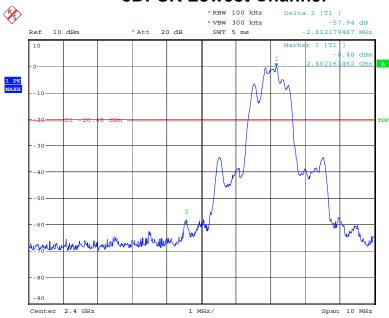

Date: 22.JUL.2015 16:06:41

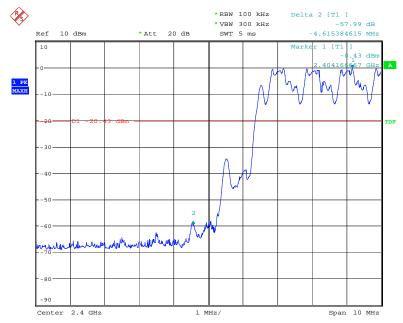


Date: 22.JUL.2015 16:08:07


Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### **8DPSK Highest Channel**

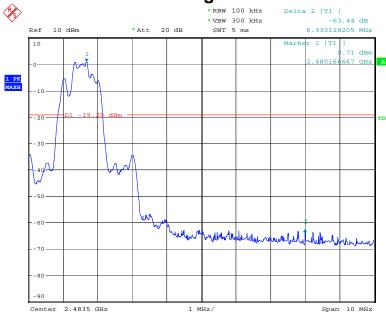

Date: 22.JUL.2015 16:10:20

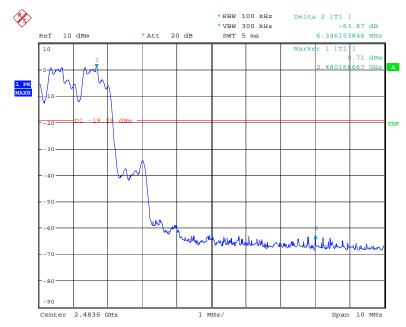

Date: 22.JUL.2015 16:11:15

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



#### 11. Antenna Application

#### 11.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

#### 11.2 Measurement Results

The antenna is integral antenna and no consideration of replacement, and the best case gain of the antenna is 2dBi. So, the antenna is consider meet the requirement.

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### 12. Conducted Spurious Emissions

#### 12.1 Measurement Procedure

Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.


#### 12.2. Measurement Results

Please refer to following plots, the worst case (GFSK) was shown.

Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27




#### **Lowest Channel**

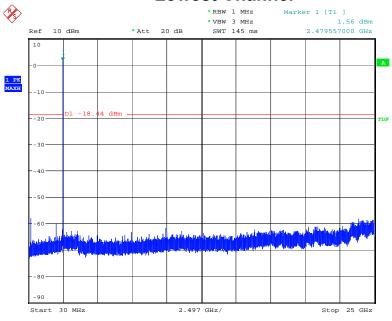

Date: 22.JUL.2015 16:14:59

# Note: Sweep points=30001pts Middle Channel

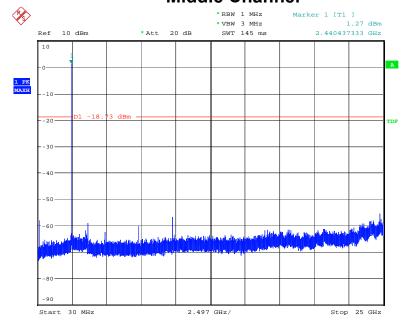

Date: 22.JUL.2015 16:14:01


Note: Sweep points=30001pts

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1507099F

FCC ID: 2AAQZMID773-MTK27



### **Highest Channel**

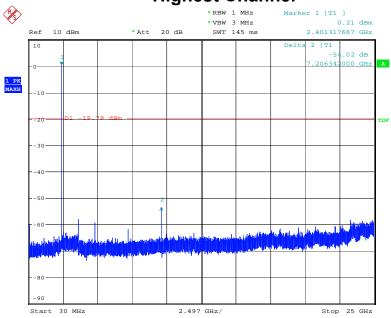

Date: 22.JUL.2015 16:12:57

Note: Sweep points=30001pts

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1507099F FCC ID: 2AAQZMID773-MTK27



### 13. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 24, 2014	Nov. 23, 2015
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 27, 2014	Nov. 26, 2015
Positioning Controller	UC	UC 3000	N/A	0~360°, 1-4m	N/A	N/A
Color Monitor	SUNSPO	SP-140A	N/A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	32A	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	200A	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	200A	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Mar. 07, 2015	Mar. 06, 2016
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Nov. 08, 2014	Nov. 07, 2015
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	15GHz~26.5GHz	Oct.24, 2014	Oct.23, 2015
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Nov. 06, 2014	Nov. 05, 2015
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.11, 2014	Oct.10, 2015
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Sep. 02, 2014	Sep. 01, 2015
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Nov. 04, 2014	Nov. 03, 2015
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 08, 2014	Nov. 07, 2015
Temporary antenna connector	TESCOM	SS402	N/A	1G-18GHz	N/A	N/A